


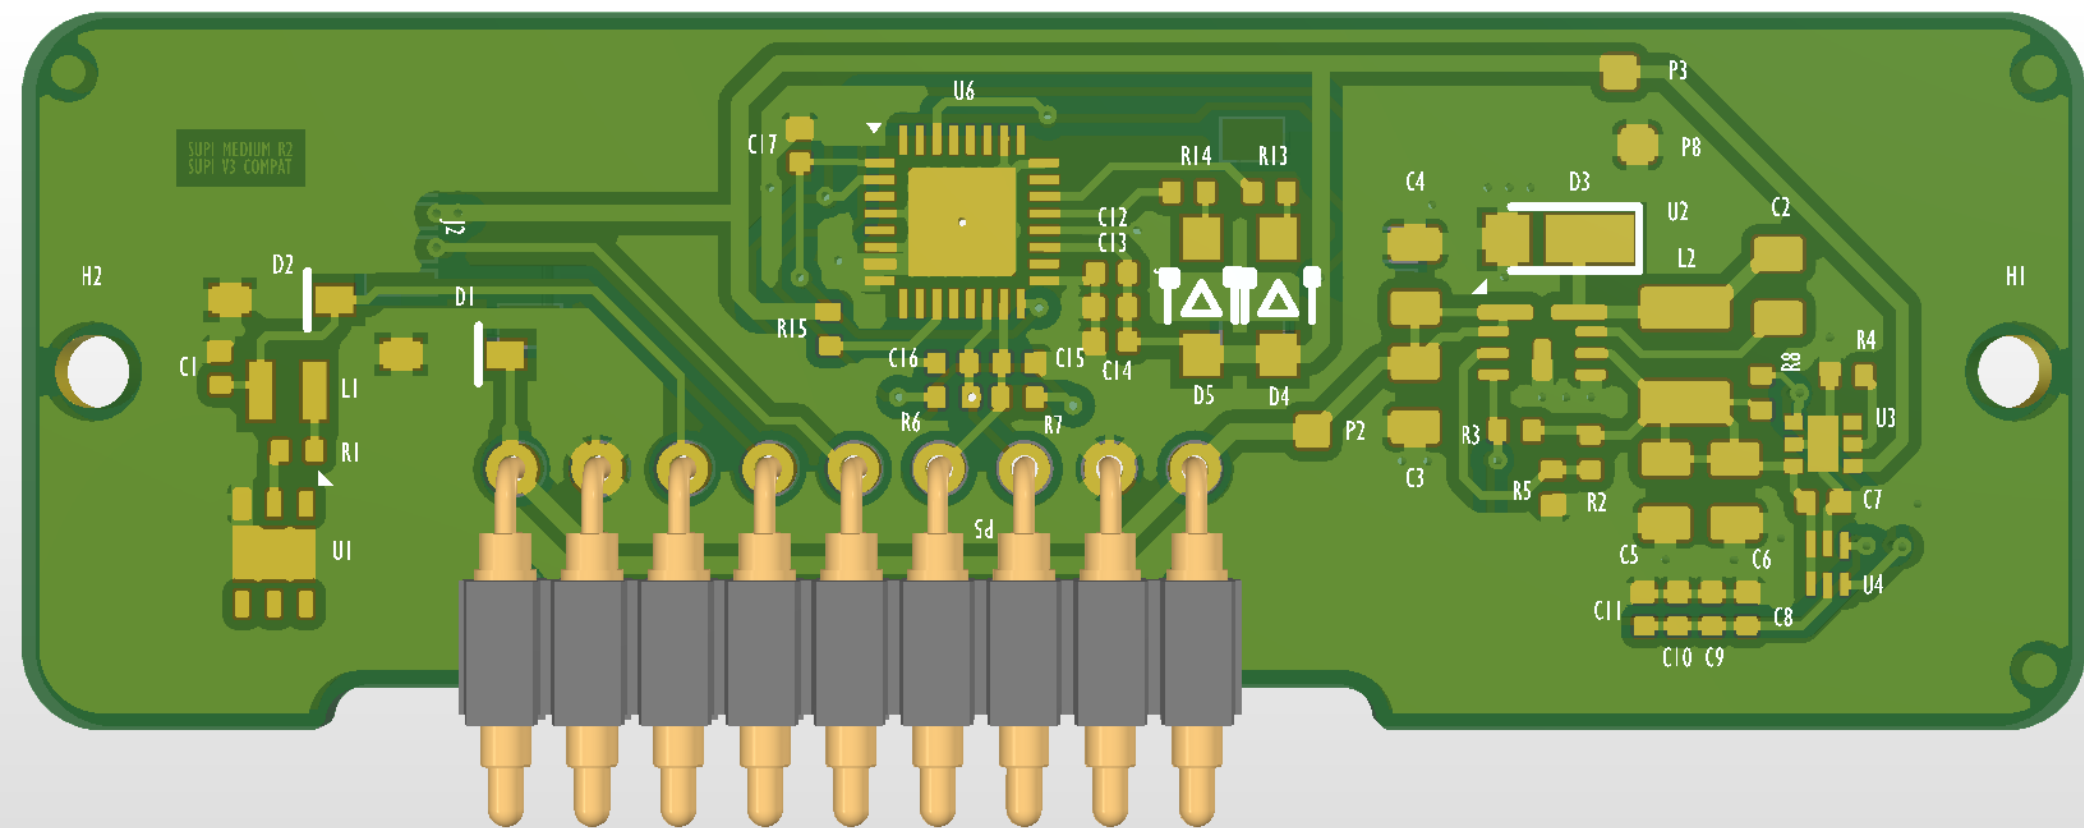

1

2

3

4


- Notes:
1. APPLICABLE STANDARDS AND SPECIFICATIONS:
a. ASME Y14.100
b. ASME Y14.5M-2018
c. IPC 610 and J-STD-001
d. QA11754533
 2. PRECAUTIONARY PACKAGING, HANDLING, AND PROCESSING PROCEDURES SHALL BE USED TO PREVENT DAMAGE FROM ELECTROSTATIC, ELECTROMAGNETIC, AND OTHER ENVIRONMENTAL FIELD FORCES PER ANSI/ESD S20.20 AND MIL-STD-1686.
 3. PCB SHALL BE ASSEMBLED IN ACCORDANCE WITH IPC J-STD-001, CLASS 3 UNLESS OTHERWISE SPECIFIED. SOLDER COMPONENTS USING FN 2
- WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610 CLASS 3 UNLESS OTHERWISE SPECIFIED. IN CASE OF A CONFLICT, IPC J-STD-001 TAKES PRECEDENCE.
4. FOR SCHEMATIC DIAGRAM SEE DRAWING XXXXXXXX
 5. PCB SHALL BE CLEANED IN ACCORDANCE WITH IPC-A-610
 6. DO NOT POPULATE COMPONENTS LISTED IN THE TABLE

PARTS LIST				
FIND NO	REFERENCE DESIGNATION	QTY	PART NUMBER	DESCRIPTION
1	C1	1	C0402C472K5RACTU	CAP 0402 4700PF 50V 10% X7R
2	C2	1	C0805C334K5RACTU	CAP 0805 0.33uF 50V 10% X7R CER
3	C3, C4	2	CC0805KKX5R9BB106	CAP 0805 10UF 50V 10% X5R
4	C5, C6	2	C2012X5R1C226M125AC	CAP 0805 22UF 16V 20% X5R
5	C7, C8, C9, C10, C11, C12, C13, C17	8	CL05B104KA5NNNC	Multilayer Ceramic Capacitor, 0.1 uF, 25 V, ± 10%, X7R, 0402 [1005 Metric]
6	C14	1	CL05A475KQ5NRNC	Cap Ceramic 4.7uF 6.3V JB 10% SMD 0402 85°C Punched Paper T/R
7	C15, C16	2	LD025A470JAB2A	CAP 0402 47pF 50V 5% C0G/NP0
8	D1	1	SMF26A	SMF Series 200 W 26 V Uni-Directional Surface Mount TVS Diode - SOD-123F
9	D2	1	P4FL3.3A_R1_00001	TVS Diodes & ESD Suppressors; P4FL3.3A_R1_00001; PANJIT; 3.3 V; 5.2 V
11	D3	1	SS3060HE_R1_00001	DIODE SCHOTTKY 60V 3A SOD123HE
12	D4, D5	2	APT2012SECK/J3-PRV	Red 625nm LED Indication - Discrete 2.2V 0805
13	J1, J2	2	SM04B-SRSS-TB	Conn Shrouded Header (4 Sides) HDR 4 POS 1.25mm Solder RA Side Entry SMD T/R
14	L1	1	MDF2016BSS270CTD25	Ferrite Bead, Aec-Q200, 0806, 1A Rohs Compliant: Yes Tdk MDF2016BSS270CTD25
15	L2	1	5-2176797-4	FIXED IND 2.2UH 3A 72 MOHM SMD
16	P5	1	829-22-009-20-001101	Board Connector, 9 Contact(s), 1 Row(s), Male, Right Angle, Solder Terminal
17	R1	1	ERJ-2RKF1000X	Res 0402 100 Ohm 0.1W 1% Thick Film
18	R2	1	ERJ2RKF5232X	Res 0402 52.3K 1/10W 1% Thick Film
19	R3	1	ERJ-2RKF1133X	Res 0402 113K 1/10W 1% Thick Film
20	R4, R5, R8, R15	4	RK73H1ETTPD1002F	RES 0402 10K 1/10W 1%
21	R6, R7	2	RC0402JR-070RL	Res 0402 0 Ohm 1/16W 5% Thick Film
22	R13, R14	2	RK73H1ETTP4990F	RES 0402 499 OHM 1/10W 1%
23	U1	1	DS2431Q+T&R	IC EEPROM 1KBIT 1-WIRE 6TDFN
24	U2	1	MCP16361T-E/NMX	IC BUCK CONVERTER 48V 2MHZ
25	U3	1	NCP380HMUAJAATBG	Power Distribution Switch, Current-Limiting (Fixed and Adjustable) Adjustable, Enable H
26	U4	1	TPS389030DSER	Supervisor Open Drain or Open Collector 1 Channel 6-WSON (1.5x1.5)
27	U6	1	FT232RNG-TRAY	USB Bridge, USB to UART USB 2.0 UART Interface 32-QFN (5x5)

DO NOT POPULATE LIST
FIND NO | REFERENCE DESIGNATION


DISTRIBUTION STATEMENT A. APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

THE UNITED STATES GOVERNMENT HAS UNLIMITED RIGHTS IN THE TECHNICAL DATA IN THIS DOCUMENT. ANY COPY OR MODIFICATION OF THIS DOCUMENT, OR ANY DERIVATIVE WORK CREATED THEREFROM, IN WHOLE OR IN PART, MUST INCLUDE THIS LEDGEND. ANY CLAIM BY ANOTHER TO THE RIGHTS OF THE UNITED STATES GOVERNMENT IN THIS DATA IS A VIOLATION OF FEDERAL LAWS AND REGULATIONS.


		DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	CONTRACT NUMBER		DESIGN ACTIVITY			US ARMY				
			TOLERANCES ON ANGLES ± 2 PLACE DECIMAL ± 3 PLACE DECIMAL ±	CONTRACTOR		COMBAT CAPABILITIES DEVELOPMENT COMMAND ARMAMENTS CENTER						
				DRAWN BY M. SARGENT	DATE (YEAR-MO-DA) 26JUN12		SUPI PAYLOAD					
				CHECKER ABC	ENGINEER B. PELTZER							
12345678	ABCDEF	THIRD ANGLE PROJECTION 		ENGINEER ABC	QUALITY ENGINEER M. SEMTAK							
12345678	ABCDEF		DRAWING APPROVAL ABC 1900-01-01		SIZE C	CAGE CODE 19200	DWG. NO. PB-F-0230					
12345678	ABCDEF											
D	NEXT ASSY		USED ON	MATL ENGR	MODELED BY	DESIGN APPROVAL ABC 1900-01-01						
APPLICATION		ABC	ABC	ABC 1900-01-01		SCALE: 1:1		UNIT WT.		SHEET 1 OF 1		

REVISIONS				
MODEL REV	DRAWING REV	DESCRIPTION	DATE(YEAR-MO-DA)	APPROVED
X.1			26JUN12	

View from Top side (Scale 4:1)

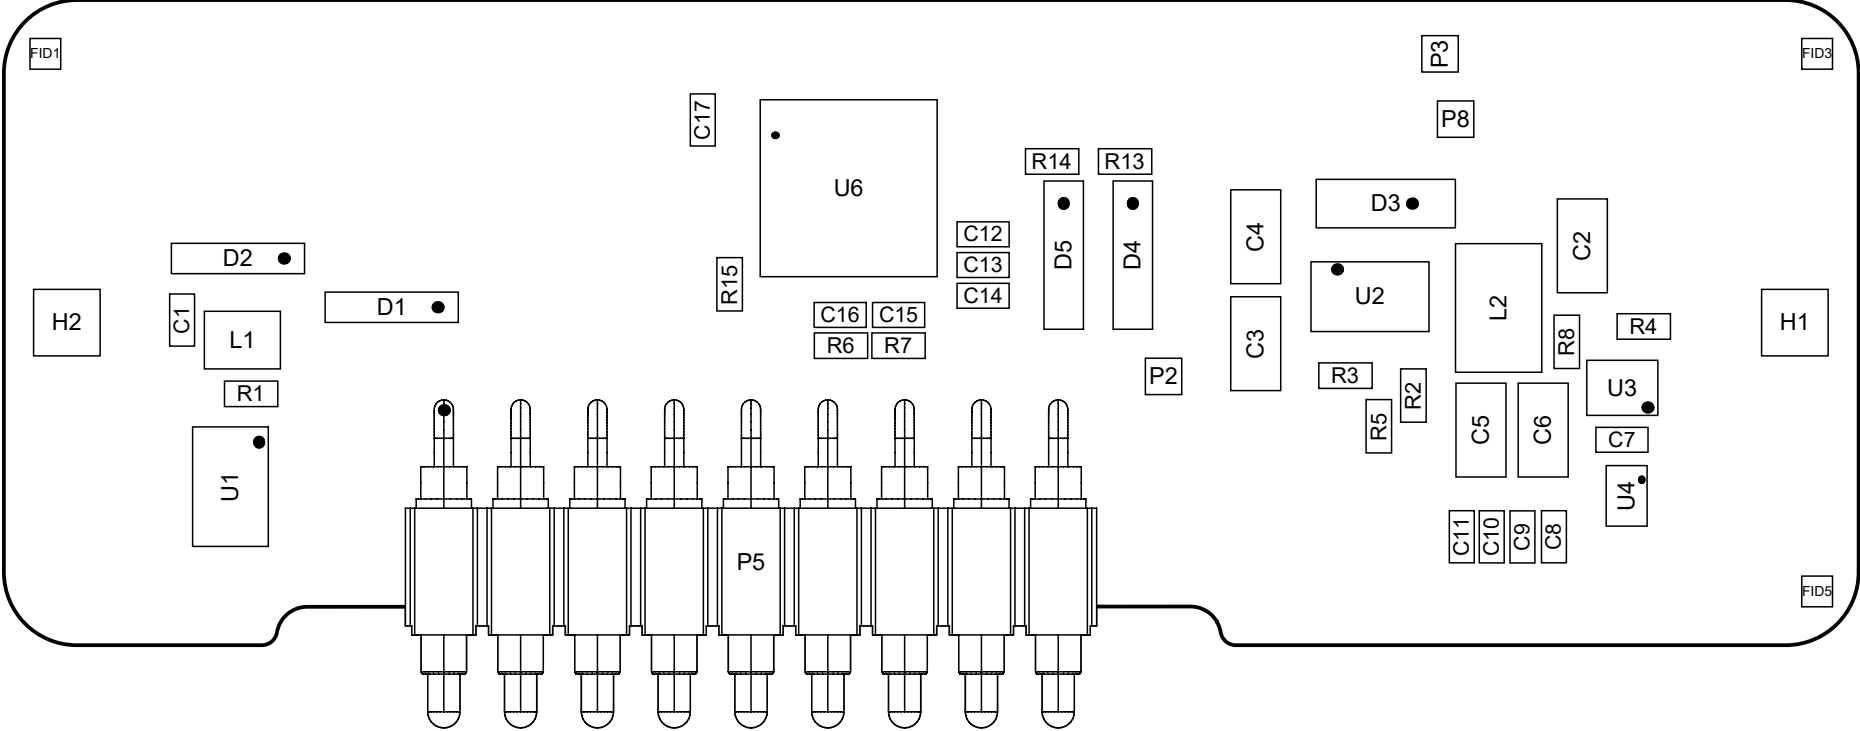

View from Bottom side (Scale 4:1)

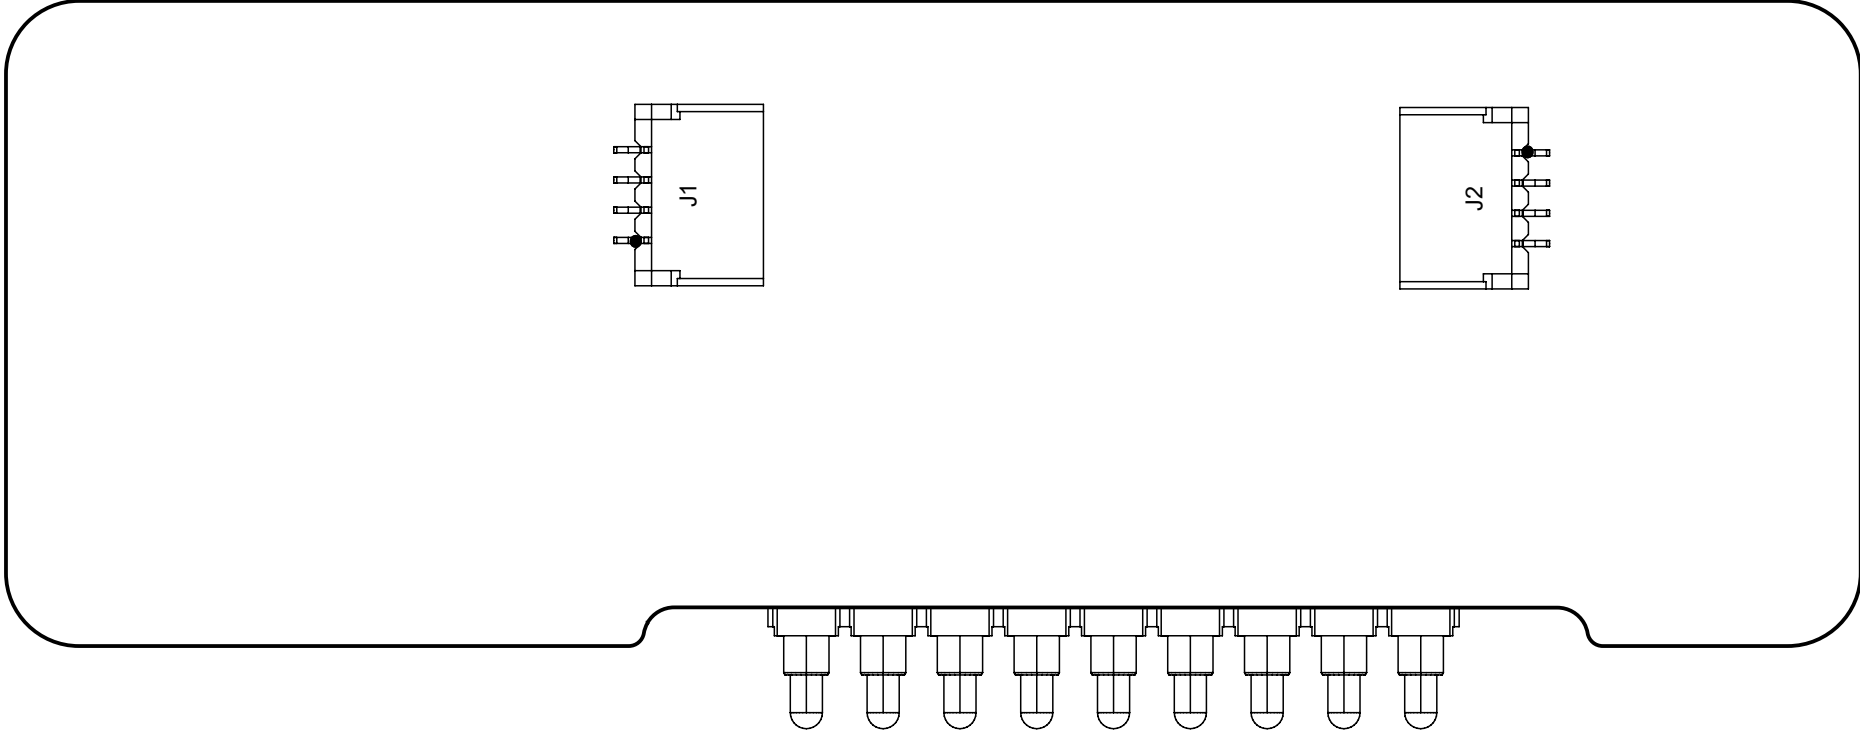

THIS DRAWING IS CAD MAINTAINED.
CHANGES SHALL BE INCORPORATED BY THE DESIGN
ACTIVITY

PART NO. PB-F-0230

1

2

3

4

DWG NO PB-F-0230 SH 1