

1. Description


1.1. Project

| | |
|-----------------|--------------------|
| Project Name | FindMeSAT_V2 |
| Board Name | NUCLEO-L496ZG-P |
| Generated with: | STM32CubeMX 4.24.0 |
| Date | 04/21/2018 |

1.2. MCU

| | |
|----------------|----------------|
| MCU Series | STM32L4 |
| MCU Line | STM32L4x6 |
| MCU name | STM32L496ZGTxP |
| MCU Package | LQFP144 |
| MCU Pin number | 144 |

2. Pinout Configuration

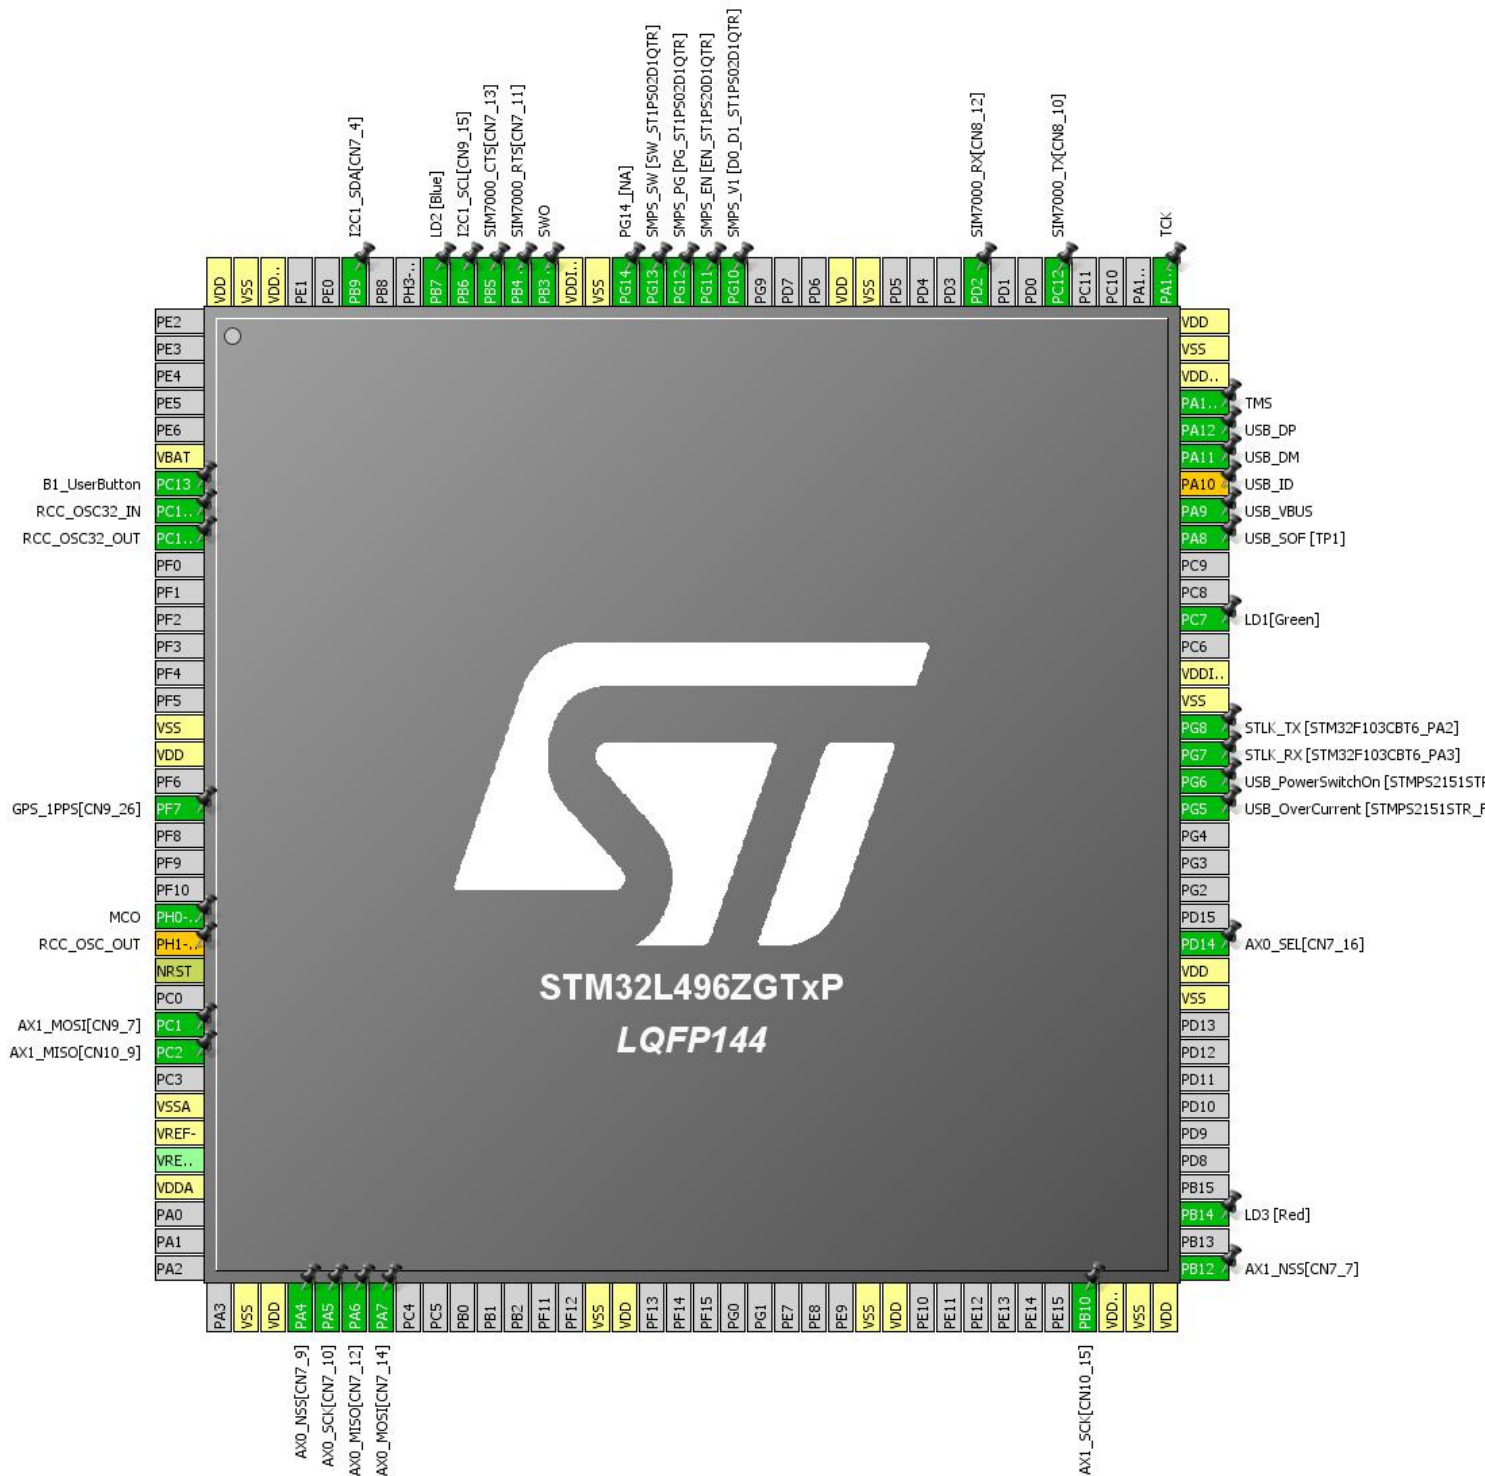

3. Pins Configuration

| Pin Number LQFP144 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|--|
| 6 | VBAT | Power | | |
| 7 | PC13 | I/O | GPIO_EXTI13 | B1_UserButton |
| 8 | PC14-OSC32_IN (PC14) | I/O | RCC_OSC32_IN | |
| 9 | PC15-OSC32_OUT (PC15) | I/O | RCC_OSC32_OUT | |
| 16 | VSS | Power | | |
| 17 | VDD | Power | | |
| 19 | PF7 | I/O | TIM5_CH2 | GPS_1PPS[CN9_26] |
| 23 | PH0-OSC_IN (PH0) | I/O | RCC_OSC_IN | MCO |
| 24 | PH1-OSC_OUT (PH1) * | I/O | RCC_OSC_OUT | |
| 25 | NRST | Reset | | |
| 27 | PC1 | I/O | SPI2_MOSI | AX1_MOSI[CN9_7] |
| 28 | PC2 | I/O | SPI2_MISO | AX1_MISO[CN10_9] |
| 30 | VSSA | Power | | |
| 31 | VREF- | Power | | |
| 33 | VDDA | Power | | |
| 38 | VSS | Power | | |
| 39 | VDD | Power | | |
| 40 | PA4 | I/O | SPI1_NSS | AX0_NSS[CN7_9] |
| 41 | PA5 | I/O | SPI1_SCK | AX0_SCK[CN7_10] |
| 42 | PA6 | I/O | SPI1_MISO | AX0_MISO[CN7_12] |
| 43 | PA7 | I/O | SPI1_MOSI | AX0_MOSI[CN7_14] |
| 51 | VSS | Power | | |
| 52 | VDD | Power | | |
| 61 | VSS | Power | | |
| 62 | VDD | Power | | |
| 69 | PB10 | I/O | SPI2_SCK | AX1_SCK[CN10_15] |
| 70 | VDD12 | Power | | |
| 71 | VSS | Power | | |
| 72 | VDD | Power | | |
| 73 | PB12 | I/O | SPI2_NSS | AX1_NSS[CN7_7] |
| 75 | PB14 ** | I/O | GPIO_Output | LD3 [Red] |
| 83 | VSS | Power | | |
| 84 | VDD | Power | | |
| 85 | PD14 ** | I/O | GPIO_Output | AX0_SEL[CN7_16] |
| 90 | PG5 ** | I/O | GPIO_Input | USB_OverCurrent [STMP2151STR_FAULT] |


| Pin Number LQFP144 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|---------------------------------------|
| 91 | PG6 ** | I/O | GPIO_Output | USB_PowerSwitchOn [STMP2151STR_EN] |
| 92 | PG7 | I/O | LPUART1_TX | STLK_RX [STM32F103CBT6_PA3] |
| 93 | PG8 | I/O | LPUART1_RX | STLK_TX [STM32F103CBT6_PA2] |
| 94 | VSS | Power | | |
| 95 | VDDIO2 | Power | | |
| 97 | PC7 ** | I/O | GPIO_Output | LD1[Green] |
| 100 | PA8 | I/O | USB_OTG_FS_SOF | USB_SOF [TP1] |
| 101 | PA9 | I/O | USB_OTG_FS_VBUS | USB_VBUS |
| 102 | PA10 * | I/O | USB_OTG_FS_ID | USB_ID |
| 103 | PA11 | I/O | USB_OTG_FS_DM | USB_DM |
| 104 | PA12 | I/O | USB_OTG_FS_DP | USB_DP |
| 105 | PA13 (JTMS/SWDIO) | I/O | SYS_JTMS-SWDIO | TMS |
| 106 | VDDUSB | Power | | |
| 107 | VSS | Power | | |
| 108 | VDD | Power | | |
| 109 | PA14 (JTCK/SWCLK) | I/O | SYS_JTCK-SWCLK | TCK |
| 113 | PC12 | I/O | UART5_TX | SIM7000_TX[CN8_10] |
| 116 | PD2 | I/O | UART5_RX | SIM7000_RX[CN8_12] |
| 120 | VSS | Power | | |
| 121 | VDD | Power | | |
| 125 | PG10 ** | I/O | GPIO_Output | SMPS_V1 [D0_D1_ST1PS02D1QTR] |
| 126 | PG11 ** | I/O | GPIO_Output | SMPS_EN [EN_ST1PS20D1QTR] |
| 127 | PG12 ** | I/O | GPIO_Input | SMPS_PG [PG_ST1PS02D1QTR] |
| 128 | PG13 ** | I/O | GPIO_Output | SMPS_SW [SW_ST1PS02D1QTR] |
| 129 | PG14 ** | I/O | GPIO_Analog | PG14_[NA] |
| 130 | VSS | Power | | |
| 131 | VDDIO2 | Power | | |
| 132 | PB3 (JTDO/TRACESWO) | I/O | SYS_JTDO-SWO | SWO |
| 133 | PB4 (NJTRST) | I/O | UART5_RTS | SIM7000_RTS[CN7_11] |
| 134 | PB5 | I/O | UART5_CTS | SIM7000_CTS[CN7_13] |
| 135 | PB6 | I/O | I2C1_SCL | I2C1_SCL[CN9_15] |
| 136 | PB7 ** | I/O | GPIO_Output | LD2 [Blue] |
| 139 | PB9 | I/O | I2C1_SDA | I2C1_SDA[CN7_4] |
| 142 | VDD12 | Power | | |

| Pin Number LQFP144 | Pin Name (function after reset) | Pin Type | Alternate Function(s) | Label |
|-----------------------|---------------------------------------|----------|--------------------------|-------|
| 143 | VSS | Power | | |
| 144 | VDD | Power | | |

** The pin is affected with an I/O function

* The pin is affected with a peripheral function but no peripheral mode is activated

4. Clock Tree Configuration

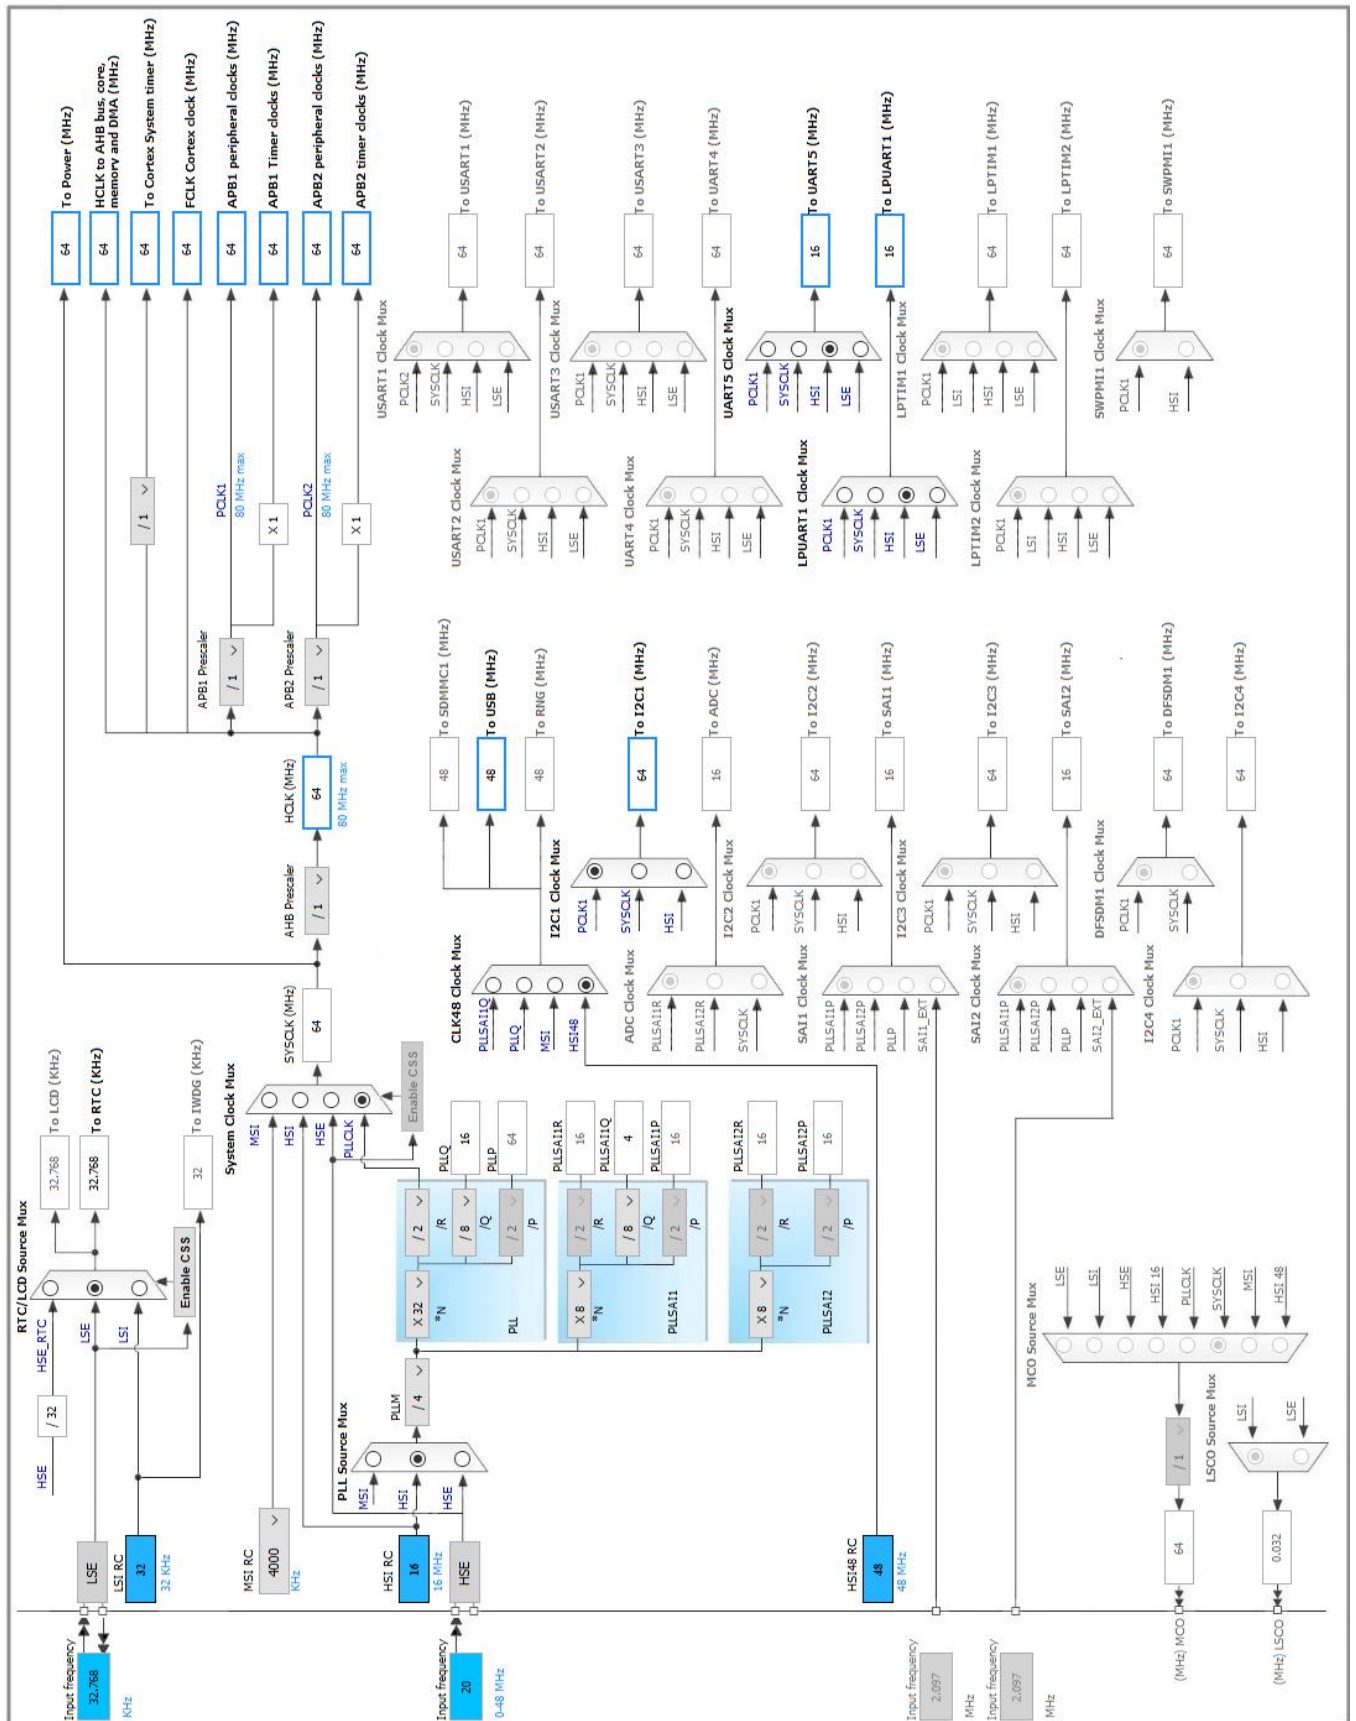

5. IPs and Middleware Configuration

5.1. I2C1

I2C: I2C

5.1.1. Parameter Settings:

Timing configuration:

| | |
|-------------------------------|---------------------|
| I2C Speed Mode | Fast Mode * |
| I2C Speed Frequency (KHz) | 400 |
| Rise Time (ns) | 0 |
| Fall Time (ns) | 0 |
| Coefficient of Digital Filter | 0 |
| Analog Filter | Enabled |
| Timing | 0x00602173 * |

Slave Features:

| | |
|----------------------------------|----------|
| Clock No Stretch Mode | Disabled |
| General Call Address Detection | Disabled |
| Primary Address Length selection | 7-bit |
| Dual Address Acknowledged | Disabled |
| Primary slave address | 0 |

5.2. LPUART1

Mode: Asynchronous

5.2.1. Parameter Settings:

Basic Parameters:

| | |
|-------------|---------------------------|
| Baud Rate | 209700 |
| Word Length | 7 Bits (including Parity) |
| Parity | None |
| Stop Bits | 1 |

Advanced Parameters:

| | |
|----------------|----------------------|
| Data Direction | Receive and Transmit |
| Single Sample | Disable |

Advanced Features:

| | |
|-------------------------------|---------|
| Auto Baudrate Mode | Disable |
| TX Pin Active Level Inversion | Disable |
| RX Pin Active Level Inversion | Disable |
| Data Inversion | Disable |
| TX and RX pins Swapping | Disable |
| Overrun | Enable |
| DMA on RX Error | Enable |
| MSB First | Disable |

5.3. RCC

High Speed Clock (HSE): BYPASS Clock Source

Low Speed Clock (LSE) : Crystal/Ceramic Resonator

5.3.1. Parameter Settings:

System Parameters:

| | |
|-------------------|--------------------|
| VDD voltage (V) | 3.3 |
| Instruction Cache | Enabled |
| Prefetch Buffer | Enabled * |
| Data Cache | Enabled |
| Flash Latency(WS) | 3 WS (4 CPU cycle) |

RCC Parameters:

| | |
|--------------------------------|-------------------------------------|
| HSI Calibration Value | 64 |
| MSI Calibration Value | 0 |
| MSI Auto Calibration | Disabled |
| HSE Startup Timeout Value (ms) | 100 |
| LSE Startup Timeout Value (ms) | 5000 |
| LSE Drive Capability | LSE oscillator low drive capability |

Power Parameters:

| | |
|-------------------------------|---------------------------------|
| Power Regulator Voltage Scale | Power Regulator Voltage Scale 1 |
|-------------------------------|---------------------------------|

5.4. RTC

mode: Activate Clock Source

mode: Activate Calendar

Alarm A: Internal Alarm A

WakeUp: Internal WakeUp

5.4.1. Parameter Settings:

General:

| | |
|-------------------------------|---------------|
| Hour Format | Hourformat 24 |
| Asynchronous Predivider value | 127 |
| Synchronous Predivider value | 255 |

Calendar Time:

| | |
|--|----------------------|
| Data Format | BCD data format |
| Hours | 0 |
| Minutes | 0 |
| Seconds | 0 |
| Day Light Saving: value of hour adjustment | Daylightsaving None |
| Store Operation | Storeoperation Reset |

Calendar Date:

| | |
|----------|---------|
| Week Day | Monday |
| Month | January |
| Date | 1 |
| Year | 0 |

Alarm A:

| | |
|--------------------------|---------------------------------|
| Hours | 0 |
| Minutes | 0 |
| Seconds | 0 |
| Sub Seconds | 0 |
| Alarm Mask Date Week day | Disable |
| Alarm Mask Hours | Disable |
| Alarm Mask Minutes | Disable |
| Alarm Mask Seconds | Disable |
| Alarm Sub Second Mask | All Alarm SS fields are masked. |
| Alarm Date Week Day Sel | Date |
| Alarm Date | 1 |

Wake UP:

| | |
|-----------------|-------------|
| Wake Up Clock | RTCCLK / 16 |
| Wake Up Counter | 0 |

5.5. SPI1

Mode: Full-Duplex Master

Hardware NSS Signal: Hardware NSS Output Signal

5.5.1. Parameter Settings:

Basic Parameters:

| | |
|--------------|----------|
| Frame Format | TI * |
| Data Size | 8 Bits * |

Clock Parameters:

| | |
|---------------------------|----------------|
| Prescaler (for Baud Rate) | 4 * |
| Baud Rate | 16.0 MBits/s * |

Advanced Parameters:

| | |
|-----------------|-----------------|
| CRC Calculation | Disabled |
| NSS Signal Type | Output Hardware |

5.6. SPI2

Mode: Full-Duplex Master

Hardware NSS Signal: Hardware NSS Output Signal

5.6.1. Parameter Settings:

Basic Parameters:

| | |
|--------------|----------|
| Frame Format | TI * |
| Data Size | 8 Bits * |

Clock Parameters:

| | |
|---------------------------|----------------|
| Prescaler (for Baud Rate) | 4 * |
| Baud Rate | 16.0 MBits/s * |

Advanced Parameters:

| | |
|-----------------|-----------------|
| CRC Calculation | Disabled |
| NSS Signal Type | Output Hardware |

5.7. SYS

Debug: Trace Asynchronous Sw

Timebase Source: TIM2

5.8. TIM5

Clock Source : Internal Clock
Channel2: Input Capture direct mode

5.8.1. Parameter Settings:

Counter Settings:

| | |
|---|-----------------|
| Prescaler (PSC - 16 bits value) | 0 |
| Counter Mode | Up |
| Counter Period (AutoReload Register - 32 bits value) | 0 |
| Internal Clock Division (CKD) | No Division |
| auto-reload preload | Enable * |

Trigger Output (TRGO) Parameters:

| | |
|------------------------------|--|
| Master/Slave Mode (MSM bit) | Disable (Trigger input effect not delayed) |
| Trigger Event Selection TRGO | Reset (UG bit from TIMx_EGR) |

Input Capture Channel 2:

| | |
|-----------------------------|-------------|
| Polarity Selection | Rising Edge |
| IC Selection | Direct |
| Prescaler Division Ratio | No division |
| Input Filter (4 bits value) | 0 |

5.9. UART5

Mode: Asynchronous
Hardware Flow Control (RS232): CTS/RTS

5.9.1. Parameter Settings:

Basic Parameters:

| | |
|-------------|---------------------------|
| Baud Rate | 19200 * |
| Word Length | 8 Bits (including Parity) |
| Parity | None |
| Stop Bits | 1 |

Advanced Parameters:

| | |
|----------------|----------------------|
| Data Direction | Receive and Transmit |
| Over Sampling | 16 Samples |
| Single Sample | Disable |

Advanced Features:

| | |
|-------------------------------|---------|
| TX Pin Active Level Inversion | Disable |
| RX Pin Active Level Inversion | Disable |

| | |
|-------------------------|---------|
| Data Inversion | Disable |
| TX and RX Pins Swapping | Disable |
| Overrun | Enable |
| DMA on RX Error | Enable |
| MSB First | Disable |

5.10. USB_OTG_FS

Mode: Device_Only

Activate_VBUS: VBUS sensing

mode: Activate_SOF

5.10.1. Parameter Settings:

| | |
|-------------------------------------|---------------------|
| Speed | Full Speed 12MBit/s |
| Endpoint 0 Max Packet size | 64 Bytes |
| Enable internal IP DMA | Disabled |
| Low power | Disabled |
| Battery charging | Enabled |
| Link Power Management | Disabled |
| Use dedicated end point 1 interrupt | Disabled |
| VBUS sensing | Enabled |
| Signal start of frame | Enabled |

5.11. FREERTOS

mode: Enabled

5.11.1. Config parameters:

Versions:

| | |
|--------------------|-------|
| FreeRTOS version | 9.0.0 |
| CMSIS-RTOS version | 1.02 |

Kernel settings:

| | |
|--------------------|-----------------|
| USE_PREEMPTION | Enabled |
| CPU_CLOCK_HZ | SystemCoreClock |
| TICK_RATE_HZ | 1000 |
| MAX_PRIORITIES | 7 |
| MINIMAL_STACK_SIZE | 128 |

| | |
|-----------------------------------|----------|
| MAX_TASK_NAME_LEN | 16 |
| USE_16_BIT_TICKS | Disabled |
| IDLE_SHOULD_YIELD | Enabled |
| USE_MUTEXES | Enabled |
| USE_RECURSIVE_MUTEXES | Disabled |
| USE_COUNTING_SEMAPHORES | Disabled |
| QUEUE_REGISTRY_SIZE | 8 |
| USE_APPLICATION_TASK_TAG | Disabled |
| ENABLE_BACKWARD_COMPATIBILITY | Enabled |
| USE_PORT_OPTIMISED_TASK_SELECTION | Enabled |
| USE_TICKLESS_IDLE | Disabled |
| USE_TASK_NOTIFICATIONS | Enabled |

Memory management settings:

| | |
|--------------------------|---------|
| Memory Allocation | Dynamic |
| TOTAL_HEAP_SIZE | 3000 |
| Memory Management scheme | heap_4 |

Hook function related definitions:

| | |
|------------------------------|----------|
| USE_IDLE_HOOK | Disabled |
| USE_TICK_HOOK | Disabled |
| USE_MALLOC_FAILED_HOOK | Disabled |
| USE_DAEMON_TASK_STARTUP_HOOK | Disabled |
| CHECK_FOR_STACK_OVERFLOW | Disabled |

Run time and task stats gathering related definitions:

| | |
|--------------------------------|----------|
| GENERATE_RUN_TIME_STATS | Disabled |
| USE_TRACE_FACILITY | Disabled |
| USE_STATS_FORMATTING_FUNCTIONS | Disabled |

Co-routine related definitions:

| | |
|---------------------------|----------|
| USE_CO_ROUTINES | Disabled |
| MAX_CO_ROUTINE_PRIORITIES | 2 |

Software timer definitions:

| | |
|------------|----------|
| USE_TIMERS | Disabled |
|------------|----------|

Interrupt nesting behaviour configuration:

| | |
|--|----|
| LIBRARY_LOWEST_INTERRUPT_PRIORITY | 15 |
| LIBRARY_MAX_SYSCALL_INTERRUPT_PRIORITY | 5 |

5.11.2. Include parameters:

Include definitions:

| | |
|-------------------|---------|
| vTaskPrioritySet | Enabled |
| uxTaskPriorityGet | Enabled |
| vTaskDelete | Enabled |

| | |
|-----------------------------|----------|
| vTaskCleanUpResources | Disabled |
| vTaskSuspend | Enabled |
| vTaskDelayUntil | Disabled |
| vTaskDelay | Enabled |
| xTaskGetSchedulerState | Enabled |
| xTaskResumeFromISR | Enabled |
| xQueueGetMutexHolder | Disabled |
| xSemaphoreGetMutexHolder | Disabled |
| pcTaskGetTaskName | Disabled |
| uxTaskGetStackHighWaterMark | Disabled |
| xTaskGetCurrentTaskHandle | Disabled |
| eTaskGetState | Disabled |
| xEventGroupSetBitFromISR | Disabled |
| xTimerPendFunctionCall | Disabled |
| xTaskAbortDelay | Disabled |
| xTaskGetHandle | Disabled |

5.12. USB_DEVICE

Class For FS IP: Communication Device Class (Virtual Port Com)

5.12.1. Parameter Settings:

Basic Parameters:

| | |
|--|------------------------------------|
| USBD_MAX_NUM_INTERFACES (Maximum number of supported interfaces) | 1 |
| USBD_MAX_NUM_CONFIGURATION (Maximum number of supported configuration) | 1 |
| USBD_MAX_STR_DESC_SIZ (Maximum size for the string descriptors) | 512 |
| USBD_SUPPORT_USER_STRING (Enable user string descriptor) | Enabled * |
| USBD_SELF_POWERED (Enabled self power) | Enabled |
| USBD_DEBUG_LEVEL (USBD Debug Level) | 0: No debug message |
| USBD_LPM_ENABLED (Link Power Management) | 1: Link Power Management supported |

Class Parameters:

| | |
|------------------------|------|
| USB CDC Rx Buffer Size | 2048 |
| USB CDC Tx Buffer Size | 2048 |

5.12.2. Device Descriptor:

Device Descriptor:

| | |
|-------------------------------------|------------------------|
| VID (Vendor Identifier) | 1155 |
| LANGID_STRING (Language Identifier) | English(United States) |

MANUFACTURER_STRING (Manufacturer Identifier)

STMicroelectronics

Device Descriptor FS:

PID (Product Identifier)

22336

PRODUCT_STRING (Product Identifier)

STM32 Virtual ComPort

SERIALNUMBER_STRING (Serial number)

00000000001A

CONFIGURATION_STRING (Configuration Identifier)

CDC Config

INTERFACE_STRING (Interface Identifier)

CDC Interface

*** User modified value**

6. System Configuration

6.1. GPIO configuration

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|---------|-----------------------|---------------|-------------------------------|-----------------------------|-------------|-----------------------------|
| I2C1 | PB6 | I2C1_SCL | Alternate Function Open Drain | Pull-up | Very High * | I2C1_SCL[CN9_15] |
| | PB9 | I2C1_SDA | Alternate Function Open Drain | Pull-up | Very High * | I2C1_SDA[CN7_4] |
| LPUART1 | PG7 | LPUART1_TX | Alternate Function Push Pull | Pull-up | Very High * | STLK_RX [STM32F103CBT6_PA3] |
| | PG8 | LPUART1_RX | Alternate Function Push Pull | Pull-up | Very High * | STLK_TX [STM32F103CBT6_PA2] |
| RCC | PC14-OSC32_IN (PC14) | RCC_OSC32_IN | n/a | n/a | n/a | |
| | PC15-OSC32_OUT (PC15) | RCC_OSC32_OUT | n/a | n/a | n/a | |
| | PH0-OSC_IN (PH0) | RCC_OSC_IN | n/a | n/a | n/a | MCO |
| SPI1 | PA4 | SPI1_NSS | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | AX0_NSS[CN7_9] |
| | PA5 | SPI1_SCK | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | AX0_SCK[CN7_10] |
| | PA6 | SPI1_MISO | Alternate Function Push Pull | Pull-up * | Very High * | AX0_MISO[CN7_12] |
| | PA7 | SPI1_MOSI | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | AX0_MOSI[CN7_14] |
| SPI2 | PC1 | SPI2_MOSI | Alternate Function Push Pull | Pull-up * | Very High * | AX1_MOSI[CN9_7] |
| | PC2 | SPI2_MISO | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | AX1_MISO[CN10_9] |
| | PB10 | SPI2_SCK | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | AX1_SCK[CN10_15] |
| | PB12 | SPI2_NSS | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | AX1_NSS[CN7_7] |

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|-----------------------|------------------------|-----------------|--|-----------------------------|--------------------|-------------------------------------|
| SYS | PA13 (JTMS/SWDIO) | SYS_JTMS-SWDIO | n/a | n/a | n/a | TMS |
| | PA14 (JTCK/SWCLK) | SYS_JTCK-SWCLK | n/a | n/a | n/a | TCK |
| | PB3 (JTDO/TRACESWO) | SYS_JTDO-SWO | n/a | n/a | n/a | SWO |
| TIM5 | PF7 | TIM5_CH2 | Alternate Function Push Pull | Pull-up * | Low | GPS_1PPS[CN9_26] |
| UART5 | PC12 | UART5_TX | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | SIM7000_TX[CN8_10] |
| | PD2 | UART5_RX | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | SIM7000_RX[CN8_12] |
| | PB4 (NJTRST) | UART5_RTS | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | SIM7000_RTS[CN7_11] |
| | PB5 | UART5_CTS | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | SIM7000_CTS[CN7_13] |
| USB_OTG_FS | PA8 | USB_OTG_FS_SOF | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | USB_SOF [TP1] |
| | PA9 | USB_OTG_FS_VBUS | Input mode | No pull-up and no pull-down | n/a | USB_VBUS |
| | PA11 | USB_OTG_FS_DM | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | USB_DM |
| | PA12 | USB_OTG_FS_DP | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | USB_DP |
| Single Mapped Signals | PH1-OSC_OUT (PH1) | RCC_OSC_OUT | n/a | n/a | n/a | |
| | PA10 | USB_OTG_FS_ID | Alternate Function Push Pull | No pull-up and no pull-down | Very High * | USB_ID |
| GPIO | PC13 | GPIO_EXTI13 | External Interrupt Mode with Rising edge trigger detection | No pull-up and no pull-down | n/a | B1_UserButton |
| | PB14 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LD3 [Red] |
| | PD14 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | AX0_SEL[CN7_16] |
| | PG5 | GPIO_Input | Input mode | No pull-up and no pull-down | n/a | USB_OverCurrent [STMP2151STR_FAULT] |
| | PG6 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | USB_PowerSwitchOn [STMP2151STR_EN] |
| | PC7 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LD1[Green] |
| | PG10 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | SMPS_V1 |

| IP | Pin | Signal | GPIO mode | GPIO pull/up pull down | Max Speed | User Label |
|----|------|-------------|------------------|-----------------------------|-----------|------------------------------|
| | | | | | | [D0_D1_ST1PS02D1QTR] |
| | PG11 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | SMPS_EN [EN_ST1PS20D1QTR] |
| | PG12 | GPIO_Input | Input mode | No pull-up and no pull-down | n/a | SMPS_PG [PG_ST1PS02D1QTR] |
| | PG13 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | SMPS_SW [SW_ST1PS02D1QTR] |
| | PG14 | GPIO_Analog | Analog mode | No pull-up and no pull-down | n/a | PG14_[NA] |
| | PB7 | GPIO_Output | Output Push Pull | No pull-up and no pull-down | Low | LD2 [Blue] |

6.2. DMA configuration

nothing configured in DMA service

6.3. NVIC configuration

| Interrupt Table | Enable | Preenmption Priority | SubPriority |
|--|--------|----------------------|-------------|
| Non maskable interrupt | true | 0 | 0 |
| Hard fault interrupt | true | 0 | 0 |
| Memory management fault | true | 0 | 0 |
| Prefetch fault, memory access fault | true | 0 | 0 |
| Undefined instruction or illegal state | true | 0 | 0 |
| System service call via SWI instruction | true | 0 | 0 |
| Debug monitor | true | 0 | 0 |
| Pendable request for system service | true | 15 | 0 |
| System tick timer | true | 15 | 0 |
| RTC wake-up interrupt through EXTI line 20 | true | 0 | 0 |
| RCC global interrupt | true | 5 | 0 |
| TIM2 global interrupt | true | 0 | 0 |
| I2C1 event interrupt | true | 5 | 0 |
| I2C1 error interrupt | true | 5 | 0 |
| RTC alarm interrupt through EXTI line 18 | true | 0 | 0 |
| TIM5 global interrupt | true | 5 | 0 |
| USB OTG FS global interrupt | true | 5 | 0 |
| PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/35/36/37/38 | unused | | |
| Flash global interrupt | unused | | |
| SPI1 global interrupt | unused | | |
| SPI2 global interrupt | unused | | |
| EXTI line[15:10] interrupts | unused | | |
| UART5 global interrupt | unused | | |
| LPUART1 global interrupt | unused | | |
| FPU global interrupt | unused | | |

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

| | |
|-----------|----------------|
| Series | STM32L4 |
| Line | STM32L4x6 |
| MCU | STM32L496ZGTxP |
| Datasheet | 029173_Rev2 |

7.2. Parameter Selection

| | |
|-------------|------|
| Temperature | 25 |
| Vdd | null |

8. Software Project

8.1. Project Settings

| Name | Value |
|-----------------------------------|--|
| Project Name | FindMeSAT_V2 |
| Project Folder | Z:\nfs_ds_nfs\git\FindMeSAT__SW\FindMeSAT_V2_SW\TrueSTUDIO\FindMeS |
| Toolchain / IDE | TrueSTUDIO |
| Firmware Package Name and Version | STM32Cube FW_L4 V1.11.0 |

8.2. Code Generation Settings

| Name | Value |
|---|---------------------------------------|
| STM32Cube Firmware Library Package | Copy only the necessary library files |
| Generate peripheral initialization as a pair of '.c/.h' files | Yes |
| Backup previously generated files when re-generating | No |
| Delete previously generated files when not re-generated | Yes |
| Set all free pins as analog (to optimize the power consumption) | Yes |

9. Software Pack Report