
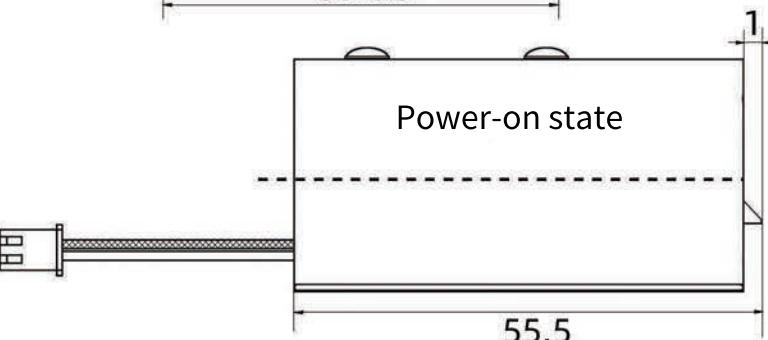
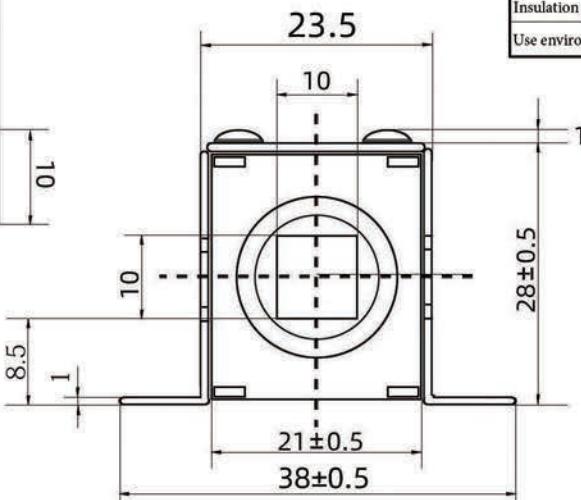


Electric lock power line
XH-2P-2.54 terminal
Exposed length 370mm

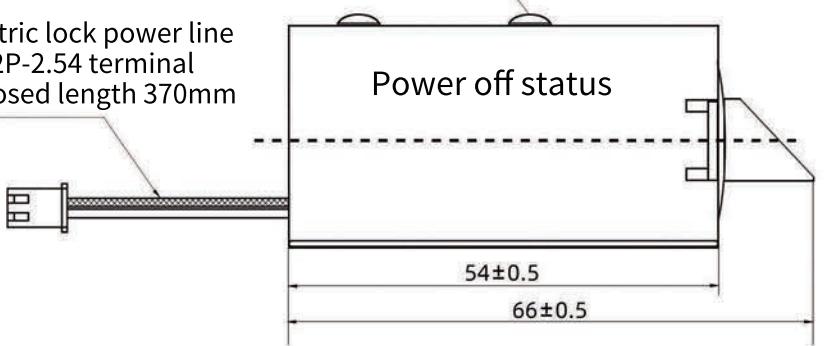

Voltage	DC12V	DC24V
Current	0.4A	0.3A
Power	4.8W	7.2A
Power on hours	≤ 24 Intermittent use is recommended	
Suction of lock tongue	Initial suction: 0.8N Holding suction: 10N	
Stroke of lock tongue	10mm	
Operative mode	Power-on pull-in power-off eject	
Specific performance	Can be powered on for a long time	
Insulation withstand voltage	600VAC/1sec	
Insulation resistance	500VDC/100MΩ	
Insulation grade	F (155°C)	
Use environment	-20°C~+40°C, humidity: 5~90%	

RECOGNITION	DESIGNER	CONFIRMOR	VERSION	CHANGE CONTENT	CHANGE PERSON	DATE	The materials and surface treatments used in this product are in compliance with ROHS specifications	General tolerance	LESS THAN 60	±0.1	PROPORTION	MODEL LY03 (long power on) Appearance size chart	
									6~30	±0.2	1:1		
									30~60	±0.3	UNIT mm		
									GREATER THAN 60	±0.4			
									THICKNESS	Ra3.2	R ANGLE		
									CONCENTRICITY	±0.1	0.1	Appearance size chart	
									FLATNESS	±0.1	CHAMFER		
									VERTICALITY	±0.1	0.1*45°		