

|           |                                                     |
|-----------|-----------------------------------------------------|
| Exp No: 3 | Experiments on CISCO PACKET TRACER - Hub and Switch |
|-----------|-----------------------------------------------------|

### AIM:

To understand the environment of Cisco Packet Tracer, to design simple networks using a hub and a switch with 4 to 6 hosts, and to analyse the behaviour of these devices by tracing the communication in simulation mode.

### ALGORITHM / PROCEDURE:

1. Open Cisco Packet Tracer. Study the workspace: device selection box (bottom left), logical workspace (centre), Realtime / Simulation switch (bottom right).
2. Select **End Devices** and drag 5 PCs and a Hub on to the workspace.
3. Select **Connections** and use the **Automatically Choose Connection Type** (copper straight-through) to connect each PC to the hub.
4. Click a PC, go to **Desktop > IP Configuration** and set the IP address 192.168.1.1 to 192.168.1.5 with subnet mask 255.255.255.0.
5. Open **Desktop > Command Prompt** of PC0 and ping the other PCs to check the connectivity.
6. Switch to **Simulation** mode, click **Add Simple PDU** (envelope) and click PC0 then PC3. Press **Capture / Forward** and watch how the packet moves.
7. Repeat steps 2 to 6 by replacing the hub with a **Switch** (Experiment 2).
8. Build a network that has both a hub and a switch (Experiment 3), connect hub and switch with a crossover cable, send a PDU from a hub PC to a switch PC and compare the behaviour.
9. Observe the event list and the MAC address table of the switch show mac-address-table.

### DIAGRAM:

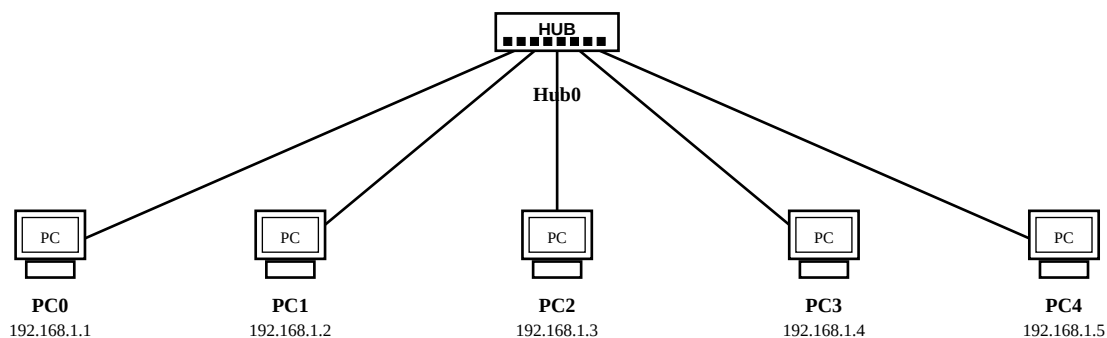


Fig 1: Network using only a HUB (5 hosts)

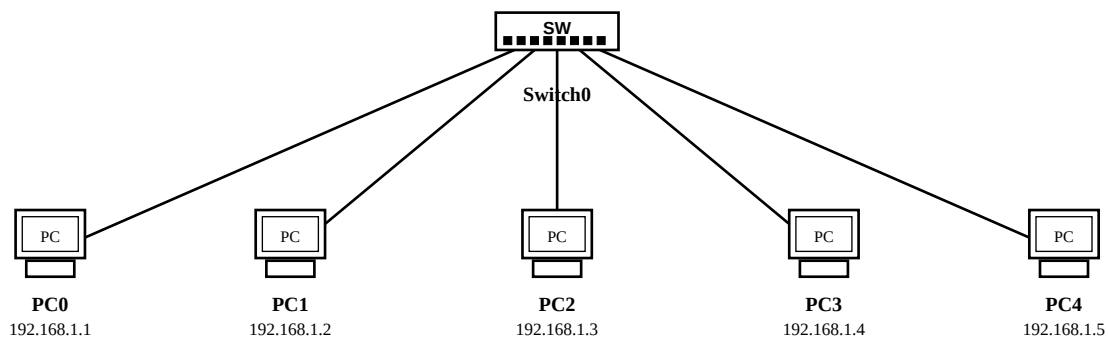


Fig 2: Network using only a SWITCH (5 hosts)

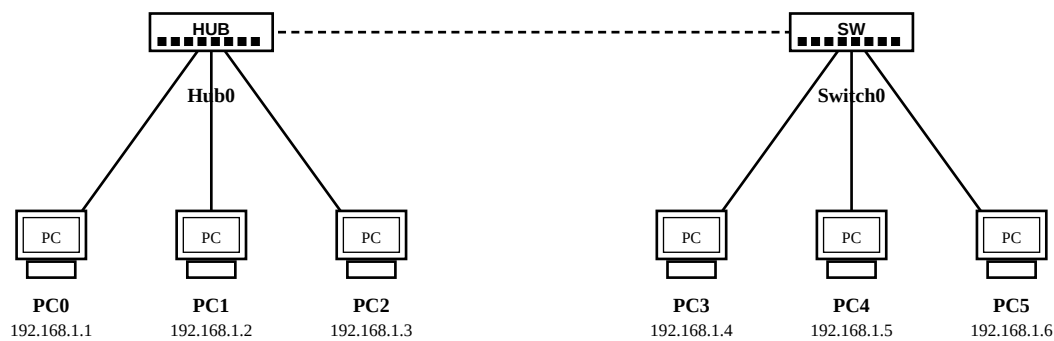


Fig 3: Network using both HUB and SWITCH (6 hosts)

### Network topology implemented in our college

The college network follows an **extended star (hierarchical) topology**. The computers of each lab are connected to a lab switch with straight-through UTP cables (star). All lab switches are connected to the core switch kept in the server room and the core switch goes to the router / firewall and then to the ISP.


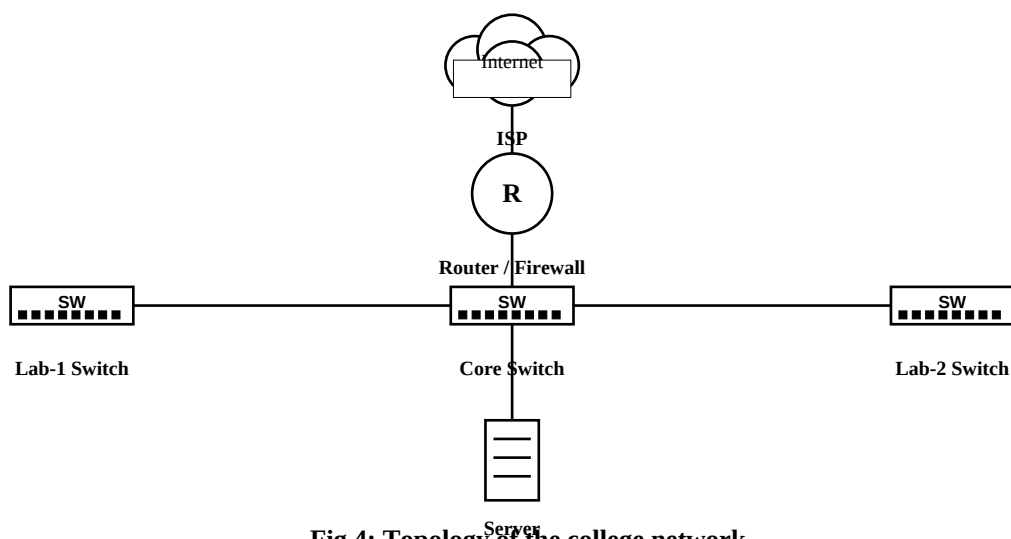


Fig 4: Topology of the college network

**OUTPUT:**

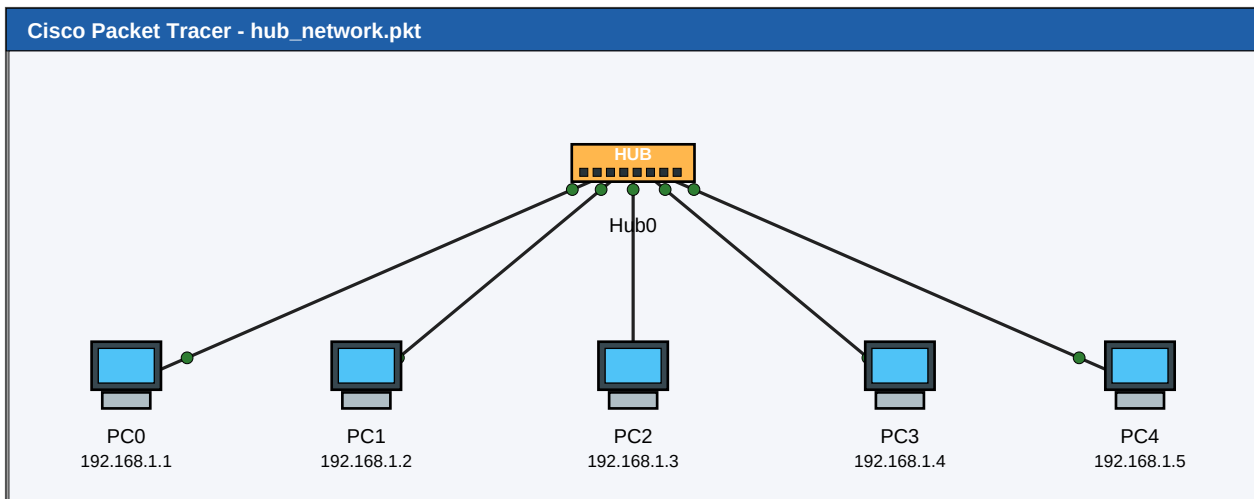

### Experiment 1 : hub network in Packet Tracer (all link lights green)

#### PC0 - Command Prompt

```

C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Request timed out.
Reply from 192.168.1.4: bytes=32 time=6ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 6ms, Average = 2ms

C:\>ping 192.168.1.4

Pinging 192.168.1.4 with 32 bytes of data:

Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128
Reply from 192.168.1.4: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.1.4:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

```


The first ping loses one packet because the ARP request has to be resolved first. The second ping shows 0% loss.

#### Simulation mode - Hub (PC0 to PC3)

| Fire | Last Status | Source | Destination | Type | Color  | Time(sec) | Periodic | Num |
|------|-------------|--------|-------------|------|--------|-----------|----------|-----|
|      | Successful  | PC0    | Hub0        | ARP  | Yellow | 0.000     | N        | 0   |
|      | Successful  | Hub0   | PC1         | ARP  | Yellow | 0.001     | N        | 1   |
|      | Successful  | Hub0   | PC2         | ARP  | Yellow | 0.001     | N        | 2   |
|      | Successful  | Hub0   | PC3         | ARP  | Yellow | 0.001     | N        | 3   |
|      | Successful  | Hub0   | PC4         | ARP  | Yellow | 0.001     | N        | 4   |
|      | Failed      | PC1    | ---         | ICMP | Green  | 0.002     | N        | 5   |
|      | Successful  | PC0    | Hub0        | ICMP | Green  | 0.003     | N        | 6   |

The hub repeats every frame on all ports. PC1, PC2 and PC4 receive the frame and drop it because it is not meant for them.

### Cisco Packet Tracer - switch\_network.pkt

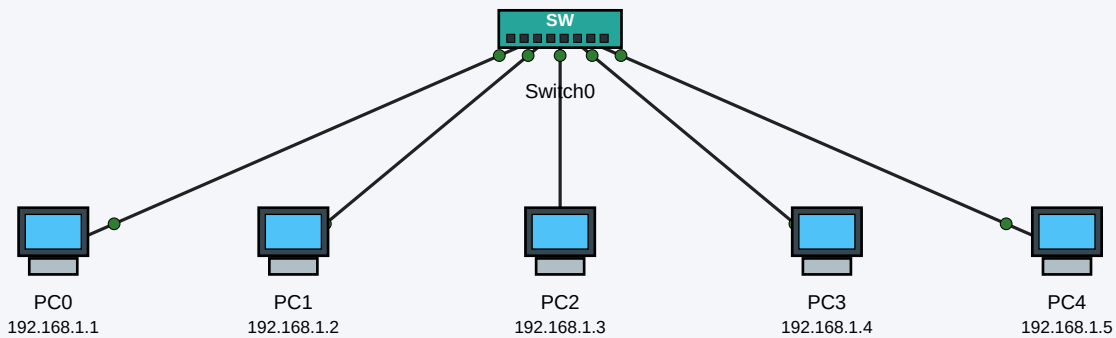

### Experiment 2 : switch network in Packet Tracer

#### Switch0 - CLI

```
Switch>enable
Switch#show mac-address-table
Mac Address Table
```


| Vlan | Mac Address    | Type    | Ports |
|------|----------------|---------|-------|
| 1    | 0001.4382.a3c1 | DYNAMIC | Fa0/1 |
| 1    | 0002.1779.b4d2 | DYNAMIC | Fa0/4 |
| 1    | 0060.2fa1.0c55 | DYNAMIC | Fa0/2 |

Switch#

| Fire | Last Status | Source  | Destination | Type | Color | Time(sec) | Periodic | Num |
|------|-------------|---------|-------------|------|-------|-----------|----------|-----|
|      | Successful  | PC0     | Switch0     | ARP  |       | 0.000     | N        | 0   |
|      | Successful  | Switch0 | PC1         | ARP  |       | 0.001     | N        | 1   |
|      | Successful  | Switch0 | PC2         | ARP  |       | 0.001     | N        | 2   |
|      | Successful  | Switch0 | PC3         | ARP  |       | 0.001     | N        | 3   |
|      | Successful  | PC3     | Switch0     | ARP  |       | 0.002     | N        | 4   |
|      | Successful  | PC0     | Switch0     | ICMP |       | 0.003     | N        | 5   |
|      | Successful  | Switch0 | PC3         | ICMP |       | 0.004     | N        | 6   |

Only the first ARP broadcast is flooded. After the switch has learnt the MAC addresses, the ICMP frame goes only to the port of PC3.

### Cisco Packet Tracer - hub\_switch.pkt

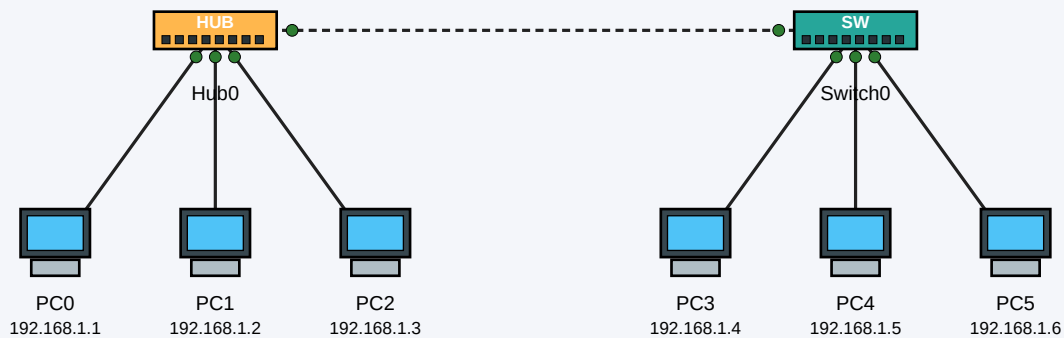

### Experiment 3 : hub and switch in the same network

| Fire | Last Status | Source | Destination | Type | Color | Time(sec) | Periodic | Num |
|------|-------------|--------|-------------|------|-------|-----------|----------|-----|
|      | Successful  | PC0    | Hub0        | ICMP |       | 0.000     | N        | 0   |

|  |            |         |         |      |  |       |   |   |
|--|------------|---------|---------|------|--|-------|---|---|
|  | Successful | Hub0    | PC1     | ICMP |  | 0.001 | N | 1 |
|  | Successful | Hub0    | PC2     | ICMP |  | 0.001 | N | 2 |
|  | Successful | Hub0    | Switch0 | ICMP |  | 0.001 | N | 3 |
|  | Successful | Switch0 | PC3     | ICMP |  | 0.002 | N | 4 |
|  | Successful | PC3     | Switch0 | ICMP |  | 0.003 | N | 5 |
|  | Successful | Switch0 | Hub0    | ICMP |  | 0.004 | N | 6 |

| Point              | Hub                             | Switch                                          |
|--------------------|---------------------------------|-------------------------------------------------|
| OSI layer          | Physical layer (Layer 1)        | Data link layer (Layer 2)                       |
| Forwarding         | Repeats the signal to all ports | Forwards the frame only to the destination port |
| Address table      | None                            | MAC address table (learning)                    |
| Collision domain   | One for all the ports           | One for each port                               |
| Bandwidth          | Shared among all hosts          | Dedicated to each port                          |
| Duplex             | Half duplex                     | Full duplex                                     |
| Security / traffic | Anyone can capture the traffic  | Traffic is limited to the two hosts             |

## **RESULT:**

Thus the Cisco Packet Tracer environment was studied. Networks using only a hub, only a switch, and both a hub and a switch were designed and the packet flow was traced in simulation mode. The hub broadcasts every frame to all ports whereas the switch learns MAC addresses and forwards the frame only to the destination port.