

# Out of Plane Rolling via Simple Pushing Robot Team

David L. McPherson      Ronald S. Fearing

April 1, 2016

## I Motivation, Problem Statement, Related Work

As robots make the migratory leap from well-controlled factory cages into the rough-and-tumble of natural environments, a growing theme is physical interaction. Locomotive physical interactions are necessarily becoming more complex as the robot is tasked with facing more draconian domains and steeper terrains. Sticky crawlers, hexapods, snakes, tumbling robots, whegs, wheel robots, MIT cheetahs, bipedal walkers: all these locomotion types require more finesse in the physical interaction between the robot and its terrain. Here physical interactions are between the robot and its surrounding terrain. The object being "manipulated" is the robot's body as its position evolves through the space.

More complex physical interactions are also being pioneered in the realm of grasping and manipulation. The science of grasping kinematics and dynamics were refined for factory pick-and-place robots with high precision, high gain controllers moving steely fingers precisely to stiff locations. However, as robots leave the factory, they no longer have the luxuries previously assumed by past developments. Robots no longer know the exact initial position of target parts. Indeed, the target part may be unstably tumbling about in unknown ways. To remedy this misfortune, ingenious engineers are working towards compliant grasping that naturally includes more forgiveness in the mechanics (see Bicchi et. al [9]). Pioneers have even delved into manipulation frameworks that preclude the need for static force or form closure. These frameworks (such as dynamic manipulation (Mason et. al [5]) and dexterous manipulation (Fearing et. al [1])) allow for more robust manipulations by leaving certain freedoms unconstrained and moving the object within these freedoms. This all builds on and improves the solutions already obtained for factory grasps and manipulation, leveraging our rich past in engineering grasping to build more robust techniques for the tumultuous environs of tomorrow's robots. Here the physical interactions are between a robot hand and a target object to be manipulated.

In this work we seek to fuse these two realms of physical interaction and perform manipulation via locomotion. Objects in the robots environment can be manipulated by pushing. The core of our proposition here is to use this pushing coupled with effector design and coordinated pushing maneuvers to achieve 5DOF manipulation of objects in the environment. Rus et al.[7] demonstrated techniques for coordinating robots to manipulate furniture in the plane with 3DOF (x,y,yaw). Sugar et al. [8] followed up by digging deeper into the controls for such a team of robots manipulating objects in the plane. This research extends the capabilities of a team of robot manipulators moving in the plane to enable manipulating objects to roll out of the plane.

We can achieve this without adding grippers or claws or other additional actuators. Instead, we design the shape of the robot so that the pushing contact surface will roll the target object out of plane.

We take the first step in this brave new world with a case study in manipulating one particular type of object: a capsized robot in the same heterogeneous team as our manipulators. This case study makes for an exciting motivating application by allowing the heterogenous swarm to self-correct. Simultaneously, insights into why the general problem is difficult can be glimpsed through the lens of this initial case study. Finally, the capsized robot's shape (half an ellipsoid) is a fair surrogate for a class of convex polyhedra.

## 2 Technical Approach

### 2.1 Robotic Platforms

The Biomimetic Millisystems Lab at Berkeley has been investigating group exploration using a heterogeneous team of two types of robots. The first robot is the lightweight and highly mobile RoACH robot. This robot is modeled after the American Cockroach due to its wide variety of high speed, stable gaits [2]. We will be using the RoACH model with the terradynamically streamed shell designed by Li et. al [4]. However, this robot is also prone to landing inverted on its back and being incapable of righting. Previous work [3] has investigated additional actuators and mechanisms for getting the robot back on its feet. However, we are interested in keeping the number of actuators low, for the sake of an affordable robot swarm. We can achieve the same righting behavior by simply tuning some team member's shape for out-of-plane rolling.

The second robot The platform is codenamed "Zummy" and is shown in Fig. 1. A further description of the experimental system can be found at <https://wiki.eecs.berkeley.edu/biomimetics/Main/Zummy>. The Zummy platform combines a high power ODROID processor with the commercially available Zumo chassis (from Pololu). The processor can run Linux, ROS, and computer vision algorithms for experiments in sensor fusion, SLAM, and swarm control. This work will not leverage the strength of the ODROID processor for much. Instead, the capable tank-tread design provides a steady locomotion base for transporting around the real focus of this study: a carefully shaped plow. Two 1600mA, 6V, 30 oz-in miniature motors differentially drive the robot's treads and provide sufficient push force behind our plow.

### 2.2 Effector Design

Here we extend the rich history of research in manipulation to when the "robot hand" is not one connected mechanism, but instead a disconnected team of independent robots. Distances between the individual fingers are not tightly constrained as in a traditional dexterous hand where all fingers are linked to a unifying palm. However, our robots have the added constraint of being grounded to move in the plane rather than flex through three dimensions like traditional fingers.

To overcome this shortcoming, we do not design the fingers to rigidly enclose the object (force or form closure). That is, we do not secure the object in a grasp as in a traditional pick-and-place schema. The pick-and-place schema is infeasible for our robot swarm since we effectively only have a 3DOF "arm" rather than a 6 or 7DOF one. Our "arm" cannot rotate in three-space. We will still use the pick-and-place schema for achieving manipulations in these three DOF, but if we want full manipulation (including: roll, pitch, and z) we need something more for our manipulation.

Enter the tumbling manipulation mode – and the required shape-for-contact design requisite to it. By abandoning the notion of a closure-sealed grasp, our robot can leverage carefully controlled slippage through dexterous manipulation to achieve extra DOF. We will build on work by Fearing et. al [1], and use a cylindrical contact surface. This choice for contact surface is well motivated by the cylinder's inherent instability in contact. This instability will tend to push any contacted object up and over the cylinder, allowing exciting new modes for manipulation (as we will see shortly).

The cylindrical roller will be affixed to the front of the Zummy robot as shown in Fig. 1. As will be described in the next sections analysis, the cylinder requires a frictional backstop to push the target object against. This can be either a fixture in the

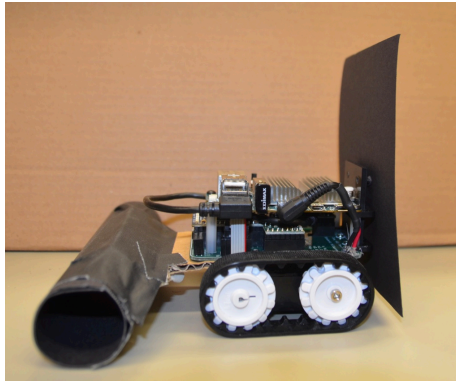


Figure 1: Zumi Platform with Designed Plow and Backstop

environment or the frictive backside of another Zumi backing into the target object. The cylindrical contact surface on the front of the robot, is paired with a backstop contact surface on the back of the robot.

### 2.3 Shape for Contact Literature

Rather than add an active flipping arm or mechanism, we will use purely passive kinematics of the pushing robot's shape to manipulate the object. Shape designs for reorienting objects have been thoroughly explored in the robot hand literature. Rodriguez et al.[6] derived the desired shape for an end effector given a target motion. Zhang et al.[10] investigated how parallel jaws can reorient objects vertically. Fearing et al. [1] used cylindrical fingers to allow objects to roll to a new equilibrium. This work will similarly investigate how designing just the contact shape can result in desired manipulations.

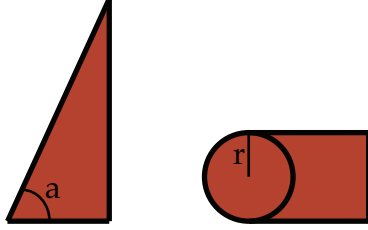


Figure 2: Pushing Surface Types:  
(left) plow (right) roller

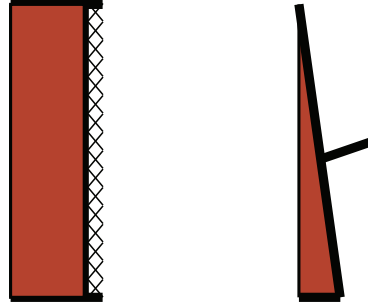


Figure 3: Hinge Surface Types:  
(left) friction plane (right) entrapping hinge

### 3 Results

#### 3.1 Simulation

Recall that each robot is designed with a pushing surface on the front and a hinging surface on its back. The robot can choose to engage an object with either of these surfaces since it moves with unicycle kinematics. We considered two types of front pushing surfaces: plow and cylindrical roller (see Fig. 2). We also considered two types of hinging surfaces: frictive wall and entrapping hinge (see Fig. 3).

To gain insight into how these designs would flip our inverted robot, we plot the trajectories that the ellipsoid will roll through as the plow finger and hinge finger approach each other. We use kinematics to determine the ellipsoid's configuration dependent on plow position and then calculate the friction and normal forces quasi-statically. We highlight the sections of the traces where a frictive surface will act as a perfect hinge using friction force.

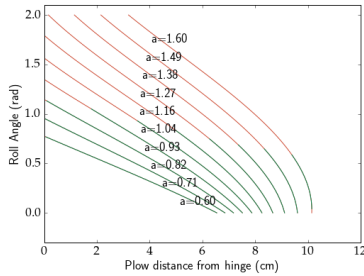


Figure 4: Trace of object roll w.r.t  
plow distance from hinge

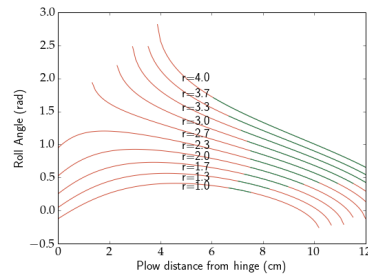


Figure 5: Trace of object roll w.r.t  
roller distance from hinge

#### 3.2 Experiment

We then tested the cylindrical pushing surface paired with an entrapping hinge. The frictive backstop wall on the Zumi can be used to rotate target objects up to 90 degrees. However, we wish to flip the capsized robot a full 180 degrees requiring a dif-

ferent backstop type. In this experiment we will use another RoACH robot equipped with an "entrapping hinge" type backstop as described in the previous section. This will catch the lip of the capsized roach which will then turn about the caught point like a hinge. This design successfully righted the fallen robot as shown in Fig. 6.




Figure 6: Photo Sequence of Experimental Flipping

Although the flipping behavior is reliable, at the time of this writing the author has not decided upon a suitable metric for quantifying the manipulation capability and reliability. See "Scheduled Experiments" section.

## 4 Scheduled Experiments

Our future work will focus on better quantifying and characterizing the limits of this team-righting manipulation.

We will use the system communication architecture illustrated in Fig. 7. This architecture will allow coordinated control of a team of robot fingers to enact trajectories to manipulate a target object.




Figure 7: Information Flow and Block Diagram of Robot System

Secondly, we wish to adapt the pushing surfaces to apply to our RoACH platforms and thereby have a homogeneous team capable of righting a capsized comrade. This extension will push our manipulation to the analogue of compliant grasps, when the mass of the object and the fingers are in the same order of magnitude. In this scenario, the fingers are no longer certain to move to the desired position, but instead will be pushed back by the target object compliantly.

Finally, we will extend the swarm rolling manipulation to more general shapes besides the useful application examined here (righting a capsized ellipsoidal comrade). In particular we hope to examine the flipping characteristics for target shapes such as convex polyhedra and semi-cylinders.

## 5 Main Experimental Insights

Robots can be used to perform full DOF manipulations of environmental objects using only passive kinematics through shape design. Analysis for designing robot interface shape for contact can leverage rich, general manipulation theory and translate to new domain of locomotive manipulation. This allows a swarm to manipulate objects without the need to drive up system complexity and adding extra motors to create gripper systems or articulated plows. In turn this newly afforded object manipulation capability affords robots a wide array of scintillating new application vistas. A bevy of bots could clear rubble or other obstacles out of their path to ease transport. Working together, a supporting squad of bots could hoist up a compatriot into a chimney climbing configuration or push them through a hard-to-reach hole. Teams of bots could manipulate objects into steps or ramps to allow access to previously inaccessible regions.

## References

- [1] Ronald S Fearing. Simplified grasping and manipulation with dextrous robot hands. *Robotics and Automation, IEEE Journal of*, 2(4):188–195, 1986.
- [2] D. W. Haldane, K. C. Peterson, F. L. Garcia Bermudez, and R. S. Fearing. Animal-inspired design and aerodynamic stabilization of a hexapedal millirobot. In *Robotics and Automation (ICRA), 2013 IEEE International Conference on*, pages 3279–3286, May 2013.
- [3] C. C. Kessens, D. C. Smith, and P. R. Osteen. A framework for autonomous self-righting of a generic robot on sloped planar surfaces. In *Robotics and Automation (ICRA), 2012 IEEE International Conference on*, pages 4724–4729, May 2012.
- [4] Chen Li, Andrew O Pullin, Duncan W Haldane, Han K Lam, Ronald S Fearing, and Robert J Full. Terradynamically streamlined shapes in animals and robots enhance traversability through densely cluttered terrain. *Bioinspiration & biomimetics*, 10(4):046003, 2015.
- [5] Kevin M. Lynch and Matthew T. Mason. Dynamic nonprehensile manipulation: Controllability, planning, and experiments. *The International Journal of Robotics Research*, 18(1):64–92, 1999.
- [6] Alex Rodriguez and Matthew T Mason. Effector form design for 1dof planar actuation. In *Robotics and Automation (ICRA), 2013 IEEE International Conference on*, pages 349–356. IEEE, 2013.
- [7] Daniela Rus, Bruce Donald, and Jim Jennings. Moving furniture with teams of autonomous robots. In *Intelligent Robots and Systems 95.'Human Robot Interaction and Cooperative Robots', Proceedings. 1995 IEEE/RSJ International Conference on*, volume 1, pages 235–242. IEEE, 1995.
- [8] Thomas G Sugar and Vijay Kumar. Control of cooperating mobile manipulators. *Robotics and Automation, IEEE Transactions on*, 18(1):94–103, 2002.
- [9] G. Tonietti, R. Schiavi, and A. Bicchi. Design and control of a variable stiffness actuator for safe and fast physical human/robot interaction. In *Robotics and Automation, 2005. ICRA 2005. Proceedings of the 2005 IEEE International Conference on*, pages 526–531, April 2005.
- [10] Mike Tao Zhang and Ken Goldberg. Gripper point contacts for part alignment. *Robotics and Automation, IEEE Transactions on*, 18(6):902–910, 2002.