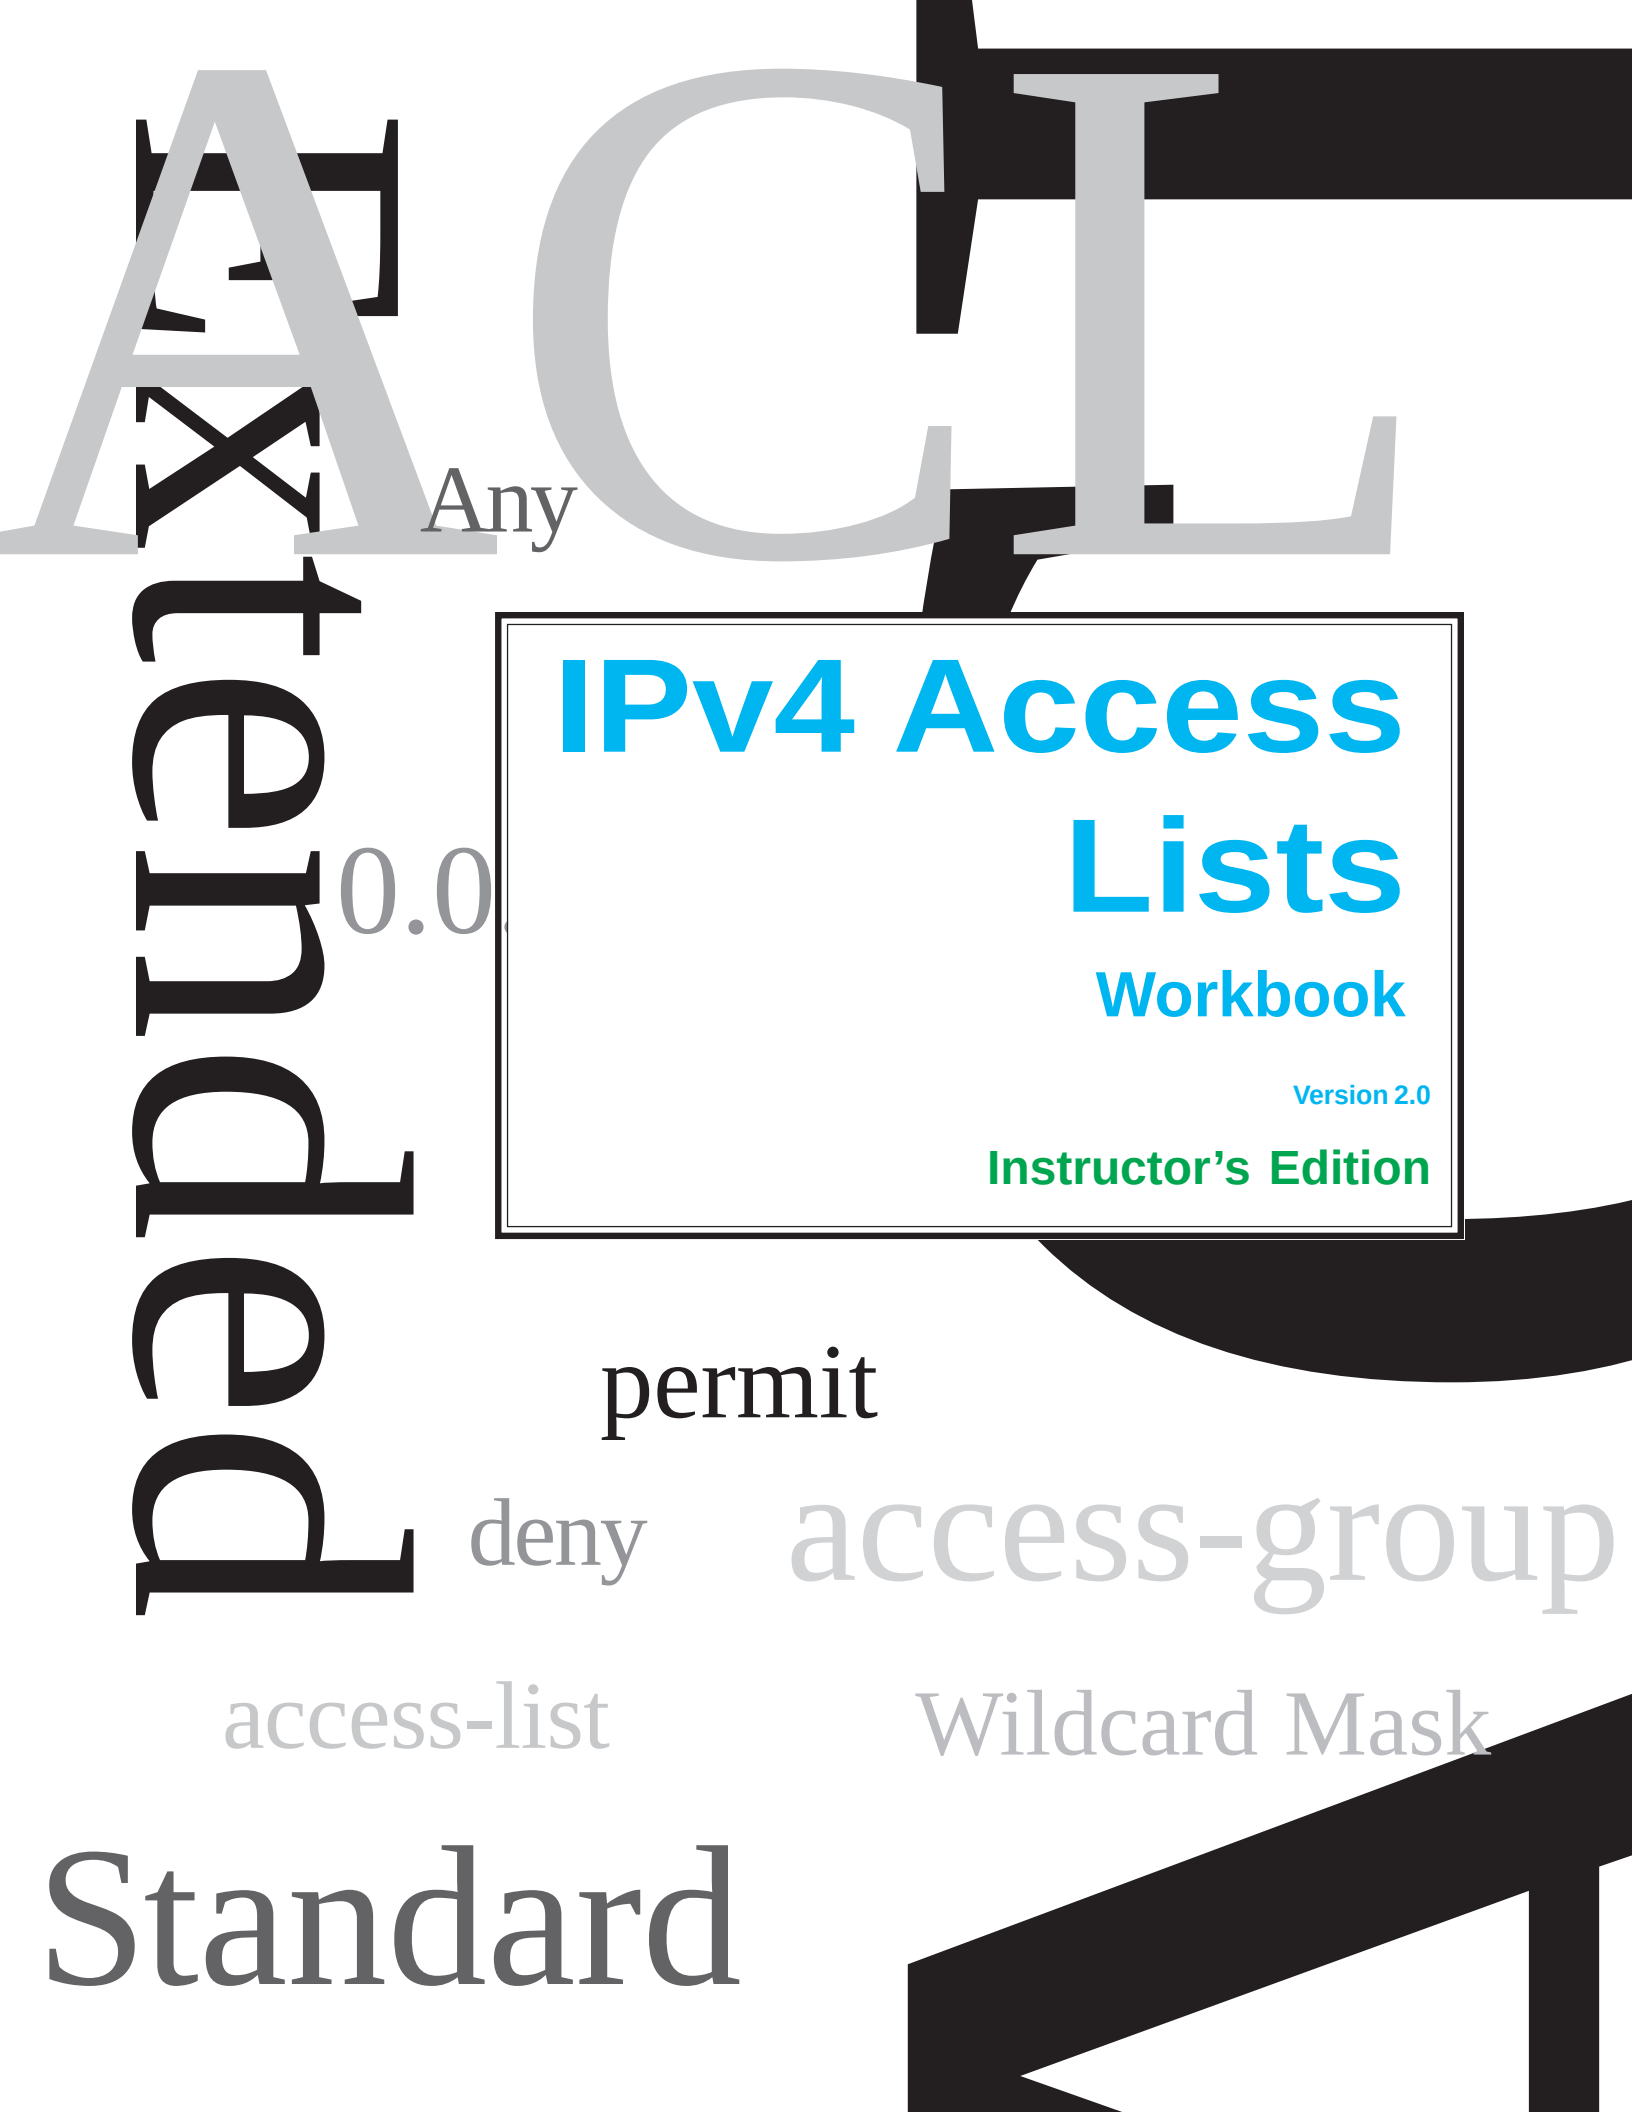

IPv4 Access Lists

Workbook

Version 2.0

Instructor's Edition

Access-List Numbers

IP Standard	1	to	99
IP Extended	100	to	199
Ethernet Type Code	200	to	299
Ethernet Address	700	to	799
DECnet and Extended DECnet	300	to	399
XNS	400	to	499
Extended XNS	500	to	599
Appletalk	600	to	699
48-bit MAC Addresses	700	to	799
IPX Standard	800	to	899
IPX Extended	900	to	999
IPX SAP (service advertisement protocol)	1000	to	1099
IPX SAP SPX	1000	to	1099
Extended 48-bit MAC Addresses	1100	to	1199
IPX NLSP	1200	to	1299
IP Standard, expanded range	1300	to	1999
IP Extended, expanded range	2000	to	2699
SS7 (voice)	2700	to	2999
Standard Vines	1	to	100
Extended Vines	101	to	200
Simple Vines	201	to	300
Transparent bridging (protocol type)	200	to	299
Transparent bridging (vendor type)	700	to	799
Extended Transparent bridging	1100	to	1199
Source-route bridging (protocol type)	200	to	299
Source-route bridging (vendor type)	700	to	799

Produced by: Robb Jones
Robert.Jones@fcps.org
Frederick County Career & Technology Center
Cisco Networking Academy
Frederick County Public Schools
Frederick, Maryland, USA

Special Thanks to Melvin Baker, Jim Dorsch, and Brent Sieling
for taking the time to check this workbook for errors, and making suggestions for improvements.

What are Access Control Lists?

ACLs...

...are a sequential list of instructions that tell a router which packets to permit or deny.

General Access Lists Information

Access Lists...

...are read sequentially.

...are set up so that as soon as the packet matches a statement it stops comparing and permits or denies the packet.

...need to be written to take care of the most abundant traffic first.

...must be configured on your router before you can deny packets.

...can be written for all supported routed protocols; but each routed protocol must have a different ACL for each interface.

...must be applied to an interface to work.

How routers use Access Lists

(Outbound Port - Default)

- The router checks to see if the packet is routable. If it is it looks up the route in its routing table.
- The router then checks for an ACL on that outbound interface.
- If there is no ACL the router switches the packet out that interface to its destination.
- If there is an ACL the router checks the packet against the access list statements sequentially. Then permits or denies each packet as it is matched.
- If the packet does not match any statement written in the ACL it is denyed because there is an implicit “deny any” statement at the end of every ACL.

Standard Access Lists

Standard Access Lists...

...are numbered from 1 to 99 or 1300 to 1999.

...filter (permit or deny) only source addresses.

...do not have any destination information so it must placed as close to the destination as possible.

...work at layer 3 of the OSI model.

Why standard ACLs are placed close to the destination.

If you want to block traffic from Juan's computer from reaching Janet's computer with a standard access list you would place the ACL **close to the destination** on Router D, interface Gig0/0. Since its using only the source address to permit or deny packets the ACL here will not effect packets reaching Routers B, or C.

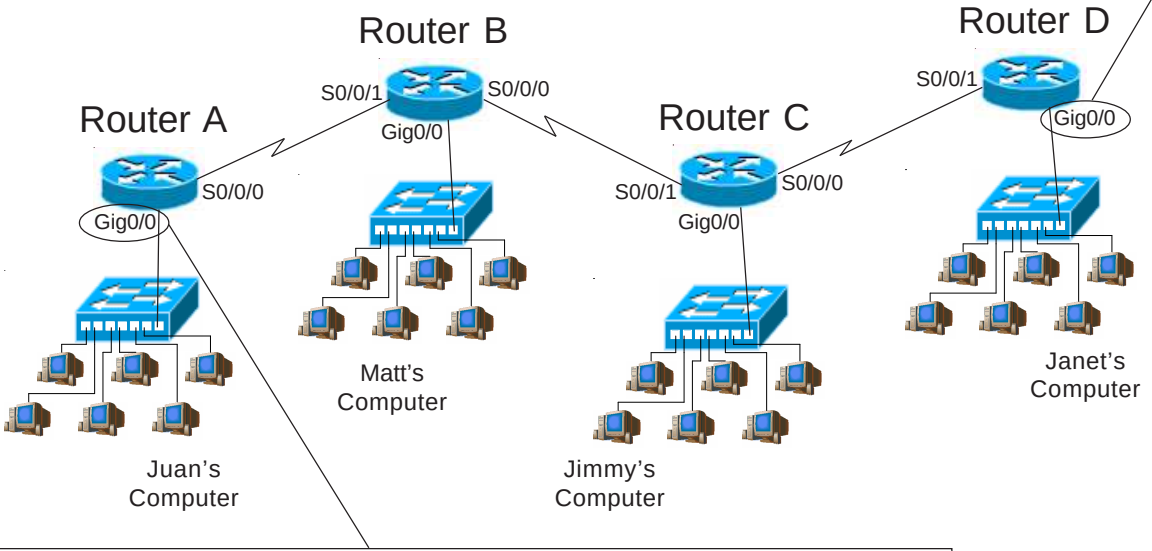

If you place the ACL on router A to block traffic to Router D it will also block all packets going to Routers B, and C; because all the packets will have the same source address.

Standard Access List Placement
Sample Problems

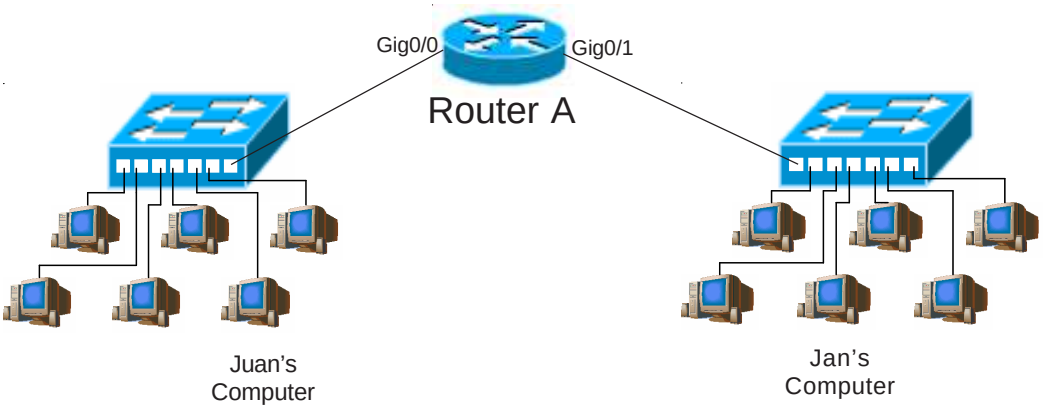

In order to permit packets from Juan's computer to arrive at Jan's computer you would place the standard access list at router interface Gig0/1.

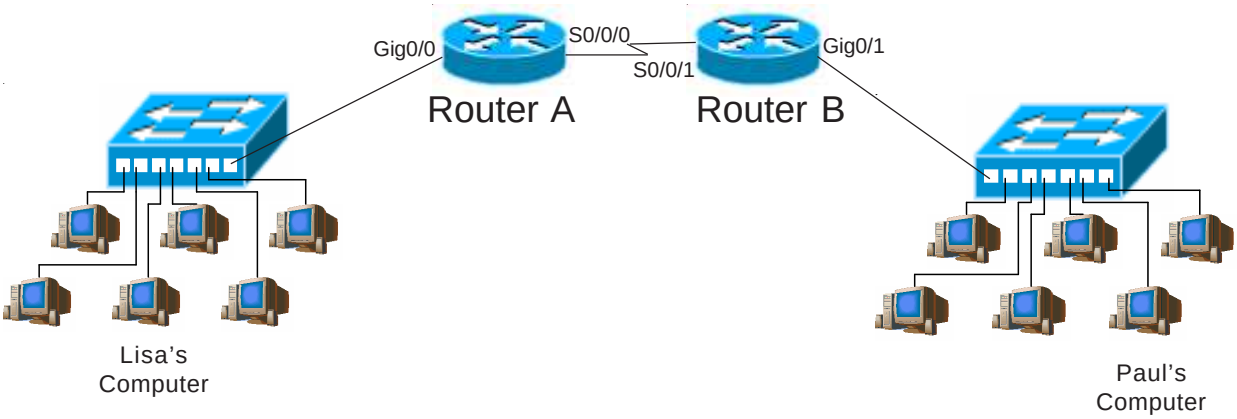

Lisa has been sending unnecessary information to Paul. Where would you place the standard ACL to deny all traffic from Lisa to Paul?
Router Name Router B Interface Gig0/1

Where would you place the standard ACL to deny traffic from Paul to Lisa?
Router Name Router A Interface Gig0/0

Standard Access List Placement

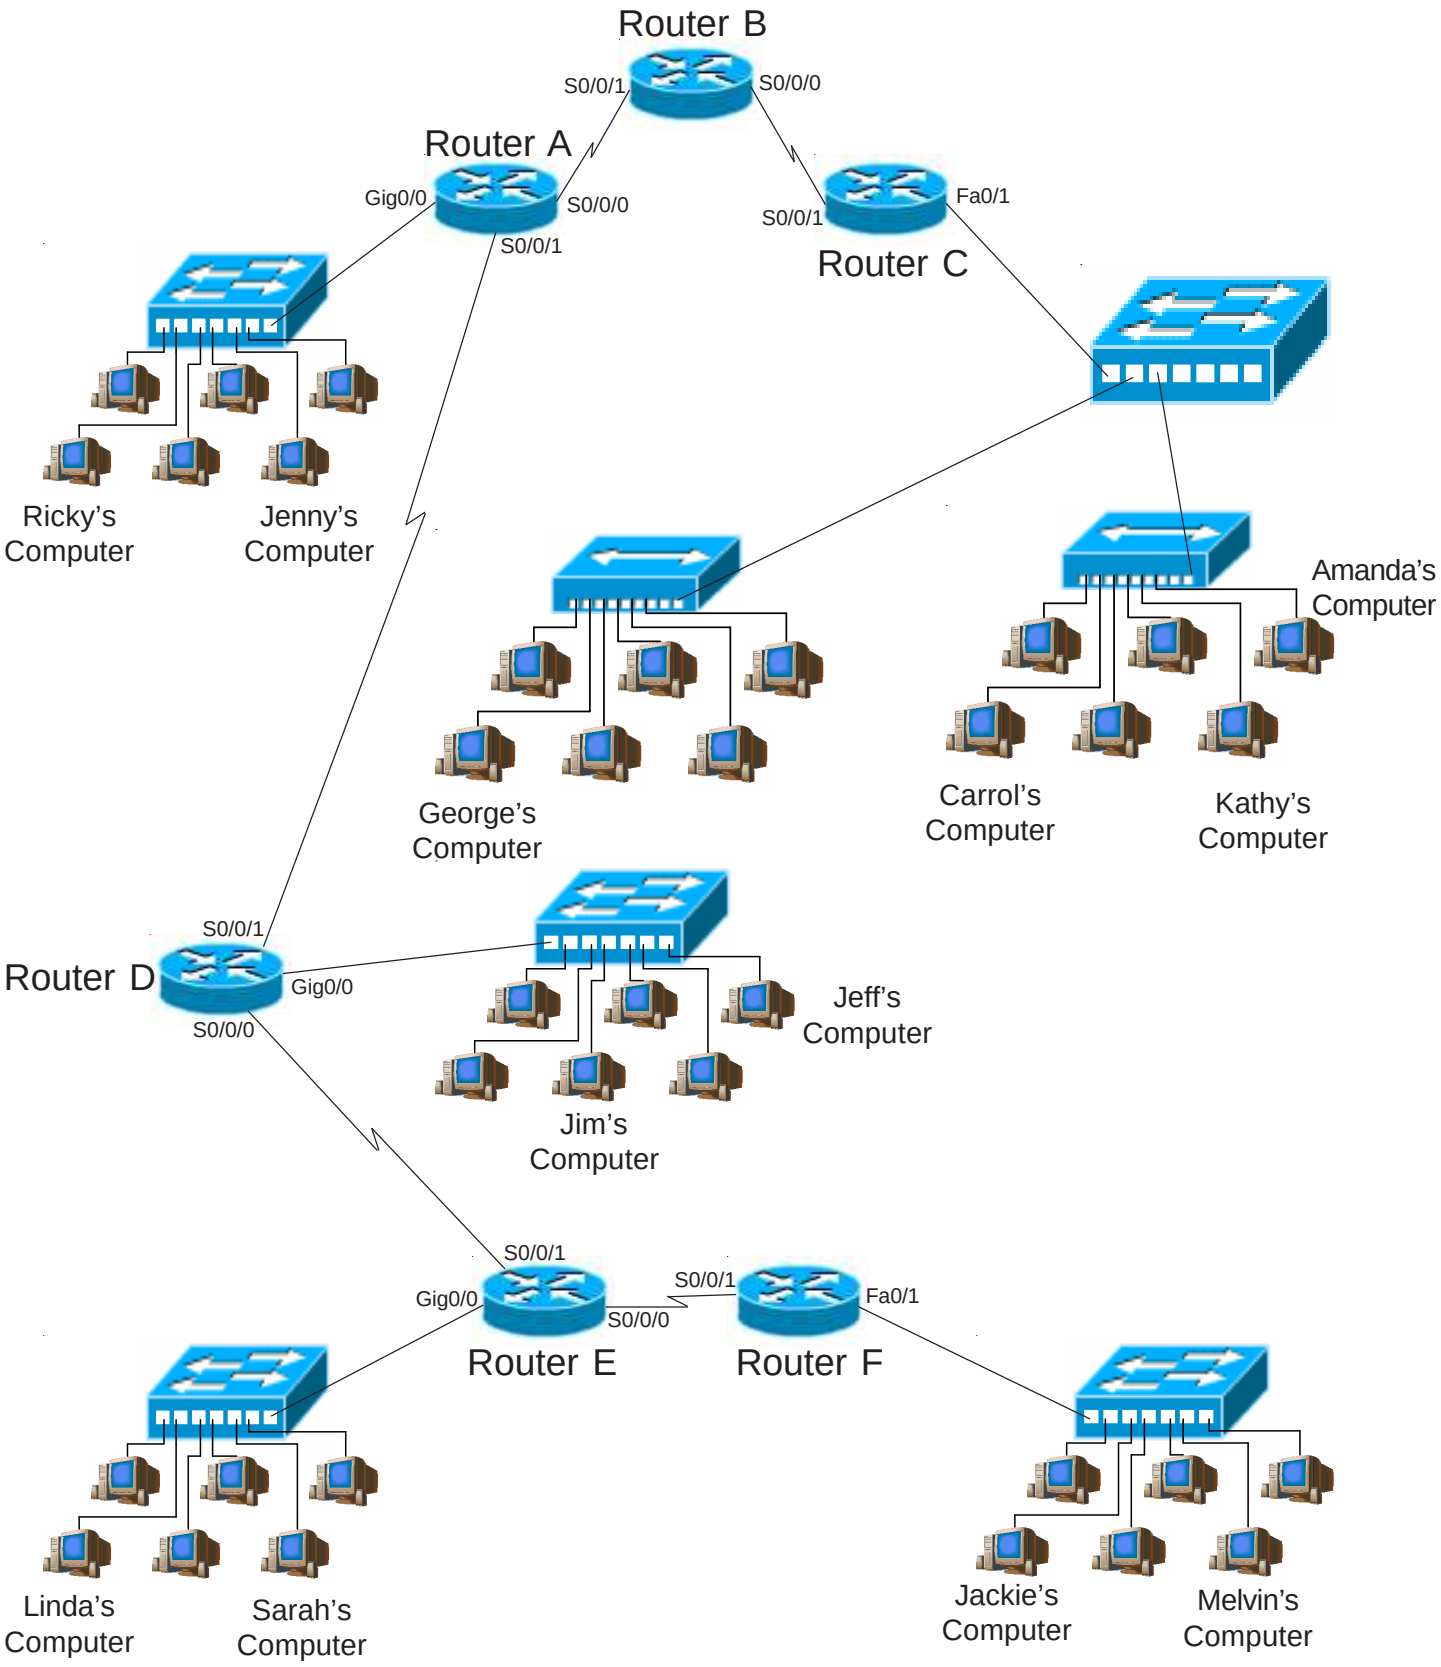

Standard Access List Placement

1. Where would you place a standard access list to permit traffic from Ricky's computer to reach Jeff's computer?

Router Name Router D
Interface Gig0/0

2. Where would you place a standard access list to deny traffic from Melvin's computer from reaching Jenny's computer?

Router Name Router A
Interface Gig0/0

3. Where would you place a standard access list to deny traffic to Carrol's computer from Sarah's computer?

Router Name Router C
Interface Fa0/1

4. Where would you place a standard access list to permit traffic to Ricky's computer from Jeff's computer?

Router Name Router A
Interface Gig0/0

5. Where would you place a standard access list to deny traffic from Amanda's computer from reaching Jeff and Jim's computer?

Router Name Router D
Interface Gig0/0

6. Where would you place a standard access list to permit traffic from Jackie's computer to reach Linda's computer?

Router Name Router E
Interface Gig0/0

7. Where would you place a standard access list to permit traffic from Ricky's computer to reach Carrol and Amanda's computer?

Router Name Router C
Interface FA0/1

8. Where would you place a standard access list to deny traffic to Jenny's computer from Jackie's computer?

Router Name Router A
Interface Gig0/0

9. Where would you place a standard access list to permit traffic from George's computer to reach Linda and Sarah's computer?

Router Name Router E
Interface Gig0/0

10. Where would you place an ACL to deny traffic from Jeff's computer from reaching George's computer?

Router Name Router C
Interface FA0/1

11. Where would you place a standard access list to deny traffic to Sarah's computer from Ricky's computer?

Router Name Router E
Interface Gig0/0

12. Where would you place an ACL to deny traffic from Linda's computer from reaching Jackie's computer?

Router Name Router F
Interface FA0/1

Extended Access Lists

Extended Access Lists...

...are numbered from 100 to 199 or 2000 to 2699.

...filter (permit or deny) based on the: source address
destination address
protocol
application / port number

... are placed close to the source.

...work at both layer 3 and 4 of the OSI model.

Why extended ACLs are placed close to the source.

If you want to deny traffic from Juan's computer from reaching Janet's computer with an extended access list you would place the ACL **close to the source** on Router A, interface Gig0/0. Since it can permit or deny based on the destination address it can reduce backbone overhead and not affect traffic to Routers B or C.

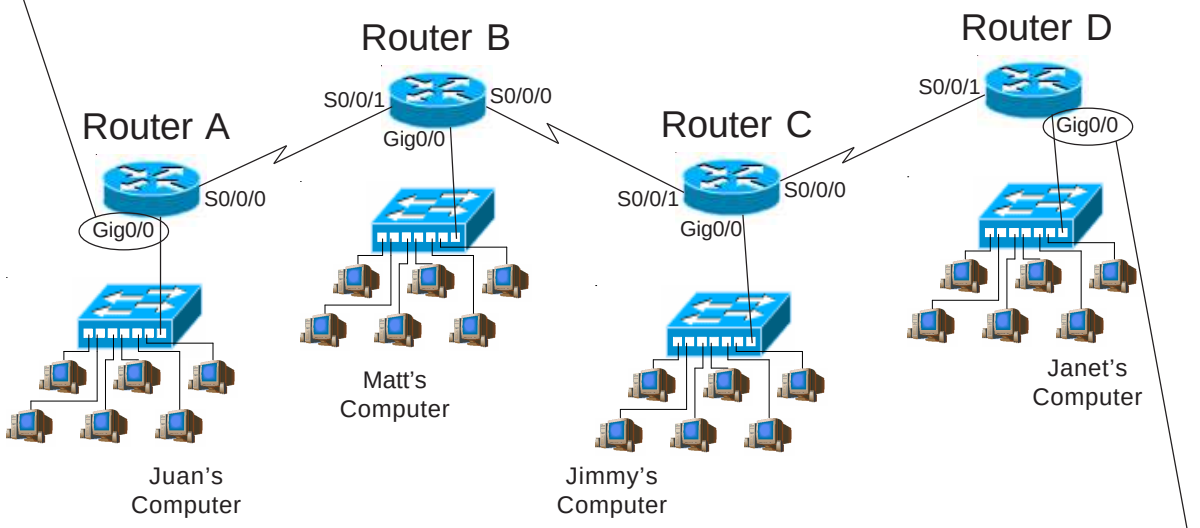

If you place the ACL on Router D to block traffic from Router A, it will work. However, Routers B and C will have to route the packet before it is finally blocked at Router D. This increases the volume of useless network traffic.

Extended Access List Placement
Sample Problems

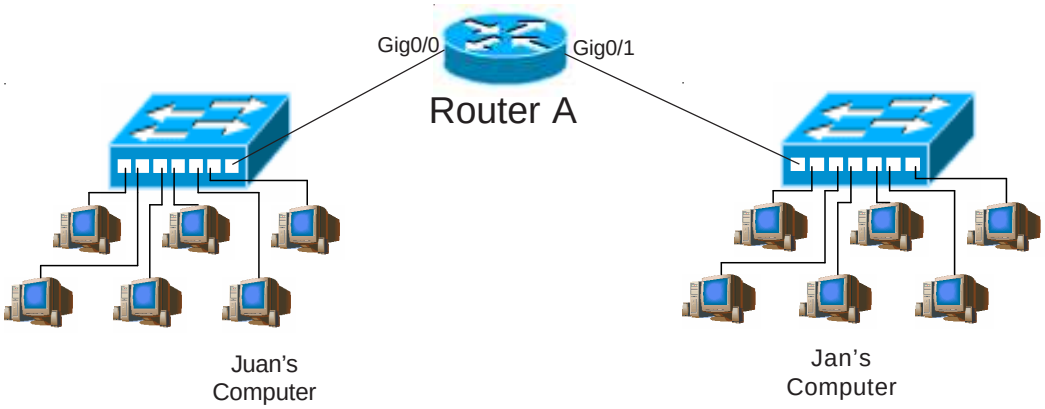

In order to permit packets from Juan's computer to arrive at Jan's computer you would place the extended access list at router interface Gig0/0.

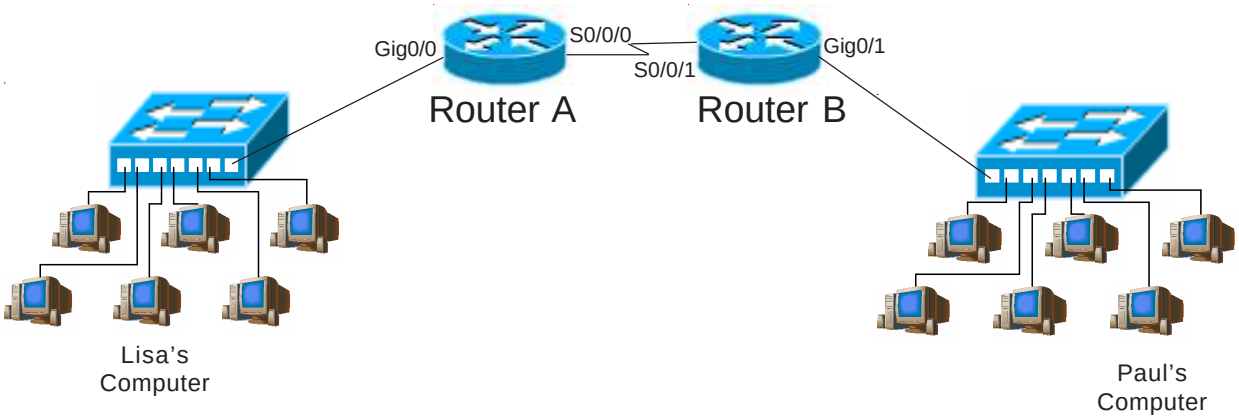

Lisa has been sending unnecessary information to Paul. Where would you place the extended ACL to deny all traffic from Lisa to Paul?
Router Name Router A Interface Gig0/0

Where would you place the extended ACL to deny traffic from Paul to Lisa?
Router Name Router B Interface Gig0/1

Extended Access List Placement

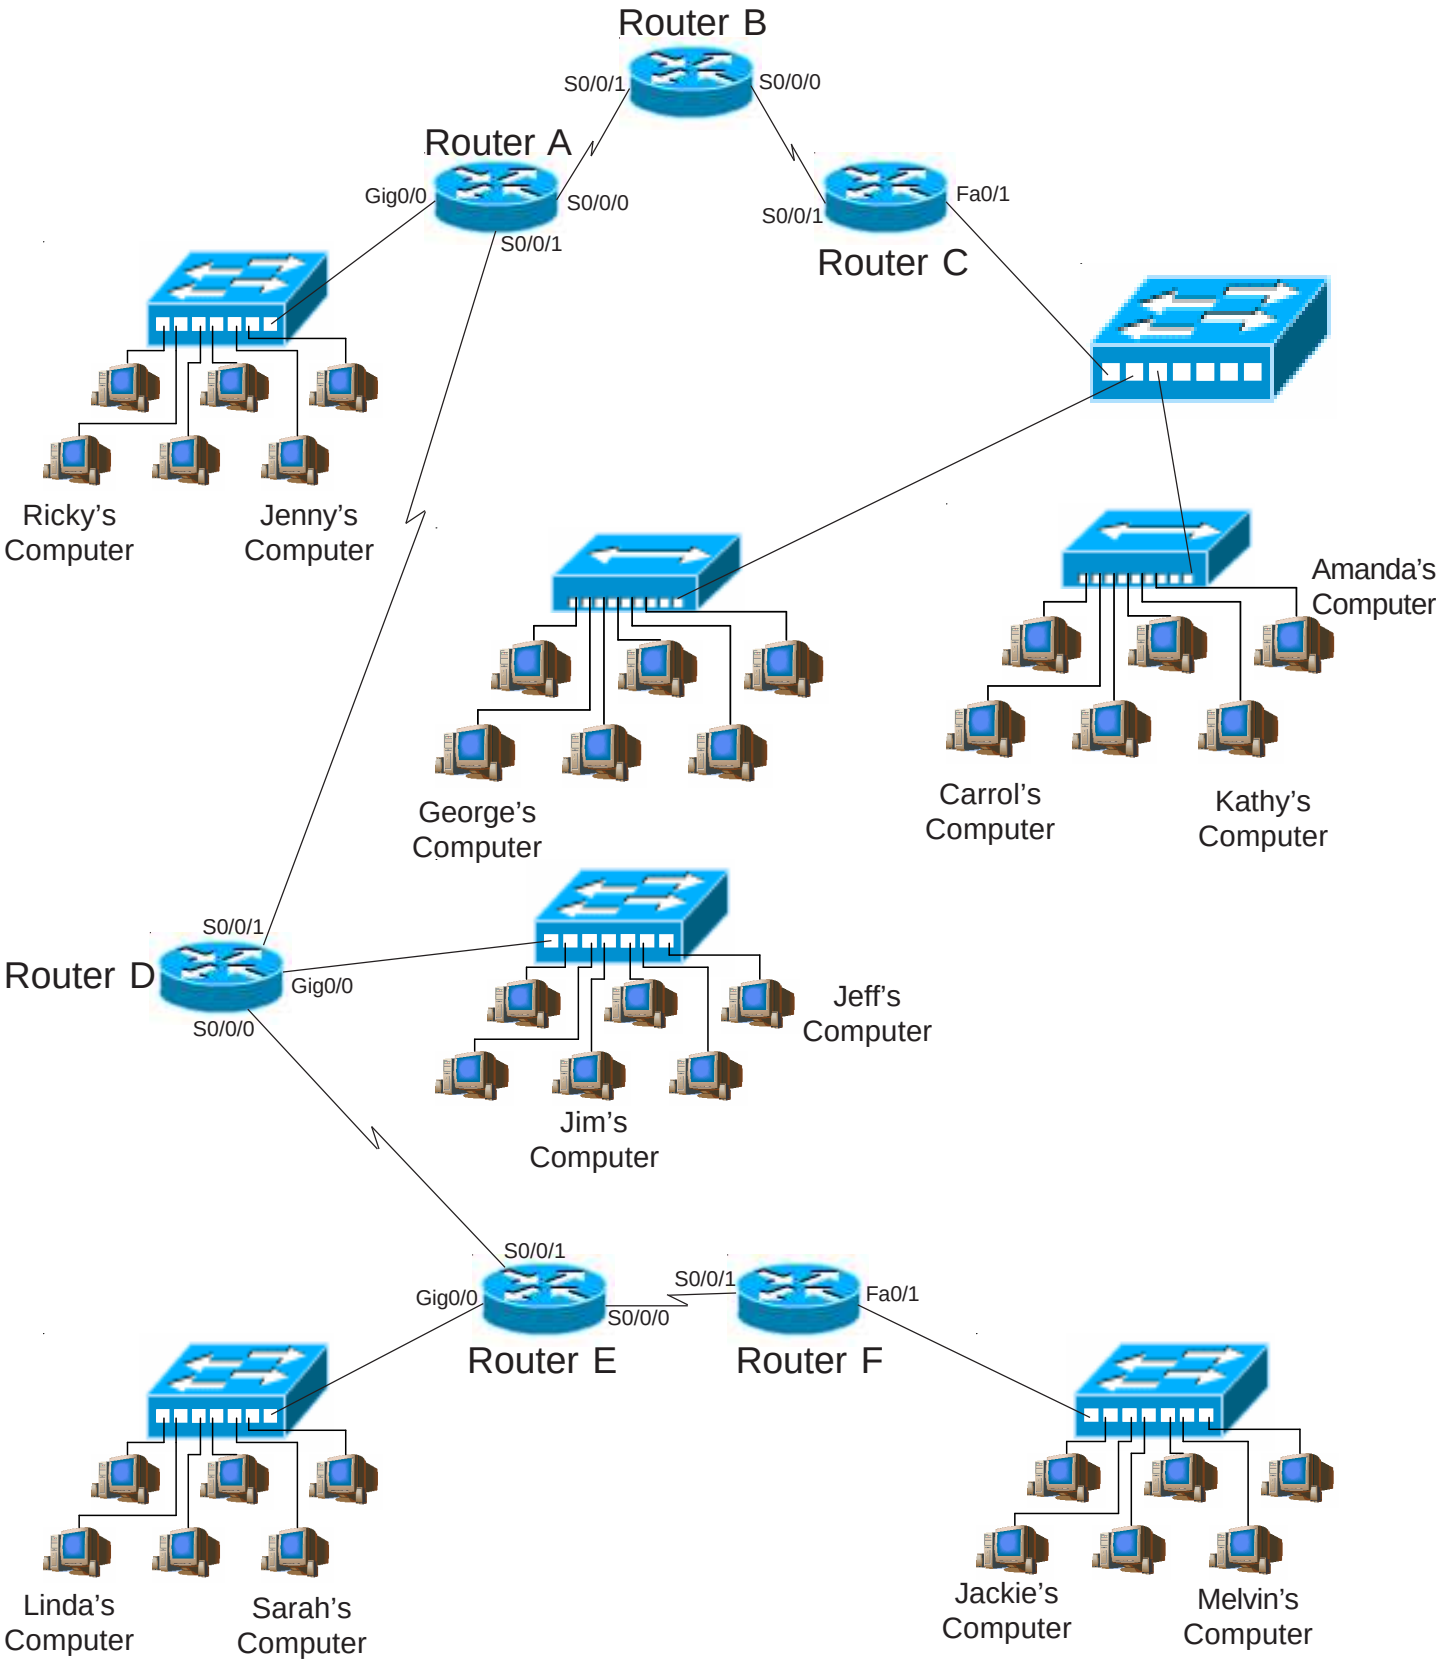

Extended Access List Placement

1. Where would you place an ACL to deny traffic from Jeff's computer from reaching George's computer?

Router Name Router D
Interface Gig0/0

2. Where would you place an extended access list to permit traffic from Jackie's computer to reach Linda's computer?

Router Name Router F
Interface Fa0/1

3. Where would you place an extended access list to deny traffic to Carrol's computer from Ricky's computer?

Router Name Router A
Interface Gig0/0

4. Where would you place an extended access list to deny traffic to Sarah's computer from Jackie's computer?

Router Name Router F
Interface Gig0/0

5. Where would you place an extended access list to permit traffic from Carrol's computer to reach Jeff's computer?

Router Name Router C
Interface Fa0/1

6. Where would you place an extended access list to deny traffic from Melvin's computer from reaching Jeff and Jim's computer?

Router Name Router F
Interface Fa0/1

7. Where would you place an extended access list to permit traffic from George's computer to reach Jeff's computer?

Router Name Router C
Interface Fa0/1

8. Where would you place an extended access list to permit traffic from Jim's computer to reach Carrol and Amanda's computer?

Router Name Router D
Interface Gig0/0

9. Where would you place an ACL to deny traffic from Linda's computer from reaching Kathy's computer?

Router Name Router E
Interface Gig0/0

10. Where would you place an extended access list to deny traffic to Jenny's computer from Sarah's computer?

Router Name Router E
Interface Gig0/0

11. Where would you place an extended access list to permit traffic from George's computer to reach Linda and Sarah's computer?

Router Name Router C
Interface Fa0/1

12. Where would you place an extended access list to deny traffic from Linda's computer from reaching Jenny's computer?

Router Name Router E
Interface Gig0/0

Choosing to Filter Incoming or Outgoing Packets

Access Lists on your incoming port...

...requires less CPU processing.

...filters and denies packets before the router has to make a routing decision.

Access Lists on your outgoing port...

...are outbound by default unless otherwise specified.

...increases the CPU processing time because the routing decision is made and the packet switched to the correct outgoing port before it is tested against the ACL.

Breakdown of a Standard ACL Statement

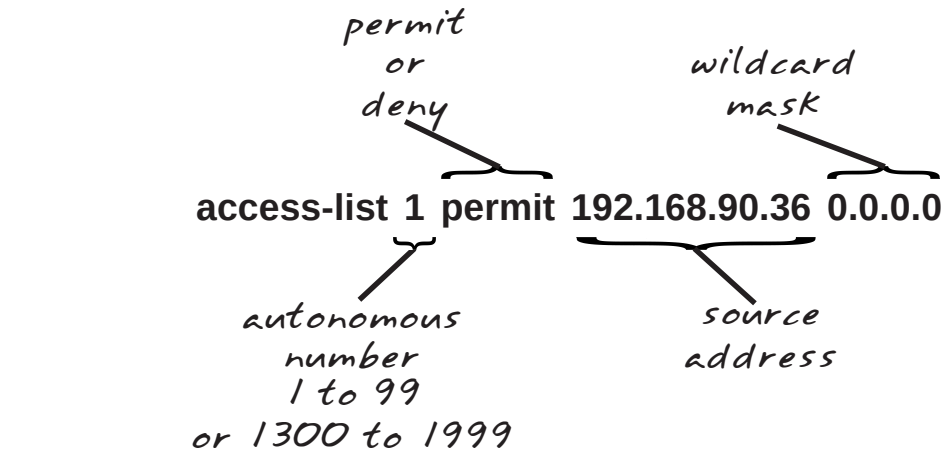

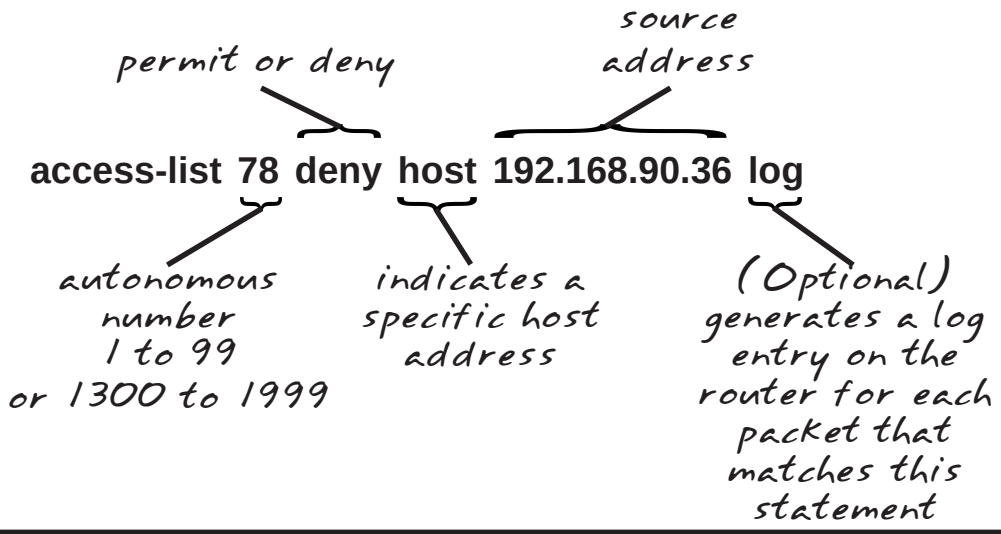

Breakdown of an Extended ACL Statement

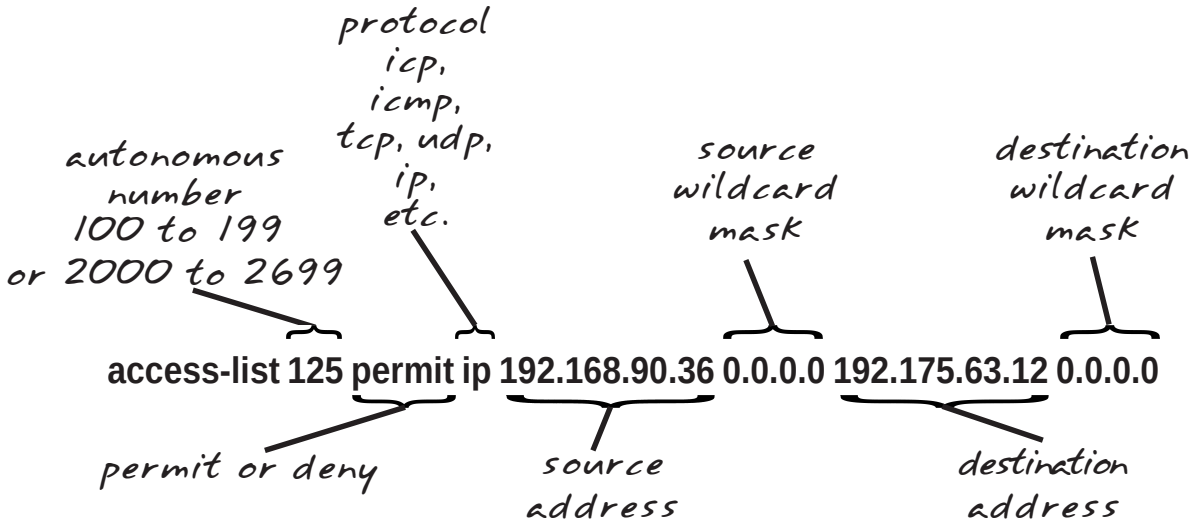

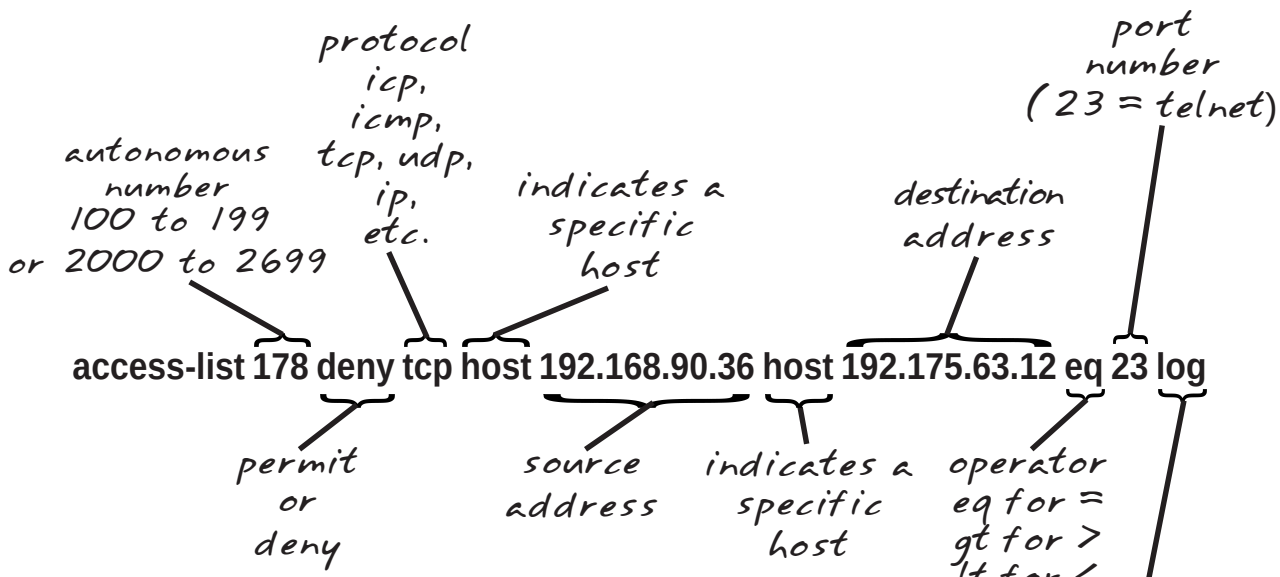

Protocols Include: (Layers 3 and 4)

IP	IGMP	IPINIP
TCP	GRE	OSPF
UDP	IGRP	NOS
ICMP	EIGRP	Integer 0-255

To match any internet protocol use IP.

What are Named Access Control Lists?

Named ACLs...

...are standard or extended ACLs which have an alphanumeric name instead of a number. (ie. 1-99 or 100-199)

Named Access Lists Information

Named Access Lists...

...identify ACLs with an intuitive name instead of a number.

...eliminate the limits imposed by using numbered ACLs. (798 for standard and 799 for extended)

...names should be typed in all CAPITOLS to make it easier to see.

...provide the ability to modify your ACLs without deleting and reloading the revised access list. It will only allow you to add statements to the end of the exsisting statements.

...are not compatable with any IOS prior to Release 11.2.

...can not repeat the same name on multiple ACLs.

Applying a Standard Named Access List called "GEORGE"

Write a named standard access list called "GEORGE" on Router A, interface E1 to block Melvin's computer from sending information to Kathy's computer; but will allow all other traffic.

Place the access list at:
Router Name: Router A
Interface: E1
Access-list Name: GEORGE

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)#ip access-list standard GEORGE
Router(config-std-nacl)# deny host 72.16.70.35
Router(config-std-nacl)# permit any
Router(config-std-nacl)# interface gig0/1
Router(config-if)# ip access-group george out
Router(config-if)# exit
Router(config)# exit
```

Applying an extended Named Access List called “GRACIE”

Write a named extended access list called “GRACIE” on Router A, Interface E0 called “Gracie” to deny HTTP traffic intended for web server 192.168.207.27, but will permit all other HTTP traffic to reach the only the 192.168.207.0 network. Deny all other IP traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: E0
Access-list Mail: GRACIE

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)#ip access-list extended GRACIE
Router(config-ext-nacl)# deny tcp any host 192.168.207.27 eq www
Router(config-ext-nacl)# permit tcp any 192.168.207.0 0.0.0.255 eq www
Router(config-ext-nacl)# interface gig0/1
Router(config-if)# ip access-group gracie in
Router(config-if)# exit
Router(config)# exit
```

Choices for Using Wildcard Masks

Wildcard masks are usually set up to do one of four things:

1. Match a specific host.
2. Match an entire subnet.
3. Match a specific range.
4. Match all addresses.

1. Matching a specific host.

For standard access lists:

Access-List 10 permit 192.168.150.50 0.0.0.0

or

Access-List 10 permit 192.168.150.50 (standard ACL's assume a 0.0.0.0 mask)

or

Access-List 10 permit host 192.168.150.50

For extended access lists:

Access-list 110 deny ip 192.168.150.50 0.0.0.0 any

or

Access-list 110 deny ip host 192.168.150.50 any

2. Matching an entire subnet

Example 1

Address: 192.168.50.0 Subnet Mask: 255.255.255.0

Access-list 25 deny 192.168.50.0 0.0.0.255

Example 2

Address: 172.16.0.0 Subnet Mask: 255.255.0.0

Access-list 12 permit 172.16.0.0 0.0.255.255

Example 3

Address: 10.0.0.0 Subnet Mask: 255.0.0.0

Access-list 125 deny udp 10.0.0.0 0.255.255.255 any

3. Match a specific range

Example 1

Address: 10.250.50.112 Subnet Mask: 255.255.255.224

```
                                255.255.255.255
Custom Subnet mask:            -255.255.255.224
                                ---------------
Wildcard:                         0.   0.   0.  31
```

Access-list 125 permit udp 10.250.50.112 0.0.0.31 any

Example 2

Address Range: 192.168.16.0 to 192.168.16.127

```
                                192.168.16.127
                               -192.168.16.  0
                                -------------
Wildcard:                         0.   0.  0.127
```

Access-list 125 deny ip 192.168.16.0 0.0.0.127 any
(This ACL would block the lower half of the subnet.)

Example 3

Address: 172.250.16.32 to 172.250.31.63

```
                                172. 250. 31.  63
                               -172. 250. 16.  32
                                -----------------
Wildcard:                         0.   0. 15.  31
```

Access-list 125 permit ip 172.250.16.32 0.0.15.31 any

4. Match everyone.

For standard access lists:

Access-List 15 permit any
or
Access-List 15 deny 0.0.0.0 255.255.255.255

For extended access lists:

Access-List 175 permit ip any any
or
Access-List 175 deny tcp 0.0.0.0 255.255.255.255 any

Creating Wildcard Masks

- Just like a subnet mask the wildcard mask tells the router what part of the address to check or ignore. Zero (0) must match exactly, one (1) will be ignored.
- The source address can be a single address, a range of addresses, or an entire subnet.
- As a rule of thumb the wildcard mask is the inverse of the subnet mask.

Example #1:
IP Address and subnet mask: 204.100.100.0 255.255.255.0
IP Address and wildcard mask: 204.100.100.0 0.0.0.255

- All zero's (or 0.0.0.0) means the address must match exactly.

Example #2:
10.10.150.95 0.0.0.0 (This address must match exactly.)

- One's will be ignored.

Example #3:
10.10.150.95 0.0.0.255 (Any 10.10.150.0 subnet address will match.
10.10.150.0 to 10.10.150.255)

- This also works with subnets.

Example #4:
IP Address and subnet mask: 192.170.25.30 255.255.255.224
IP Address and wildcard mask: 192.170.25.30 0.0.0.31
(Subtract the subnet mask from
255.255.255.255 to create the wildcard)

Do the math... 255 - 255 = 0 (This is the inverse of the subnet mask.)
255 - 224 = 31

Example #5:
IP Address and subnet mask: 172.24.128.0 255.255.128.0
IP Address and wildcard mask: 172.24.128.0 0.0.127.255

Do the math... 255 - 255 = 0 (This is the inverse of the subnet mask.)
255 - 128 = 127
255 - 0 = 255

Wildcard Mask Problems

1. Create a wildcard mask to match this exact address.
   IP Address: 192.168.25.70
   Subnet Mask: 255.255.255.0
   0.0.0.0

2. Create a wildcard mask to match this range.
   IP Address: 210.150.10.0
   Subnet Mask: 255.255.255.0
   0.0.0.255

3. Create a wildcard mask to match this host.
   IP Address: 195.190.10.35
   Subnet Mask: 255.255.255.0
   0.0.0.0

4. Create a wildcard mask to match this range.
   IP Address: 172.16.0.0
   Subnet Mask: 255.255.0.0
   0.0.255.255

5. Create a wildcard mask to match this range.
   IP Address: 10.0.0.0
   Subnet Mask: 255.0.0.0
   0.255.255.255

6. Create a wildcard mask to match this exact address.
   IP Address: 165.100.0.130
   Subnet Mask: 255.255.255.192
   0.0.0.0

7. Create a wildcard mask to match this range.
   IP Address: 192.10.10.16
   Subnet Mask: 255.255.255.224
   0.0.0.31

8. Create a wildcard mask to match this range.
   IP Address: 171.50.75.128
   Subnet Mask: 255.255.255.192
   0.0.0.63

9. Create a wildcard mask to match this host.
   IP Address: 10.250.30.2
   Subnet Mask: 255.0.0.0
   0.0.0.0

10. Create a wildcard mask to match this range.
    IP Address: 210.150.28.16
    Subnet Mask: 255.255.255.240
    0.0.0.15

11. Create a wildcard mask to match this range.
    IP Address: 172.18.0.0
    Subnet Mask: 255.255.224.0
    0.0.31.255

12. Create a wildcard mask to match this range.
    IP Address: 135.35.230.32
    Subnet Mask: 255.255.255.248
    0.0.0.7

Basic Wildcard Mask Problems

Based on the given information list the range of source addresses for each ACE statement.

1. access-list **10 permit 192.168.150.50 0.0.0.0**

Answer: 192.168.150.50

2. **access-list 5 permit any**

Answer: Any address

3. **access-list 125 deny tcp 195.223.50.0 0.0.0.63 host 172.168.10.1 fragments**

Answer: 195.223.50.0 to 195.223.50.63

4. **access-list 11 deny 210.10.10.0 0.0.0.255**

Answer: 210.10.10.0 to 210.10.10.255

5. **access-list 108 deny ip 192.220.10.0 0.0.0.15 172.32.4.0 0.0.0.255**

Answer: 192.220.10.0 to 192.220.10.15

6. **access-list 171 deny any host 175.18.24.10 fragments**

Answer: Any Address

7. **access-list 105 permit 192.168.15.0 0.0.0.255 any**

Answer: 192.168.15.0 to 192.168.15.255

8. **access-list 109 permit tcp 172.16.10.0 0.0.0.255 host 192.168.10.1 eq 80**

Answer: 172.16.10.0 to 172.16.10.255

9. **access-list 111 permit ip any any**

Answer: Any Address

10. **access-list 195 permit udp 172.30.12.0 0.0.0.127 172.50.10.0 0.0.0.255**

Answer: 172.30.12.0 to 172.30.12.127

11. **access-list 110 permit ip 192.168.15.0 0.0.0.3 192.168.30.10 0.0.0.0**

Answer: 192.168.15.0 to 192.168.15.3

12. **access-list 120 permit ip 192.168.15.0 0.0.0.7 192.168.30.10 0.0.0.0**

Answer: 192.168.15.0 to 192.168.15.7

13. **access-list 130 permit ip 192.168.15.0 0.0.0.15 192.168.30.10 0.0.0.0**

Answer: 192.168.15.0 to 192.168.15.15

14. **access-list 140 permit ip 192.168.15.0 0.0.0.31 192.168.30.10 0.0.0.0**

Answer: 192.168.15.0 to 192.168.15.31

15. **access-list 150 permit ip 192.168.15.0 0.0.0.63 192.168.30.10 0.0.0.0**

Answer: 192.168.15.0 to 192.168.15.63

16. **access-list 101 Permit ip 192.168.15.0 0.0.0.127 192.168.30.10 0.0.0.0**

Answer: 192.168.15.0 to 192.168.15.127

17. **access-list 185 permit ip 192.168.15.0 0.0.0.255 192.168.30.0 0.0.0.255**

Answer: 192.168.15.0 to 192.168.15.255

18. **access-list 160 deny udp 172.16.0.0 0.0.1.255 172.18.10.18 0.0.0.0 gt 22**

Answer: 172.16.0.0 to 172.16.1.255

19. **access-list 195 permit icmp 172.85.0.0 0.0.15.255 172.50.10.0 0.0.0.255**

Answer: 172.85.0.0 to 172.85.15.255

20. **access-list 10 permit 175.15.120.0 0.0.0.255**

Answer: 175.15.120.0 to 175.15.120.255

21. **access-list 190 permit tcp 192.15.10.0 0.0.0.31 any**

Answer: 192.15.10.0 to 192.15.10.31

22. **access-list 100 permit ip 10.0.0.0 0.255.255.255 172.50.10.0 0.0.0.255**

Answer: 10.0.0.0 to 10.255.255.255

(Slightly More) **Advanced Wildcard Mask Problems**

Not every address range ends with a zero making it simple to determine the address range. Using basic subnetting you can adjust the host portion of the IP address with the wildcard mask to indicate specific ranges.

IP Address: 192 . 100 . 10 . 0
Custom Subnet Mask: 255.255.255.240

Address Ranges:
192.100.10.0 to 192.100.10.15
192.100.10.16 to 192.100.10.31
192.100.10.32 to 192.100.10.47 (Range in the sample below)
192.100.10.48 to 192.100.10.63
192.100.10.64 to 192.100.10.79
192.100.10.80 to 192.100.10.95
192.100.10.96 to 192.100.10.111
192.100.10.112 to 192.100.10.127
192.100.10.128 to 192.100.10.143
192.100.10.144 to 192.100.10.159
192.100.10.160 to 192.100.10.175
192.100.10.176 to 192.100.10.191
192.100.10.192 to 192.100.10.207
192.100.10.208 to 192.100.10.223
192.100.10.224 to 192.100.10.239
192.100.10.240 to 192.100.10.255

Based on this sample to deny or permit the third subnet we would create the correct wildcard mask by inverting the subnet mask from 255.255.255.240 to 0.0.0.15. The third address range would be 192.100.10.32 to 192.100.10.47 .

A standard ACE statement would be written as:

access-list 10 permit 192.100.10.32 0.0.0.15

The wildcard mask indicates that address range 0 to 15 will be permitted. If the source address was 192.100.10.**0** it would indicate the first 16 addresses (0 to 15). Since the source address is 192.100.10.**32**, it indicates that the address range will be from 192.100.10.**32** to 192.100.10.**47** (32 to 47). The IP address indicates the starting point for the wildcard mask to begin counting up from.

This technique gives you greater control with the addresses you want to permit or deny. It is a **Best Practice** to stay within standard address ranges.

Based on the given information list the range of source addresses for each ACE statement.

1. access-list **10 permit 192.100.10.64 0.0.0.15**

Answer: 192.100.10.64 to 192.100 10. 79

2. **access-list 5 permit 172.16.128.0 0.0.63.255**

Answer: 172.16.128.0 to 172.16.191.255

3. **access-list 125 deny tcp 192.100.10.208 0.0.0.15 host 192.168.10.1 log**

Answer: 192.100.10.208 to 192.100 10. 223

4. **access-list 11 deny 210.48.72.192 0.0.0.31**

Answer: 210.48.72.192 to 210.48.72.223

5. **access-list 108 deny ip 192.168.5.184 0.0.0.7 192.64.4.0 0.0.0.255**

Answer: 192.168.5.184 to 192.168.5.191

6. **access-list 171 deny 172.32.128.0 0.0.15.255 any**

Answer: 172.32.128.0 to 172.32.143.255

7. **access-list 105 permit 165.50.196.0 0.0.3.255 any**

Answer: 165.50.196.0 to 165.50.199.255

8. **access-list 109 permit tcp 172.16.128.0 0.0.127.255 host 172.16.20.1**

Answer: 172.16.128.0 to 172.16.255.255

9. **access-list 111 permit ip 192.168.1.236 0.0.0.3 any**

Answer: 192.168.1.236 to 192.168.1.239

10. **access-list 195 permit udp 172.32.160.0.0 0.0.31.255 172.100.10.0 0.0.0.255**

Answer: 172.32.160.0 to 172.32.191.255

11. **access-list 110 permit ip 10.64.0.0 0.63.255.255 172.168.40.10 0.0.0.0**

Answer: 10.64.0.0 to 10.127.255.255

Wildcard Mask Problems

Based on the given information list the range of destination addresses for each ACE statement.

1.**access-list 125 deny tcp 195.223.50.0 0.0.0.63 host 172.168.10.1 fragments**

Answer: 172.168.10.1

2. **access-list 115 permit any any**

Answer: Any address

3. **access-list 150 permit ip 192.168.30.10 0.0.0.0 192.168.15.0 0.0.0.63**

Answer: 192.168.15.0 to 192.168.15.63

4. **access-list 120 deny tcp 172.32.4.0 0.0.0.255 192.220.10.0 0.0.0.15**

Answer: 192.220.10.0 to 192.220.10.15

5. **access-list 108 deny ip 192.220.10.0 0.0.0.15 172.32.4.0 0.0.0.255**

Answer: 172.32.4.0 to 172.32.4.255

6. **access-list 101 deny ip 140.130.110.100 0.0.0.0 0.0.0.0 255.255.255.255**

Answer: Any Address

7. **access-list 105 permit any 192.168.15.0 0.0.0.255**

Answer: 192.168.15.0 to 192.168.15.255

8. **access-list 120 permit ip 192.168.15.10 0.0.0.0 172.16.40.0 0.0.3.255**

Answer: 172.16.40.0 to 172.16.43.255

9. **access-list 160 deny udp 172.16.0.0 0.0.1.255 172.18.104.0 0.0.7.255 eq 21**

Answer: 172.18.104.0 to 172.18.111.255

10. **access-list 150 permit ip 192.168.30.0 0.0.0.63 192.168.15.96 0.0.0.31**

Answer: 192.168.15.96 to 192.168.15.127

Writing
Standard Access Lists...

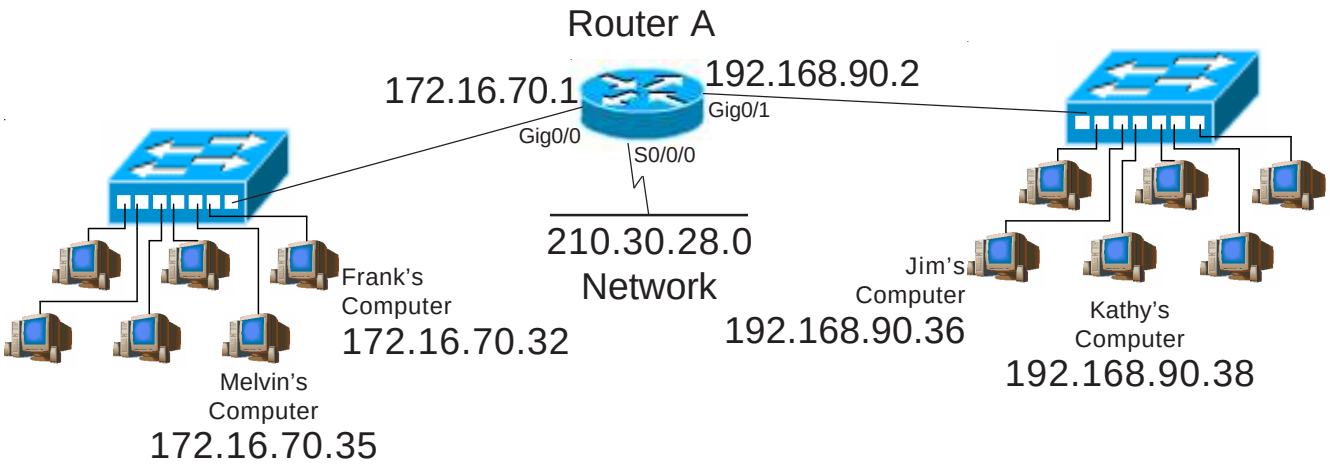

Standard Access List Sample #1

Write a standard access list to block Melvin's computer from sending information to Kathy's computer; but will allow all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Gig0/1
Access-list #: 10

Note:
A standard access list blocks only the source address. Melvin will also be blocked from sending information to Jim or anyone else on the 192.168.90.0 network.

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# access-list 10 deny 172.16.70.35
                                  or
                access-list 10 deny 172.16.70.35 0.0.0.0
                                  or
                access-list 10 deny host 172.16.70.35
Router(config)# access-list 10 permit 0.0.0.0 255.255.255.255
                                  or
                access-list 10 permit any
Router(config)# interface gig0/1
Router(config-if)# ip access-group 10 out
Router(config-if)# exit
Router(config)# exit
```

[Viewing information about existing ACL's]

`Router# show configuration`	(This will show which access groups are associated with particular interfaces)
`Router# show access list 10`	(This will show detailed information about this ACL)

Standard Access List Sample #2

Include a remark with each statement of your ACL. Write a standard access list to block Jim's computer from sending information to Frank's computer; but will allow all other traffic from the 192.168.90.0 network. Permit all traffic from the 210.30.28.0 network to reach the 172.16.70.0 network. Deny all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Gig0/0
Access-list #: 28

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 28 remark Block Jim from reaching Frank
Router(config)# access-list 28 deny 192.168.90.36
                                  or
                access-list 28 deny 192.168.90.36 0.0.0.0
                                  or
                access-list 28 deny host 192.168.90.36
Router(config)# access-list 28 remark Allow all other traffic
Router(config)# access-list 28 permit 192.168.90.0 0.0.0.255
Router(config)# access-list 28 remark Allow all traffic
Router(config)# access-list 28 permit 210.30.28.0 0.0.0.255
Router(config)# interface Gig0/0
Router(config-if)# ip access-group 28 out
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

[Remark Command]

The remark command allows you to place text within the ACL so it can be viewed after it is inserted on the router. It can be viewed using the show run or any command that lists the ACL.

[Disabling ACL's]

```
Router# configure terminal
Router(config)# interface gig0/0
Router(config-if)# no ip access-group 28 out
Router(config-if)# exit
Router(config)# exit
```

[Removing an ACL]

```
Router# configure terminal
Router(config)# interface gig0/0
Router(config-if)# no ip access-group 28 out
Router(config-if)# exit
Router(config)# no access-list 28
Router(config)# exit
```

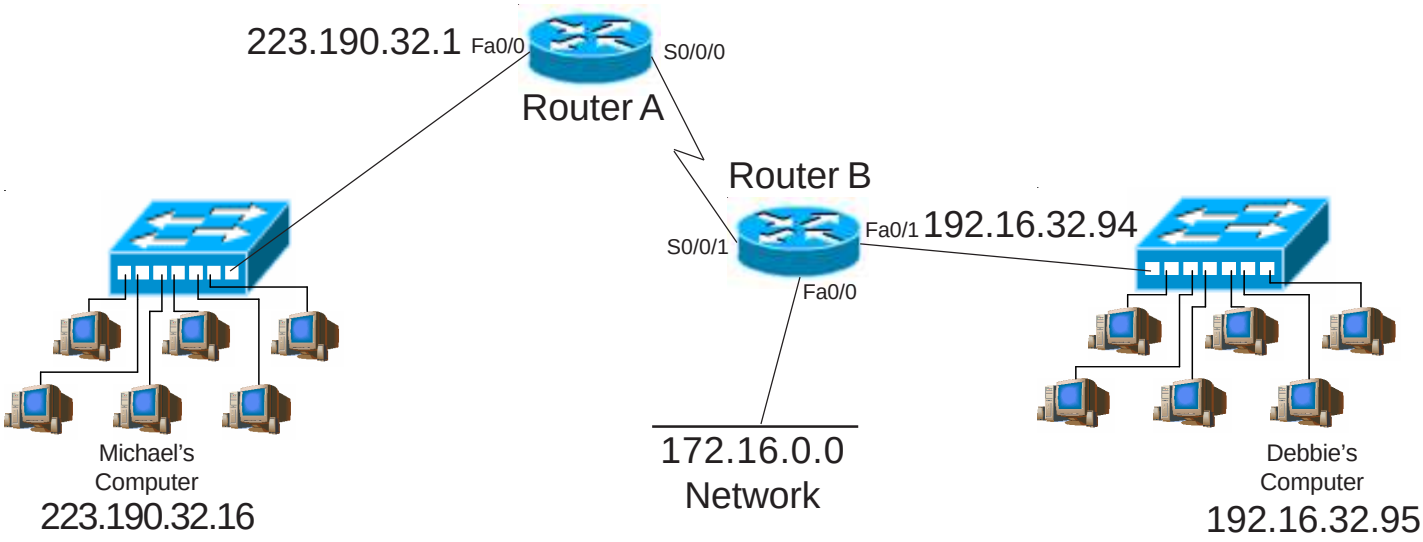

Standard Access List Problem #1

Write a standard access list to block Debbie's computer from receiving information from Michael's computer; but will allow all other traffic. List all the command line options for this problem. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Fa0/1
Access-list #: 35 (1-99)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)# access-list 35 deny 223.190.32.16
                or
                access-list 35 deny host 223.190.32.16
                or
                access-list 35 deny 223.190.32.16 0.0.0.0

Router(config)# access-list 35 permit any
                or
                access-list 35 permit 0.0.0.0 255.255.255.255

Router(config)# interface fa0/1

Router(config-if)# ip access-group 35 in or (out) (circle one)
Router(config-if)# exit
Router(config)# exit
```

Standard Access List Problem #2

Write a standard access list to permit Debbie's computer to receive information from Michael's computer; but will deny all other traffic from the 223.190.32.0 network. Block all traffic from the 172.16.0.0 network. Permit all other traffic. List all the command line options for this problem. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Fa0/1
Access-list #: 40 (1-99)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)# access-list 40 permit 223.190.32.16
                          or
                access-list 40 permit host 223.190.32.16
                          or
                access-list 40 permit 223.190.32.16 0.0.0.0

Router(config)# access-list 40 deny 223.190.32.0 0.0.0.255

Router(config)# access-list 40 deny 172.16.0.0 0.0.255.255

Router(config)# access-list 40 permit any
                          or
                access-list 40 permit 0.0.0.0 255.255.255.255

Router(config)# interface fa0/1

Router(config-if)# ip access-group 40 in or (out) (circle one)
Router(config-if)# exit
Router(config)# exit
```

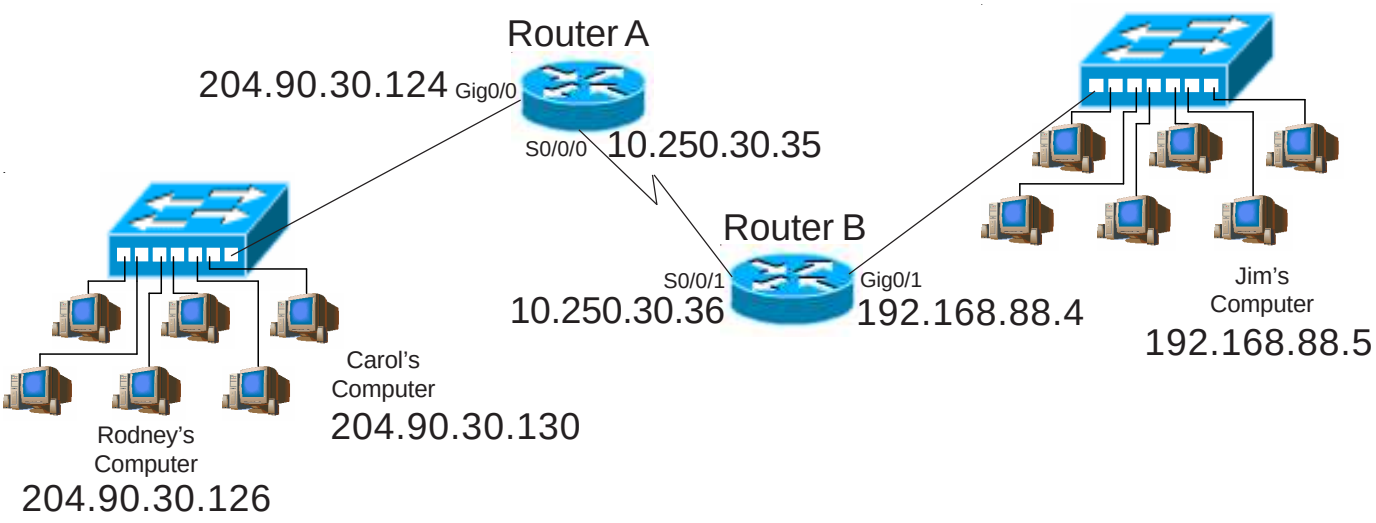

Standard Access List Problem #3

Write a standard access list to block Rodney and Carol's computer from sending information to Jim's computer; but will allow all other traffic from the 204.90.30.0 network. Block all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Gig0/1
Access-list #: 45 (1-99)

[Writing and installing an ACL]

Router# configure terminal (or config t)

Router(config)# access-list 45 deny 204.90.30.130
or access-list 45 deny host 204.90.30.130
or access-list 45 deny 204.90.30.130 0.0.0.0

access-list 45 deny 204.90.30.126
or access-list 45 deny host 204.90.30.126
or access-list 45 deny 204.90.30.126 0.0.0.0

access-list 45 permit 204.90.30.0 0.0.0.255

Router(config)# interface gig0/1

Router(config-if)# ip access-group 45 in or (out) (circle one)
Router(config-if)# exit
Router(config)# exit

Standard Access List Problem #4

Include a remark with each statement of your ACL. Using a minimum number of commands write a standard access list named "Ralph" to block Carol's computer from sending information to Jim's computer; but will permit Jim to receive data from Rodney. Block the upper half of the 204.90.30.0 range from reaching Jim's computer while permitting the lower half of the range. Block all other traffic. For help with blocking the upper half of the range review page 13 or the wildcard mask problems on pages 16 and 17. For help with named ACLs review pages 12 and 13. For help with the remark command review page 23.

Place the access list at:
Router Name: Router B
Interface: Gig0/1
Access-list Name: Ralph

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# ip access-list standard Ralph
Router(config-std-nacl)# remark Permits the lower half of the range
                        remark while blocking all other traffic
                        permit 204.90.30.0 0.0.0.127
                        _____
                        _____
                        _____
                        _____
                        _____
                        _____
                        _____
Router(config-std-nacl)# interface gig0/1
Router(config-if)# ip access-group Ralph in or (out) (circle one)
Router(config-if)# exit
Router(config)# exit
```

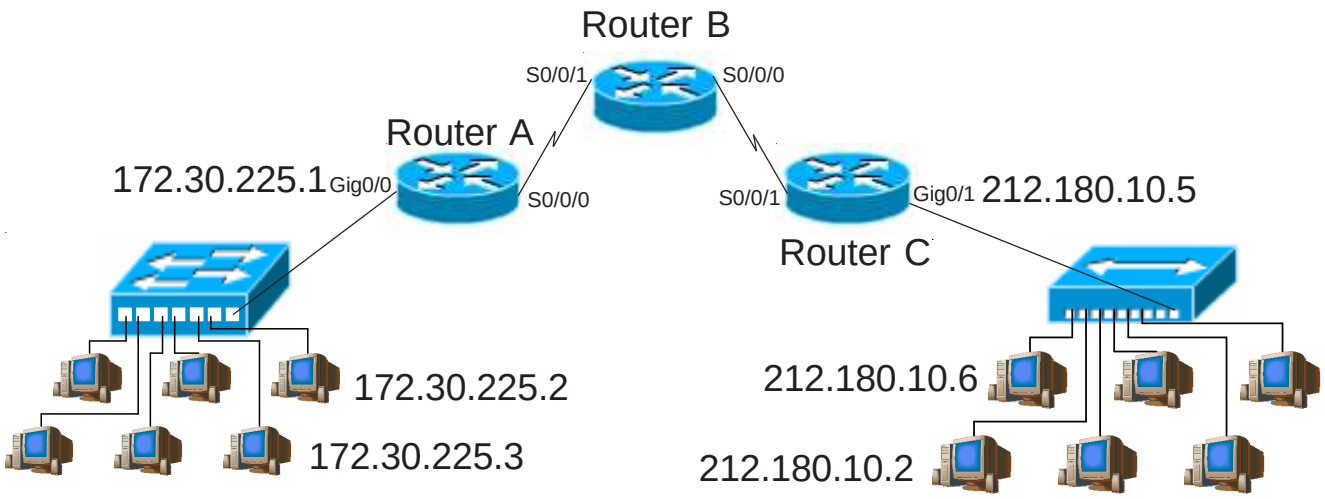

Standard Access List Problem #5

Write a standard access list to block 172.30.225.2 and 172.30.225.3 from sending information to the 212.180.10.0 network; but will allow all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router C
Interface: Gig0/1
Access-list #: 55 (1-99)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)#  access-list 55 deny 172.30.225.2
            or   access-list 55 deny host 172.30.225.2
            or   access-list 55 deny 172.30.225.2 0.0.0.0
            ----------------------------------------------
                 access-list 55 deny 172.30.225.3
            or   access-list 55 deny host 172.30.225.3
            or   access-list 55 deny 172.30.225.3 0.0.0.0
            ----------------------------------------------
                 access-list 55 permit any
```

This ACL could be shortened to these two statements.

```
access-list 55 deny 172.30.225.2 0.0.0.1
access-list 55 permit any
```

```
Router(config)# interface gig0/1

Router(config-if)# ip access-group 55 in or (out) (circle one)
Router(config-if)# exit
Router(config)# exit
```

Standard Access List Problem #6

Add a remark to each statement explaining its purpose. Write a standard access list to block and log 212.180.10.2 from sending information to the 172.30.225.0 network. Permit and log 212.180.10.6 to send data to the 172.30.225.0 network. Deny all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written. Check the example on page 10 for help with the logging option. For help with the remark command review page 23.

Place the access list at:
Router Name: Router A
Interface: Gig0/0
Access-list #: 60 (1-99)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# access-list 60 remark block and log this user
```

or `access-list 60 deny 212.180.10.2 log`

or `access-list 60 deny host 212.180.10.2 log`

or `access-list 60 deny 212.180.10.2 0.0.0.0 log`

`access-list 60 remark allow and log this user`

`access-list 60 permit 212.180.10.6 log`

or `access-list 60 permit host 212.180.10.6 log`

or `access-list 60 permit 212.180.10.6 0.0.0.0 log`

```
Router(config)# interface gig0/0
Router(config-if)# ip access-group 60 in or (out) (circle one)
Router(config-if)# exit
Router(config)# exit
```

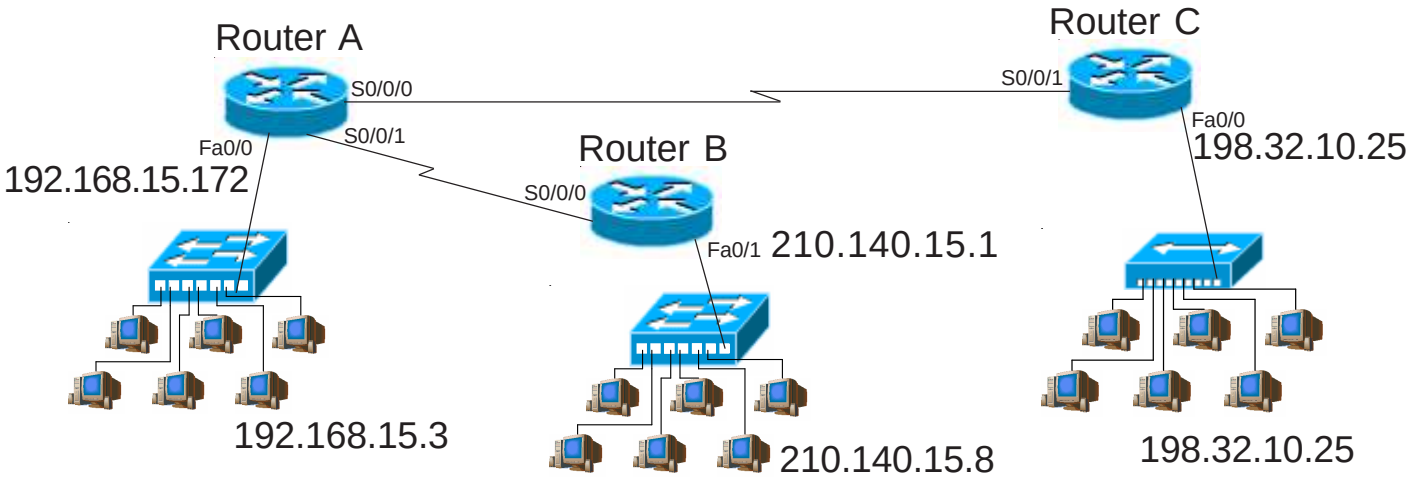

Standard Access List Problem #7

Write a standard access list to block the addresses 192.168.15.1 to 192.168.15.31 from sending information to the 210.140.15.0 network. Do not permit any traffic from 198.32.10.25 to reach the 210.140.15.0 network. Permit all other traffic. For help with this problem review page 13 or the wildcard mask problems on pages 16 and 17.

Place the access list at:
Router Name: Router B
Interface: Fa0/1
Access-list #: 65 (1-99)

[Writing and installing an ACL]

Router# configure terminal (or config t)

Router(config)# access-list 65 deny 192.168.15.0 0.0.0.31

access-list 65 deny 198.32.10.25
or
access-list 65 deny host 198.32.10.25
or
access-list 65 deny 198.32.10.25 0.0.0.0

access-list 65 permit any

Router(config)# interface fa0/1

Router(config-if)# ip access-group 65 in or out (circle one)
Router(config-if)# exit
Router(config)# exit

Standard Access List Problem #8

Write a standard named access list called "CISCO_LAB_A" to permit traffic from the lower half of the 198.32.10.0 network to reach 192.168.15.0 network; block the upper half of the addresses. Allow host 198.32.10.192 to reach network 192.168.15.0. Permit all other traffic. For help with this problem review page 13 or the wildcard masks problems on pages 16 and 17. For assistance with named ACLs review pages 12 and 13.

Place the access list at:
Router Name: Router A
Interface: Fa0/0
Access-list Name: CISCO_LAB_A

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# ip access-list standard CISCO_LAB_A
Router(config-std-nacl)# permit 198.32.10.0 0.0.0.127
```

permit host 198.32.10.192
or
permit 198.32.10.192 0.0.0.0
or
permit 198.32.10.192

deny 198.32.10.0 0.0.0.255

permit any

An alternate (and shorter) version of this:

Permit 198.32.10.192 0.0.0.0

Deny 198.32.10.128 0.0.0.127

Permit Any

```
Router(config-std-nacl)# interface fa0/0
Router(config-if)# ip access-group CISCO_LAB_A in or out (circle one)
Router(config-if)# exit
Router(config)# exit
```

Standard Access List Problem #9

Write a standard access list to block network 192.168.255.0 from receiving information from the following addresses: 10.250.1.1, 10.250.2.1, 10.250.4.1, and the entire 10.250.3.0 255.255.255.0 network. Allow all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Fa0/0
Access-list #: 75 (1-99)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)#   access-list 75 deny 10.250.1.1
                  or
                    access-list 75 deny host 10.250.1.1
                  or
                    access-list 75 deny 10.250.1.1 0.0.0.0
                  ---------------------------------------
                    access-list 75 deny 10.250.2.1
                  or
                    access-list 75 deny host 10.250.2.1
                  or
                    access-list 75 deny 10.250.2.1 0.0.0.0
                  ---------------------------------------
                    access-list 75 deny 10.250.4.1
                  or
                    access-list 75 deny host 10.250.4.1
                  or
                    access-list 75 deny 10.250.4.1 0.0.0.0
                  ---------------------------------------
                    access-list 75 deny 10.250.3.0 0.0.0.255
                  ---------------------------------------
                    access-list 75 permit any
                  ---------------------------------------

                  ---------------------------------------

Router(config)# interface fa0/0

Router(config-if)# ip access-group 75 in or (out) (circle one)
Router(config-if)# exit
Router(config)# exit
```

Writing Extended Access Lists...

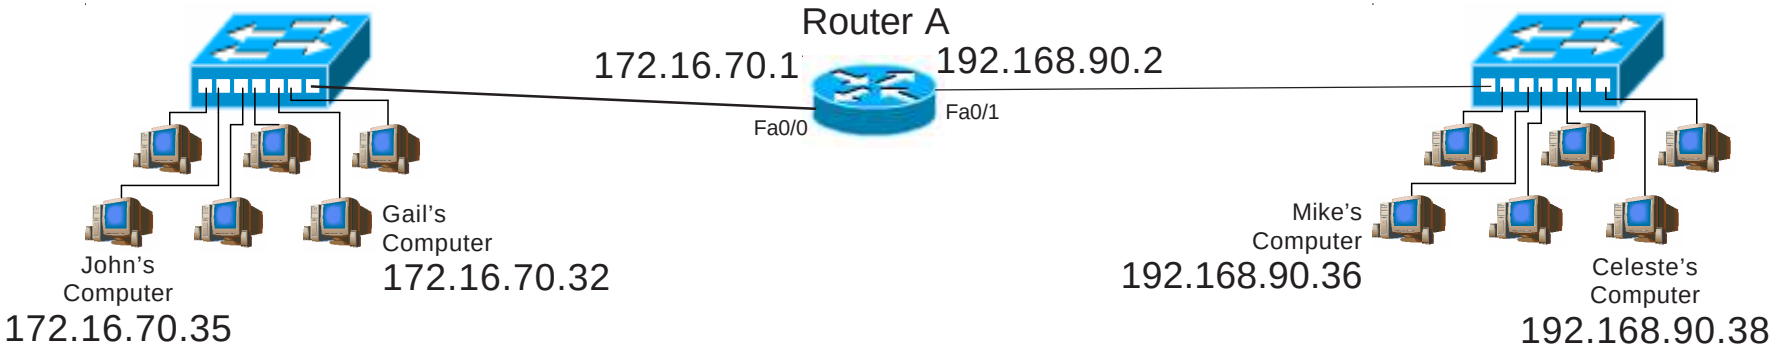

Extended Access List Sample #1 — Deny/Permit Specific Addresses

Write an extended access list to prevent John's computer from sending information to Mike's computer; but will allow all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: FA0/0
Access-list #: 110

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# access-list 110 deny ip 172.16.70.35 0.0.0.0 192.168.90.36 0.0.0.0
                                    or
                access-list 110 deny ip host 172.16.70.35 host 192.168.90.36
Router(config)# access-list 110 permit ip any any
                                    or
                 access-list 110 permit ip 0.0.0.0 255.255.255.255 0.0.0.0 255.255.255.255
Router(config)# interface fa0/0
Router(config-if)# ip access-group 110 in
Router(config-if)# exit
Router(config)# exit
```

[Viewing information about existing ACL's]

`Router# show configuration`	(This will show which access groups are associated with particular interfaces)
`Router# show access list 110`	(This will show detailed information about this ACL)

Extended Access List Sample #2 — Deny/Permit Specific Addresses

Write an extended access list to block the 172.16.70.0 network from receiving information from Mike's computer at 192.168.90.36. Block the lower half of the ip addresses from 192.168.90.0 network from reaching Gail's computer at 172.16.70.32. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: FA0/1
Access-list #: 135

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 135 deny ip 192.168.90.36 0.0.0.0 172.16.70.0 0.0.0.255
                                or
                access-list 135 deny ip host 192.168.90.36 172.16.70.0 0.0.0.255
Router(config)# access-list 135 deny ip 192.168.90.0 0.0.0.127 172.16.70.32 0.0.0.0
                                or
                access-list 135 deny ip 192.168.90.0 0.0.0.127 host 172.16.70.32
Router(config)# access-list 135 permit ip any any
                                or
               access-list 135 permit ip 0.0.0.0 255.255.255.255 0.0.0.0 255.255.255.255
Router(config)# interface fa0/1
Router(config-if)# ip access-group 135 in
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

[Disabling ACL's]

```
Router# configure terminal
Router(config)# interface fa0/1
Router(config-if)# no ip access-group 135 out
Router(config-if)# exit
Router(config)# exit
```

[Removing an ACL]

```
Router# configure terminal
Router(config)# interface fa0/1
Router(config-if)# no ip access-group 135 out
Router(config-if)# exit
Router(config)# no access-list 135
Router(config)# exit
```

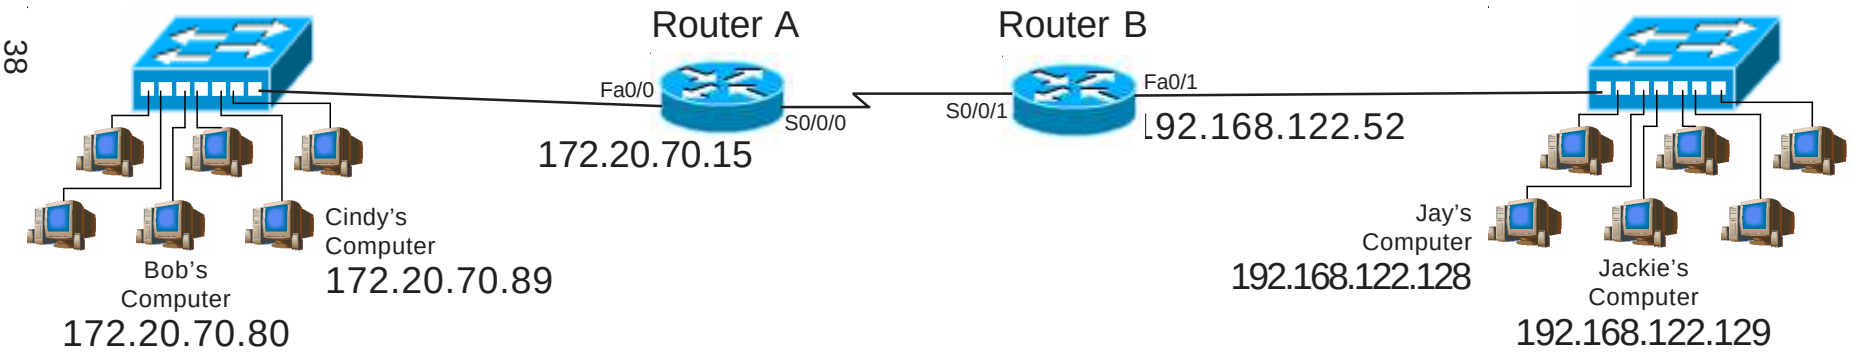

Extended Access List Problem #1 — Deny/Permit Specific Addresses

Write an extended access list to prevent Jay's computer from receiving information from Cindy's computer. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Fa0/0
Access-list #: 105 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)# access-list 105 deny ip host 172.20.70.89 host 192.168.122.128
          or
                access-list 105 deny ip 172.30.225.2 0.0.0.0 192.168.122.128 0.0.0.0

                access-list 105 permit ip any any

Router(config)# interface fa0/0
Router(config-if)# ip access-group 110 (in) or out (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

Extended Access List Problem #2 — Deny/Permit Specific Addresses

Write an extended access list to block the 172.20.70.0 255.255.255.0 network from receiving information from Jackie's computer at 192.168.122.129. Block the lower half of the ip addresses from 192.168.122.0 network from reaching Cindy's computer at 172.20.70.89. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Fa0/1
Access-list #: 110 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 110 deny ip host 192.168.122.129 172.20.70.0 0.0.0.255
```
or
```
access-list 110 deny ip 192.168.122.129 0.0.0.0 172.20.70.0 0.0.0.255
```
```
access-list 110 deny ip 192.168.122.0 0.0.0.127 host 172.20.70.89
```
or
```
access-list 110 deny ip 192.168.122.0 0.0.0.127 172.20.70.89 0.0.0.0
```
```
access-list 110 permit ip any any
```

```
Router(config)# interface fa0/1
Router(config-if)# ip access-group 110 (in) or out (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

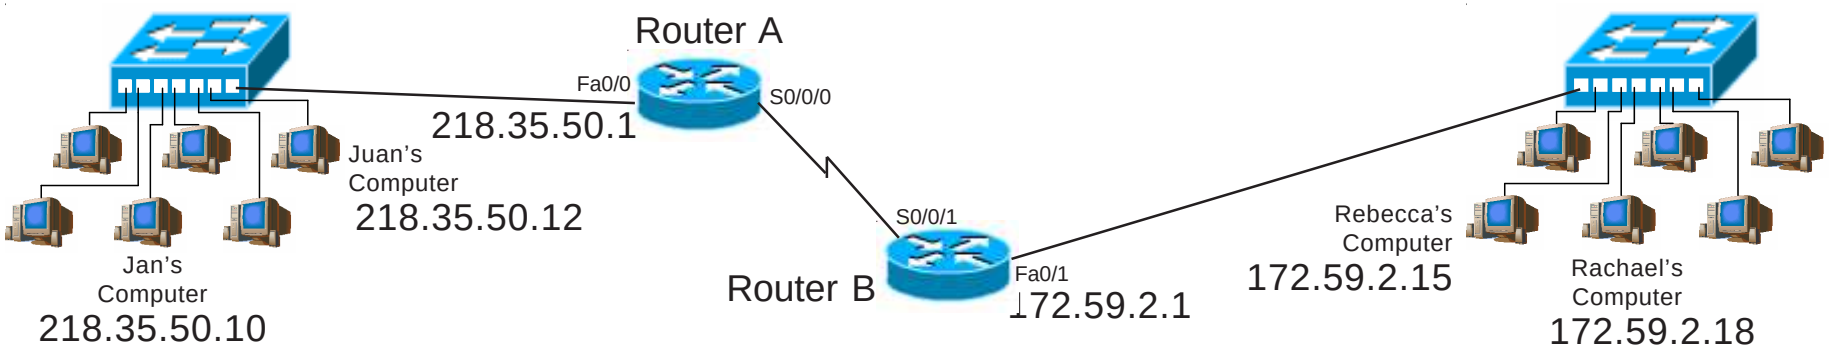

Extended Access List Problem #3 — Deny/Permit Specific Addresses

Write a named extended access list called "LAB_166" to permit Jan's computer at 218.35.50.10 to receive packets from Rachael's computer at 172.59.2.18; but not Rebecca's computer at 172.59.2.15. Deny all other packets. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Gig0/1
Access-list Name: LAB_166

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)#ip access-list extended LAB_166

Router(config-ext-nacl)# permit ip host 172.59.2.18 host 218.35.50.10
                      or
                        permit ip 172.59.2.18 0.0.0.0 218.35.50.10 0.0.0.0


Router(config-ext-nacl)# interface gig0/1
Router(config-if)# ip access-group LAB_166 (in or out) (circle one)
Router(config-if)# exit
Router(config)# exit
```

Extended Access List Problem #4 — Deny/Permit Specific Addresses

Write an extended access list to allow Juan's computer at 218.35.50.12 to send information to Rebecca's computer at 172.59.2.15; but not Rachael's computer at 172.59.2.18. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Gig0/0
Access-list #: 120 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 120 deny ip host 218.35.50.12 host 172.59.2.18
```
or
```
access-list 120 deny ip 218.35.50.12 0.0.0.0 172.59.2.18 0.0.0.0
access-list 120 permit ip any any
```

```
Router(config)# interface gig0/0
Router(config-if)# ip access-group 115 (in) or out (circle one)
Router((config-if)# exit
Router(config)# exit
Router# copy run start
```

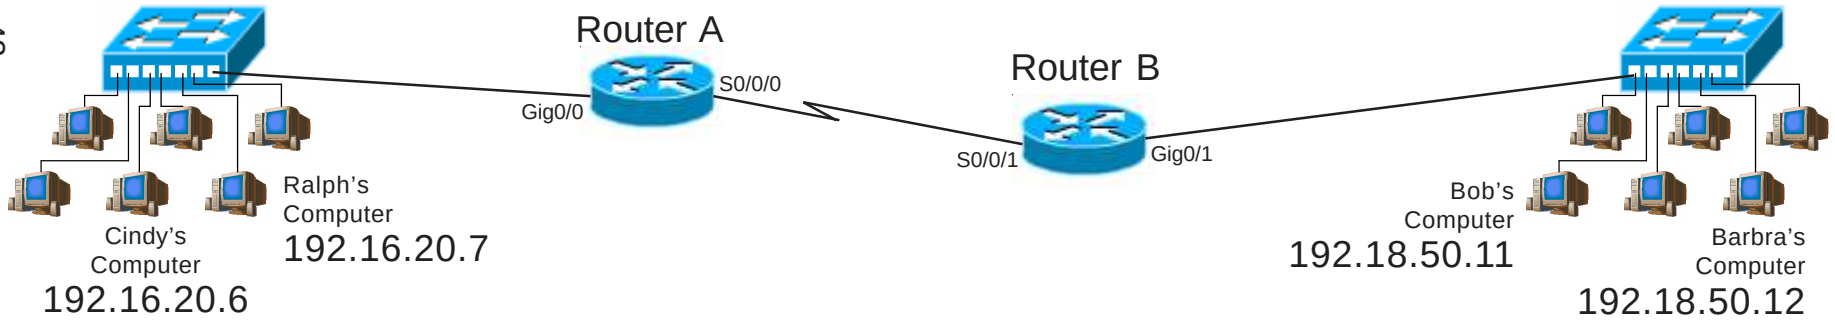

Extended Access List Sample #3 — Deny/Permit Entire Ranges

Write an extended access list to permit the 192.16.20.0 network to receive packets from the 192.18.50.0 network. Deny all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Gig0/1
Access-list #: 111

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# access-list 111 permit ip 192.18.50.0 0.0.0.255 192.168.20.0 0.0.0.255
Router(config)# access-list 111 deny ip any any
                                  or
                access-list 111 deny ip 0.0.0.0 255.255.255.2550.0.0.0 255.255.255.255
Router(config)# interface gig0/1
Router(config-if)# ip access-group 111 in
Router(config-if)# exit
Router(config)# exit
```

[Viewing information about existing ACL's]

`Router# show configuration`	(This will show which access groups are associated with particular interfaces)
`Router# show access list 111`	(This will show detailed information about this ACL)

Extended Access List Sample #4 — Deny/Permit Entire Ranges

Add a remark to each statement. Write an extended access list to block the 192.18.50.0 network from receiving information from the 192.16.20.0 network. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Gig0/0
Access-list #: 188

[Remark Command]

The remark command allows you to place text within the ACL so it can be viewed after it is inserted on the router. It can be viewed using the show run or any command that lists the ACEs.

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 188 remark block all traffic from the Science lab
Router(config)# access-list 188 deny ip 192.16.20.0 0.0.0.255 192.18.50.0 0.0.0.255
Router(config)# access-list 188 remark allow everyone else unrestricted access
Router(config)# access-list 188 permit ip any any
                                  or
                access-list 188 permit ip 0.0.0.0 255.255.255.255 0.0.0.0 255.255.255.255
Router(config)# interface gig0/0
Router(config-if)# ip access-group 188 in
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

[Disabling ACL's]

```
Router# configure terminal
Router(config)# interface gig0/0
Router(config-if)# no ip access-group 188 out
Router(config-if)# exit
Router(config)# exit
```

[Removing an ACL]

```
Router# configure terminal
Router(config)# interface gig0/0
Router(config-if)# no ip access-group 188 out
Router(config-if)# exit
Router(config)# no access-list 188
Router(config)# exit
```

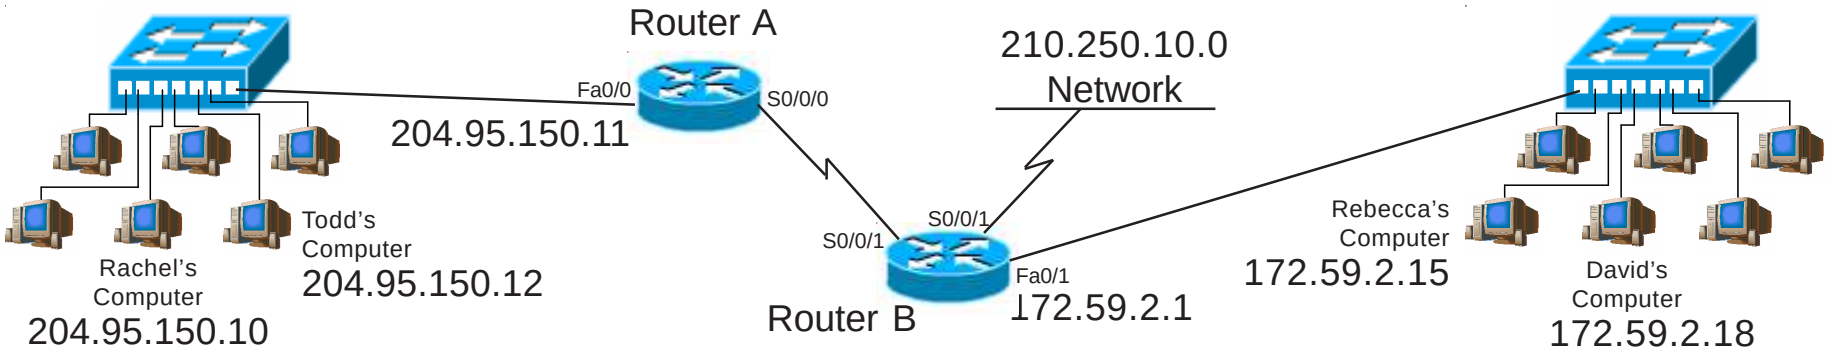

Extended Access List Problem #5 — Deny/Permit Entire Ranges

Include a remark with each statement of your ACL. Write an extended access list to permit network 204.95.150.0 to send packets to network 172.59.0.0, but not to the 210.250.10.0 network. Permit all other traffic. For help with the remark command review page 41. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Fa0/0
Access-list #: 125 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)#access-list 125 remark keep Marketing from bothering Research
              access-list 125 deny ip 204.95.150.0 0.0.0.255 210.250.10.0 0.0.0.255
              access-list 125 remark allow all other traffic
              access-list 125 permit ip any any
Router(config)# interface fa0/0
Router(config-if)# ip access-group 125 in or out (circle one)
Router(config-if)# exit
Router(config)# exit
```

Extended Access List Problem #6 — Deny/Permit Entire Ranges

Write an extended access list to allow Rachel's computer at 204.95.150.10 to receive information from the 172.59.2.0 255.255.255.0 network. Deny all other hosts on the 204.95.150.0 network access from the 172.59.2.0 255.255.255.0 network. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Fa0/1
Access-list #: 130 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 130 permit ip 172.59.2.0 0.0.0.255 host 204.95.150.10
        or
                access-list 130 permit ip 172.59.2.0 0.0.0.255 204.95.150.10 0.0.0.0
                access-list 130 deny ip 172.59.2.0 0.0.0.255 204.95.150.0 0.0.0.255
                access-list 130 permit ip any any
```

```
Router(config)# interface Fa0/1
Router(config-if)# ip access-group 130 (in) or out (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

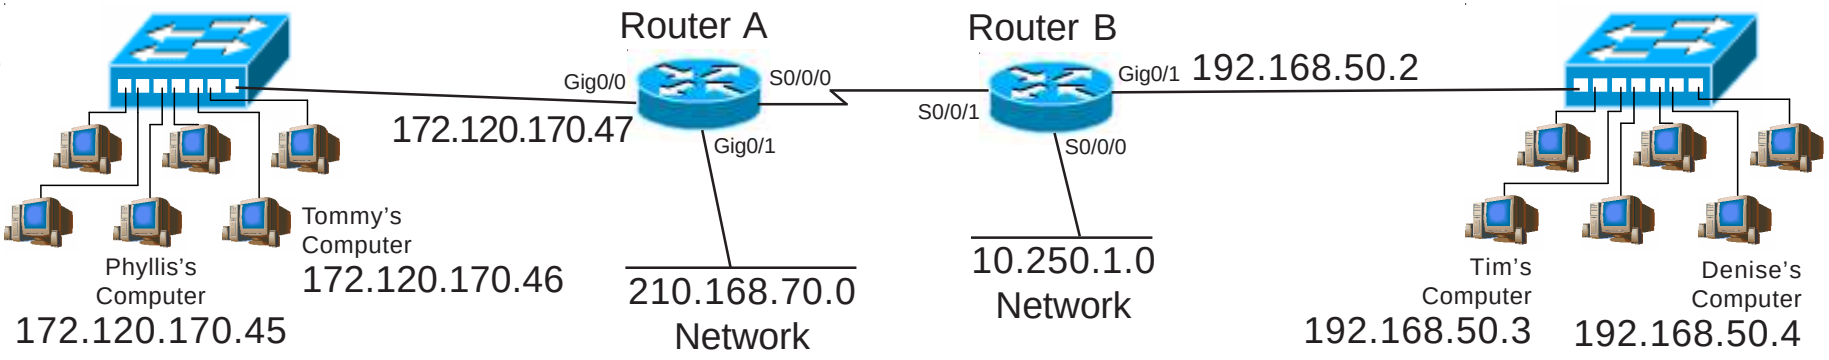

Extended Access List Problem #7 — Deny/Permit Entire Ranges

Write a named extended access list called "Godzilla" to prevent the 172.120.0.0 network from sending information to the 210.168.70.0 , and 10.250.1.0 255.255.255.0 networks; but will permit traffic to the 192.168.50.0 network. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Gig0/0
Access-list Name: GODZILLA

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# ip access-list extended GODZILLA
Router(config-ext-nacl)# deny ip 172.120.0.0 0.0.255.255 210.168.70.0 0.0.0.255
                          deny ip 172.120.0.0 0.0.255.255 10.250.1.0 0.0.0.255
                          permit ip any any
Router(config-ext-nacl)# interface gig0/0
Router(config-if)# ip access-group GODZILLA in or out (circle one)
Router(config-if)# exit
Router(config)# exit
```

Extended Access List Problem #8 — Deny/Permit Entire Ranges

Assuming default subnet masks write an extended access list to permit Tim at 192.168.50.3 to receive data from the 172.120.0.0 network. Allow the 192.168.50.0 network to receive information from Phyllis's computer at 172.120.170.45. Deny all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Gig0/0
Access-list #: 140 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 140 permit ip 172.120.0.0 0.0.255.255 host 192.168.50.3
        or access-list 140 permit ip 172.120.0.0 0.0.255.255 192.168.50.3 0.0.0.0

           access-list 140 permit ip host 172.120.170.45 192.168.50.0 0.0.0.255
        or access-list 140 permit ip 172.120.170.45 0.0.0.0 192.168.50.0 0.0.0.255
```

```
Router(config)# interface gig0/0
Router(config-if)# ip access-group 140 (in) or out (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

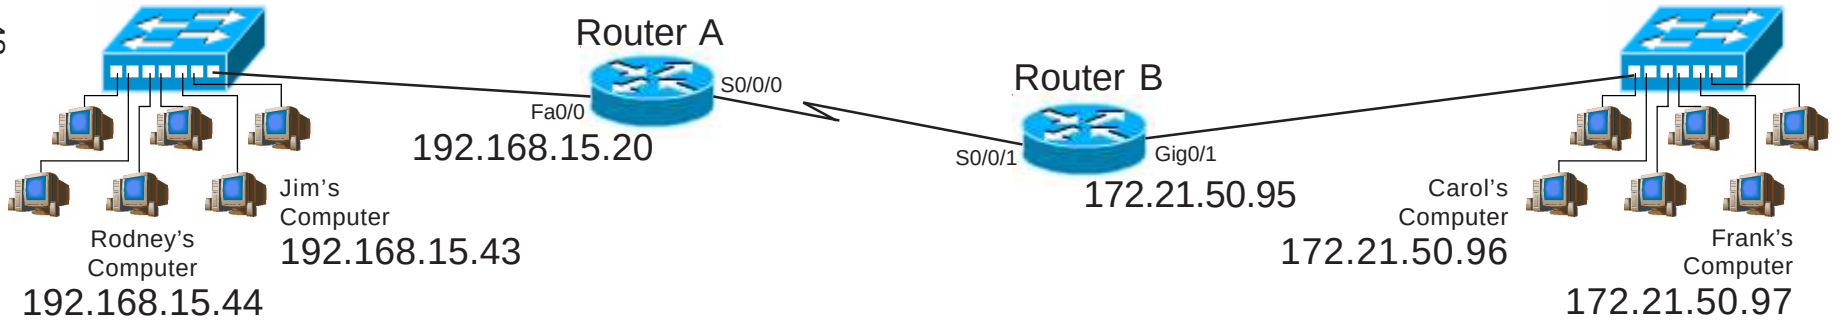

Extended Access List Sample #5 — Deny/Permit a Range of Addresses

Write an extended access list to deny the first 15 usable addresses of the 192.168.15.0 network from reaching the 172.21.0.0 network. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Fa0/0
Access-list #: 185

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# access-list 185 deny ip 192.168.15.0 0.0.0.15 172.21.50.0 0.0.255.255
Router(config)# access-list 185 permit ip any any
                                  or
                access-list 185 permit ip 0.0.0.0 255.255.255.255 0.0.0.0 255.255.255.255
Router(config)# interface fa0/0
Router(config-if)# ip access-group 185 in
Router(config-if)# exit
Router(config)# exit
```

[Viewing information about existing ACL's]

`Router# show configuration`	(This will show which access groups are associated with particular interfaces)
`Router# show access list 185`	(This will show detailed information about this ACL)

Extended Access List Sample #6 — Deny/Permit a Range of Addresses

Write an extended access list which will allow the lower half of 192.168.15.0 network access to the 172.21.50.0 network. Deny all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Fa0/0
Access-list #: 121

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 121 permit ip 192.168.15.0 0.0.0.127 172.21.50.0 0.0.0.255
Router(config)# access-list 121 deny ip any any
                                  or
                access-list 121 deny ip 0.0.0.0 255.255.255.255 0.0.0.0 255.255.255.255
Router(config)# interface fa0/0
Router(config-if)# ip access-group 121 in
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

[Disabling ACL's]

```
Router# configure terminal
Router(config)# interface fa0/0
Router(config-if)# no ip access-group 121 in
Router(config-if)# exit
Router(config)# exit
```

[Removing an ACL]

```
Router# configure terminal
Router(config)# interface fa0/0
Router(config-if)# no ip access-group 121 in
Router(config-if)# exit
Router(config)# no access-list 121
Router(config)# exit
```

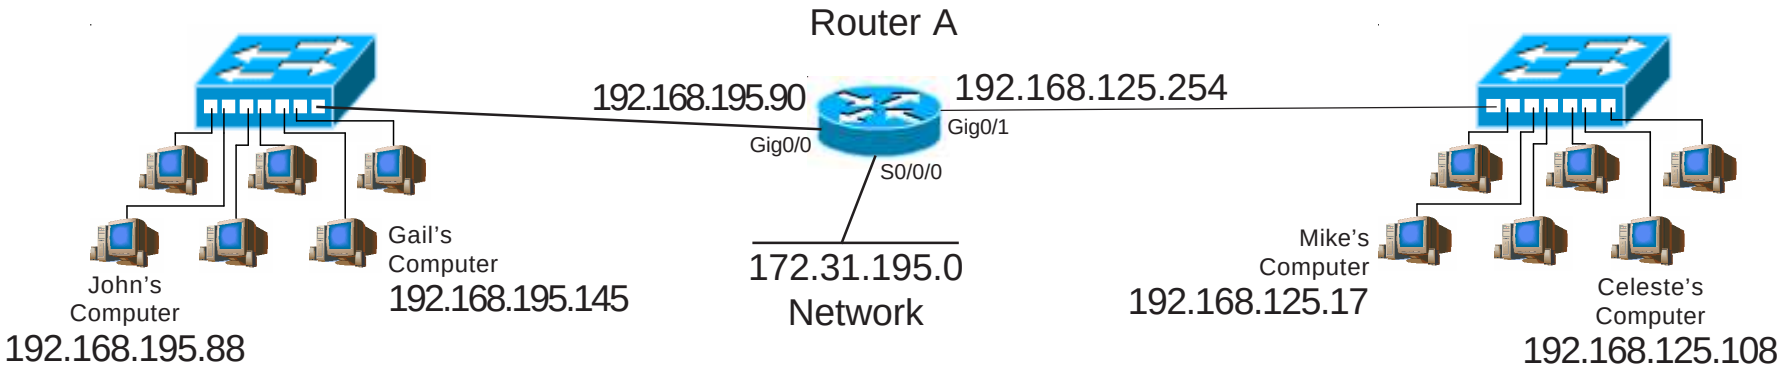

Extended Access List Problem #9 — Deny/Permit a Range of Addresses

Write an extended access list to prevent the first 31 usable addresses in the 192.168.125.0 network from reaching the 192.168.195.0 network. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Gig0/1
Access-list #: 145 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)#access-list 145 deny ip 192.168.125.0 0.0.0.31 192.168.195.0 0.0.0.255
              access-list 145 permit ip any any

Router(config)# interface gig0/1
Router(config-if)# ip access-group 145 in or out (circle one)
Router(config-if)# exit
```

Extended Access List Problem #10 — Deny/Permit a Range of Addresses

Include a remark with each statement of your ACL. Write a named extended access list called "Media_Center" to permit the range of addresses from 172.31.195.1 through 172.31.195.7 to send data to the 192.168.125.0 network. Deny all other traffic.
For help with the remark command review page 41. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: S0/0/0
Access-list Name: MEDIA_CENTER

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# ip access-list extended MEDIA_CENTER

Router(config-ext-nacl)#remark Allow the first seven addresses from the Media Center
                        permit ip 172.31.195.0 0.0.0.7 192.168.125.0 0.0.0.255
```

```
Router(config-ext-nacl)# interface S0/0/0
Router(config-if)# ip access-group MEDIA_CENTER (in) or out (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

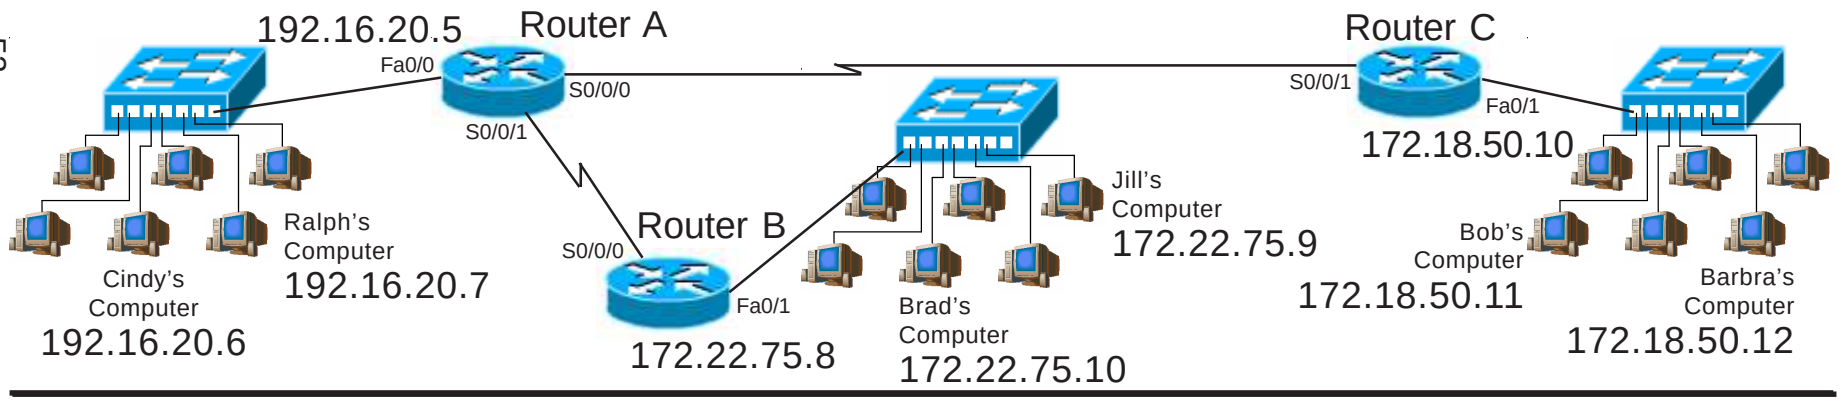

Extended Access List Problem #11 — Deny/Permit a Range of Addresses

Write an extended access list to permit the first 3 usable addresses in the 192.16.20.0 network to reach the 172.22.75.0 network. Deny the addresses from 192.16.20.4 through 192.16.20.31 from reaching the 172.22.75.0 network. Permit all other traffic. Keep in mind that there are multiple ways this ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Fa0/0
Access-list #: 155 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)#access-list 155 permit ip 192.16.20.0 0.0.0.3 172.22.75.0 0.0.0.255
              access-list 155 deny ip 192.16.20.0 0.0.0.31 172.22.75.0 0.0.0.255
              access-list 155 permit ip any any

Router(config)# interface fa0/0
Router(config-if)# ip access-group 155 (in) or out (circle one)
Router(config-if)# exit
```

Extended Access List Problem #12 — Deny/Permit a Range of Addresses

Write an extended access list to deny the addresses from 172.22.75.8 through 172.22.75.127 from sending data to the 172.18.50.0 network. Deny the first half of the addresses from the 172.22.75.0 network from reaching the 192.16.20.0 network. Permit all other traffic. Keep in mind that there are multiple ways this ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Fa0/1
Access-list #: 160 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 160 permit ip 172.22.75.0 0.0.0.7 172.18.50.0 0.0.0.255
                access-list 160 deny ip 172.22.75.0 0.0.0.127 192.16.20.0 0.0.0.255
                access-list 160 permit ip any any
```

```
Router(config)# interface fa0/1
Router(config-if)# ip access-group 160 (in) or out (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

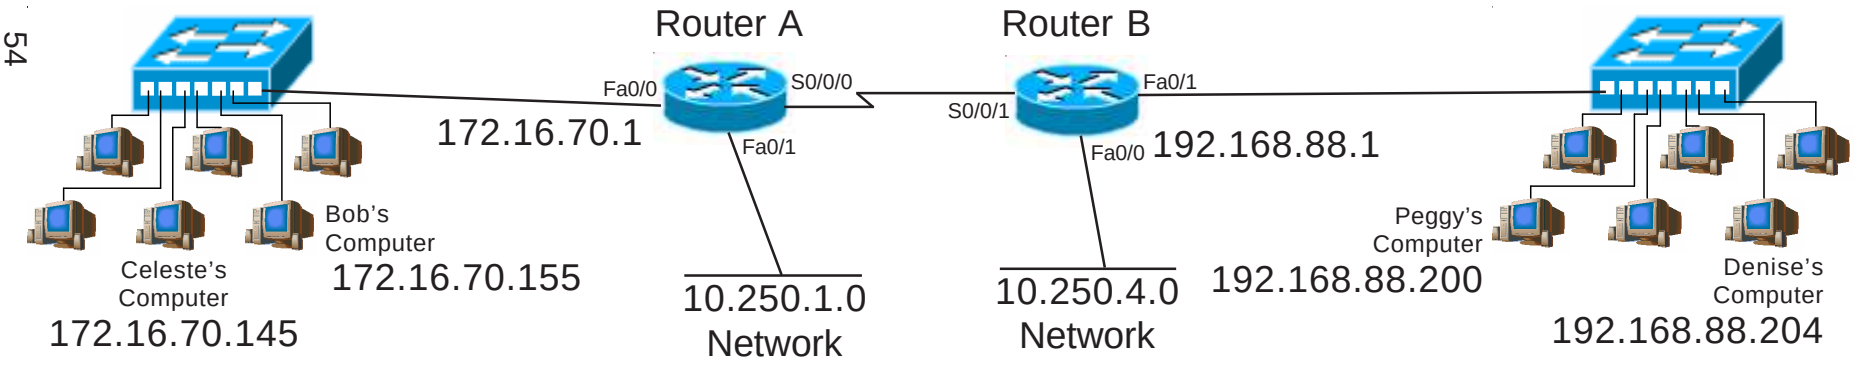

Extended Access List Problem #13 — Deny/Permit a Range of Addresses

Include a remark with each statement of your ACL. Write an extended access list to permit the first 63 usable addresses in the 192.168.88.0 network to reach the lower half of the addresses in the 172.16.70.0 network; but not the upper half. Deny all other traffic. For help with the remark command review page 41. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Fa0/1
Access-list #: 165 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)#access-list 165 remark block the upper half of the addresses from passing
              access-list 165 permit ip 192.168.88.0 0.0.0.63 172.16.70.0 0.0.0.127

Router(config)# interface fa0/1
Router(config-if)# ip access-group 165 in or out (circle one)
Router(config-if)# exit
```

Extended Access List Problem #14 — Deny/Permit a Range of Addresses

Write an extended access list to deny the addresses from 10.250.1.0 through 10.250.1.63 from sending data to Denise's computer. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Fa0/1
Access-list #: 170 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 170 deny ip 10.250.1.0 0.0.0.63 host 192.168.88.204
        or  access-list 170 deny ip 10.250.1.0 0.0.0.63 192.168.88.204 0.0.0.0
            access-list 170 permit ip any any
Router(config)# interface fa0/1
Router(config-if)# ip access-group 170 in or out (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

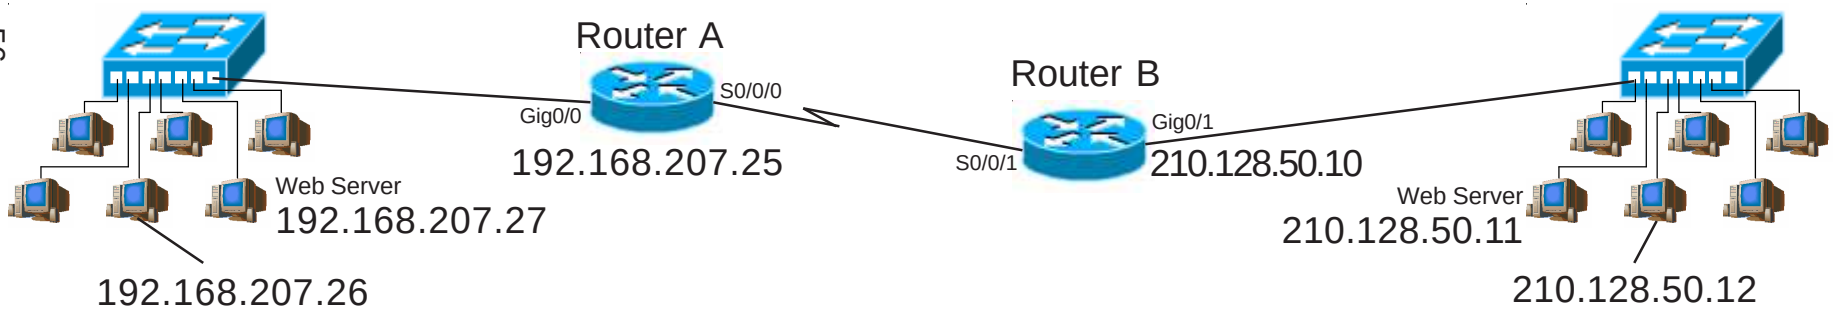

Extended Access List Sample #7 — Deny/Permit Port Numbers

Write an extended access list to deny HTTP traffic intended for web server 192.168.207.27 from all other networks, but will permit all other HTTP traffic to reach the 192.168.207.0 network. Deny all other IP traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Gig0/1
Access-list #: 198

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# access-list 198 deny tcp any 192.168.207.27 0.0.0.0 eq www
                                  or
                access-list 198 deny tcp any host 192.168.207.27 eq www
Router(config)# access-list 198 permit tcp any 192.168.207.0 0.0.0.255 eq www
Router(config)# interface gig0/1
Router(config-if)# ip access-group 198 in
Router(config-if)# exit
Router(config)# exit
```

[Viewing information about existing ACL's]

`Router# show configuration`	(This will show which access groups are associated with particular interfaces)
`Router# show access list 198`	(This will show detailed information about this ACL)

Extended Access List Sample #8 — Deny/Permit Port Numbers

Write an extended access list on Router B to deny pings between hosts on the 210.128.50.0 and the 192.168.207.0 network. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Gig0/1
Access-list #: 134

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 134 deny icmp 210.128.50.0 0.0.0.255 192.168.207.0 0.0.0.255
Router(config)# access-list 134 permit ip any any
Router(config)# interface gig0/1
Router(config-if)# ip access-group 134 in
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

Hint:
It's OK to use multiple protocols in the same ACL.

[Disabling ACL's]

```
Router# configure terminal
Router(config)# interface Gig0/1
Router(config-if)# no ip access-group 134 out
Router(config-if)# exit
Router(config)# exit
```

[Removing an ACL]

```
Router# configure terminal
Router(config)# interface Gig0/1
Router(config-if)# no ip access-group 134 out
Router(config-if)# exit
Router(config)# no access-list 134
Router(config)# exit
```

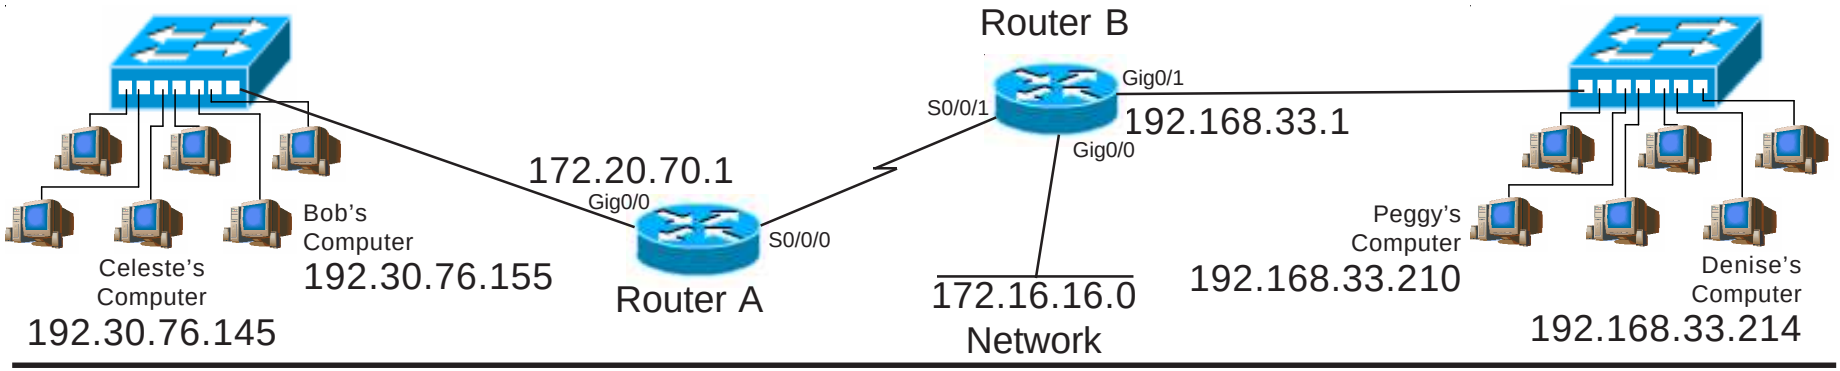

Extended Access List Sample #9 — Deny/Permit Port Numbers

Write an Extended access list to permit Denise's computer to use TFTP with Bob's computer. Deny all other traffic from the 192.168.33.0 network to the 192.30.76.0 network. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Gig0/1
Access-list #: 145

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# access-list 145 permit udp 192.168.33.214 0.0.0.0 192.30.76.155 0.0.0.0 eq tftp
                                    or
                access-list 145 permit udp host 192.168.33.214 host 192.30.76.155 eq tftp
Router(config)# interface  Gig0/1
Router(config-if)# ip access-group 145 in
Router(config-if)# exit
Router(config)# exit
```

[Viewing information about existing ACL's]

`Router# show configuration`	(This will show which access groups are associated with particular interfaces)
`Router# show access list 45`	(This will show detailed information about this ACL)

Extended Access List Sample #10 — Deny/Permit Port Numbers

Write an extended access list to deny FTP traffic from ip addresses 192.30.76.0 through 192.30.76.13 to any destination. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Gig0/0
Access-list #: 155

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 155 deny tcp 192.30.76.0 0.0.0.8 any eq ftp  (Blocks 0 to 7)
Router(config)# access-list 155 deny tcp 192.30.76.8 0.0.0.4 any eq ftp  (Blocks 8 to 11)
Router(config)# access-list 155 deny tcp 192.30.76.12 0.0.0.1 any eq ftp (Blocks 12 to 13)
Router(config)# access-list 155 permit ip any any
                          or
                access-list 155 permit ip 0.0.0.0 255.255.255.255 0.0.0.0 255.255.255.255
Router(config)# interface gig0/0
Router(config-if)# ip access-group 155 in
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

Hint:
It's OK to use multiple protocols in the same ACL.

The first three TCP statements could be shortened to:

```
access-list 155 permit tcp 192.30.76.14 0.0.0.1 any eq ftp  (Permits 14 and 15)
access-list 155 deny tcp 192.30.76.8 0.0.0.15 any eq ftp    (Blocks 0 to 15)
```

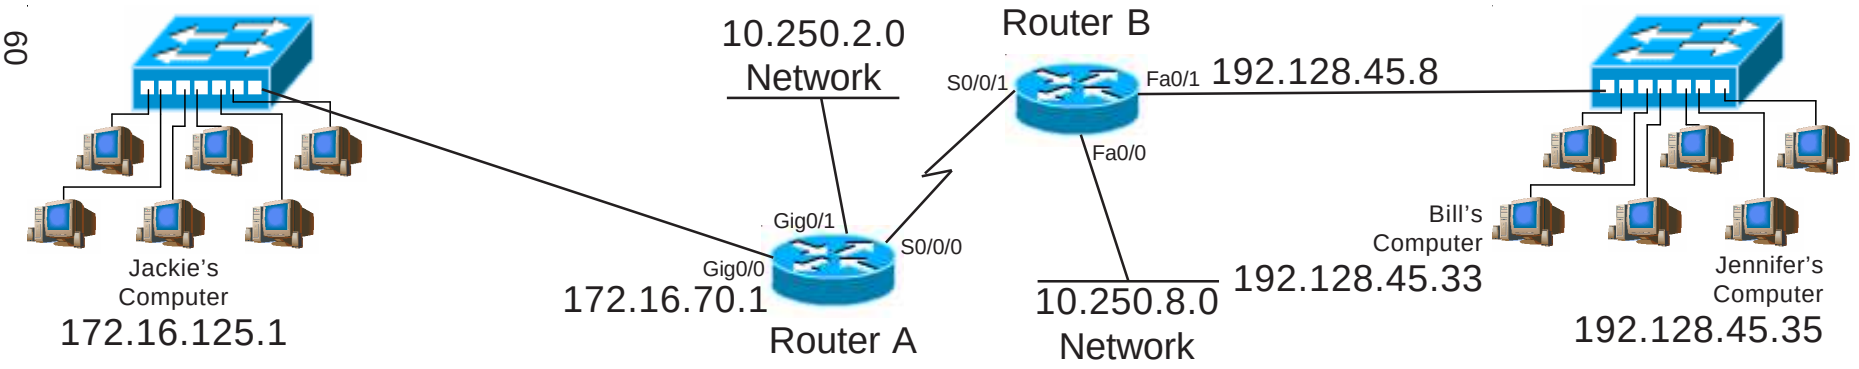

Extended Access List Problem #15 — Deny/Permit a Port Numbers

Write an extended access list to permit ICMP traffic from the 192.128.45.0 network to reach the 172.16.125.0 255.255.255.0 and 10.250.2.0 255.255.255.0 networks. Deny all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Fa0/1
Access-list #: 175 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)#access-list 175 permit icmp 192.128.45.0 0.0.0.255 172.16.125.0 0.0.0.255
              access-list 175 permit icmp 192.128.45.0 0.0.0.255 10.250.2.0 0.0.0.255
Router(config)# interface fa0/1
Router(config-if)# ip access-group 175 (in) or out (circle one)
Router(config-if)# exit
```

Extended Access List Problem #16 — Deny/Permit a Port Numbers

Write a named extended access list called "PEGGYS_LAB" to deny telnet from 10.250.8.0 through 10.250.8.127 from reaching the 192.128.45.0 network. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Fa0/0
Access-list Name: PEGGYS_LAB

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)# ip access-list extended PEGGYS_LAB

Router(config-std-nacl)# deny tcp 10.250.8.0 0.0.0.127 192.128.45.0 0.0.0.255 eq 23

Router(config-std-nacl)# permit ip any any

Router(config-ext-nacl)# interface fa0/0
Router(config-if)# ip access-group PEGGYS_LAB in or out (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
Router# copy run start
```

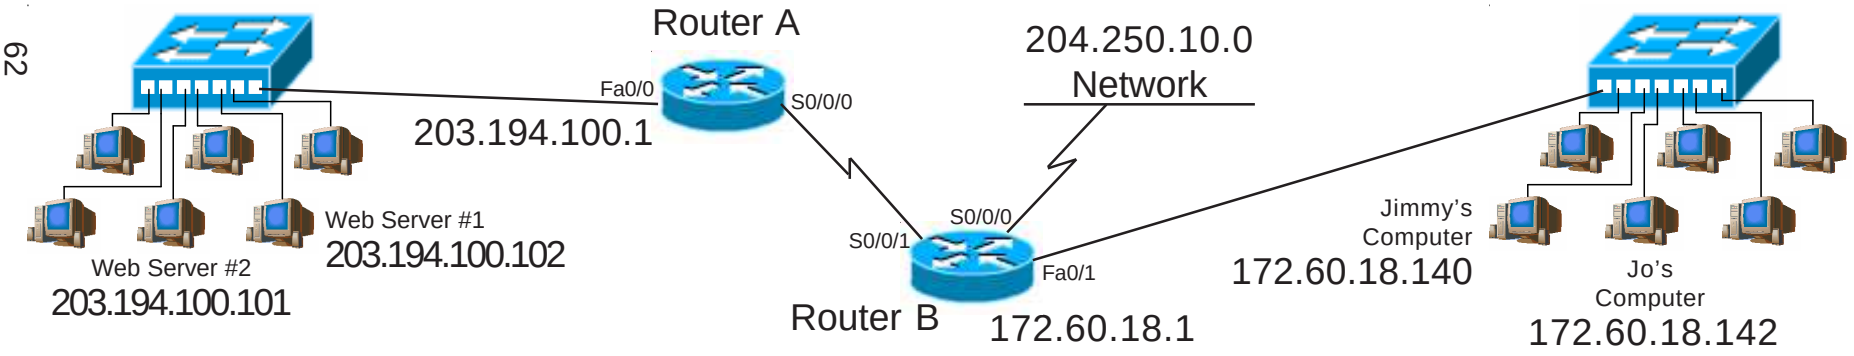

Extended Access List Problem #17 — Deny/Permit Port Numbers

Write an access list to deny Jimmy's computer from sending ftp packets to Web Server 1, but permit ftp to Web Server #2. Permit all other traffic. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Fa0/1
Access-list #: 150 (1-99)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)# access-list 150 deny tcp host 172.60.18.140 host 203.194.100.102 eq ftp
            or
              access-list 150 deny tcp 172.60.18.140 0.0.0.0 203.194.100.102 0.0.0.0 eq ftp
Router(config)# access-list 150 permit ip any any
            or
              access-list 150 permit 0.0.0.0 255.255.255.255 0.0.0.0 255.255.255.255

Router(config)# interface Fa0/1
Router(config-if)# ip access-group 150 (in) or out (circle one)
Router(config-if)# exit
Router(config)# exit
```

Extended Access List Problem #18 — Deny/Permit Port Numbers

Write an extended access list to deny all HTTP traffic intended for the web server at 203.194.100.102 from the 172.66.0.0 network. Permit all other HTTP traffic from the 204.250.10.0 and 172.60.0.0 networks to any other web servers. Deny all other IP traffic to the 203.194.100.0 network. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: S0/0/1
Access-list #: 185 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# access-list 185 deny tcp any host 203.194.100.102 eq 80
```

or

access-list 185 deny tcp any 203.194.100.102 0.0.0.0 eq 80

access-list 185 permit tcp any any eq 80

```
Router(config)# interface S0/0/1
Router(config-if)# ip access-group 185 in or (out) (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

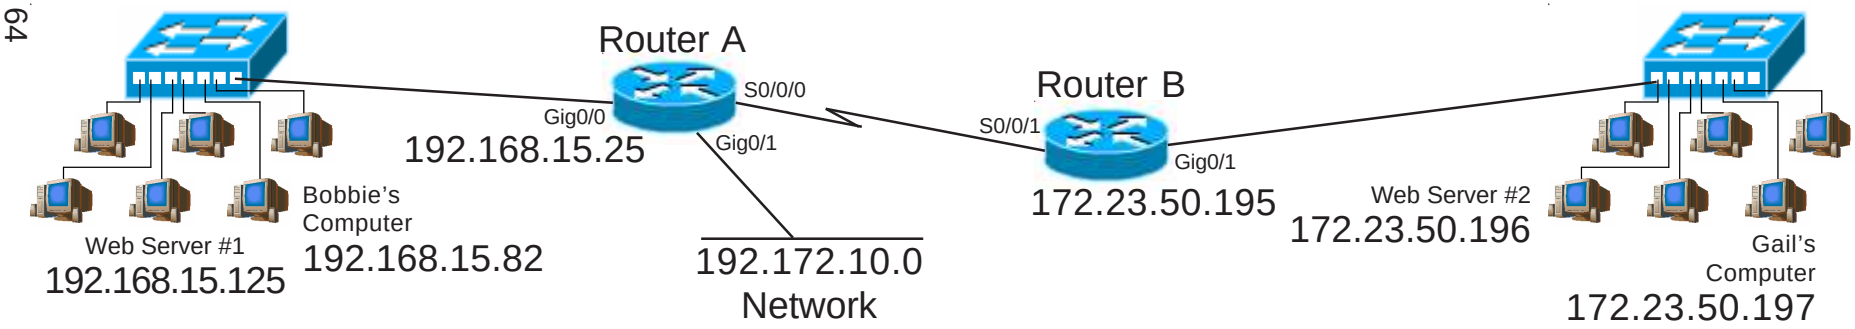

Extended Access List Problem #19 — Deny/Permit Port Numbers

Include a remark with each statement of your ACL. Write an extended access list to permit TFTP traffic from all hosts on the 192.168.15.0 network. Deny all other traffic. For help with the remark command review page 41.Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: Gig0/0
Access-list #: 190 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)# access-list 175 remark allow ftp from the 192.168.15.0 network
                access-list 175 permit udp 192.168.15.0 0.0.0.255 any eq tftp
                
                

Router(config)# interface gig0/0
Router(config-if)# ip access-group 190 (in) or out (circle one)
Router(config-if)# exit
Router(config)# exit
```

Extended Access List Problem #20 — Deny/Permit Port Numbers

Write an extended access list that permits web traffic from web server #2 at 172.23.50.196 to reach everyone on the 192.168.15.0 network. Deny all other IP traffic going to the 192.172.10.0, and 192.168.15.0 networks from the 172.25.50.0 network. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: Gig0/1
Access-list #: 195 (100-199)

[Writing and installing an ACL]

```
Router# configure terminal
Router(config)# access-list 195 permit tcp host 172.23.50.196 192.168.15.0 0.0.0.255 eq 80
```

or

access-list 195 permit tcp 172.23.50.196 0.0.0.0 192.168.15.0 0.0.0.255 eq 80

```
Router(config)# interface gig0/1
Router(config-if)# ip access-group 195 (in) or out (circle one)
Router(config-if)# exit
Router(config)# exit
Router# copy run start
```

Writing Access Lists to Restrict Telnet Access...

Restricting access to telnet can be a very usefull option. Telnet is considered a very insecure protocol because it sends passwords through the network in clear-text. By switching from the *access-group* command to the *access-class* command you can increase your security by allowing only those users through that you want to use telnet. The *access-class* command also allows you to apply this access list to the vty connections.

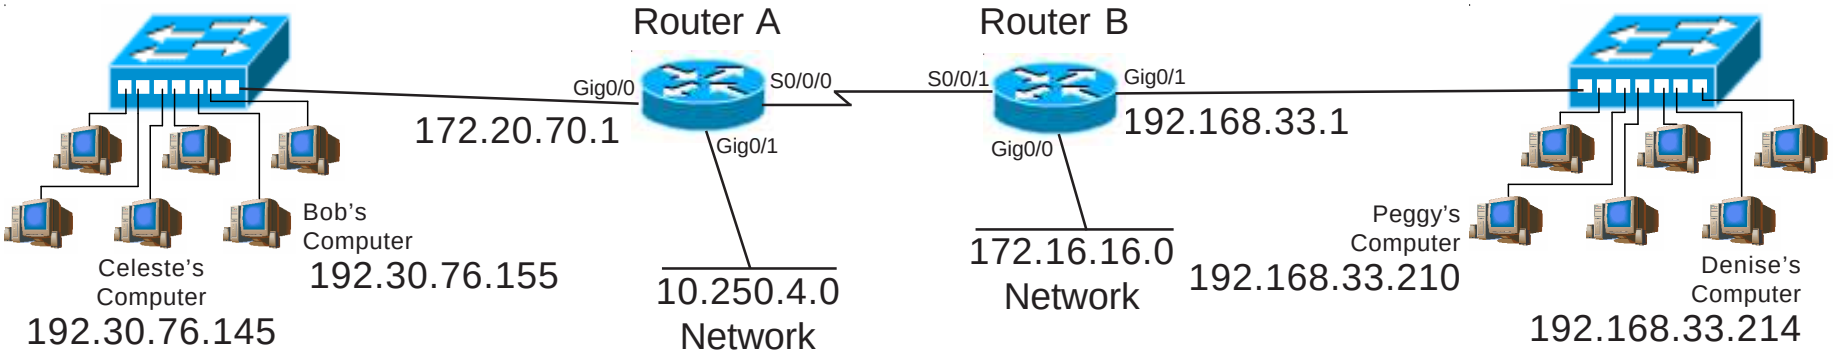

Standard Access List Sample #11 — Deny/Permit Telnet

Write a standard access list to permit Denise's and Bob's computers to telnet into Router B. Deny all other telnet traffic Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: line VTY 0 4
Access-list #: 45

(using line VTY 0 4 instead of an interface like E1 allows you to apply this access list to all VTY lines with one statement)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)
Router(config)# access-list 45 permit 192.168.33.214 0.0.0.0
                                    or
                access-list 45 permit host 192.168.33.214
Router(config)# access-list 45 permit 192.30.76.155 0.0.0.0
                                    or
                access-list 45 permit host 192.30.76.155
Router(config)# line vty 0 4
Router(config-line)#access-class 45 in
Router(config-line)# exit
Router(config)# exit
```

[Viewing information about existing ACL's]

`Router# show configuration`	(This will show which access groups are associated with particular interfaces)
`Router# show access list 45`	(This will show detailed information about this ACL)

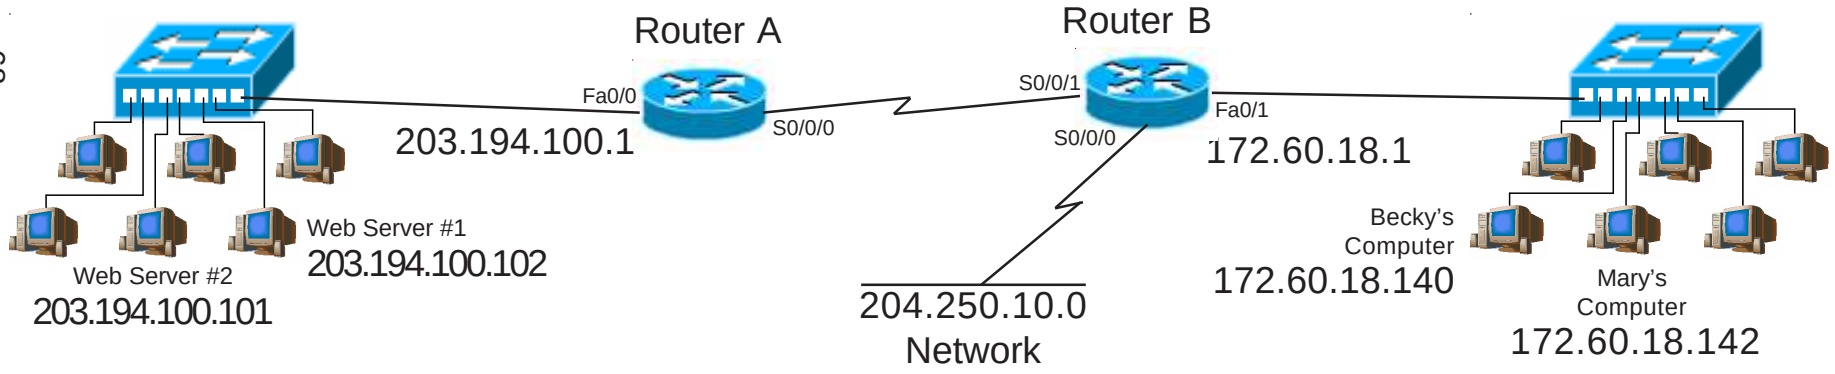

Access List Problem #21 — Deny/Permit Telnet

Write a standard access list to permit Becky and Mary's computer to telnet into Router B. Deny all other traffic.
Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router B
Interface: line vty 0 4
Access-list #: 50 (1-99)

These ACE statements could be shortened to:

access-list 50 permit 172.60.18.140 0.0.0.2

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)# access-list 50 permit 172.60.18.140
            or access-list 50 permit host 172.60.18.140
            or access-list 50 permit 172.60.18.140 0.0.0.0
              access-list 50 permit 172.60.18.142
            or access-list 50 permit host 172.60.18.142
            or access-list 50 permit 172.60.18.142 0.0.0.0

Router(config)# line vty 0 4
Router(config-line)# access-class 50 (in) or out (circle one)
Router(config-line)# exit
Router(config)# exit
```

Access List Problem #22 — Deny/Permit Telnet

Write a standard access list to permit which will permit Web Server #1 to telnet into Router A. Log the telnet attempts. Deny all other telnet access. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: line vty 0 4
Access-list #: 60 (1-99)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)# access-list 60 permit 203.194.100.102 0.0.0.0 log
              or
                access-list 60 permit 203.194.100.102 log
              or
                access-list 60 permit host 203.194.100.102 log
```

```
Router(config)   access-list 60 deny any log
```
(You have to add the implicit deny any log for this to log)

```
Router(config)# line vty 0 4
Router(config-line)# access-class 60 in or out
Router(config-line)# exit
Router(config)# exit
```
(circle one)

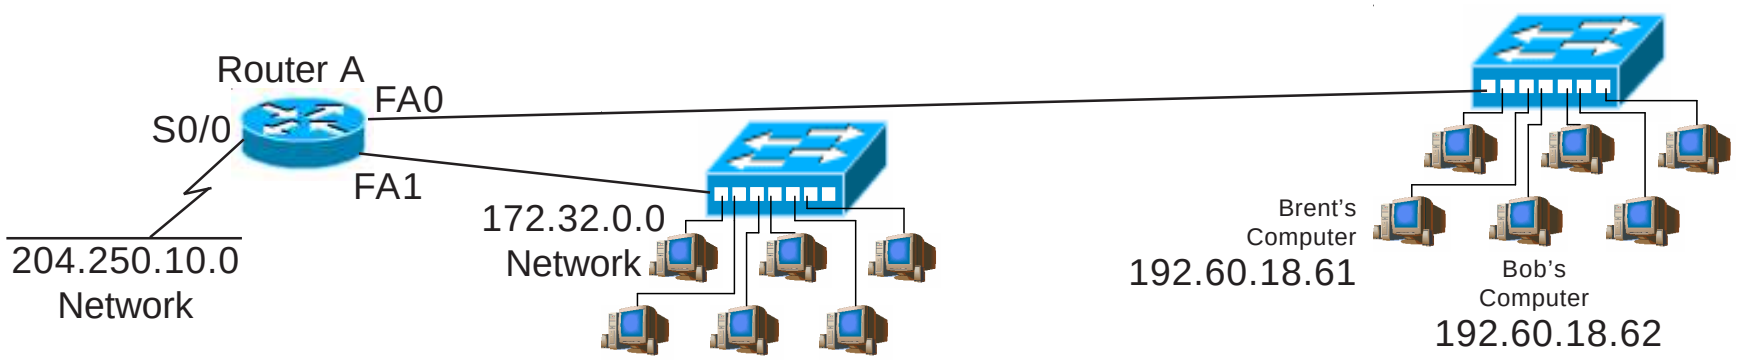

Access List Problem #23 — Deny/Permit Telnet

Write a standard access list to deny Brent and Bob's computer telnet access to into Router A. Permit all other telnet traffic from the 192.60.18.0 network. Keep in mind that there may be multiple ways many of the individual statements in an ACL can be written.

Place the access list at:
Router Name: Router A
Interface: line vty 0 4
Access-list #: 70 (1-99)

[Writing and installing an ACL]

```
Router# configure terminal (or config t)

Router(config)# access-list 70 deny 192.60.18.61
                or access-list 70 deny host 192.60.18.61
                or access-list 70 deny 192.60.18.61 0.0.0.0
                access-list 70 deny 192.60.18.62
                or access-list 70 deny host 192.60.18.62
                or access-list 70 deny 192.60.18.62 0.0.0.0
                access-list 70 permit 192.60.18.0 0.0.0.255 any

Router(config)# line vty 0 4
Router(config-line)# access-class 70 in or out (circle one)
Router(config-line)# exit
Router(config)# exit
```

Reference

Port Numbers

Port numbers are now assigned by the ICANN (Internet Corporation for Assigned Names and Numbers). Commonly used TCP and UDP applications are assigned a port number; such as: HTTP - 80, POP3 - 110, FTP - 20. When an application communicates with another application on another node on the internet, it specifies that application in each data transmission by using its port number. You can also type the name (ie. Telnet) instead of the port number (ie. 23). Port numbers range from 0 to 65536 and are divided into three ranges:

Well Known Ports	0	to	1,023
Registered Ports	1,024	to	49,151
Dynamic and/or Private Ports	49,152	to	65,535

Below is a short list of some commonly used ports. For a complete list of port numbers go to http://www.iana.org/assignments/port-numbers.

Some commonly used port numbers:

0	Reserved	
1	TCPMUX	(TCP Port Service Multiplexer)
5	RJE	(Remote Job Entry)
7	ECHO	
9	DISCARD	
11	SYSTAT	(Active users)
13	DAYTIME	
17	QUOTE	(Quote of the day)
18	MSP	(Message Send Protocol)
19	CHARGEN	(Character generator)
20	FTP-DATA	(File Transfer Protocol - Data)
21	FTP	(File Transfer Protocol - Control)
22	SSH	(Remote Login Protocol)
23	Telnet	(Terminal Connection)
25	SMTP	(Simple Mail Transfer Protocol)
29	MSG ICP	
37	TIME	
39	RLP	(Resource Location Protocol
42	NAMESERV	(Host Name Server)

43	NICNAME	(Who Is)
49	LOGIN	(Login Host Protocol)
53	DNS	(Domain Name Server)
67	BOOTP	(Bootstrap Protocol Server)
68	BOOTPS	(Bootstrap Protocol Client)
69	TFTP	(Trivial File Transfer Protocol)
70	GOPHER	(Gopher Services)
75		(Any Privite Dial-out Service)
79	FINGER	
80	HTTP	(Hypertext Transfer Protocol)
95	SUPDUP	(SUPDUP Protocol)
101	HOSTNAME	(NIC Host Name Server)
108	SNAGAS	(SNA Gateway Access Server)
109	POP2	(Post Office Protocol - Version 2)
110	POP3	(Post Office Protocol - Version 3)
113	AUTH	(Authentication Service)
115	SFTP	(Simple File Transfer Protocol)
117	UUCP-PATH	(UUCP Path Service)
118	SQLSERV	(SQL Services)
119	NNTP	(Newsgroup)
123	NTP	(Network Tim Protocol)
137	NetBIOS-NS	(NetBIOS Name Service)
139	NetBIOS-SSN	(NetBIOS Session Service)
143	IMAP	(Interim Mail Access Protocol)
150	SQL-NET	(NetBIOS Session Service)
156	SQLSRV	(SQL Service)
161	SNMP	(Simple Network Management Protocol)
179	BGP	(Border Gateway Protocol)
190	GACP	(Gateway Access Control Protocol)
194	IRC	(Internet Relay Chat)
197	DLS	(Directory Location Service)
389	LDAP	(Lightweight Directory Access Protocol)
396	NETWARE-IP	(Novell Netware over IP)
443	HTTPS	(HTTP MCom)
444	SNPP	(Simple Network Paging Protocol)
445	Microsoft-DS	
458	Apple QuickTime	
546	DHCP Client	
547	DHCP Server	
563	SNEWS	
569	MSN	

Class A Addresses

VLSM Chart 8-15 Bits (2nd octet)

/8 255.0.0.0 16,777,216 Hosts	/9 255.128.0.0 8,388.608 Hosts	/10 255.192.0.0 4,194,304 Hosts	/11 255.224.0.0 2,097,152 Hosts	/12 255.240.0.0 1,048,576 Hosts	/13 255.248.0.0 524,288 Hosts	/14 255.252.0.0 262,144 Hosts	/15 255.254.0.0 131,072 Hosts
0 - 255	0-127	0-63	0-31	0-15	0-7	0-3	0 - 1 2 - 3
						4-7	4 - 5 6 - 7
					8-15	8-11	8 - 9 10 - 11
						12-15	12 - 13 14 - 15
				16-31	16-23	16-19	16 - 17 18 - 19
						20-23	20 - 21 22 - 23
					24-31	24-27	24 - 25 26 - 27
						28-31	28 - 29 30 - 31
			32-63	32-47	32-39	32-35	32 - 33 34 - 35
						36-39	36 - 37 38 - 39
					40-47	40-43	40 - 41 42 - 43
						44-47	44 - 45 46 - 47
				48-63	48-55	48-51	48 - 49 50 - 51
						52-55	52 - 53 54 - 55
					56-63	56-59	56 - 57 58 - 59
						60-63	60 - 61 62 - 63
		64-127	64-95	64-79	64-71	64-67	64 - 65 66 - 67
						68-71	68 - 69 70 - 71
					72-79	72-75	72 - 73 74 - 75
						76-79	76 - 77 78 - 79
				80-95	80-87	80-83	80 - 81 82 - 83
						84-87	84 - 85 86 - 87
					88-95	88-91	88 - 89 90 - 91
						92-95	92 - 93 94 - 95
			96-127	96-111	96-103	96-99	96 - 97 98 - 99
						100-103	100 - 101 102 - 103
					104-111	104-107	104 - 105 106 - 107
						108-111	108 - 109 110 - 111
				112-127	112-119	112-115	112 - 113 114 - 115
						116-119	116 - 117 118 - 119
					120-127	120-123	120 - 121 122 - 123
						124-127	124 - 125 126 - 127
	128-255	128-191	128-159	128-143	128-135	128-131	128 - 129 130 - 131
						132-135	132 - 133 134 - 135
					136-143	136-139	136 - 137 138 - 139
						140-143	140 - 141 142 - 143
				144-159	144-151	144-147	144 - 145 146 - 147
						148-151	148 - 149 150 - 151
					152-159	152-155	152 - 153 154 - 155
						156-159	156 - 157 158 - 159
			160-191	160-175	160-167	160-163	160 - 161 162 - 163
						164-167	164 - 165 166 - 167
					168-175	168-171	168 - 169 170 - 171
						172-175	172 - 173 174 - 175
				176-191	176-183	176-179	176 - 177 178 - 179
						180-183	180 - 181 182 - 183
					184-191	184-187	184 - 185 186 - 187
						188-191	188 - 189 190 - 191
		192-255	192-223	192-207	192-199	192-195	192 - 193 194 - 195
						196-199	196 - 197 198 - 199
					200-207	200-203	200 - 201 202 - 203
						204-207	204 - 205 206 - 207
				208-223	208-215	208-211	208 - 209 210 - 211
						212-215	212 - 213 214 - 215
					216-223	216-219	216 - 217 218 - 219
						220-223	220 - 221 222 - 223
			224-255	224-239	224-231	224-227	224 - 225 226 - 227
						228-231	228 - 229 230 - 231
					232-239	232-235	232 - 233 234 - 235
						236-239	236 - 237 238 - 239
				240-255	240-247	240-243	240 - 241 242 - 243
						244-247	244 - 245 246 - 247
					248-255	248-251	248 - 249 250 - 251
						252-255	252 - 253 254 - 255

Class B Addresses

VLSM Chart 16-23 Bits (3rd octet)

/16 255.255.0.0 65,536 Hosts	/17 255.255.128.0 32,768 Hosts	/18 255.255.192.0 16,384 Hosts	/19 255.255.224.0 8,192 Hosts	/20 255.255.240.0 4,096 Hosts	/21 255.255.248.0 2,048 Hosts	/22 255.255.252.0 1,024 Hosts	/23 255.255.254.0 512 Hosts
0 - 255	0-127	0-63	0-31	0-15	0-7	0-3	0 - 1 2 - 3
						4-7	4 - 5 6 - 7
					8-15	8-11	8 - 9 10 - 11
						12-15	12 - 13 14 - 15
				16-31	16-23	16-19	16 - 17 18 - 19
						20-23	20 - 21 22 - 23
					24-31	24-27	24 - 25 26 - 27
						28-31	28 - 29 30 - 31
			32-63	32-47	32-39	32-35	32 - 33 34 - 35
						36-39	36 - 37 38 - 39
					40-47	40-43	40 - 41 42 - 43
						44-47	44 - 45 46 - 47
				48-63	48-55	48-51	48 - 49 50 - 51
						52-55	52 - 53 54 - 55
					56-63	56-59	56 - 57 58 - 59
						60-63	60 - 61 62 - 63
		64-127	64-95	64-79	64-71	64-67	64 - 65 66 - 67
						68-71	68 - 69 70 - 71
					72-79	72-75	72 - 73 74 - 75
						76-79	76 - 77 78 - 79
				80-95	80-87	80-83	80 - 81 82 - 83
						84-87	84 - 85 86 - 87
					88-95	88-91	88 - 89 90 - 91
						92-95	92 - 93 94 - 95
			96-127	96-111	96-103	96-99	96 - 97 98 - 99
						100-103	100 - 101 102 - 103
					104-111	104-107	104 - 105 106 - 107
						108-111	108 - 109 110 - 111
				112-127	112-119	112-115	112 - 113 114 - 115
						116-119	116 - 117 118 - 119
					120-127	120-123	120 - 121 122 - 123
						124-127	124 - 125 126 - 127
	128-255	128-191	128-159	128-143	128-135	128-131	128 - 129 130 - 131
						132-135	132 - 133 134 - 135
					136-143	136-139	136 - 137 138 - 139
						140-143	140 - 141 142 - 143
				144-159	144-151	144-147	144 - 145 146 - 147
						148-151	148 - 149 150 - 151
					152-159	152-155	152 - 153 154 - 155
						156-159	156 - 157 158 - 159
			160-191	160-175	160-167	160-163	160 - 161 162 - 163
						164-167	164 - 165 166 - 167
					168-175	168-171	168 - 169 170 - 171
						172-175	172 - 173 174 - 175
				176-191	176-183	176-179	176 - 177 178 - 179
						180-183	180 - 181 182 - 183
					184-191	184-187	184 - 185 186 - 187
						188-191	188 - 189 190 - 191
		192-255	192-223	192-207	192-199	192-195	192 - 193 194 - 195
						196-199	196 - 197 198 - 199
					200-207	200-203	200 - 201 202 - 203
						204-207	204 - 205 206 - 207
				208-223	208-215	208-211	208 - 209 210 - 211
						212-215	212 - 213 214 - 215
					216-223	216-219	216 - 217 218 - 219
						220-223	220 - 221 222 - 223
			224-255	224-239	224-231	224-227	224 - 225 226 - 227
						228-231	228 - 229 230 - 231
					232-239	232-235	232 - 233 234 - 235
						236-239	236 - 237 238 - 239
				240-255	240-247	240-243	240 - 241 242 - 243
						244-247	244 - 245 246 - 247
					248-255	248-251	248 - 249 250 - 251
						252-255	252 - 253 254 - 255

Class C Addresses

VLSM Chart 24-30 Bits (4th octet)

/24 255.255.255.0 256 Hosts	/25 255.255.255.128 128 Hosts	/26 255.255.255.192 64 Hosts	/27 255.255.255.224 32 Hosts	/28 255.255.255.240 16 Hosts	/29 255.255.255.248 8 Hosts	/30 255.255.255.252 4 Hosts
0 - 255	0-127	0-63	0-31	0-15	0-7	0-3
						4-7
					8-15	8-11
						12-15
				16-31	16-23	16-19
						20-23
					24-31	24-27
						28-31
			32-63	32-47	32-39	32-35
						36-39
					40-47	40-43
						44-47
				48-63	48-55	48-51
						52-55
					56-63	56-59
						60-63
		64-127	64-95	64-79	64-71	64-67
						68-71
					72-79	72-75
						76-79
				80-95	80-87	80-83
						84-87
					88-95	88-91
						92-95
			96-127	96-111	96-103	96-99
						100-103
					104-111	104-107
						108-111
				112-127	112-119	112-115
						116-119
					120-127	120-123
						124-127
	128-255	128-191	128-159	128-143	128-135	128-131
						132-135
					136-143	136-139
						140-143
				144-159	144-151	144-147
						148-151
					152-159	152-155
						156-159
			160-191	160-175	160-167	160-163
						164-167
					168-175	168-171
						172-175
				176-191	176-183	176-179
						180-183
					184-191	184-187
						188-191
		192-255	192-223	192-207	192-199	192-195
						196-199
					200-207	200-203
						204-207
				208-223	208-215	208-211
						212-215
					216-223	216-219
						220-223
			224-255	224-239	224-231	224-227
						228-231
					232-239	232-235
						236-239
				240-255	240-247	240-243
						244-247
					248-255	248-251
						252-255