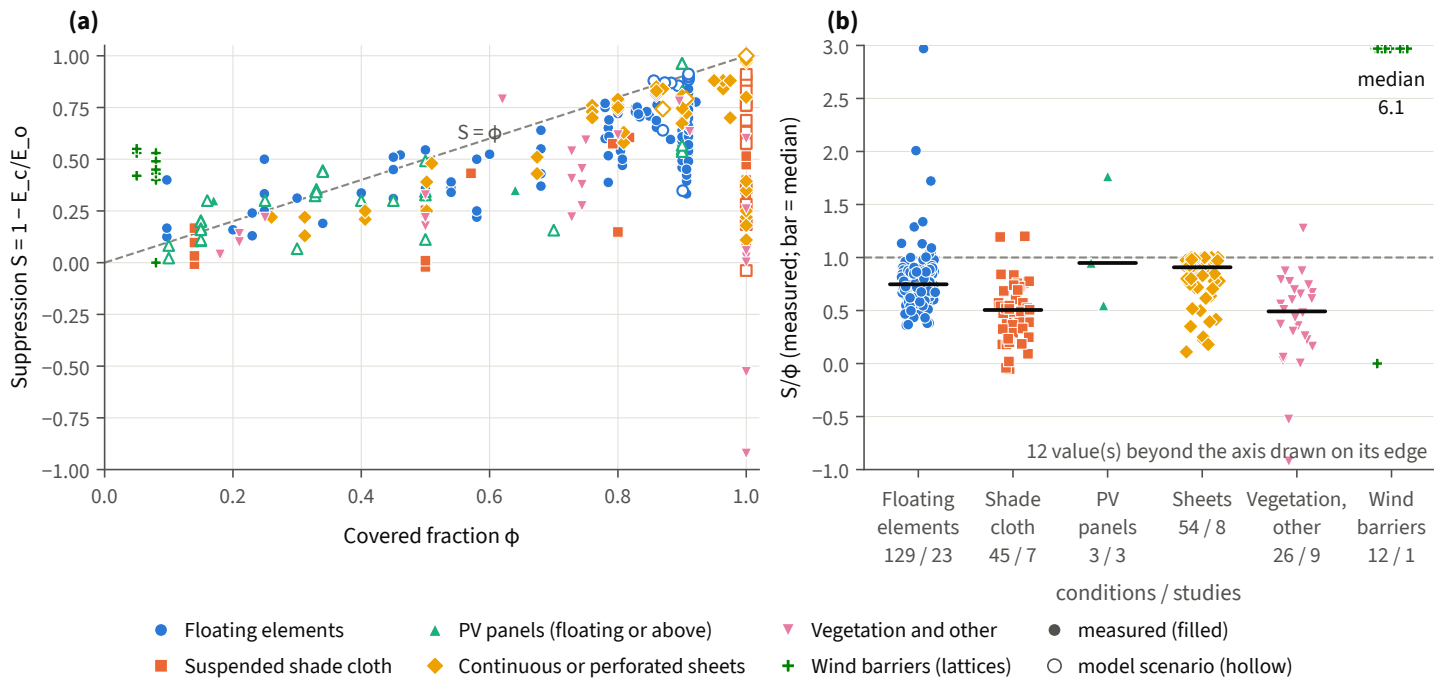
(a)
Suppression S = 1 − E_c/E_o
Covered fraction ϕ
S = ϕ
1.00
0.75
0.50
0.25
0.00
−0.25
−0.50
−0.75
−1.00
0.0
0.2
0.4
0.6
0.8
1.0
(b)
S/ϕ (measured; bar = median)
median
6.1
12 value(s) beyond the axis drawn on its edge
3.0
2.5
2.0
1.5
1.0
0.5
0.0
−0.5
−1.0
Floating elements 129 / 23
Shade cloth 45 / 7
PV panels 3 / 3
Sheets 54 / 8
Vegetation, other 26 / 9
Wind barriers 12 / 1
conditions / studies
Floating elements
Suspended shade cloth
PV panels (floating or above)
Continuous or perforated sheets
Vegetation and other
Wind barriers (lattices)
measured (filled)
model scenario (hollow)