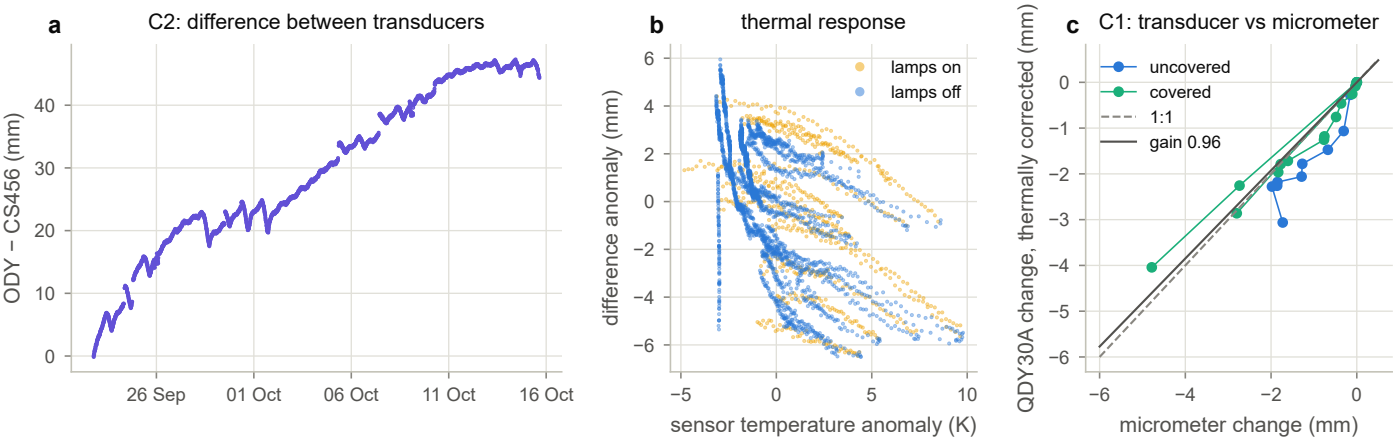

a
C2: difference between transducers
ODY − CS456 (mm)
40
30
20
10
0
26 Sep
01 Oct
06 Oct
11 Oct
16 Oct
b
thermal response
lamps on
lamps off
difference anomaly (mm)
6
4
2
0
−2
−4
−6
−5
0
5
10
sensor temperature anomaly (K)
c
C1: transducer vs micrometer
uncovered
covered
1:1
gain 0.96
QDY30A change, thermally corrected (mm)
0
−1
−2
−3
−4
−5
−6
−6
−4
−2
0
micrometer change (mm)