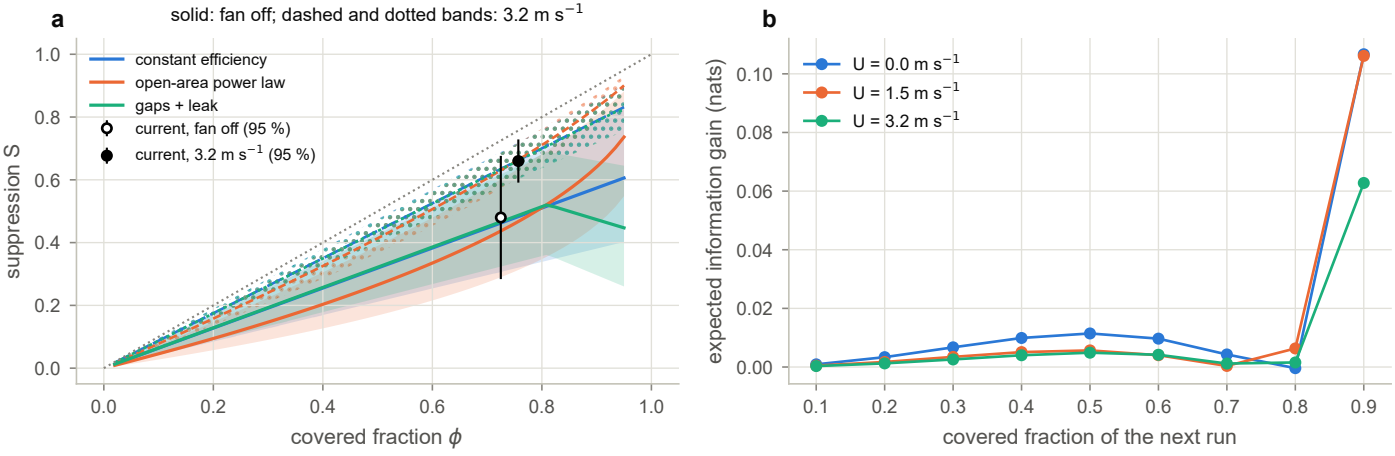

a
solid: fan off; dashed and dotted bands: 3.2 m s^{-1}
constant efficiency
open-area power law
gaps + leak
current, fan off (95 %)
current, 3.2 m s^{-1} (95 %)
suppression S
covered fraction ϕ
b
U = 0.0 m s^{-1}
U = 1.5 m s^{-1}
U = 3.2 m s^{-1}
expected information gain (nats)
covered fraction of the next run