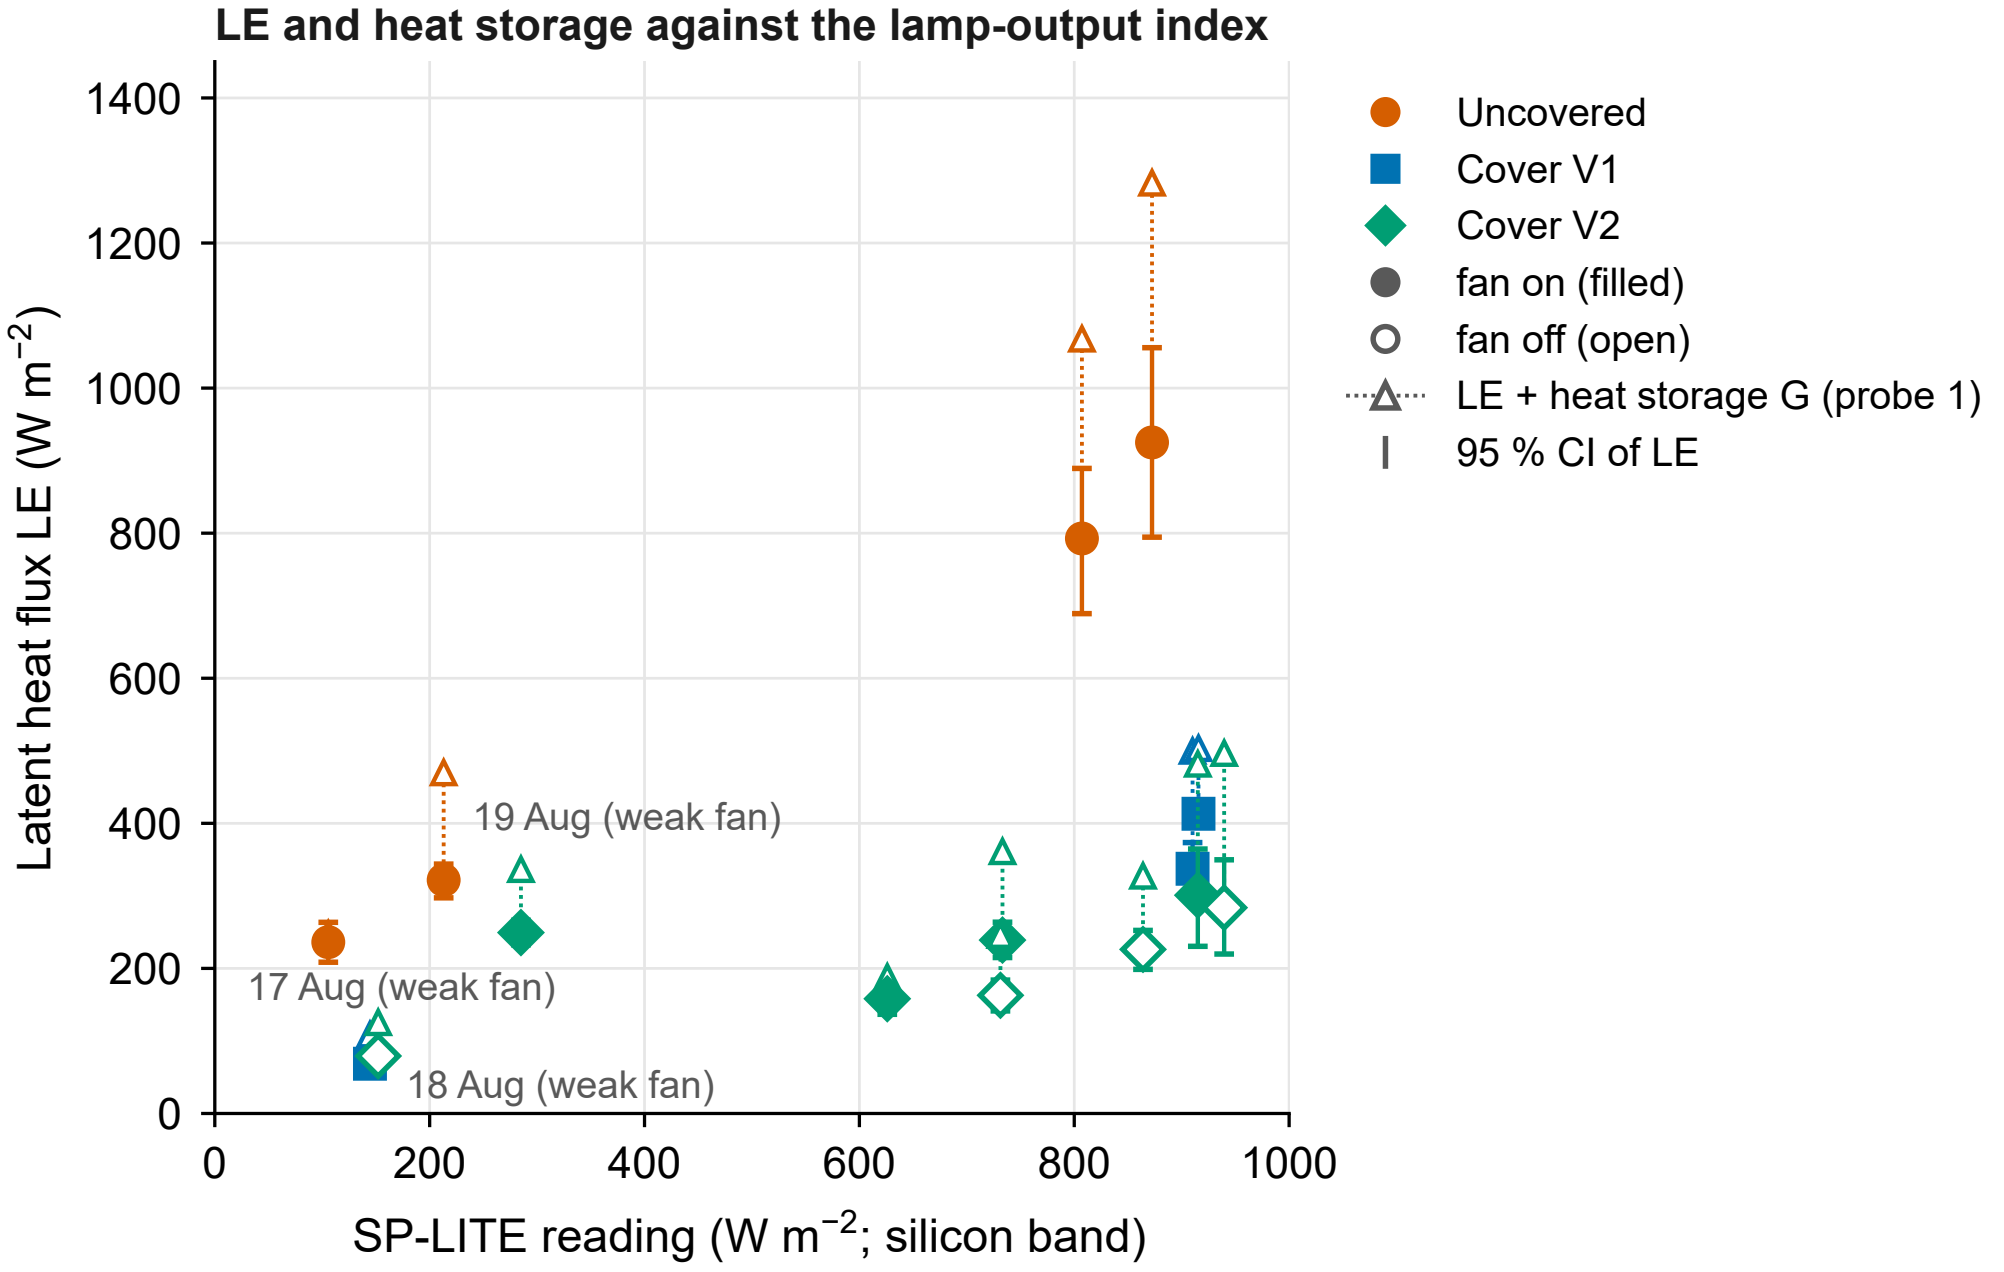
LE and heat storage against the lamp-output index
Latent heat flux LE (W m^{-2})
SP-LITE reading (W m^{-2}; silicon band)
0
200
400
600
800
1000
1200
1400
17 Aug (weak fan)
18 Aug (weak fan)
19 Aug (weak fan)
Uncovered
Cover V1
Cover V2
fan on (filled)
fan off (open)
LE + heat storage G (probe 1)
95 % CI of LE