LISI AEROSPACE – Please refer to Central Documentation Website to check validity


lisi AEROSPACE
hi-shear corporation
2600 SKYPARK DRIVE, TORRANCE, CALIFORNIA 90509 U.S.A.

HI-SHEAR Corporation, USA
a LISI AEROSPACE Company


Design Holder

CAGE No. 73197

For the current list of licensed manufacturers, please visit the LISI AEROSPACE website at:
HTTP://WWW.LISI-AEROSPACE.COM/LICENSES

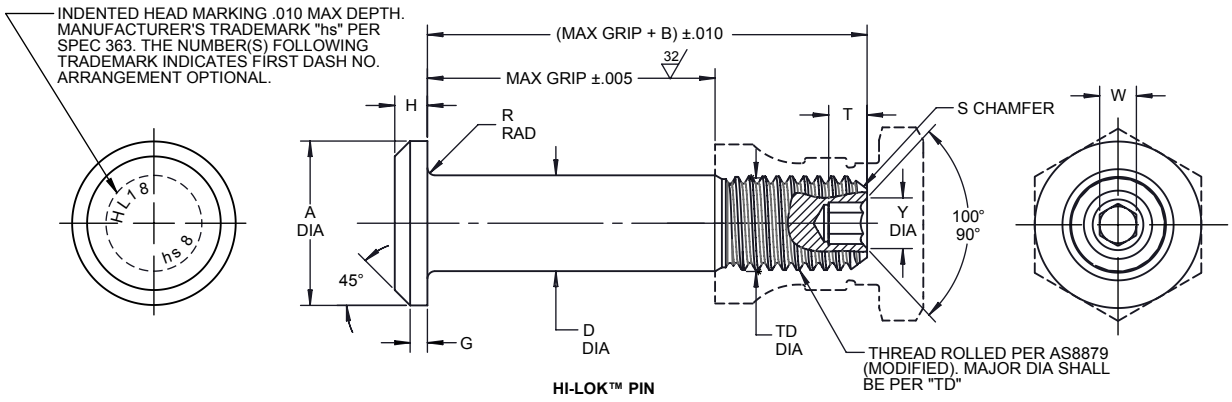

HI-LOK™ PIN

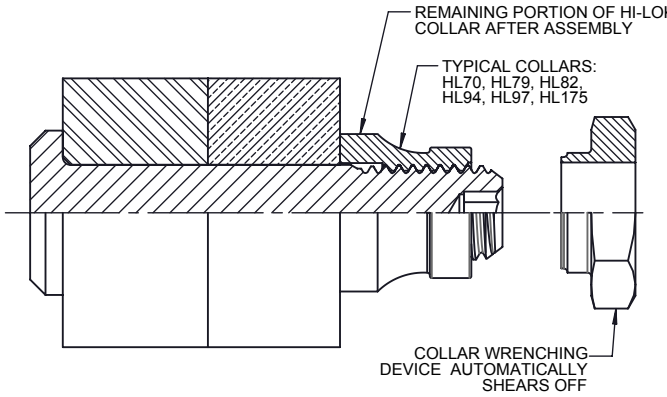

HI-LOK™ PIN AND COLLAR AFTER ASSEMBLY

FIRST DASH NO.	PIN NOM DIA	**A** DIA	**B** REF	**D** DIA	**TD** DIA	**G** REF	**H**	**R** RAD	**S** CHAMFER REF	**THREAD** MODIFIED	SOCKET **W** HEX	SOCKET **T** DEPTH	SOCKET **Y** DIA	DOUBLE SHEAR POUNDS MINIMUM	TENSION POUNDS MINIMUM
5	5/32	.262 .242	.312	.1635 .1625	.1595 .1570	.020	.047 .037	.025 .015	1/32 x 45°	.1640-32 UNJC-3A	.0801 .0791	.135 .115	[6]	4,010	1,940
6	3/16	.315 .295	.325	.1895 .1885	.1840 .1810	.025	.055 .045	.025 .015	1/32 x 45°	.1900-32 UNJF-3A	.0806 .0791	.135 .115	.119 .104	5,380	2,500
8	1/4	.412 .387	.395	.2495 .2485	.2440 .2410	.030	.069 .059	.025 .015	1/32 x 45°	.2500-28 UNJF-3A	.0967 .0947	.150 .130	.142 .122	9,300	4,300
10	5/16	.505 .475	.500	.3120 .3110	.3060 .3020	.035	.078 .068	.030 .020	3/64 x 45°	.3125-24 UNJF-3A	.1295 .1270	.170 .150	.180 .160	14,600	6,300
12	3/8	.600 .565	.545	.3745 .3735	.3680 .3640	.040	.088 .078	.030 .020	3/64 x 45°	.3750-24 UNJF-3A	.1617 .1582	.200 .180	.217 .197	21,000	8,700
14	7/16	.676 .641	.635	.4370 .4360	.4310 .4260	.045	.105 .093	.030 .020	3/64 x 45°	.4375-20 UNJF-3A	.1930 .1895	.230 .210	.253 .233	28,600	12,100
16	1/2	.770 .735	.685	.4995 .4985	.4930 .4880	.050	.115 .103	.030 .020	3/64 x 45°	.5000-20 UNJF-3A	.2242 .2207	.260 .240	.289 .269	37,300	15,300
18	9/16	.864 .829	.770	.5615 .5605	.5550 .5500	.055	.127 .112	.040 .025	1/16 x 45°	.5625-18 UNJF-3A	.2555 .2520	.290 .270	.326 .306	47,200	19,000
20	5/8	.953 .918	.825	.6240 .6230	.6180 .6120	.060	.137 .122	.040 .025	1/16 x 45°	.6250-18 UNJF-3A	.2555 .2520	.330 .305	.326 .306	58,300	23,000
24	3/4	1.108 1.066	1.050	.7490 .7480	.7430 .7370	.070	.151 .136	.045 .030	1/16 x 45°	.7500-16 UNJF-3A	.3185 .3150	.395 .365	.398 .378	83,900	30,700
28	7/8	1.285 1.241	1.210	.8740 .8730	.8680 .8610	.090	.187 .172	.050 .035	5/64 x 45°	.8750-14 UNJF-3A	.3820 .3780	.455 .425	.471 .451	114,000	45,000
32	1	1.468 1.424	1.390	.9990 .9980	.9930 .9860	.110	.218 .203	.060 .045	5/64 x 45°	1.0000-12 UNJF-3A	.5100 .5040	.580 .550	.618 .598	149,000	60,900

SEE COLLAR STANDARDS FOR COLLAR STRENGTHS. LOWER STRENGTH (PIN OR COLLAR) DETERMINES SYSTEM STRENGTH

"HI-LOK", "HL", AND "HI-KOTE", ARE TRADEMARKS OF HI-SHEAR CORPORATION

DRAWN BY J.C.S.	DATE 1962-7-19	TITLE: HI-LOK™ PIN PROTRUDING SHEAR HEAD ALLOY STEEL 1/16 GRIP VARIATION
APPROVED CESSNA	DATE 1962-7-24	
REVISION (31)	DATE F.CARINGELLA 2019-09-10	DRAWING NUMBER **HL18** 1 OF 2

HL18

©2019 Hi-Shear Corporation

LISI AEROSPACE – Please refer to Central Documentation Website to check validity

lisi AEROSPACE
hi-shear corporation
2600 SKYPARK DRIVE, TORRANCE, CALIFORNIA 90509 U.S.A.

GENERAL NOTES:
1. Concentricity: "A" to "D" diameter within .010 FIM.
2. Dimensions are in inches and to be met after finish.
3. Surface texture per ASME B46.1.
4. Hole preparation per NAS618.
5. Non-lubed pins must be used with lubed collars.
6. Evidence of broken edge across points.
7. Use HL62 for oversize replacement.

MATERIAL: ALLOY STEEL per AMS6415, AMS6349 or AMS6382, AMS6322.


HEAT TREAT: 95,000 psi shear (160,000-180,000 psi tensile per AMS-H-6875).

(31) **FINISH:**
HL18-( )-( ) = Cadmium plate per AMS-QQ-P-416, Type I, Class 2, and cetyl alcohol lube per Hi-Shear Spec. 305.
HL18PB( )-( ) = Cadmium plate per AMS-QQ-P-416, Type II, Class 2, and cetyl alcohol lube per Hi-Shear Spec. 305.
HL18TF( )-( ) = Cadmium plate per AMS-QQ-P-416, Type III, Class 2, and HI-KOTE™ 2 solid film lube per Hi-Shear Spec. 292.
5 HL18PN( )-( ) = Cadmium plate per AMS-QQ-P-416, Type II, Class 2.

SPECIFICATION: HI-LOK™ Product Specification 342.

CODE: First dash number indicates nominal diameter in 1/32nds.
Second dash number indicates maximum grip in 1/16ths.
See Finish note for explanation of code letters.

HOW TO ORDER EXAMPLE: Pin Part Number
HL18PB8-8



HL18

DRAWING NUMBER
HL18

©2019 Hi-Shear Corporation