

Suspension System RFQ for Cornell FSAE ARG26 Car
Supplier: Moll Machine Works, LLC
Issue Date: June 3, 2026

1. Summary of Request

Cornell Racing is requesting a quotation for the manufacture, inspection, assembly, and delivery of the suspension subsystem for the ARG26 Formula SAE vehicle. This RFQ covers all activities required to produce the assemblies and components defined in the attached engineering documentation, including procurement of materials and hardware, fixturing, machining, welding, finishing, inspection, and assembly.

The scope includes the manufacture of suspension links, pushrods, clevises, cones, rockers, anti-roll bar components, uprights, assembly fixtures, and related hardware assemblies, as well as the procurement of all specified raw materials, standard hardware, bearings, rod ends, springs, dampers, and other purchased components identified in the bill of materials. Components shall be manufactured and assembled in accordance with the supplied engineering drawings, bill of materials, and requirements within this RFQ.

The supplier shall provide a complete quotation for all manufacturing processes, material and purchased-component costs, tooling and fixturing, inspection, and assembly. Quotations should reflect the supplier's ability to deliver the completed suspension subsystem assemblies listed in Section 8 within the requested program timeline.

This RFQ, together with the associated bill of materials, engineering drawings, CAD data, and assembly documentation, defines the complete manufacturing and assembly requirements for the ARG26 suspension system.

2. Document Index

1. Summary of Request	1
2. Document Index	2
3. Material Procurement and Purchased Components	6
4. Machining Processes	6
4.1 Tube Preparation	7
4.2 Lathe-Manufactured Components	8
4.3 CNC-Machined Billet Components	9
4.4 Laser Cutting	11
5. Post-Machining Processes	12
5.1.1 Clevis Backing Plate Assembly	12
6. Assembly Procedures	13
6.1 Links	13
6.1.1 Toe/Push Link Assembly Procedure	13
6.1.2 A-Arm Assembly Procedure	16
6.2 Clevises	23
6.2.1 Suspension Clevis Assembly Procedure	23
6.2.3 RLR Double Clevis Assembly Procedure	25
6.2.4 Outboard Clevis Assembly Procedure	26
6.2.5 Shock Clevis Assembly Procedure	28
6.3 Rockers	28
6.3.1 Front and Rear Rocker Assembly Procedure	28
6.3.2 Rocker Clevis Assembly Procedure	31
6.4 Anti-Roll	32
6.4.1 ARB Blade Torsion Bar Assembly	32
6.4.2 ARB Blade Assembly	33
6.4.3 ARB Adapter Assembly	34
6.4.4 ARB Mount Assembly	35
6.4.5 ARB Drop Link Assembly	36
6.4.6 Front Anti-Roll Bar Assembly	37
6.4.7 Rear Anti-Roll Bar Assembly	38
6.5 Uprights	39
6.6 Shocks and Springs	41
7. Quality Control and Inspection	42
8. Deliverables	42
9. Timeline	43

10. Bill of Materials	45
11. Manufacturing Data	48
SU-A5001-AA_(FRONT LOWER LHS).pdf	48
SU-A5001-AA_(FRONT LOWER RHS).pdf	49
SU-A5001-AA_(FRONT UPPER LHS).pdf	50
SU-A5001-AA_(FRONT UPPER RHS).pdf	51
SU-A5001-AA_(REAR LOWER LHS).pdf	52
SU-A5001-AA_(REAR LOWER RHS).pdf	53
SU-A5001-AA_(REAR UPPER LHS).pdf	54
SU-A5001-AA_(REAR UPPER RHS).pdf	55
SU-A5001-AA_(TOE LINK).pdf	56
SU-A5001-AA-00001-AA.pdf	57
SU-A5001-AA-00002-AA.pdf	58
SU-A5001-AA-00003-AA.pdf	59
SU-A5001-AA-00004-AA.pdf	60
SU-A5001-AA-00005-AA.pdf	61
SU-A5001-AA-00006-AA.pdf	62
SU-A5001-AA-00007-AA.pdf	63
SU-A5001-AA-00008-AA.pdf	64
SU-A5001-AA-00009-AA.pdf	65
SU-A5001-AA-00010-AA.pdf	66
SU-A5001-AA-00011-AA.pdf	67
SU-A5001-AA-00012-AA.pdf	68
SU-A5001-AA-00013-AA.pdf	69
SU-A5001-AA-00014-AA.pdf	70
SU-A5001-AA-00015-AA.pdf	71
SU-A5001-AA-00016-AA.pdf	72
SU-A5001-AA-00017-AA.pdf	73
SU-A5001-AA-00018-AA.pdf	74
SU-A5001-AA-00019-AA.pdf	75
SU-A5001-AA-00020-AA.pdf	76
SU-A5001-AA-00021-AA.pdf	77
SU-A5001-AA-00022-AA.pdf	78
SU-A5001-AA-00023-AA.pdf	79
SU-A5001-AA-00024-AA.pdf	80
SU-A5002-AA_(FLF CLEVIS).pdf	81
SU-A5002-AA_(OUTBOARD CLEVIS).pdf	82
SU-A5002-AA_(RLR DOUBLE CLEVIS).pdf	85
SU-A5002-AA_(ROCKER CLEVIS).pdf	87
SU-A5002-AA_(RUF CLEVIS).pdf	90

SU-A5002-AA_(RUR CLEVIS).pdf	92
SU-A5002-AA_(SHOCK CLEVIS).pdf	93
SU-A5002-AA_(SUC-AN3 CLEVIS).pdf	93
SU-A5002-AA-00001-AA.pdf	97
SU-A5002-AA-00002-AA.pdf	98
SU-A5002-AA-00003-AA.pdf	99
SU-A5002-AA-00004-AA.pdf	100
SU-A5002-AA-00005-AA.pdf	101
SU-A5002-AA-00006-AA.pdf	102
SU-A5002-AA-00007-AA.pdf	103
SU-A5002-AA-00008-AA.pdf	104
SU-A5002-AA-00009-AA.pdf	105
SU-A5002-AA-00010-AA.pdf	106
SU-A5002-AA-00011-AA.pdf	107
SU-A5002-AA-00012-AA.pdf	108
SU-A5002-AA-00013-AA.pdf	109
SU-A5002-AA-00014-AA.pdf	110
SU-A5002-AA-00015-AA.pdf	111
SU-A5002-AA-00016-AA.pdf	112
SU-A5002-AA-00017-AA.pdf	113
SU-A5002-AA-00018-AA.pdf	114
SU-A5002-AA-00019-AA.pdf	115
SU-A5002-AA-00020-AA.pdf	116
SU-A5002-AA-00021-AA.pdf	117
SU-A5002-AA-00022-AA.pdf	118
SU-A5002-AA-00023-AA.pdf	119
SU-A5002-AA-00024-AA.pdf	120
SU-A5002-AA-00025-AA.pdf	121
SU-A5003-AA_(FRONT PUSH LINK).pdf	122
SU-A5003-AA_(REAR PUSH LINK).pdf	123
SU-A5003-AA-00001-AA.pdf	124
SU-A5003-AA-00002-AA.pdf	125
SU-A5003-AA-00003-AA.pdf	126
SU-A5003-AA-00004-AA.pdf	127
SU-A5003-AA-00005-AA.pdf	128
SU-A5003-AA-00006-AA.pdf	129
SU-A5004-AA_(SHOCKS AND SPRINGS).pdf	130
SU-A5005-AA_(FRONT ROCKER).pdf	131
SU-A5005-AA_(REAR ROCKER).pdf	133
SU-A5005-AA-00001-AA.pdf	135
SU-A5005-AA-00002-AA.pdf	136

SU-A5005-AA-00003-AA.pdf	137
SU-A5005-AA-00004-AA.pdf	138
SU-A5005-AA-00005-AA.pdf	139
SU-A5005-AA-00006-AA.pdf	140
SU-A5005-AA-00007-AA.pdf	141
SU-A5006-AA_(FARB ADAPTER).pdf	142
SU-A5006-AA_(FARB BLADE).pdf	144
SU-A5006-AA_(FARB MOUNT).pdf	146
SU-A5006-AA_(FARB TORSION BAR).pdf	148
SU-A5006-AA_(FRONT ANTI-ROLL).pdf	150
SU-A5006-AA_(FRONT DROP LINK).pdf	152
SU-A5006-AA_(RARB ADAPTER).pdf	154
SU-A5006-AA_(RARB BLADE).pdf	156
SU-A5006-AA_(RARB MOUNT).pdf	158
SU-A5006-AA_(RARB TORSION BAR).pdf	160
SU-A5006-AA_(REAR ANTI-ROLL).pdf	162
SU-A5006-AA_(REAR DROP LINK).pdf	164
SU-A5006-AA-00001-AA.pdf	166
SU-A5006-AA-00002-AA.pdf	167
SU-A5006-AA-00003-AA.pdf	168
SU-A5006-AA-00004-AA.pdf	169
SU-A5006-AA-00005-AA.pdf	170
SU-A5006-AA-00006-AA.pdf	171
SU-A5006-AA-00007-AA.pdf	172
SU-A5006-AA-00008-AA.pdf	173
SU-A5006-AA-00009-AA.pdf	174
SU-A5006-AA-00010-AA.pdf	175
SU-A5006-AA-00011-AA.pdf	176
SU-A5006-AA-00012-AA.pdf	177
SU-A5006-AA-00013-AA.pdf	178
SU-A5006-AA-00014-AA.pdf	179
SU-A5006-AA-00015-AA.pdf	180
SU-A5007-AA-00001-AA.pdf	181
SU-A5007-AA-00002-AA.pdf	182
SU-A5007-AA-00003-AA.pdf	183
SU-A5007-AA-00004-AA.pdf	184
SU-A5007-AA-FRONT.pdf	185
SU-A5007-AA-REAR.pdf	186
SU-A5008-AA-00001-AA.pdf	187
SU25_A0804_P01.pdf	188
SU25_A0804_P02.pdf	189

SU25_A0804_P03.pdf	190
SU26_A080	191
SU26_A0505_P02.pdf	201
SU26_A0505_P05.pdf	202
SU26_A0505_P06.pdf	203
SU26_A0505_P07.pdf	204
SU26_A0505_P08.pdf	205
SU26_A0505_P09.pdf	206
SU26_A0505(FRONT).pdf	207
SU26_A0505(REAR).pdf	208
SU26_A0603_P03_(ShockPot Mount Rocker).pdf	209
SU26_A0603_P04_(ShockPot Mount Clevis).pdf	210
SU26_A0802_P01.pdf	211
SU26_A0802_P02.pdf	212
SU26_A0803_P01.pdf	213
SU26_A0803_P02.pdf	214

3. Material Procurement and Purchased Components

Moll Machining shall be responsible for procuring all raw materials, purchased components, standard hardware, consumables, and miscellaneous items required to deliver the suspension subsystem assemblies as specified in this RFQ.

Material specifications (e.g., temper, steel standards) for each machined component are specified in their respective manufacturing drawings. Moll Machining shall determine the required stock size and material form from the associated engineering drawings and manufacturing data. Purchased components, quantities, vendors, and vendor part numbers are listed in the bill of materials.

Any proposed substitutions, material changes, component alternatives, sourcing concerns, or lead-time risks shall be identified in the quotation and approved by Cornell Racing prior to implementation.

4. Machining Processes

This section covers the manufacturing processes required for the ARG26 suspension system. Subsections are divided by manufacturing type and outline the applicable parts, materials, machines/tooling, and manufacturing and inspection procedures. Use part numbers (format: SU-A5XXX-AA-XXXXX-AA for parts; or format: SU26_AXXX_PXX for jigs) to reference associated manufacturing data and BOM information.

For the full list of components that Moll Machining would be responsible for manufacturing, see the Bill of Materials. Note: the ARG26 suspension system contains only one composite component, the FARB Shroud (SU-A5006-AA-00007-AA), but Moll Machining is not responsible for making this.

4.1 Tube Preparation

This section provides instructions to prepare the link tubes, toe link tubes, push rod tubes, and anti-roll torsion bar tubes for a total of 24 parts. Complete the following steps for the part numbers listed below with reference to the associated drawing and BOM information. Ensure correct dimensions and quantities.

Part List:

Tube Part Numbers:

- (2x) SU-A5001-AA-00001-AA (TL Tube)
- (2x) SU-A5001-AA-00002-AA (FUF Tube)
- (2x) SU-A5001-AA-00003-AA (FUR Tube)
- (2x) SU-A5001-AA-00004-AA (FLF Tube)
- (2x) SU-A5001-AA-00005-AA (FLR Tube)
- (2x) SU-A5001-AA-00006-AA (RUF Tube)
- (2x) SU-A5001-AA-00007-AA (RUR Tube)
- (2x) SU-A5001-AA-00008-AA (RLF Tube)
- (2x) SU-A5001-AA-00009-AA (RLR Tube)
- (2x) SU-A5003-AA-00001-AA (FPL Tube)
- (2x) SU-A5003-AA-00002-AA (RPL Tube)
- (1x) SU-A5006-AA-00001-AA (FARB Torsion Bar)
- (1x) SU-A5006-AA-00009-AA (RARB Torsion Bar)

Materials Required:

- AISI 4130 Steel Tubing (varied diameters, see drawings)
- Abrasive material (e.g. Scotch Brite)
- Cleaning solvent (e.g. acetone)

Machines / Tooling Required:

- Metal bandsaw (or equivalent)
- Deburring tools
- Precision measuring instruments

Manufacturing Procedure

1. **Cut the tubes:** Use a metal bandsaw to cut all link tubes to the specified lengths (see drawing for dimensions). Ensure each cut is square using a right angle.
2. **Deburr Edges:** Deburr both the internal and external edges of each tube end. Ensure each tube end has a flat, perpendicular mating surface and a smooth internal surface (minimum of 1 inch from edge).
3. **Clean:** Use a cleaning solvent to clean the internal surfaces of each tube to remove oils, chips, and debris.
4. **Prepare Surface for Welding:** Abrade the external tube surfaces of all tubes using abrasive material until the surface has a uniform, matte finish with no visible mill scale.

Inspection / Quality Control

Visually inspect the tubes for damage, dents, or rust. Verify tube lengths and diameters, cut squareness, and weld region cleanliness in accordance with the associated drawings.

4.2 Lathe-Manufactured Components

This section covers the manufacturing of inserts, cones, links, jig components, anti-roll bar (ARB) drop links, and shock sensor mounts for a total of 32 unique parts. Complete the following steps for the part numbers listed below with reference to the associated drawing and BOM information. Ensure correct dimensions and quantities.

Part List:

Links and Anti-Roll Bar Inserts Part Numbers:

- (1x) SU-A5001-AA-00010-AA (TL Insert LH)
- (1x) SU-A5001-AA-00011-AA (TL Insert RH)
- (1x) SU-A5003-AA-00003-AA (FPL RH Insert)
- (1x) SU-A5003-AA-00004-AA (FPL LH Insert)
- (1x) SU-A5003-AA-00005-AA (RPL RH Insert)
- (1x) SU-A5003-AA-00006-AA (RPL LH Insert)

Cone Part Numbers:

- (8x) SU-A5001-AA-00024-AA (Tab Cone)
- (20x) SU-A5002-AA-00009-AA (SUC AN3 Thru Cone)
- (20x) SU-A5002-AA-00010-AA (SUC AN3 Hat Cone)
- (2x) SU-A5002-AA-00011-AA (Toe Link Thru Cone)
- (2x) SU-A5002-AA-00012-AA (Toe Link Hat Cone)
- (4x) SU-A5002-AA-00013-AA (Shock Clevis Thru Cone)
- (4x) SU-A5002-AA-00014-AA (Shock Clevis Hat Cone)
- (2x) SU-A5002-AA-00015-AA (SOC Thru Cone)
- (8x) SU-A5002-AA-00016-AA (SOC Hat Cone)
- (2x) SU-A5002-AA-00017-AA (RLBJ Thru Cone)
- (4x) SU-A5002-AA-00018-AA (Outboard Clevis Thru Cone)
- (4x) SU25_A03_P11 (Outboard Clevis Hat Cone)
- (4x) SU-A5005-AA-00003-AA (Rocker Antiroll Bar Thru Cone)
- (4x) SU-A5005-AA-00004-AA (Rocker Antiroll Bar Hat Cone)
- (8x) SU-A5005-AA-00005-AA (Rocker Shock Thru Cone)
- (4x) SU-A5005-AA-00006-AA (Rocker-Pushlink Thru Cone)
- (4x) SU-A5005-AA-00007-AA (Rocker-Pushlink Hat Cone)

Links Jig Component Part Numbers:

- (2x) SU26_A0802_P01 (AN3 Bearing Post)
- (2x) SU26_A0802_P02 (AN4 Bearing Post)
- (2x) SU25_A0804_P01 (AN3 Custom Washer)
- (2x) SU25_A0804_P02 (AN4 Custom Washer)

- (2x) SU25_A0804_P03 (AN4 Custom Washer (Large))

Anti-Roll Bar Drop Link Part Numbers:

- (1x) SU-A5006-AA-00008-AA (FARB Drop Link)
- (1x) SU-A5006-AA-00015-AA (RARB Drop Link)

Sensor Mount Part Numbers:

- (1x) SU26_A0603_P04 (Shockpot Mount (Clevis Side))
- (1x) SU26_A0603_P03 (Shockpot Mount (Rocker Side))

Materials Required:

- AISI 4130 Steel Hex Bar
- AISI 4130 Steel Round Bar
- AL 7075 Round Bar
- AL 6061 Round Bar
- AL 6061 Hex Bar

Manufacturing Procedure:

Manufacture all components in accordance with the associated engineering drawings. All dimensions and tolerances shall be interpreted in accordance with ASME Y14.5. Ensure all dimensions, tolerances, surface finishes, and geometric controls conform to the requirements specified on the drawings unless otherwise noted.

Inspection / Quality Control:

Visually inspect for damage, dents, or rust. Inspect all critical dimensions identified on the engineering drawing using calibrated measurement equipment appropriate for the specified tolerance.

4.3 CNC-Machined Billet Components

This section covers the manufacturing of link adapters, links, and anti-roll bar jig components, clevises, rockers, anti-roll bar components, and uprights for a total of 88 parts. Complete the following steps for the part numbers listed below with reference to the associated engineering drawings and BOM information. Ensure all components are manufactured to the specified dimensions, tolerances, finishes, and quantities.

Part List:**Link Adapter Part Numbers:**

- (1x) SU-A5001-AA-00012-AA (FU Outboard Adapter LHS)
- (1x) SU-A5001-AA-00013-AA (FU Outboard Adapter RHS)
- (1x) SU-A5001-AA-00014-AA (RU Outboard Adapter LHS)
- (1x) SU-A5001-AA-00015-AA (RU Outboard Adapter RHS)
- (2x) SU-A5001-AA-00016-AA (FL Outboard Adapter)
- (2x) SU-A5001-AA-00017-AA (RL Outboard Adapter)

- (4x) SU-A5001-AA-00018-AA (FU Inboard Adapter)
- (4x) SU-A5001-AA-00019-AA (RU Inboard Adapter)
- (2x) SU-A5001-AA-00020-AA (FLF Inboard Adapter)
- (2x) SU-A5001-AA-00021-AA (FLR Inboard Adapter)
- (2x) SU-A5001-AA-00022-AA (RLF Inboard Adapter)
- (2x) SU-A5001-AA-00023-AA (RLR Inboard Adapter)

Links and Anti-Roll Bar Jig Component Part Numbers:

- (2x) SU26_A0803_P01 (Midpoint Post Half)
- (1x) SU26_A0803_P02 (Midpoint Shim)
- (2x) SU26_A0505_P02 (ARB Rear Torsion Bar Insert Support)
- (1x) SU26_A0505_P05 (ARB Jig Baseplate)
- (2x) SU26_A0505_P06 (ARB Front Torsion Bar Insert Support)
- (2x) SU26_A0505_P07 (ARB Jig Midpoint Support Half)
- (2x) SU26_A0505_P08 (ARB Rear Torsion Bar Insert Support 2)
- (2x) SU26_A0505_P09 (ARB Front Torsion Bar Insert Support 2)

Clevis Part Numbers:

- (8x) SU-A5002-AA-00001-AA (SUC-AN3 Clevis)
- (2x) SU-A5002-AA-00002-AA (FLF Clevis)
- (2x) SU-A5002-AA-00003-AA (RUF Clevis)
- (2x) SU-A5002-AA-00004-AA (RUR Clevis)
- (2x) SU-A5002-AA-00005-AA (RLR Double Clevis)
- (2x) SU-A5002-AA-00006-AA (Shock Clevis)
- (4x) SU-A5002-AA-00007-AA (Rocker Clevis)
- (4x) SU-A5002-AA-00008-AA (Outboard Clevis)

Rocker Part Numbers:

- (2x) SU-A5005-AA-00001-AA (Front Rocker)
- (2x) SU-A5005-AA-00002-AA (Rear Rocker)

Anti-Roll Bar Component Part Numbers:

- (2x) SU-A5006-AA-00003-AA (FARB Blade)
- (2x) SU-A5006-AA-00004-AA (FARB Adapter)
- (2x) SU-A5006-AA-00005-AA (FARB Mount)
- (2x) SU-A5006-AA-00011-AA (RARB Blade)
- (2x) SU-A5006-AA-00012-AA (RARB Adapter)
- (2x) SU-A5006-AA-00013-AA (RARB Mount)
- (2x) SU-A5006-AA-00002-AA (FARB Torsion Bar Insert)
- (2x) SU-A5006-AA-00010-AA (RARB Torsion Bar Insert)

Upright Part Numbers:

- (1x) SU-A5007-AA-00001-AA (Front Upright (Left))

- (1x) SU-A5007-AA-00001-AA (Front Upright (Right))
- (1x) SU-A5007-AA-00002-AA (Rear Upright (Left))
- (1x) SU-A5007-AA-00002-AA (Rear Upright (Right))

Materials Required:

- ST 4130 Steel Billet
- ST 8620 Steel Billet
- AL 7075 Billet
- AL 6061 Billet

Manufacturing procedure:

Manufacture all components in accordance with the associated engineering drawings. All dimensions and tolerances shall be interpreted in accordance with ASME Y14.5. Ensure all dimensions, tolerances, surface finishes, and geometric controls conform to the requirements specified on the drawings unless otherwise noted.

Inspection / Quality Control:

Visually inspect for damage, dents, or rust. Inspect all critical dimensions identified on the engineering drawing using calibrated measurement equipment appropriate for the specified tolerance.

4.4 Laser Cutting

This section covers the manufacturing of backing plates, baseplates, and camber shims for a total of 31 parts. Complete the following steps for the part numbers listed below with reference to the associated engineering drawings and BOM information. Ensure all components are manufactured to the specified dimensions, tolerances, finishes, and quantities.

Part List:

Jig Plate Baseplate Part Number:

- (1x) SU26_A0801_P01 (Jig Plate Baseplate)

Clevis Backing Plate Part Numbers:

- (8x) SU-A5002-AA-00019-AA (SUC-AN3 Clevis Backing Plate)
- (2x) SU-A5002-AA-00020-AA (FLF Clevis Backing Plate)
- (2x) SU-A5002-AA-00021-AA (RLR Double Clevis Backing Plate)
- (2x) SU-A5002-AA-00022-AA (RUF Clevis Backing Plate)
- (2x) SU-A5002-AA-00023-AA (RUR Clevis Backing Plate)
- (2x) SU-A5002-AA-00024-AA (Shock Clevis Backing Plate)
- (4x) SU-A5002-AA-00025-AA (Rocker Clevis Backing Plate)

Anti-Roll Bar Backing Plate Part Numbers:

- (2x) SU-A5006-AA-00006-AA (FARB Mount Backing Plate)
- (2x) SU-A5006-AA-00014-AA (RARB Mount Backing Plate)

Suspension Set up Component Part Number:

- (4x) SU-A5008-AA-00001-AA (Camber Shim 0.25")

Materials Required:

- AL 5052 Sheet
- AL 6061 Sheet
- AL 7075 Sheet
- 1018 Steel Sheet

Manufacturing Procedure:

Manufacture all components in accordance with the associated engineering drawings. All dimensions and tolerances shall be interpreted in accordance with ASME Y14.5. Ensure all dimensions, tolerances, surface finishes, and geometric controls conform to the requirements specified on the drawings unless otherwise noted.

Inspection / Quality Control:

Visually inspect for damage, dents, or rust. Inspect all critical dimensions identified on the engineering drawing using calibrated measurement equipment appropriate for the specified tolerance.

5. Post-Machining Processes

5.1.1 Clevis Backing Plate Assembly

This section covers the post-machining processes for the clevis backing plates. Complete the following steps for each ID number and its associated components. Results in a total of 8 prepared backing plates.

ID	Backing Plate	Fasteners
1	(1x) SU-A5002-AA-00019-AA (SUC-AN3 Clevis Backing Plate)	(2x) McMaster 90857A129 (4x) McMaster 97525A300
2	(1x) SU-A5002-AA-00020-AA (FLF Clevis Backing Plate)	(2x) McMaster 90857A129 (4x) McMaster 97525A300
3	(1x) SU-A5002-AA-00022-AA (RUF Clevis Backing Plate)	(2x) McMaster 90857A129 (4x) McMaster 97525A300
4	(1x) SU-A5002-AA-00023-AA (RUR Clevis Backing Plate)	(2x) McMaster 90857A129 (4x) McMaster 97525A300

5	(1x) SU-A5002-AA-00021-AA (RLR Double Clevis Backing Plate)	(2x) McMaster 90857A129 (4x) McMaster 97525A300
6	(1x) SU-A5002-AA-00025-AA (Rocker Clevis Backing Plate)	(2x) McMaster 90857A129 (4x) McMaster 97525A300
7	(1x) SU-A5002-AA-00024-AA (Shock Clevis Backing Plate)	(2x) Pegasus NUT PLATE (4x) McMaster 97525A300
8	(1x) SU-A5006-AA-00014-AA (RARB Mount Backing Plate)	(2x) McMaster 90857A129 (4x) McMaster 97525A300

Table 1: Clevis Backing Plate Assembly Components

Backing Plate Assembly Procedure:

1. **Prepare the backing plate:** Place the backing plate on a clean work surface and verify that the rivet holes and nut plate mounting locations are clear of debris.
2. **Insert the rivets:** Install the rivets from the underside of the backing plate. The domed heads of the rivets should face away from the backing plate.
3. **Position the nut plates:** Place the nut plates over the protruding rivets on the opposite side of the backing plate. Ensure each nut plate is seated flat against the backing plate and aligned with the center bolt hole.
4. **Install the rivets:** Using a manual riveting tool, set the rivets to secure the nut plates to the backing plate.
5. **Inspect the assembly:** Confirm that each nut plate is fully seated, properly aligned, and securely fastened. Verify that the domed rivet heads remain on the underside of the backing plate and that the nut plates match the orientation shown in the assembly drawing.

6. Assembly Procedures

6.1 Links

6.1.1 Toe/Push Link Assembly Procedure

This section covers the assembly of the toe and push links. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 6 links.

Assembly quantity needed:

- (2x) Toe Link
- (2x) Front Push Link
- (2x) Rear Push Link

Relevant Assembly Drawings:

- SU-A5001-AA_(TOE LINK)
- SU-A5003-AA_(FRONT PUSH LINK)
- SU-A5003-AA_(REAR PUSH LINK)

The table below indicates the quantity needed per link.

ID	Link	Tube	Inserts	Jig Plate Parts	Rod Ends + Check Nuts
1	Toe Link	(1x) SU-A5001-A A-00001-AA (TL Tube)	(1x) SU-A5001-AA-0 0010-AA (TL Insert LH) (1x) SU-A5001-AA-0 0011-AA (TL Insert RH)	(1x) SU26_A0801_P01 (Jig Plate) (2x) SU26_A0802_P01 (AN3 Bearing Post) (2x) SU26_A0803_P01 (Midpoint Post Half) (1x) SU26_A0803_P02 (Midpoint Shim)	(1x) Pegasus Auto Racing 3060-3-R (1x) Aircraft Spruce AN315-3R (1x) Pegasus Auto Racing 3060-3-L (1x) Aircraft Spruce AN315-3L
2	Front Push Link	(1x) SU-A5003-A A-00001-AA (FPL Tube)	(1x) SU-A5003-AA-0 0003-AA (FPL RH Insert) (1x) SU-A5003-AA-0 0004-AA (FPL LH Insert)	(1x) SU26_A0801_P01 (Jig Plate) (2x) SU26_A0803_P01 (Midpoint Post Half) (1x) SU26_A0803_P02 (Midpoint Shim) (2x) SU26_A0802_P02 (AN4 Bearing Post)	Aircraft Spruce AN315-4R McMaster 2458K121 Aircraft Spruce AN315-4L McMaster 2458K122

3	Rear Push Link	(1x) SU-A5003-A A-00002-AA (RPL Tube)	(1x) SU-A5003-AA-0 0005-AA (RPL RH Insert) (1x) SU-A5003-AA-0 0006-AA (RPL LH Insert)	(2x) SU26_A0803_P01 (Midpoint Post Half) (1x) SU26_A0803_P02 (Midpoint Shim) (1x) SU26_A0801_P01 (Jig Plate)	Aircraft Spruce AN315-4R McMaster 2458K121 Aircraft Spruce AN315-4L McMaster 2458K122
---	----------------	--	--	--	--

Table 2: Link Assembly Components

Link Assembly Procedure:

1. **Assemble jig plate:** Install the midpoint support onto the jig plate with bolts (specified in assembly drawings) and hand-tighten until snug.
2. **Assemble jig plate:** Install the two bearing posts onto the jig plate at the labeled positions. Secure the posts to the plate.
3. **Install inserts into tubes:** Insert the LH link insert into one side of the link tube, and insert the RH link insert into the other side of the tube.
4. **Adding rod ends:** Thread the LH rod end into the LH insert and the RH rod end into the RH insert. Install the corresponding check nuts onto each rod end before threading into the insert.
5. **Put the link on the jig plate:** Position the completed toe link tube assembly onto the two bearing posts. Align each rod end with its corresponding bearing post. Install the AN3 bolts with AN3 washers through each rod end and bearing post connection. Hand-tighten to secure the hardware.
6. **Tighten the midpoint support:** Align the toe link tube at the midpoint support and fully tighten the midpoint support hardware to secure the assembly.
7. **Final checks before welding:** Confirm all fasteners are tightened, and ensure the assembly has been put together according to the assembly drawing
8. **Weld:** Weld the inserts into the tube following the drawing.



Figure 1: Welding inserts into the link

9. **Post-welding:** Carefully remove the rod ends from the bearing posts.
10. **Clean and prep the welded assembly.** Remove any welding residue, spatter, oil, or dust with acetone and lightly sand to create a prepped surface for paint adhesion.
11. **Apply primer:** Using Rust-Oleum Flat Gray Primer Spray, apply 2–3 light, even coats according to the manufacturer's instructions. Allow the recommended flash time between coats and let the primer dry completely before painting.
12. **Paint:** Apply 2–3 light coats of Rust-Oleum Ultra Matte Black Acrylic Enamel 2X Spray Paint, allowing proper drying time between coats. Allow the paint to fully cure before handling or assembly.

For push rods only, follow these additional steps:

1. Request a quote from IZZE-RACING LLC for a 24-Bit ADC-to-CAN Strain Gauge to be installed on each of the four push rods. The quote should also include Load Cell Amplifiers.
2. Ship all four push rods to IZZE-RACING LLC for installation by week 4 (see section 9 for suggested timeline).

6.1.2 A-Arm Assembly Procedure

This section covers the assembly of the A-Arms. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 8 A-Arms.

Assembly quantity needed:

- (1x) Front Upper A-Arm LHS
- (1x) Front Upper A-Arm RHS
- (1x) Front Lower A-Arm LHS

- (1x) Front Lower A-Arm RHS
- (1x) Rear Upper A-Arm LHS
- (1x) Rear Upper A-Arm RHS
- (1x) Rear Lower A-Arm LHS
- (1x) Rear Lower A-Arm RHS

Relevant Assembly Drawings:

- SU-A5001-AA_(FRONT UPPER LHS)
- SU-A5001-AA_(FRONT UPPER RHS)
- SU-A5001-AA_(FRONT LOWER LHS)
- SU-A5001-AA_(FRONT LOWER RHS)
- SU-A5001-AA_(REAR UPPER LHS)
- SU-A5001-AA_(REAR UPPER RHS)
- SU-A5001-AA_(REAR LOWER LHS)
- SU-A5001-AA_(REAR LOWER RHS)

The table below indicates the quantity needed per A-Arm.

ID	Link	Tube	Adapters	Jig Plate Parts	Bearings
1	Front Upper A-Arm LHS	(1x) SU-A5001-AA-00002-AA (FUF Tube) (1x) SU-A5001-AA-00003-AA (FUR Tube)	(1x) SU-A5001-AA-00012-AA (FU Outboard Adapter LHS) (2x) SU-A5001-AA-00018-AA (FU Inboard Adapter)	(1x) SU26_A0801_P01 (Jig Plate) (2x) SU26_A0802_P01 (AN3 Bearing Post) (1x) SU26_A0802_P02 (AN4 Bearing Post) (2x) SU25_A0804_P01 (AN3 Custom Washer) (1x) SU25_A0804_P02 (AN4 Custom Washer)	(2x) McMaster 63195K11, Swivel Joint, Lubrication-Free, 3/16" ID, 9/16" OD (1x) McMaster 63195K12 Swivel Joint, Lubrication-Free, 1/4" ID, 21/32" OD

2	Front Upper A-Arm RHS	(1x) SU-A5001-AA-00002-AA (FUF Tube) (1x) SU-A5001-AA-00003-AA (FUR Tube)	(1x) SU-A5001-AA-00013-AA (FU Outboard Adapter RHS) (2x) SU-A5001-AA-00018-AA (FU Inboard Adapter)	(1x) SU26_A0801_P01 (Jig Plate) (2x) SU26_A0802_P01 (AN3 Bearing Post) (1x) SU26_A0802_P02 (AN4 Bearing Post) (2x) SU25_A0804_P01 (AN3 Custom Washer) (1x) SU25_A0804_P02 (AN4 Custom Washer)	(2x) McMaster 63195K11, Swivel Joint, Lubrication-Free, 3/16" ID, 9/16" OD (1x) McMaster 63195K12 Swivel Joint, Lubrication-Free, 1/4" ID, 21/32" OD
3	Front Lower A-Arm	(1x) SU-A5001-AA-00004-AA (FLF Tube) (1x) SU-A5001-AA-00005-AA (FLR Tube)	(1x) SU-A5001-AA-00016-AA (FL Outboard Adapter) (1x) SU-A5001-AA-00020-AA (FLF Inboard Adapter) (1x) SU-A5001-AA-00021-AA (FLR Inboard Adapter)	(1x) SU26_A0801_P01 (Jig Plate) (2x) SU26_A0802_P01 (AN3 Bearing Post) (1x) SU26_A0802_P02 (AN4 Bearing Post) (2x) SU25_A0804_P01 (AN3 Custom Washer) (1x)	(2x) McMaster 63195K11, Swivel Joint, Lubrication-Free, 3/16" ID, 9/16" OD (1x) McMaster 63195K12 Swivel Joint, Lubrication-Free, 1/4" ID, 21/32" OD

				SU25_A0804_P02 (AN4 Custom Washer)	
				(2x) SU26_A0803_P01 (Midpoint Post Half)	
4	Rear Upper A-Arm LHS	(1x) SU-A5001-AA-00006-AA (RUF Tube) (1x) SU-A5001-AA-00007-AA (RUR Tube)	(1x) SU-A5001-AA-00014-AA (RU Outboard Adapter LHS) (2x) SU-A5001-AA-00019-AA (RU Inboard Adapter)	(1x) SU26_A0801_P01 (Jig Plate) (2x) SU26_A0802_P01 (AN3 Bearing Post) (1x) SU26_A0802_P02 (AN4 Bearing Post) (2x) SU25_A0804_P01 (AN3 Custom Washer) (1x) SU25_A0804_P02 (AN4 Custom Washer)	(2x) McMaster 63195K11, Swivel Joint, Lubrication-Free, 3/16" ID, 9/16" OD (1x) McMaster 63195K12 Swivel Joint, Lubrication-Free, 1/4" ID, 21/32" OD
5	Rear Upper A-Arm RHS	(1x) SU-A5001-AA-00006-AA (RUF Tube) (1x) SU-A5001-AA-00007-AA (RUR Tube)	(1x) SU-A5001-AA-00015-AA (RU Outboard Adapter RHS) (2x) SU-A5001-AA-00019-AA (RU Inboard)	(1x) SU26_A0801_P01 (Jig Plate) (2x) SU26_A0802_P01 (AN3 Bearing Post) (1x)	(2x) McMaster 63195K11, Swivel Joint, Lubrication-Free, 3/16" ID, 9/16" OD (1x) McMaster

			Adapter)	SU26_A0802_P02 (AN4 Bearing Post) (2x) SU25_A0804_P01 (AN3 Custom Washer) (1x) SU25_A0804_P02 (AN4 Custom Washer)	63195K12 Swivel Joint, Lubrication-Free, 1/4" ID, 21/32" OD
6	Rear Lower A-Arm	(1x) SU-A5001-AA-00008-AA (RLF Tube) (1x) SU-A5001-AA-00009-AA (RLR Tube)	(1x) SU-A5001-AA-00017-AA (RL Outboard Adapter) (1x) SU-A5001-AA-00022-AA (RLF Inboard Adapter) (1x) SU-A5001-AA-00023-AA (RLR Inboard Adapter)	(1x) SU26_A0801_P01 (Jig Plate) (2x) SU26_A0802_P01 (AN3 Bearing Post) (1x) SU26_A0802_P02 (AN4 Bearing Post) (2x) SU25_A0804_P01 (AN3 Custom Washer) (1x) SU25_A0804_P02 (AN4 Custom Washer) (2x) SU26_A0803_P01 (Midpoint Post Half)	(2x) McMaster 63195K11, Swivel Joint, Lubrication-Free, 3/16" ID, 9/16" OD (1x) McMaster 63195K12 Swivel Joint, Lubrication-Free, 1/4" ID, 21/32" OD

Table 3: A-Arm Assembly Components

A-Arms Assembly Procedure:

1. **Assemble the jig plate:** Secure the bearing posts and midpoint support onto the jig plate in the locations shown in the assembly drawing.
2. **Prepare the tube assemblies:** Insert the outboard adapter into the respective tubes. Install the inboard adapters into the opposite end of the tube, following the orientation shown in the assembly drawing.



Figure 2: Front/Rear A-Arm Constrained by Midpoint Support Post

3. **Position the A-arm assembly onto the fixture:** Place the completed tube and adapter assembly onto the bearing posts, aligning the adapters with the corresponding mounting locations on the jig plate.



Figure 3: Front/Rear A-Arm Pre-Welding Setup on Jig Plate

4. **Install the washers:** Place the washers onto the top of the adapters as shown in the assembly drawing.

5. **Install and tighten the fasteners:** Insert and tighten the fasteners through the adapters and bearing posts. Hand tighten the midpoint support until snug once the assembly is correctly aligned.



Figure 4: Front/Rear A-Arm Fastened to Bearing Post



Figure 5: Front/Rear A-Arm Fastened to Another Bearing Post

6. **Verify alignment before welding:** Confirm that the link assembly is secure on the jig plate.
7. **Weld the assembly:** Weld the adapters to the tube assembly according to the specified weld procedure. Ensure all welds are completed uniformly around the joints.
8. **Allow the assembly to cool:** Let the welded assembly cool to room temperature before removing it from the jig plate to prevent distortion.
9. **Remove the assembly from the fixture:** Remove all fasteners and lift the completed A-arm assembly from the jig plate.
10. **Prepare the assembly for coating:** Mask all bearing contact surfaces, including the inside diameter of the bearing cups. Clean the assembly and remove any weld residue, oil, dust, or other contaminants.
11. **Apply primer:** Apply 2–3 light coats of 15 oz. Flat Gray Primer Spray, allowing the recommended flash and dry times before painting.

12. **Apply spray paint:** Apply 2–3 light coats of Rust-Oleum Ultra Matte Black Acrylic Enamel 2X Spray Paint while ensuring all masked bearing-contact surfaces remain free of coating material.
13. **Install the bearings:** Press-fit the COM4-T bearing into the outboard adapter and the COM3-T bearings into the inboard adapters.
14. **Stake the bearings:** Stake the installed bearings according to the specified standard.
15. **Perform final inspection:** Confirm that all welds, coatings, bearing installations, and staked features meet the assembly and quality requirements.

6.2 Clevises



Figure 6: Final Clevises Assemblies (excluding outboard clevis)

6.2.1 Suspension Clevis Assembly Procedure

This section covers the assembly of the following suspension clevises with their associated cones, backing plates, and fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 14 clevis assemblies.

Assembly quantity needed:

- (8x) SUC-AN3 Clevis ASSY
- (2x) FLF Clevis ASSY
- (2x) RUF Clevis ASSY
- (2x) RUR Clevis ASSY

Relevant Assembly Drawings:

- SU-A5002-AA_(SUC-AN3 CLEVIS)
- SU-A5002-AA_(FLF CLEVIS)
- SU-A5002-AA_(RUF CLEVIS)

- SU-A5002-AA_(RUR CLEVIS)

The table below indicates the quantity needed per clevis.

ID	Clevis	Cones	Backing Plates	Fasteners
1	(1x) SU-A5002-AA-0000 1-AA (SUC-AN3 Clevis)	(1x) SU-A5002-AA-00009 -AA (SUC AN3 Thru Cone) (1x) SU-A5002-AA-00010 -AA (SUC AN3 Hat Cone)	(1x) SU-A5002-AA-00019 -AA (SUC-AN3 Clevis Backing Plate)	(3x) Aircraft Spruce AN3-13A (4x) Aircraft Spruce AN960-10 (1x) Aircraft Spruce AN365-428A
2	(1x) SU-A5002-AA-0000 2-AA (FLF Clevis)	(1x) SU-A5002-AA-00009 -AA (SUC AN3 Thru Cone) (1x) SU-A5002-AA-00010 -AA (SUC AN3 Hat Cone)	(1x) SU-A5002-AA-00020 -AA (FLF Clevis Backing Plate)	(3x) Aircraft Spruce AN3-13A (4x) Aircraft Spruce AN960-10 (1x) Aircraft Spruce AN365-428A
3	(1x) SU-A5002-AA-0000 3-AA (RUF Clevis)	(1x) SU-A5002-AA-00009 -AA (SUC AN3 Thru Cone) (1x) SU-A5002-AA-00010 -AA (SUC AN3 Hat Cone)	(1x) SU-A5002-AA-00022 -AA (RUF Clevis Backing Plate)	(3x) Aircraft Spruce AN3-13A (4x) Aircraft Spruce AN960-10 (1x) Aircraft Spruce AN365-428A
4	(1x) SU-A5002-AA-0000 4-AA (RUR Clevis)	(1x) SU-A5002-AA-00009 -AA (SUC AN3 Thru Cone) (1x) SU-A5002-AA-00010 -AA (SUC AN3 Hat	(1x) SU-A5002-AA-00023 -AA (RUR Clevis Backing Plate)	(3x) Aircraft Spruce AN3-13A (4x) Aircraft Spruce AN960-10 (1x) Aircraft Spruce AN365-428A

		Cone)		
--	--	-------	--	--

Table 4: Clevis Assembly Components

Clevis Assembly Procedure:

1. **Install the two clevis bolts:** Insert the two bolts with washers through the bottom of the clevis, as shown in the assembly drawing.
2. **Fit the backing plate:** Position the backing plate onto the two clevis bolts and hand-tighten the fasteners only at this stage.
3. **Install the hat cone and thru cone:** Place the hat cone and thru cone into the clevis bore, following the orientation shown in the assembly drawing.
4. **Install the clevis pin bolt:** Insert the bolt with washer through the thru cone from the top/right-hand side, as shown in the assembly drawing.
5. **Fit lower washers and Nyloc nuts:** Install the washers and Nyloc nuts on the underside of the hat cones.
6. **Hand-tighten the clevis pin Nyloc nut:** Hand-tighten the Nyloc nut for the clevis pin. Do not fully torque at this stage unless instructed by the final assembly specification.
7. **Confirm** that all components are installed in the correct orientation and sequence according to the assembly drawing before final tightening.

6.2.3 RLR Double Clevis Assembly Procedure

This section covers the assembly of the RLR Double Clevis with its associated cones, backing plate, and fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 2 clevis assemblies.

Assembly quantity needed:

- (2x) RLR Double Clevis ASSY

Relevant Assembly Drawings:

- SU-A5002-AA_(RLR DOUBLE CLEVIS)

The table below indicates the quantity needed per clevis.

ID	Clevis	Cones	Backing Plate	Fasteners
1	(1x) SU-A5002-AA-00005 -AA (RLR Double Clevis)	(1x) SU-A5002-AA-00009 -AA (SUC AN3 Thru Cone) (1x) SU-A5002-AA-00010 -AA (SUC AN3 Hat Cone)	(1x) SU-A5002-AA-00021 -AA (RLR Double Clevis Backing Plate)	(4x) Aircraft Spruce AN3-13A (6x) Aircraft Spruce AN960-10 (2x) Aircraft Spruce AN365-428A

		(1x) SU-A5002-AA-00011 -AA (Toe Link Thru Cone)		
		(1x) SU-A5002-AA-00012 -AA (Toe Link Hat Cone)		

Table 6: Clevis Assembly Components

Clevis Assembly Procedure:

1. **Install the two clevis bolts:** Insert the two bolts with washers through the bottom of the clevis, as shown in the assembly drawing.
2. **Fit the backing plate:** Position the backing plate onto the two clevis bolts and hand-tighten the fasteners only at this stage.
3. **Install the SUC-AN3 hat cone and thru cone:** Place the SUC-AN3 hat cone and thru cone into the clevis bore, following the orientation shown in the assembly drawing.
4. **Install the SUC-AN3 clevis pin bolt:** Insert the bolt with washer through the SUC-AN3 thru cone from the top/right-hand side, as shown in the assembly drawing.
5. **Fit the SUC-AN3 lower washers and Nyloc nuts:** Install the washers and Nyloc nuts on the underside of the SUC-AN3 hat cones.
6. **Install the Toe Link hat cone and thru cone:** Place the Toe Link hat cone and thru cone into the clevis bore, following the orientation shown in the assembly drawing.
7. **Install the Toe Link clevis pin bolt:** Insert the bolt with washer through the Toe Link thru cone from the top/right-hand side, as shown in the assembly drawing.
8. **Fit the Toe Link lower washers and Nyloc nuts:** Install the washers and Nyloc nuts on the underside of the Toe Link hat cones.
9. **Hand-tighten both clevis pin Nyloc nuts:** Hand-tighten the Nyloc nuts for both clevis pins. Do not fully torque at this stage unless instructed by the final assembly specification.
10. **Confirm** that the SUC-AN3 cone stackup and Toe Link cone stackup are installed in their correct locations, with all hardware oriented according to the assembly drawing before final tightening.

6.2.4 Outboard Clevis Assembly Procedure

This section covers the assembly of the Outboard Clevis with its associated cones and fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 4 clevis assemblies.

Assembly quantity needed:

- (4x) Outboard Clevis ASSY

Relevant Assembly Drawings:

- SU-A5002-AA_(OUTBOARD CLEVIS)

The table below indicates the quantity needed per clevis.

ID	Clevis	Cones	Backing Plate	Fasteners
1	(1x) SU-A5002-AA-00008 -AA (Outboard Clevis)	(1x) SU-A5002-AA-00018 -AA (Outboard Clevis Thru Cone) (1x) SU25_A03_P11 (Outboard Clevis Hat Cone)	(1x) SU-A5002-AA-00021 -AA (RLR Double Clevis Backing Plate)	(2x) Aircraft Spruce AN3-13A (2x) Aircraft Spruce AN365-428A (1x) Aircraft Spruce AN4-13A (2x) Aircraft Spruce AN960-416 (1x) Aircraft Spruce AN365-428A

Table 7: Clevis Assembly Components

Clevis Assembly Procedure:

1. **Install the two clevis bolts:** Insert the two bolts from the inside through the bottom of the clevis, as shown in the respective assembly drawing.
2. **Install washers and Nyloc nuts for clevis bolts:** Install the washers and Nyloc nuts on the underside of the clevis.
3. **Install the hat cone and thru cone:** Place the hat cone and thru cone into the clevis bore, following the orientation shown in the assembly drawing.
4. **Install the clevis pin bolt:** Insert the bolt with the washer through the thru cone from the top/left-hand side, as shown in the assembly drawing.
5. **Fit lower washers and Nyloc nuts:** Install the washers and Nyloc nuts on the underside of the hat cones.
6. **Hand-tighten the clevis pin Nyloc nut:** Hand-tighten the Nyloc nut for the clevis pin. Do not fully torque at this stage unless instructed by the final assembly specification.
7. **Confirm** that all components are installed in the correct orientation and sequence according to the assembly drawing before final tightening.

6.2.5 Shock Clevis Assembly Procedure

This section covers the assembly of the Shock Clevis with its associated cones, backing plate, and fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 2 clevis assemblies.

Assembly quantity needed:

- (2x) Shock Clevis ASSY

Relevant Assembly Drawings:

- SU-A5002-AA_(SHOCK CLEVIS)

The table below indicates the quantity needed per clevis.

ID	Clevis	Cones	Backing Plate	Fasteners
1	(1x) SU-A5002-AA-00006 -AA (Shock Clevis)	(1x) SU-A5002-AA-00013 -AA (Shock Clevis Thru Cone) (1x) SU-A5002-AA-00014 -AA (Shock Clevis Hat Cone)	(1x) SU-A5002-AA-00024 -AA (Shock Clevis Backing Plate)	(2x) McMaster 91310A544 (2x) McMaster 98687A137

Table 8: Clevis Assembly Components

Clevis Assembly Procedure:

1. **Install the hat cone and thru cone:** Place the hat cone and thru cone into the clevis bore, following the orientation shown in the assembly drawing.
2. **Install the two clevis bolts:** Insert the two bolts with washers through the top of the clevis, as shown in the assembly drawing.
3. **Fit the backing plate:** Position the backing plate onto the two clevis bolts and hand-tighten the fasteners only at this stage. Do not fully torque at this stage unless instructed by the final assembly specification.
4. **Confirm** that all components are installed in the correct orientation and sequence according to the assembly drawing before final tightening.

6.3 Rockers

6.3.1 Front and Rear Rocker Assembly Procedure

This section covers the assembly of the Front and Rear rockers with their associated bearings, cones, peripherals, and fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 4 rocker assemblies.

Assembly quantity needed:

- (2x) Front Rocker ASSY
- (2x) Rear Rocker ASSY

Relevant Assembly Drawings:

- SU-A5005-AA_(FRONT ROCKER)
- SU-A5005-AA_(REAR ROCKER)

The table below indicates the quantity needed per rocker.

ID	Rocker	Cones	Bearings	Fasteners
1	(1x) SU-A5005-AA-0000 1-AA (Front Rocker)	(1x) SU-A5005-AA-00006 -AA (Rocker-Pushlink Thru Cone) (1x) SU-A5005-AA-00007 -AA (Rocker-Pushlink Hat Cone) (2x) SU-A5005-AA-00005 -AA (Rocker Shock Thru Cone) (1x) SU-A5005-AA-00003 -AA (Rocker AntiRoll Bar Thru Cone) (1x) SU-A5005-AA-00004 -AA (Rocker Antiroll Bar Hat Cone)	(1x) McMaster 5905K22 (2x) McMaster 5909K25 (4x) McMaster 5909K251	(1x) Aircraft Spruce AN4-11A (2x) Aircraft Spruce AN960-4 (1x) Aircraft Spruce AN365-428A (1x) McMaster 91310A544 (2x) McMaster 98687A137 (1x) McMaster 94645A210 (1x) 5-40 Bolt for ARB Drop Link (1x) McMaster 918314006
2	(1x) SU-A5005-AA-0000 2-AA (Rear Rocker)	(1x) SU-A5005-AA-00006 -AA (Rocker-Pushlink	(1x) McMaster 5905K22	(1x) Aircraft Spruce AN4-11A (2x) Aircraft Spruce AN960-4

		Thru Cone)	(2x) McMaster 5909K25	(1x) Aircraft Spruce AN365-428A
		(1x) SU-A5005-AA-00007 -AA (Rocker-Pushlink Hat Cone)	(4x) McMaster 5909K251	(1x) McMaster 91310A544 (2x) McMaster 98687A137 (1x) McMaster 94645A210
		(2x) SU-A5005-AA-00005 -AA (Rocker Shock Thru Cone)		(1x) 5-40 Bolt for ARB Drop Link (1x) McMaster 918314006
		(1x) SU-A5005-AA-00003 -AA (Rocker AntiRoll Bar Thru Cone)		(1x) McMaster 91259A626 (2x) McMaster 2872T2 (1x) Chassis NyLock
		(1x) SU-A5005-AA-00004 -AA (Rocker Antiroll Bar Hat Cone)		

Table 9: Rocker Assembly Components

Rocker Assembly Procedure:

1. **Install the needle roller bearing:** Press the needle roller bearing into the specified point on the assembly drawing. Ensure the bearing is fully seated and installed square to the mounting bore.
2. **Assemble the chassis mounting stackup:** Install the chassis mounting hardware in the following order.
 - a. Shoulder bolt → washer → thrust washer → needle roller bearing → thrust washer → rocker/chassis mounting point → thrust washer → needle roller bearing → thrust washer → washer → Nyloc nut

Hand-tighten the Nyloc nut at this stage unless otherwise specified. Confirm that the rocker rotates freely about the chassis mounting point.
3. **Assemble the pushlink stackup:** Insert the pushlink hat cone and pushlink thru cone into the pushlink mounting bore, following the orientation shown in the assembly drawing. Install the bolt with the washer through the cone stackup, then on the other side, install the second washer and the Nyloc nut. Hand-tighten the Nyloc nut at this stage.
4. **Assemble the shock stackup:** Insert the two shock thru cones into the shock mounting bore, following the orientation shown in the assembly drawing. Install the bolt with the washer through the cone stackup, then on the other side, install the second washer and the Nyloc nut. Hand-tighten the Nyloc nut at this stage.

5. **Assemble the ARB stackup:** Insert the ARB hat cone and ARB thru cone into the ARB mounting bore, following the orientation shown in the assembly drawing. Install the bolt through the cone stackup, then on the other side, install the Nyloc nut. Hand-tighten the Nyloc nut at this stage.
6. **Final orientation and function check:** Confirm that all cones, bearings, thrust washers, washers, bolts, and Nyloc nuts are installed in the correct locations and orientations according to the assembly drawing. Verify that the rocker pivots freely and that the pushlink, shock, and ARB connections are properly seated before final torque is applied.

6.3.2 Rocker Clevis Assembly Procedure

This section covers the assembly of the Rocker Clevis with its associated backing plate and fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 4 clevis assemblies.

Assembly quantity needed:

- (4x) Rocker Clevis ASSY

Relevant Assembly Drawings:

- SU-A5002-AA_(ROCKER CLEVIS)

The table below indicates the quantity needed per rocker clevis.

ID	Clevis	Backing Plate	Fasteners
1	(1x) SU-A5002-AA-00007-AA (Rocker Clevis)	(1x) SU-A5002-AA-00025-AA (Rocker Clevis Backing Plate)	(2x) Aircraft Spruce AN3-13A (2x) Aircraft Spruce AN960-10

Table 10: Rocker Clevis Assembly Components

Rocker Clevis Assembly Procedure:

1. **Install the two clevis bolts:** Insert the two bolts with washers through the bottom of the clevis, as shown in the assembly drawing.
2. **Fit the backing plate:** Position the backing plate onto the two clevis bolts and hand-tighten the fasteners only at this stage.

6.4 Anti-Roll

6.4.1 ARB Blade Torsion Bar Assembly

This section covers the welding of the Front and Rear Torsion Bars on the ARB Jig Plate. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 2 unique torsion bar assemblies.

Assembly quantity needed:

- (1x) FARB Torsion Bar ASSY
- (1x) RARB Torsion Bar ASSY

Relevant Assembly Drawings:

- SU-A5006-AA_(FARB TORSION BAR)
- SU-A5006-AA_(RARB TORSION BAR)

The table below indicates the quantity needed per torsion bar.

ID	Tube	Insert	Jig Plate Parts
1	(1x) SU-A5006-AA-00001-AA (FARB Torsion Bar)	(2x) SU-A5006-AA-00002-AA (FARB Torsion Bar Insert)	(1x) SU26_A0505_P05 (ARB Jig Baseplate) (2x) SU26_A0505_P06 (ARB Front Torsion Bar Insert Support) (2x) SU26_A0505_P09 (ARB Front Torsion Bar Insert Support 2) (2x) SU26_A0803_P01 (Midpoint Post Half)
2	(1x) SU-A5006-AA-00009-AA (RARB Torsion Bar)	(2x) SU-A5006-AA-00010-AA (RARB Torsion Bar Insert)	(1x) SU26_A0505_P05 (ARB Jig Baseplate) (2x) SU26_A0505_P02 (ARB Rear Torsion Bar Insert Support) (2x) SU26_A0505_P08 (ARB Rear Torsion Bar Insert Support 2)

			(2x) SU26_A0803_P01 (Midpoint Post Half)
--	--	--	---

Table 11: Torsion Bar Assembly Components

Torsion Bar Assembly Procedure:

1. **Assemble jig plate:** Install the midpoint support onto the jig plate and tightly thread it in place.
2. **Assemble jig plate:** Install the two torsion bar insert supports onto the jig plate at the labeled positions. Secure the posts to the plate.
3. **Install inserts into tubes:** Insert the torsion bar inserts into each side of the torsion bar tube.
4. **Position the assembly on the jig plate:** Place the completed torsion bar assembly onto the two insert supports. Install both Torsion Bar Insert Support 2 components and tighten all hardware.
5. **Tighten the midpoint support:** Align the tube at the midpoint support and fully tighten the midpoint support hardware to secure the assembly.
6. **Final checks before welding:** Confirm all fasteners are tightened and ensure the assembly has been assembled according to the assembly drawing.
7. **Weld the assembly:** Weld the inserts into the tube according to the specified weld procedure.
8. **Allow the assembly to cool:** Let the welded assembly cool to room temperature before handling.
9. **Remove the assembly from the fixture:** Carefully remove the torsion bar assembly from the jig plate.
10. **Prepare the assembly for coating:** Clean the assembly and remove any weld residue, oil, dust, or other contaminants.
11. **Apply primer:** Apply 2–3 light coats of 15 oz. Flat Gray Primer Spray, allowing the recommended flash and dry times before painting.
12. **Apply spray paint:** Apply 2–3 light coats of Rust-Oleum Ultra Matte Black Acrylic Enamel 2X Spray Paint 12 oz, allowing the recommended drying time between coats.
13. **Perform final inspection:** Confirm that all welds, coatings, and assembly features meet the drawing and quality requirements.

6.4.2 ARB Blade Assembly

This section covers the assembly of the Front and Rear Anti-Roll Bar Blades with its associated fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 2 blade assemblies.

Assembly quantity needed:

- (1x) FARB Blade ASSY

- (1x) RARB Blade ASSY

Relevant Assembly Drawings:

- SU-A5006-AA_(FARB BLADE)
- SU-A5006-AA_(RARB BLADE)

The table below indicates the quantity needed per blade assembly.

ID	Blade	Fasteners
1	(1x)SU-A5006-AA-00003-AA (FARB Blade)	(1x) McMaster 90296A202 (1x) Aircraft Spruce AN3-3A (1x) Aircraft Spruce AN960-10 (1x) McMaster 918314006
2	(1x) SU-A5006-AA-00011-AA (RARB Blade)	(1x) McMaster 90296A202 (1x) Aircraft Spruce AN3-3A (1x) Aircraft Spruce AN960-10 (1x) McMaster 918314006

Table 12: ARB Blade Assembly Components

ARB Blade Assembly Procedure:

1. **Install the HeliCoil insert:** Install the distorted thread HeliCoil insert into the bottom of the blade. Ensure the insert is fully seated and installed square to the threaded hole.
2. **Install the bolt and washer:** Place the washer onto the bolt, then hand-tighten the bolt into the HeliCoil insert. Do not fully torque at this stage unless instructed by the final assembly specification.
3. **Install the blade tip Nyloc nut:** Hand-tighten the Nyloc nut onto the blade tip hardware.
4. **Final inspection:** Confirm that the HeliCoil insert is properly seated, the washer is installed under the bolt head, and the Nyloc nut is correctly engaged on the blade tip.

6.4.3 ARB Adapter Assembly

This section covers the assembly of the Front and Rear Anti-Roll Bar Adapters with its associated fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 2 adapter assemblies.

Assembly quantity needed:

- (1x) FARB Adapter ASSY
- (1x) RARB Adapter ASSY

Relevant Assembly Drawings:

- SU-A5006-AA_(FARB ADAPTER)
- SU-A5006-AA_(RARB ANTI-ROLL)

The table below indicates the quantity needed per adapter assembly.

ID	Adapter	Fasteners
1	(1x) SU-A5006-AA-00004-AA (FARB Adapter)	(1x) McMaster 92196A194 (1x) McMaster 90633A009
2	(1x) SU-A5006-AA-00012-AA (RARB Adapter)	(1x) McMaster 92196A194 (1x) McMaster 90633A009

Table 13: ARB Adapter Assembly Components

Adapter Assembly Procedure:

1. **Install the bolt and Nyloc:** Place the bolt through the clamping side of the adapter. Hand-tighten the Nyloc nut onto the opposite side of the adapter. See the assembly drawing for proper orientation.

6.4.4 ARB Mount Assembly

This section covers the assembly of the Front and Rear Anti-Roll Bar mounts with their associated peripherals and fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 2 mount assemblies.

Assembly quantity needed:

- (1x) FARB Mount ASSY
- (1x) RARB Mount ASSY

Relevant Assembly Drawings:

- SU-A5006-AA_(FARB MOUNT)
- SU-A5006-AA_(RARB MOUNT)

The table below indicates the quantity needed per mount assembly.

ID	Adapter	Peripherals	Fasteners
1	(1x) SU-A5006-AA-00005-AA (FARB Mount)	(1x) McMaster 1677K343 (1x) McMaster 9410T34 (1x) SU-A5006-AA-00006-AA (FARB Mount Backing Plate)	(1x) McMaster 92196A194 (1x) McMaster 90633A009
2	(1x) SU-A5006-AA-00013-AA (RARB Mount)	(1x) McMaster 6338K425 (1x) McMaster 9410T35	(1x) McMaster 92196A194 (1x) McMaster 90633A009

		(1x) SU-A5006-AA-00014-AA (RARB Mount Backing Plate)	
--	--	---	--

Table 14: ARB Mount Assembly Components

Front ARB Mount Assembly Procedure:

1. **Install the bronze bushing:** Arbor press the bronze bushing into the adapter on the correct side, as shown in the assembly drawing. Ensure the bushing is fully seated and installed square to the adapter face.
2. **Install the mount hardware:** Insert the bolts with washers through the mount, following the orientation shown in the assembly drawing.
3. **Attach the backing plate:** Position the backing plate onto the protruding bolts and finger-tighten the bolts. Do not fully torque at this stage unless instructed by the final assembly specification.
4. **Final orientation check:** Confirm that the bronze bushing, mount, bolts, washers, and backing plate are installed in the correct orientation according to the assembly drawing.

Rear ARB Mount Assembly Procedure:

1. **Install the bronze bushing:** Install the bronze bushing into the mount, following the orientation shown in the assembly drawing. Ensure the bushing is fully seated and square to the mounting face.
2. **Install the mount bolt and backing plate:** Position the backing plate underneath the bolt heads, then insert the bolts through the mount as shown in the assembly drawing.
3. **Install the Nyloc nuts:** Install the Nyloc nuts onto the bolts on the opposite side of the mount and finger-tighten them. Do not fully torque at this stage.
4. **Final orientation check:** Confirm that the bronze bushing, backing plate, bolts, and Nyloc nuts are installed in the correct orientation according to the assembly drawing.

6.4.5 ARB Drop Link Assembly

This section covers the assembly of the Front and Rear Anti-Roll Bar Drop Links with their associated peripherals and fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 2 unique drop link assemblies.

Assembly quantity needed:

- (1x) FARB Drop Link ASSY
- (1x) RARB Drop Link ASSY

Relevant Assembly Drawings:

- SU-A5006-AA_(FARB DROP LINK)
- SU-A5006-AA_(RARB DROP LINK)

The table below indicates the quantity needed per drop link.

ID	Drop Link	Rod Ends + Check Nuts
1	(1x) SU-A5006-AA-00008-AA (FARB Drop Link)	(1x) McMaster 60645K611 (1x) McMaster 60645K612 (1x) McMaster 91841A007 (1x) McMaster 94450A515
2	(1x) SU-A5006-AA-00015-AA (RARB Drop Link)	(1x) McMaster 60645K611 (1x) McMaster 60645K612 (1x) McMaster 91841A007 (1x) McMaster 94450A515

Table 15: ARB Drop Link Assembly Components

ARB Drop Link Assembly Procedure:

1. **Install the RH check nut:** Thread the right-hand check nut onto the right-hand rod end.
2. **Install the LH check nut:** Thread the left-hand check nut onto the left-hand rod end.
3. **Install the RH rod end:** Thread the right-hand rod end into the right-hand threaded side of the drop link.
4. **Install the LH rod end:** Thread the left-hand rod end into the left-hand threaded side of the drop link.
5. **Set rod end position:** Adjust the rod ends as required so that the drop link rod end has 4 threads showing and rod end orientation matches the assembly drawing or setup specification.
6. **Tighten the check nuts:** Tighten both check nuts to 20 in-lbs against the drop link to lock the rod ends in position.

6.4.6 Front Anti-Roll Bar Assembly

This section covers the complete assembly of the Front Anti-Roll bar (FARB) using the sub-assemblies from above. Results in a total of 1 unique anti-roll bar assembly.

Assembly quantity needed:

- (1x) FARB ASSY

Relevant Assembly Drawings:

- SU-A5006-AA_(FRONT ANTI-ROLL)

The table below indicates the quantity needed per FARB Assembly.

ID	Sub-Assembly
1	(1x) FARB Torsion Bar ASSY
2	(2x) FARB Blade ASSY

3	(2x) FARB Adapter ASSY
4	(2x) FARB Mount ASSY
5	(2x) FARB Drop Link ASSY
6	(1x) FARB Shroud

Table 16: FARB Assembly Components

1. **Install the torsion bar into the mounts:** Insert the FARB torsion bar assembly through the FARB mount assemblies, following the orientation shown in the assembly drawing. Ensure the torsion bar is properly seated and able to rotate freely in the mounts.
2. **Install the shaft collars:** Slide the two shaft collars onto the torsion bar. Position the shaft collars at the specified locations shown in the assembly drawing or setup specification, then tighten the shaft collars to hold the torsion bar in position.
3. **Install the adapters:** Slide one FARB adapter assembly onto each end of the torsion bar. Position the adapters according to the assembly drawing, then tighten the adapter clamp hardware to secure each adapter to the torsion bar.
4. **Install the blades:** Insert one FARB blade assembly into each adapter. Tighten the bolt through the backside of the adapter into the bottom of each blade to secure the blade to the adapter.
5. **Install the drop links:** Attach one FARB drop link assembly to each blade tip. Install and tighten the Nyloc nut at each blade tip to secure the drop link to the blade.
6. **Install the FARB shroud:** Place the FARB shroud over the torsion bar, following the orientation shown in the assembly drawing.
7. **Final inspection:** Confirm that both mounts, shaft collars, adapters, blades, drop links, and the shroud are installed in the correct orientation according to the assembly drawing. Verify that all clamping hardware, blade bolts, and Nyloc nuts are tightened as required by the final assembly specification.

6.4.7 Rear Anti-Roll Bar Assembly

This section covers the complete assembly of the rear anti-roll bar (RARB) using the sub-assemblies from above. Results in a total of 1 unique anti-roll bar assembly.

Assembly quantity needed:

- (1x) RARB ASSY

Relevant Assembly Drawings:

- SU-A5006-AA_(REAR ANTI-ROLL)

The table below indicates the quantity needed per RARB Assembly.

ID	Sub-Assembly
----	--------------

1	(1x) RARB Torsion Bar ASSY
2	(2x) RARB Blade ASSY
3	(2x) RARB Adapter ASSY
4	(2x) RARB Mount ASSY
5	(2x) RARB Drop Link ASSY

Table 17: RARB Assembly Components

1. **Install the torsion bar into the mounts:** Insert the RARB torsion bar assembly through the RARB mount assemblies, following the orientation shown in the assembly drawing. Ensure the torsion bar is properly seated and able to rotate freely in the mounts.
2. **Install the shaft collars:** Slide the two shaft collars onto the torsion bar. Position the shaft collars at the specified locations shown in the assembly drawing or setup specification, then tighten the shaft collars to hold the torsion bar in position.
3. **Install the adapters:** Slide one RARB adapter assembly onto each end of the torsion bar. Position the adapters according to the assembly drawing, then tighten the adapter clamp hardware to secure each adapter to the torsion bar.
4. **Install the blades:** Insert one RARB blade assembly into each adapter. Tighten the bolt through the backside of the adapter into the bottom of each blade to secure the blade to the adapter.
5. **Install the drop links:** Attach one RARB drop link assembly to each blade tip. Install and tighten the Nyloc nut at each blade tip to secure the drop link to the blade.
6. **Final inspection:** Confirm that both mounts, shaft collars, adapters, blades, drop links, and the shroud are installed in the correct orientation according to the assembly drawing. Verify that all clamping hardware, blade bolts, and Nyloc nuts are tightened as required by the final assembly specification.

6.5 Uprights

This section covers the assembly of the suspension uprights with their associated peripherals and fasteners. For each line item and its associated components, follow the outlined assembly procedure. Results in a total of 2 unique upright assemblies.

Assembly quantity needed:

- (2x) Front Upright
- (2x) Rear Upright

Relevant Assembly Drawings:

- SU-A5007-AA-FRONT
- SU-A5007-AA-REAR

The table below indicates the quantity needed per upright assembly.

ID	Upright	Cones	Peripherals	Fasteners
1	(1x) SU-A5007-AA-0000 1-AA (Front Upright)	(1x) SU-A5002-AA-00015 -AA (SOC Thru Cone) (1x) SU-A5002-AA-00016 -AA (SOC Hat Cone) (1x) SU-A5002-AA-00009 -AA (SUC AN3 Thru Cone) (1x) SU-A5002-AA-00010 -AA (SUC AN3 Hat Cone)	(1x) Outboard Clevis ASSY (See Section 6.2.4) (1x) SU-A5008-AA-00001 -AA (Camber Shim 0.25")	(1x) Aircraft Spruce AN4-13A (2x) Aircraft Spruce AN960-416 (2x) Aircraft Spruce AN365-428A (1x) Aircraft Spruce AN3-13A (2x) Aircraft Spruce AN960-10 (1x) Aircraft Spruce AN365-428A
2	(1x) SU-A5007-AA-0000 2-AA (Rear Upright)	(1x) SU-A5002-AA-00017 -AA (RLBJ Thru Cone) (1x) SU-A5002-AA-00016 -AA (SOC Hat Cone) (1x) SU-A5002-AA-00009 -AA (SUC AN3 Thru Cone) (1x) SU-A5002-AA-00010 -AA (SUC AN3 Hat Cone)	(1x) Outboard Clevis ASSY (See Section 6.2.4) (1x) SU-A5008-AA-00001 -AA (Camber Shim 0.25")	(1x) Aircraft Spruce AN4-13A (2x) Aircraft Spruce AN960-416 (2x) Aircraft Spruce AN365-428A (1x) Aircraft Spruce AN3-13A (2x) Aircraft Spruce AN960-10 (1x) Aircraft Spruce AN365-428A

Table 18: Upright Assembly Components

Upright Assembly Procedure:

1. **Position the outboard clevis assembly:** Place the outboard clevis assembly onto the upright, following the orientation shown in the assembly drawing.
2. **Install the camber shim:** Place the camber shim between the outboard clevis assembly and the upright. Ensure the shim is fully seated and aligned with the mounting holes.
3. **Install and tighten the clevis mounting bolts:** Insert the clevis mounting bolts through the outboard clevis, camber shim, and upright. Install the required washers and Nyloc nuts, then tighten the bolts to 40 in-lbs to secure the outboard clevis assembly to the upright.
4. **Assemble the lower ball joint stackup:** Install the thru cone and SOC hat cone into the lower ball joint stackup as shown in the assembly drawing.
5. **Install the lower ball joint hardware:** Insert the AN4-13A bolt through the lower ball joint stackup. Install the washers and Nyloc nut as shown in the assembly drawing. Hand tighten the stackup.
6. **Assemble the tie rod stackup:** Install the SUC-AN3 thru cone and hat cone into the tie rod gusset as shown in the assembly drawing. Install the AN3 bolt, washers, and Nyloc as shown in the assembly drawing. Hand tighten the stackup.
7. **Final inspection:** Confirm that the outboard clevis, camber shim, lower ball joint cones and stackup, and tie rod cones and stackup are installed in the correct orientation according to the assembly drawing. Verify that all hardware is tightened as required by the final assembly specification.

6.6 Shocks and Springs

This section covers the assembly of the shocks and springs with their associated peripherals and fasteners. Results in a total of 1 unique drop shock and spring assembly.

Assembly quantity needed:

- (1x) Shock and Spring assembly

Relevant Assembly Drawings:

- SU-A5004-AA_(SHOCKS AND SPRINGS)

The table below indicates the quantity needed per shock and spring assembly.

ID	Components
1	(1x) Öhlins TTX25 MKII Dampers
2	(1x) Hyperco FSAE Coil Spring

Table 19: Shocks and Springs Assembly Components

Using the line items listed above:

1. **Remove the compression plate:** Remove the compression plate from the damper, following the orientation shown in the assembly drawing.

2. **Install the spring:** Slide the spring onto the damper body and seat it against the lower spring perch.
3. **Reinstall the compression plate:** Reinstall the compression plate onto the damper, ensuring it is seated properly against the spring.
4. **Secure the spring:** Install the damper nut and tighten it to secure the spring and compression plate to the damper.
5. **Final inspection:** Confirm that the spring is seated correctly on the damper, the compression plate is properly installed, and the damper nut is securely tightened.

7. Quality Control and Inspection

Inspect all manufactured components against the associated engineering drawings and BOM requirements prior to assembly or release. Verify all critical dimensions, tolerances, hole locations, thread specifications, and surface finishes in accordance with the drawing requirements. Inspect all tapped holes with the appropriate GO/NO-GO thread plug gauge.

Follow important inspection instructions for the following parts:

- Rockers: Ensure smooth movement of needle roller bearing within the rocker
- Torsion Bar: Ensure smooth movement in the mount bushing
- Cones: Ensure cones are slip fit in the bores and can move in and out by hand.
- Links (A-Arms): Ensure all A-arms install onto the assembled jig plate as a slip fit, without the need for force or inducing any bending.

8. Deliverables

The following line items, subassemblies, and quantities are delivered to Cornell FSAE Racing for final assembly and integration onto the chassis.

Category	ID	Delivered Assembly	QTY
Links	1	Front Upper A-Arm LHS	1
	2	Front Upper A-Arm RHS	1
	3	Front Lower A-Arm	2
	4	Rear Upper A-Arm LHS	1
	5	Rear Upper A-Arm RHS	1
	6	Rear Lower A-Arm	2
	7	Toe Link	2

Clevises and Cones	8	SUC-AN3 Clevis ASSY	8
	9	FLF Clevis ASSY	2
	10	RUF Clevis ASSY	2
	11	RUR Clevis ASSY	2
	12	RLR Double Clevis ASSY	2
	13	Shock Clevis ASSY	2
	14	Rocker Clevis ASSY	4
	15	Outboard Clevis ASSY	4
Rockers	16	Front Rocker ASSY	2
	17	Rear Rocker ASSY	2
Anti-Roll	18	Front Anti-Roll ASSY	1
	19	Rear Anti-Roll ASSY	1
Pushrods	20	Front Pushrod ASSY	2
	21	Rear Pushrod ASSY	2
Shocks and Springs	22	Shocks and Springs ASSY	4
Uprights	23	Front Uprights ASSY	2
	24	Rear Uprights ASSY	2

Table 20: Deliverables

9. Timeline

The following schedule represents Cornell Racing's target delivery timeline. Moll Machining may propose alternate schedules as part of their quotation; however, delivery of all assemblies listed in Section 8 within 11 weeks of purchase order release is requested. Suppliers shall account for material lead times, inspection requirements, holiday shutdowns, packaging, and shipping transit time when developing their manufacturing schedule.

Week 0: RFQ Submitted by Cornell Racing to Moll Machining, RFQ Reviewed; Quote completed and sent to Cornell Racing

Week 1: Purchase order released and material procurement initiated. Payment from Cornell Racing Received.

Week 2–3: Raw materials, purchased components, and consumables procured. Manufacturing planning, fixturing preparation, and material verification completed.

Week 4–5: Jig and fixture components manufactured. Tube preparation, laser-cut components, and lathe-manufactured components are completed. Pushrod assemblies should be completed and available for strain gauge installation by the end of Week 4.

Week 6–7: CNC-machined components completed, including adapters, clevises, rockers, anti-roll bar components, and uprights.

Week 8: Welding, post-processing, coating, and bearing installation operations completed.

Week 9: Subassembly operations completed, including links, clevises, rockers, anti-roll bars, uprights, and shock assemblies.

Week 10: Final inspection, quality control, documentation review, and packaging completed.

Week 11: Suspension system shipped and delivered to Cornell Racing.

Bill Of Materials

Line	Part #	Assembly/Component	Description	Quantity	Procurement Type	Vendor	Material
1	SU-A5001-AA	Links:					
2	SU-A5001-AA-00001-AA	TL Tube	Tube for Toe Links	2	Manufacture	Moll Machining	4130 Steel Tube
3	SU-A5001-AA-00002-AA	FUF Tube	Front Upper Front Link Tube	2	Manufacture	Moll Machining	4130 Steel Tube
4	SU-A5001-AA-00003-AA	FUR Tube	Front Upper Rear Link Tube	2	Manufacture	Moll Machining	4130 Steel Tube
5	SU-A5001-AA-00004-AA	FLF Tube	Front Lower Front Link Tube	2	Manufacture	Moll Machining	4130 Steel Tube
6	SU-A5001-AA-00005-AA	FLR Tube	Front Lower Rear Link Tube	2	Manufacture	Moll Machining	4130 Steel Tube
7	SU-A5001-AA-00006-AA	RUF Tube	Rear Upper Front Link Tube	2	Manufacture	Moll Machining	4130 Steel Tube
8	SU-A5001-AA-00007-AA	RUR Tube	Rear Upper Rear Link Tube	2	Manufacture	Moll Machining	4130 Steel Tube
9	SU-A5001-AA-00008-AA	RLF Tube	Rear Lower Front Link Tube	2	Manufacture	Moll Machining	4130 Steel Tube
10	SU-A5001-AA-00009-AA	RLR Tube	Rear Lower Rear Link Tube	2	Manufacture	Moll Machining	4130 Steel Tube
11	SU-A5001-AA-00010-AA	TL Insert LH	Threaded Insert for Toe Link (LH 10-32 UNF)	2	Manufacture	Moll Machining	4130 Steel Hex Bar
12	SU-A5001-AA-00011-AA	TL Insert RH	Threaded Insert for Toe Link (RH 10-32 UNF)	2	Manufacture	Moll Machining	4130 Steel Hex Bar
13	SU-A5001-AA-00012-AA	FU Outboard Adapter LHS	Front Upper Outboard Link Adapter for Left Hand Side	1	Manufacture	Moll Machining	4130 Steel Billet
14	SU-A5001-AA-00013-AA	FU Outboard Adapter RHS	Front Upper Outboard Link Adapter for Right Hand Side	1	Manufacture	Moll Machining	4130 Steel Billet
15	SU-A5001-AA-00014-AA	RU Outboard Adapter LHS	Rear Upper Outboard Link Adapter for Left Hand Side	1	Manufacture	Moll Machining	4130 Steel Billet
16	SU-A5001-AA-00015-AA	RU Outboard Adapter RHS	Rear Upper Outboard Link Adapter for Right Hand Side	1	Manufacture	Moll Machining	4130 Steel Billet
17	SU-A5001-AA-00016-AA	FL Outboard Adapter	Front Lower Outboard Adapter	2	Manufacture	Moll Machining	4130 Steel Billet
18	SU-A5001-AA-00017-AA	RL Outboard Adapter	Rear Lower Outboard Adapter	2	Manufacture	Moll Machining	4130 Steel Billet
19	SU-A5001-AA-00018-AA	FU Inboard Adapter	Front Upper Inboard Adapter	4	Manufacture	Moll Machining	4130 Steel Billet
20	SU-A5001-AA-00019-AA	RU Inboard Adapter	Rear Upper Inboard Adapter	4	Manufacture	Moll Machining	4130 Steel Billet
21	SU-A5001-AA-00020-AA	FLF Inboard Adapter	Front Lower Front Inboard Adapter	2	Manufacture	Moll Machining	4130 Steel Billet
22	SU-A5001-AA-00021-AA	FLR Inboard Adapter	Front Lower Rear Inboard Adapter	2	Manufacture	Moll Machining	4130 Steel Billet
23	SU-A5001-AA-00022-AA	RLF Inboard Adapter	Rear Lower Front Inboard Adapter	2	Manufacture	Moll Machining	4130 Steel Billet
24	SU-A5001-AA-00023-AA	RLR Inboard Adapter	Rear Lower Rear Inboard Adapter	2	Manufacture	Moll Machining	4130 Steel Billet
25	SU26_A08	Jig Plate Baseplate	Main aluminum baseplate for suspension link jig assembly	1	Manufacture	Moll Machining	AL 5052 Sheet
26	SU-A5001-AA-00024-AA	Tab Cone	Tab Cone for all Upper Adapters Stack Ups	1	Manufacture	Moll Machining	AL 7075 Round Bar
27	SU26_A0802_P01	AN3 Bearing Post	AN3 locating/bearing post for jig plate fixturing	2	Manufacture	Moll Machining	AL 6061 Round Bar
28	SU26_A0802_P02	AN4 Bearing Post	AN4 locating/bearing post for jig plate fixturing	2	Manufacture	Moll Machining	AL 6061 Round Bar
29	SU26_A0803_P01	Midpoint Post (Half)	Midpoint support post halves for tube support during welding	2	Manufacture	Moll Machining	AL 6061 Billet
30	SU26_A0803_P02	Midpoint Shim	Shim used for midpoint support height adjustment	1	Manufacture	Moll Machining	AL 6061 Billet
31	SU25_A0804_P01	AN3 Custom Washer	Washer for AN3 jig plate fixturing hardware	2	Manufacture	Moll Machining	AL 6061 Round Bar
32	SU25_A0804_P02	AN4 Custom Washer	Washer for AN4 jig plate fixturing hardware	2	Manufacture	Manufacture	AL 6061 Round Bar
33	SU25_A0804_P03	AN4 Custom Washer (Large)	Large-profile washer for AN4 jig plate fixturing hardware	2	Manufacture	Moll Machining	AL 6061 Round Bar
34	Pegasus Auto Racing 3060-3-R	RH Rod Ends for Toe and Steering Links	Rod End, 3/16 Bore x 10-32 Right Hand Male Thread, PTFE	2	Purchase	Pegasus Auto Racing	--
35	Pegasus Auto Racing 3060-3-L	LH Rod Ends for Toe and Steering Links	Rod End, 3/16 Bore x 10-32 Left Hand Male Thread, PTFE Lined	2	Purchase	Pegasus Auto Racing	--
36	McMaster 63195K11	Bearings for Inboard Adapters	Swivel Joint, Lubrication-Free, 3/16" ID, 9/16" OD	16	Purchase	McMaster Carr	--
37	McMaster 63195K12	Bearings for Outboard Adapters	Swivel Joint, Lubrication-Free, 1/4" ID, 21/32" OD	8	Purchase	McMaster Carr	--
38	Aircraft Spruce AN315-3R	Right-hand check nut for toe links	Nut, Full Hex AN315-3R	2	Purchase	Aircraft Spruce	--
39	Aircraft Spruce AN315-3L	Left-hand check nut for toe links	Nut, Full Hex AN315-3L	2	Purchase	Aircraft Spruce	--
40	Aircraft Spruce AN4-11A	Bolt for push link retention stack up	Bolt Undrilled AN4-11A	4	Purchase	Aircraft Spruce	--
41	Aircraft Spruce AN365-428A	Nylock nut for push link retention stack up	MS21044N4 Elastic Stop Nut	4	Purchase	Aircraft Spruce	--
42	Aircraft Spruce AN960-416	Washer for push link retention stack up	Washer, Flat AN960-416	4	Purchase	Aircraft Spruce	--
43	McMaster 92314A832	Main AN3 jig plate fixturing bolt	18-8 Stainless Steel Hex Head Screw, 10-32 Thread Size, 7/8" Long	9	Purchase	McMaster Carr	--
44	McMaster 92240A108	Main AN4 jig plate fixturing bolt	18-8 Stainless Steel Hex Head Screw, 1/4"-28 Thread Size, Fully Threaded, 1" Long	2	Purchase	McMaster Carr	--
45	McMaster 92314A838	Midpoint support fixturing bolt	18-8 Stainless Steel Hex Head Screw, 10-32 Thread Size, 2" Long	1	Purchase	McMaster Carr	--
46	McMaster 91841A195	RH hex nut	Corrosion-Resistant 18-8 Stainless Steel Hex Nuts, 10-32 Thread Size	6	Purchase	McMaster Carr	--
47	McMaster 94450A521	LH hex nut	18-8 Stainless Steel Left-Hand-Thread Thin-Profile Hex Nut, 10-32 Thread Size	1	Purchase	McMaster Carr	--
48	McMaster 60645K112	Left-hand rod end	Ball Joint Rod End, 10-32 Left Hand Thread	1	Purchase	McMaster Carr	--
49	McMaster 60645K111	Right-hand rod end	Ball Joint Rod End, 10-32 Right Hand Thread	1	Purchase	McMaster Carr	--
50	McMaster 92240A108	Right-hand threaded AN4 hex bolt	18-8 Stainless Steel Hex Head Screw, 1/4"-28 Thread Size, Fully Threaded, 1" Long	1	Purchase	McMaster Carr	--
51	McMaster 60645K122	Left-hand rod end	Ball Joint Rod End, 1/4"-28 Left Hand Thread	1	Purchase	McMaster Carr	--
52	McMaster 60645K121	Right-hand rod end	Ball Joint Rod End, 1/4"-28 Right Hand Thread	1	Purchase	McMaster Carr	--
53	Autozone 372699	Spray Paint	Rust-Oleum Ultra Matte Black Acrylic Enamel 2X Spray Paint 12Oz	1	Purchase	Autozone	--
54	Home Depot 7582838	Spray Paint Primer	15 oz. Flat Gray Primer Spray	1	Purchase	Home Depot	--
55	SU-A5002-AA	Clevis + Cones:					
56	SU-A5002-AA-00001-AA	SUC-AN3 Clevis	"Somewhat Universal Clevis" w/ AN3-size mounting holes	8	Manufacture	Moll Machining	AL 7075 Billet
57	SU-A5002-AA-00002-AA	FLF Clevis	Front Lower Front Clevis	2	Manufacture	Moll Machining	AL 7075 Billet
58	SU-A5002-AA-00003-AA	RUF Clevis	Rear Upper Front Clevis	2	Manufacture	Moll Machining	AL 7075 Billet
59	SU-A5002-AA-00004-AA	RUR Clevis	Rear Upper Rear Clevis	2	Manufacture	Moll Machining	AL 7075 Billet
60	SU-A5002-AA-00005-AA	RLR Double Clevis	Rear Lower Rear Clevis	2	Manufacture	Moll Machining	AL 7075 Billet
61	SU-A5002-AA-00006-AA	Shock Clevis	Shock Clevis	2	Manufacture	Moll Machining	AL 7075 Billet
62	SU-A5002-AA-00007-AA	Rocker Clevis	Rocker Clevis	4	Manufacture	Moll Machining	AL 7075 Billet
63	SU-A5002-AA-00008-AA	Outboard Clevis	Outboard Clevis	4	Manufacture	Moll Machining	AL 7075 Billet
64	SU-A5002-AA-00009-AA	SUC AN3 Thru Cone	"Somewhat Universal Clevis" centering clevis pin Cone	20	Manufacture	Moll Machining	AL 7075 Round Bar
65	SU-A5002-AA-00010-AA	SUC AN3 Hat Cone	"Somewhat Universal Clevis" centering link bearing Cone	20	Manufacture	Moll Machining	AL 7075 Round Bar
66	SU-A5002-AA-00011-AA	Toe Link Thru Cone	"Somewhat Universal Clevis" centering rod end Cone	2	Manufacture	Moll Machining	AL 7075 Round Bar
67	SU-A5002-AA-00012-AA	Toe Link Hat Cone	"Somewhat Universal Clevis" centering rod end Cone	2	Manufacture	Moll Machining	AL 7075 Round Bar
68	SU-A5002-AA-00013-AA	Shock Clevis Thru Cone	"Somewhat Universal Clevis" centering shock rod end Cone	4	Manufacture	Moll Machining	AL 7075 Round Bar

69	SU-A5002-AA-00014-AA	Shock Clevis Hat Cone	"Somewhat Universal Clevis" centering shock rod end Cone	4	Manufacture	Moll Machining	AL 7075 Round Bar
70	SU-A5002-AA-00015-AA	SOC Thru Cone	"Somewhat Universal Clevis" centering rod end Cone	2	Manufacture	Moll Machining	AL 7075 Round Bar
71	SU-A5002-AA-00016-AA	SOC Hat Cone	"Somewhat Universal Clevis" centering link bearing Cone	8	Manufacture	Moll Machining	AL 7075 Round Bar
72	SU-A5002-AA-00017-AA	RLBJ Thru Cone	"Somewhat Universal Clevis" centering link bearing Cone	2	Manufacture	Moll Machining	AL 7075 Round Bar
73	SU-A5002-AA-00018-AA	Outboard Clevis Thru Cone	"Somewhat Universal Clevis" centering link bearing Cone	4	Manufacture	Moll Machining	AL 7075 Round Bar
74	SU25_A03_P11	Outboard Clevis Hat Cone	"Somewhat Universal Clevis" centering link bearing Cone	4	Manufacture	Moll Machining	AL 7075 Round Bar
75	SU-A5002-AA-00019-AA	SUC-AN3 Clevis Backing Plate	Backing plate for SUC-AN3 Clevis	8	Manufacture	Moll Machining	1018 Steel Sheet
76	SU-A5002-AA-00020-AA	FLF Clevis Backing Plate	Front Lower Front Clevis Backing Plate	2	Manufacture	Moll Machining	1018 Steel Sheet
77	SU-A5002-AA-00021-AA	RLR Double Clevis Backing Plate	Rear Lower Rear Double Clevis Backing Plate	2	Manufacture	Moll Machining	1018 Steel Sheet
78	SU-A5002-AA-00022-AA	RUF Clevis Backing Plate	Rear Upper Front Clevis Backing Plate	2	Manufacture	Moll Machining	1018 Steel Sheet
79	SU-A5002-AA-00023-AA	RUR Clevis Backing Plate	Rear Upper Rear Clevis Backing Plate	2	Manufacture	Moll Machining	1018 Steel Sheet
80	SU-A5002-AA-00024-AA	Shock Clevis Backing Plate	Shock Clevis Backing Plate	2	Manufacture	Moll Machining	1018 Steel Sheet
81	SU-A5002-AA-00025-AA	Rocker Clevis Backing Plate	Rocker Clevis Backing Plate	4	Manufacture	Moll Machining	1018 Steel Sheet
82	Aircraft Spruce AN3-13A	Clevis pin	Bolt Undrilled AN3-13A	36	Purchase	Aircraft Spruce	--
83	Aircraft Spruce AN3-13A	Mounting clevises bolt	Bolt Undrilled AN3-13A	40	Purchase	Aircraft Spruce	--
84	McMaster 91310A544	Shocks to clevises mounting bolts	High-Strength Class 10.9 Steel Hex Head Screw, M8 x 1.25 mm Thread Size, 45 mm Long, Partially Threaded	4	Purchase	McMaster	--
85	Aircraft Spruce AN365-1032A	Locking and fastening AN3 hardware	MS21044N3 Elastic Stop Nut	20	Purchase	Aircraft Spruce	--
86	McMaster 94645A210	Locking and fastening M8 hardware	High-Strength Steel Nylon-Insert Locknut, Class 10, Zinc Plated, M8 x 1.25 mm Thread, 8 mm High	4	Purchase	McMaster	--
87	Aircraft Spruce AN960-10	AN3 Washer	Washer, Flat AN960-10	80	Purchase	Aircraft Spruce	--
88	McMaster 98687A137	M8 Washer	Steel Undersized Washers for M8 Screw Size	4	Purchase	McMaster	--
89	Aircraft Spruce AN4-13A	Outboard clevis pin attachment bolt	Bolt Undrilled AN4-13A	4	Purchase	Aircraft Spruce	--
90	McMaster 97525A300	Rivet	18-8 Stainless Steel Blind Rivets, Domed Head, 3/32" Diameter, for 0.020"-0.125" Material Thickness	48	Purchase	McMaster	--
91	SU-A5003-AA	Push Rods:					
92	SU-A5003-AA-00001-AA	FPL Tube	Front push link tube	2	Manufacture	Moll Machining	4130 Steel Tube
93	SU-A5003-AA-00002-AA	RPL Tube	Rear push link tube	2	Manufacture	Moll Machining	4130 Steel Tube
94	SU-A5003-AA-00003-AA	FPL RH Insert	Front push link Right Hand threaded insert	2	Manufacture	Moll Machining	4130 Steel Hex Bar
95	SU-A5003-AA-00004-AA	FPL LH Insert	Front push link Left Hand threaded insert	2	Manufacture	Moll Machining	4130 Steel Hex Bar
96	SU-A5003-AA-00005-AA	RPL RH Insert	Rear push link Right Hand insert	2	Manufacture	Moll Machining	4130 Steel Hex Bar
97	SU-A5003-AA-00006-AA	RPL LH Insert	Rear push link Left Hand insert	2	Manufacture	Moll Machining	4130 Steel Hex Bar
98	McMaster 2458K121	Right-hand rod end for front pushrods	Lubrication-Free Ball Joint Rod End, Carbon Fiber Insert, 1/4"-28 Right Hand Thread	4	Purchase	McMaster Carr	--
99	McMaster 2458K122	Left-hand rod end for front pushrods	Lubrication-Free Ball Joint Rod End, Carbon Fiber Insert, 1/4"-28 Left Hand Thread	4	Purchase	McMaster Carr	--
100	Aircraft Spruce AN315-4R	Jam/check nuts for rod end locking	Nut, Full Hex AN315-4R	4	Purchase	Aircraft Spruce	--
101	Aircraft Spruce AN315-4L	Jam/check nuts for rod end locking	Nut AN315-4L	4	Purchase	Aircraft Spruce	--
102	SU-A5004-AA	Shocks + Springs:					
103	SU26_A0603_P04	Shockpot Mount (Clevis Side)	Linear potentiometer rod end mount clevis side	4	Manufacture	Moll Machining	AL 6061 Hex Bar
104	SU26_A0603_P03	Shockpot Mount (Rocker Side)	Linear potentiometer rod end mount rocker side	4	Manufacture	Moll Machining	AL 6061 Hex Bar
105	SU-A5004-AA-00001-AA	Double-adjustable suspension damper (TTX25 series)	Ohlins TTX 25 mkII FSAE Formula SAE Shock	4	Purchase	Performance Shock Inc.	--
106	SU-A5004-AA-00002-AA	Linear-rate steel coil springs (150 pounds per in)	Hyperco Formula SAE 4.400 in. Coilover Spring 18FS150	2	Purchase	Summit Racing	--
107	SU-A5004-AA-00002-AA	Linear-rate steel coil springs (175 pounds per in)	Hyperco Formula SAE 4.400 in. Coilover Spring 18FS175	2	Purchase	Summit Racing	--
108	BMI Surplus SKU 72452	Linear potentiometer sensor for Shock Dyno	Shock Dyno LVDT sensor	2	Purchase	BMI Surplus	--
109	SU-A5005-AA	Rockers:					
110	SU-A5005-AA-00001-AA	Front Rocker	Front rocker arm bellcrank	2	Manufacture	Moll Machining	AL 7075 Billet
111	SU-A5005-AA-00002-AA	Rear Rocker	Rear rocker arm bellcrank	2	Manufacture	Moll Machining	AL 7075 Billet
112	SU-A5005-AA-00003-AA	Rocker Antiroll Bar Thru Cone	Centering ARB drop link rod end cone	4	Manufacture	Moll Machining	AL 7075 Round Bar
113	SU-A5005-AA-00004-AA	Rocker Antiroll Bar Hat Cone	Centering ARB drop link rod end cone	4	Manufacture	Moll Machining	AL 7075 Round Bar
114	SU-A5005-AA-00005-AA	Rocker Shock Thru Cone	Centering shock rod end cone	8	Manufacture	Moll Machining	AL 7075 Round Bar
115	SU-A5005-AA-00006-AA	Rocker-Pushlink Thru Cone	Centering push link rod end cone	4	Manufacture	Moll Machining	AL 7075 Round Bar
116	SU-A5005-AA-00007-AA	Rocker-Pushlink Hat Cone	Centering push link rod end cone	4	Manufacture	Moll Machining	AL 7075 Round Bar
117	McMaster 5909K25	Needle roller thrust bearing for suspension pivots	Needle-Roller Thrust Bearing for 3/8" Shaft Diameter, 13/16" OD	8	Purchase	McMaster Carr	--
118	McMaster 5909K251	Thrust bearing washer for chassis suspension pivots	0.032" Thick Washer for 3/8" Shaft Diameter Needle-Roller Thrust Bearing	16	Purchase	McMaster Carr	--
119	McMaster 92661A531	Shim washer for chassis thrust bearing stack-up	Aluminum Ring Shims, 3/8" ID, 0.005" Thick	8	Purchase	McMaster Carr	--
120	McMaster 5905K22	Press-fit ball thrust bearing for roller bearing support	Needle-Roller Bearing, Open, for 3/8" Shaft Diameter	4	Purchase	McMaster Carr	--
121	McMaster 2872T2	Washer for chassis shoulder bolt stack-up	High-Load Chemical-Resistant Thrust Bearing for 3/8" Shaft Diameter, 1/16" Thickness, 954 Bearing Bronze	8	Purchase	McMaster Carr	--
122	McMaster 98687A137	Washer for shock mounting thrust bearing stack-up	Steel Undersized Washers for M8 Screw Size	8	Purchase	McMaster Carr	--
123	Aircraft Spruce AN960-4	Low-profile washer for pushrod AN4 thrust bearing	Washer, Flat AN960-4	8	Purchase	Aircraft Spruce	--
124	McMaster 91259A626	Bolt to connect rocker with rocker clevis	Alloy Steel Shoulder Screw, 3/8" Shoulder Diameter, 1-1/4" Shoulder Length, 5/16"-18 Thread	4	Purchase	McMaster Carr	--
125	McMaster 918314006	Fastener for blade tip and adapter connection	18-8 Stainless Steel Nylon-Insert Locknut, 5-40 Thread Size	2	Purchase	McMaster Carr	--
126	SU-A5006-AA	Anti-Roll Bar (ARB):					
127	SU-A5006-AA-00001-AA	FARB Torsion Bar	Torsion bar for Front Anti-Roll Bar	1	Manufacture	Moll Machining	4130 Steel Tube
128	SU-A5006-AA-00002-AA	FARB Torsion Bar Insert	Front Anti-Roll Bar Torsion Bar Insert	2	Manufacture	Moll Machining	4130 Steel Round B
129	SU-A5006-AA-00003-AA	FARB Blade	Front Anti-Roll Bar blade	2	Manufacture	Moll Machining	8620 Steel Billet
130	SU-A5006-AA-00004-AA	FARB Adapter	Front Anti-Roll Bar Adapter	2	Manufacture	Moll Machining	4130 Steel Billet
131	SU-A5006-AA-00005-AA	FARB Mount	Front Anti-Roll Bar Mount	2	Manufacture	Moll Machining	AL 7075 Billet
132	SU-A5006-AA-00006-AA	FARB Mount Backing Plate	Front Anti-Roll Bar Mount Backing Plate	2	Manufacture	Moll Machining	AL 6061 Sheet
133	SU-A5006-AA-00007-AA	FARB Shroud	Front Anti-Roll Bar Shroud	1	Manufacture	Cornell Racing	Carbon Fiber
134	SU-A5006-AA-00008-AA	FARB Drop Link	Front Anti-Roll Bar Drop Link	2	Manufacture	Moll Machining	AL 7075 Round Bar

135	SU-A5006-AA-00009-AA	RARB Torsion Bar	Rear Anti-Roll Bar Torsion Bar Insert	1	Manufacture	Moll Machining	4130 Steel Tube
136	SU-A5006-AA-00010-AA	RARB Torsion Bar Insert	Rear Anti-Roll Bar blade	2	Manufacture	Moll Machining	4130 Steel Round B
137	SU-A5006-AA-00011-AA	RARB Blade	Rear Anti-Roll Bar Adapter	2	Manufacture	Moll Machining	8620 Steel Billet
138	SU-A5006-AA-00012-AA	RARB Adapter	Rear Anti-Roll Bar Mount	2	Manufacture	Moll Machining	4130 Steel Billet
139	SU-A5006-AA-00013-AA	RARB Mount	Rear Anti-Roll Bar Mount Backing Plate	2	Manufacture	Moll Machining	AL 6061 Billet
140	SU-A5006-AA-00014-AA	RARB Mount Backing Plate	RearAnti-Roll Bar Shroud	2	Manufacture	Moll Machining	AL 7075 Sheet
141	SU-A5006-AA-00015-AA	RARB Drop Link	Rear Anti-Roll Bar Drop Link	2	Manufacture	Moll Machining	AL 7075 Round Bar
142	SU26_A0505_P02	ARB Rear Torsion Bar Insert Support	Rear torsion bar insert support for ARB welding/manufacturing jig	2	Manufacture	Moll Machining	AL 6061 Billet
143	SU26_A0505_P06	ARB Front Torsion Bar Insert Support	Front torsion bar insert support for ARB welding/manufacturing jig	2	Manufacture	Moll Machining	AL 6061 Billet
144	SU26_A0505_P07	ARB Jig Midpoint Support Half	Midpoint support section for ARB jig fixturing	2	Manufacture	Moll Machining	AL 6061 Billet
145	SU26_A0505_P08	ARB Rear Torsion Bar Insert Support 2	Secondary rear torsion bar insert support for ARB jig	2	Manufacture	Moll Machining	AL 6061 Billet
146	SU26_A0505_P09	ARB Front Torsion Bar Insert Support 2	Secondary front torsion bar insert support for ARB jig	2	Manufacture	Moll Machining	AL 6061 Billet
147	SU26_A0505_P05	ARB Jig Baseplate	Main baseplate for ARB manufacturing and welding jig	1	Manufacture	Moll Machining	AL 6061 Billet
148	McMaster 60645K611	Rod end between ARB blade and drop links (RH)	Ball Joint Rod End, 6-32 Right Hand Thread	4	Purchase	McMaster Carr	--
149	McMaster 60645K612	Rod end between ARB blade and drop links (LH)	Ball Joint Rod End, 6-32 Left Hand Thread	4	Purchase	McMaster Carr	--
150	McMaster 94450A515	Left hand check nuts used for drop links	18-8 Stainless Steel Left-Hand-Thread Thin-Profile Hex Nut, 6-32 Thread Size	4	Purchase	McMaster Carr	--
151	McMaster 91841A007	Right hand check nuts used for drop links	Corrosion-Resistant 18-8 Stainless Steel Hex Nuts, 6-32 Thread Size	4	Purchase	McMaster Carr	--
152	McMaster 1677K343	Thrust bearing for FARB torsion bar	Ultra-Low-Friction Oil-Embedded Sleeve Bearing, Flanged, for 1/2" Shaft Diameter and 5/8" Housing ID, 1-1/2" Long	2	Purchase	McMaster Carr	--
153	McMaster 6338K425	Thrust bearing for RARB bar torsion bar	Oil-Embedded 841 Bronze Flanged Sleeve Bearing for 5/8" Shaft Diameter and 3/4" Housing ID, 5/8" Long	2	Purchase	McMaster Carr	--
154	Aircraft Spruce AN365-428A	AN3 Nuts for ARB mounts and backing plates	MS21044N4 Elastic Stop Nut	4	Purchase	Aircraft Spruce	--
155	McMaster 90857A129	AN3 Rivet-Mount Nuts	Rivet-Mount Nut, Steel, 10-32 Thread Size, MS21075-3N	4	Purchase	McMaster Carr	--
156	McMaster 97525A300	Rivets for Rivet-Mount Nuts	18-8 Stainless Steel Blind Rivets, Domed Head, 3/32" Diameter, for 0.020"-0.125" Material Thickness	4	Purchase	McMaster Carr	--
157	Aircraft Spruce AN3-13A	Bolts for ARB mounts	Bolt Undrilled AN3-13A	8	Purchase	Aircraft Spruce	--
158	Aircraft Spruce AN3-4A	Bolt for ARB blades	Bolt Undrilled AN3-4A	4	Purchase	Aircraft Spruce	--
159	McMaster 918314006	Locknuts for blade tip and adapter connection	18-8 Stainless Steel Nylon-Insert Locknut, 5-40 Thread Size	4	Purchase	McMaster Carr	--
160	McMaster 92196A194	Bolts for ARB adapters	18-8 Stainless Steel Socket Head Screw, 8-32 Thread Size, 1/2" Long	4	Purchase	McMaster Carr	--
161	McMaster 90633A009	Locknuts for ARB adapters	Low-Strength Steel Nylon-Insert Locknut, Thin-Profile, Zinc-Plated, 8-32 Thread Size	4	Purchase	McMaster Carr	--
162	McMaster 9410T34	Shaft collar for front torsion bar tube constraint	Washdown Clamping Shaft Collar for 1/2" Diameter, White Acetal Plastic	2	Purchase	McMaster Carr	--
163	McMaster 9410T35	Retaining ring for rear torsion bar tube constraint	Washdown Clamping Shaft Collar for 5/8" Diameter, White Acetal Plastic	2	Purchase	McMaster Carr	--
164	McMaster 90296A202	Helicoil Insert for ARB	18-8 Stainless Steel Screw-Locking Helical Insert, 10-32 Thread Size, 0.285" Installed Length	2	Purchase	McMaster Carr	--
165	Aircraft Spruce AN3-3A	General AN3 fastening hardware	Bolt Undrilled AN3-3A	2	Purchase	Aircraft Spruce	--
166	Aircraft Spruce AN960-10	Washer for AN3 bolt hardware	Washer, Flat AN960-10	2	Purchase	Aircraft Spruce	--
167	McMaster 918314006	Locknut for 5-40 hardware	18-8 Stainless Steel Nylon-Insert Locknut, 5-40 Thread Size	2	Purchase	Aircraft Spruce	--
168	SU-A5007-AA	Uprights:					
169	SU-A5007-AA-00001-AA	Front Upright (Left)	Front suspension upright (left), connecting A-arms to wheel hub	1	Manufacture	Moll Machining	AL 7075 Billet
170	SU-A5007-AA-00003-AA	Front Upright (Right)	Front suspension upright (right), connecting A-arms to wheel hub	1	Manufacture	Moll Machining	AL 7075 Billet
171	SU-A5007-AA-00002-AA	Rear Upright (Left)	Rear suspension upright (left), connecting A-arms to wheel hub	1	Manufacture	Moll Machining	AL 7075 Billet
172	SU-A5007-AA-00004-AA	Rear Upright (Right)	Rear suspension upright (right), connecting A-arms to wheel hub	1	Manufacture	Moll Machining	AL 7075 Billet
173	Aircraft Spruce AN4-13A	Bolt for lower ball joint attachment	Bolt Undrilled AN4-13A	4	Purchase	Aircraft Spruce	--
174	Aircraft Spruce AN960-416	Washer for lower ball joint hardware	AN960-416	8	Purchase	Aircraft Spruce	--
175	Aircraft Spruce AN365-428A	Lock nut for lower ball joint hardware	MS21044N4 Elastic Stop Nut	4	Purchase	Aircraft Spruce	--
176	Aircraft Spruce AN3-13A	Bolt for toe and steering link attachment	Bolt Undrilled AN3-13A	4	Purchase	Aircraft Spruce	--
177	Aircraft Spruce AN960-10	Washer for toe and steering link hardware	AN960-10	8	Purchase	Aircraft Spruce	--
178	Aircraft Spruce AN365-1032A	Lock nut for toe and steering link hardware	MS21044N3 Elastic Stop Nut	4	Purchase	Aircraft Spruce	--
179	Aircraft Spruce AN3-13A	Bolt to attach outboard clevis and upright	Bolt Undrilled AN3-13A	8	Purchase	Aircraft Spruce	--
180	Aircraft Spruce AN960-10	Washer to attach outboard clevis and upright	AN960-10	8	Purchase	Aircraft Spruce	--
181	Aircraft Spruce AN365-1032A	Lock nut to attach outboard clevis and upright	MS21044N3 Elastic Stop Nut	8	Purchase	Aircraft Spruce	--
182	SU-A5008-AA	Suspension Setup:					
183	SU-A5008-AA-00001-AA	Camber Shim 0.25"	Camber shim for between outboard clevis and upright	4	Manufacture	Moll Machining	AL 6061 Laser Cut

NOTES, UNLESS OTHERWISE SPECIFIED:

1. ENSURE ALL PARTS ARE WELDING COMPATABLE (NO DANGEROUS COATING)

2. ALL WELDS ARE:

- FILLET WELDS
- ALL AROUND
- TUBE TO INSERT


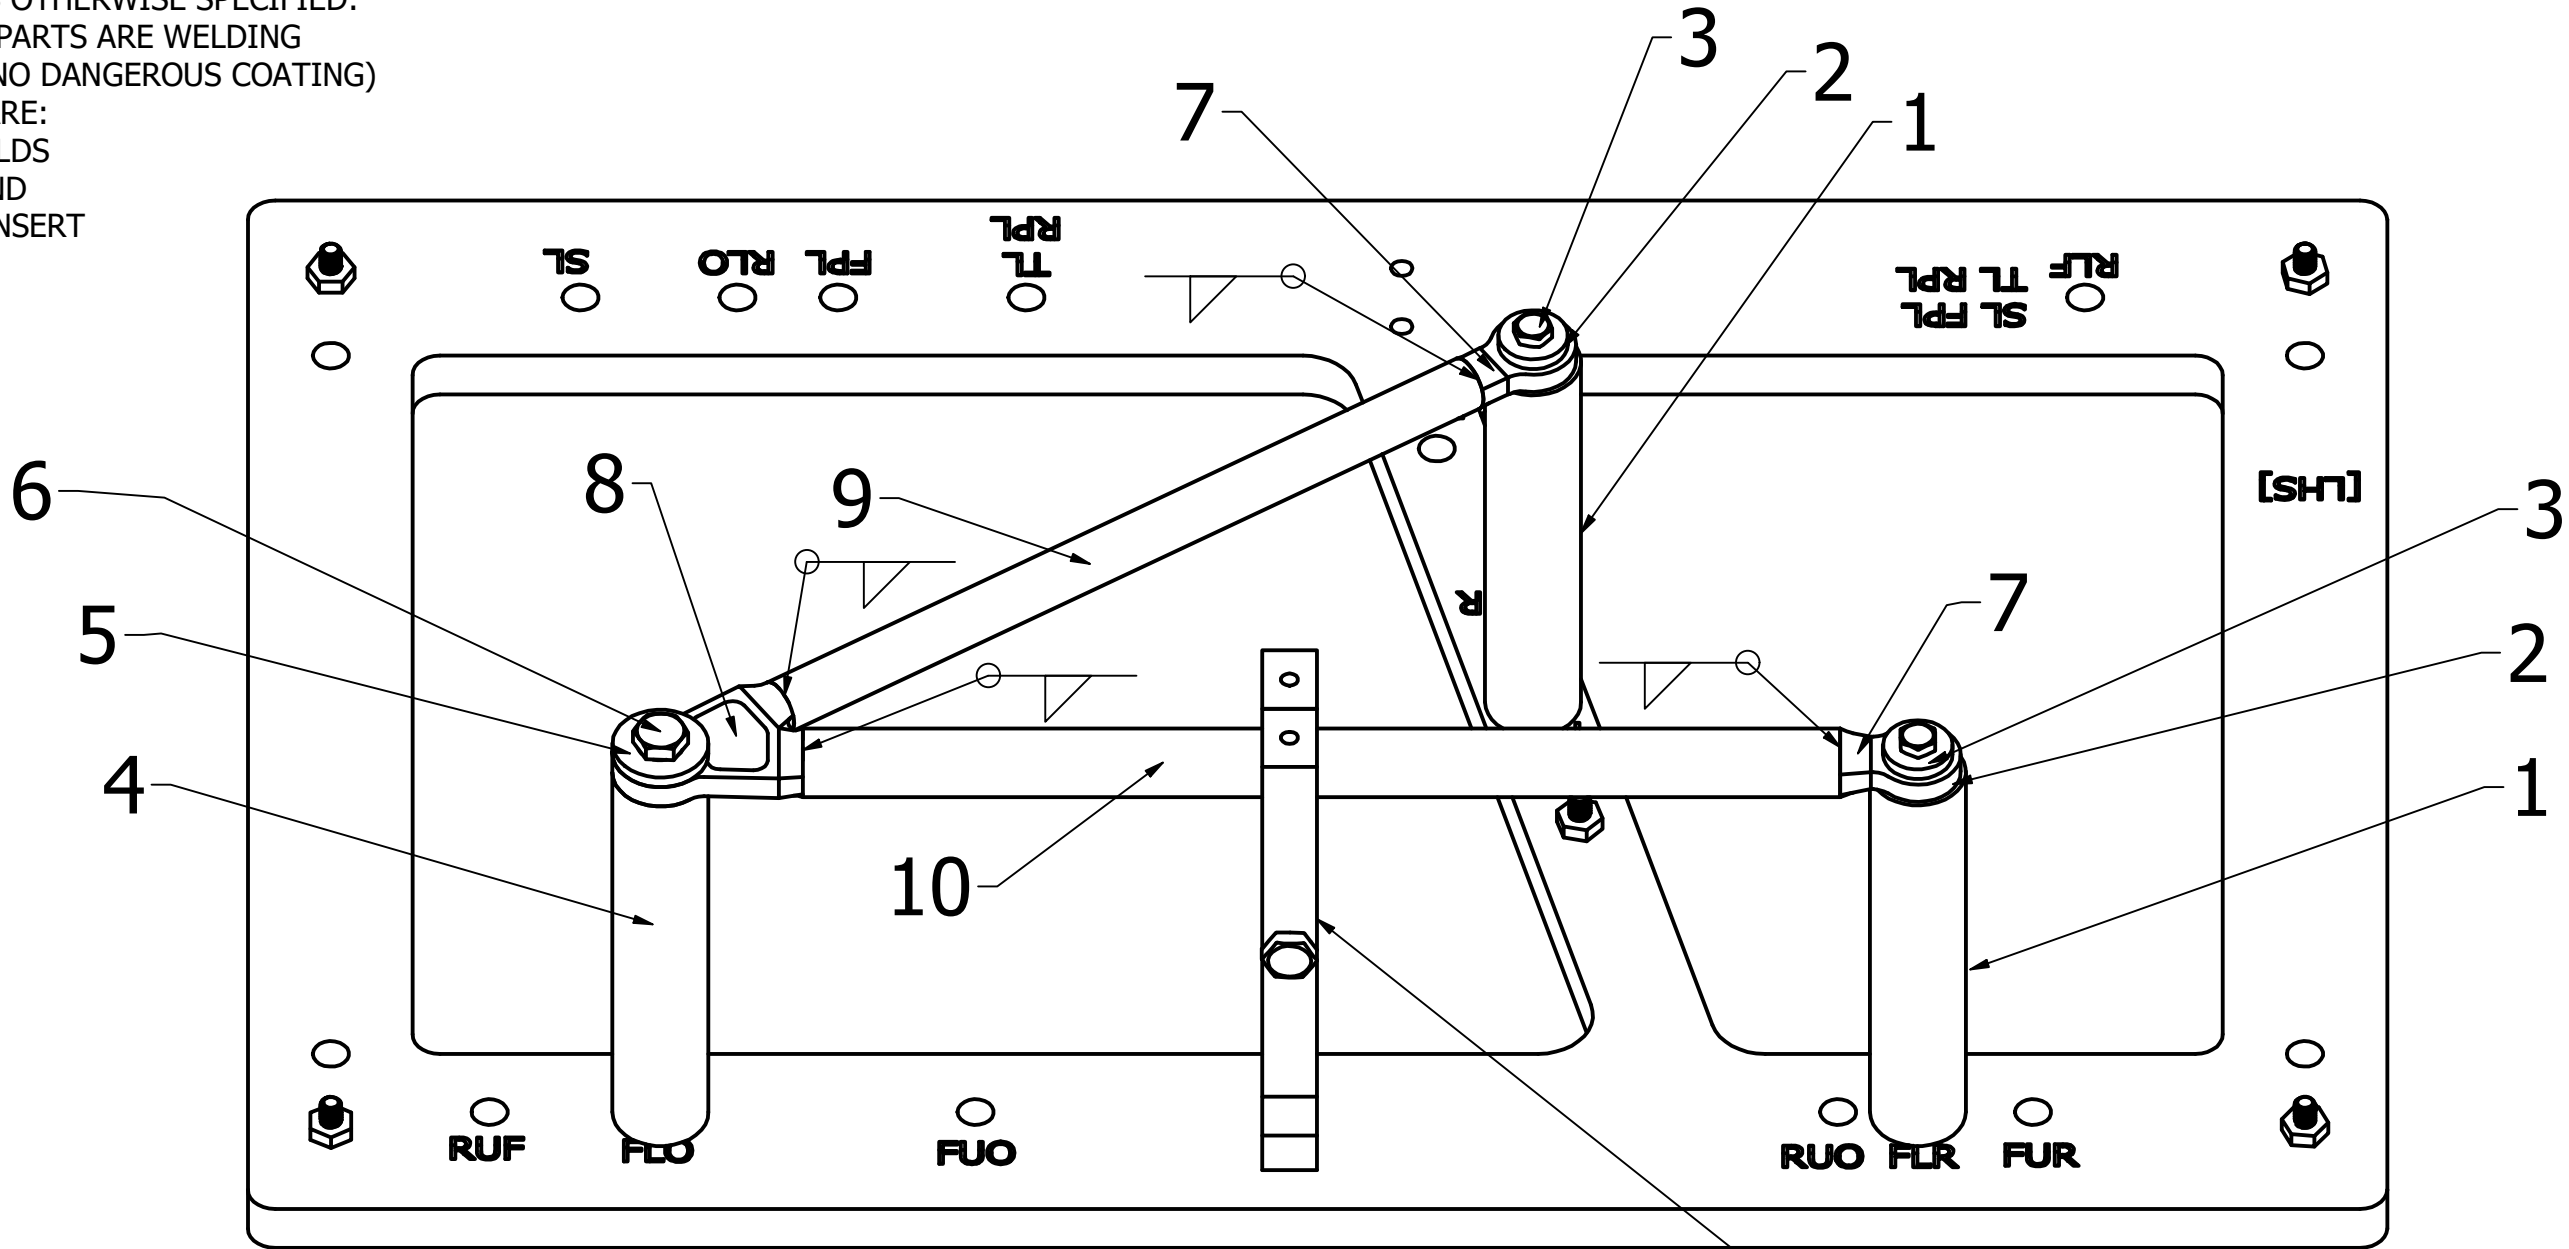


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	FRONT LOWER INBOARD ADAPTER	2
8	LINKS	FRONT LOWER OUTBOARD ADAPTER	1
9	LINKS	FRONT LOWER FRONT TUBE	1
10	LINKS	FRONT LOWER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE	DATE 12/16/2025	 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED				FINISH BARE	DESCRIPTION SU-A5001-AA_(FRONT LOWER LHS)				
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		⌀ 0.005 Ø +0.006 -0.001		DESIGNER D. RATTANAVIJAI		RESPONSIBLE ENGINEER D. RATTANAVIJAI			
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DRAWN BY D. RATTANAVIJAI		SIZE B	P/N SU26_A08	REV	
				APPROVAL		SCALE 1/1.75	DO NOT SCALE		SHEET 1 / 1

NOTES, UNLESS OTHERWISE SPECIFIED:


1. ALL WELDS ARE:
- FILLET WELDS
 - ALL AROUND
 - TUBE TO INSERT

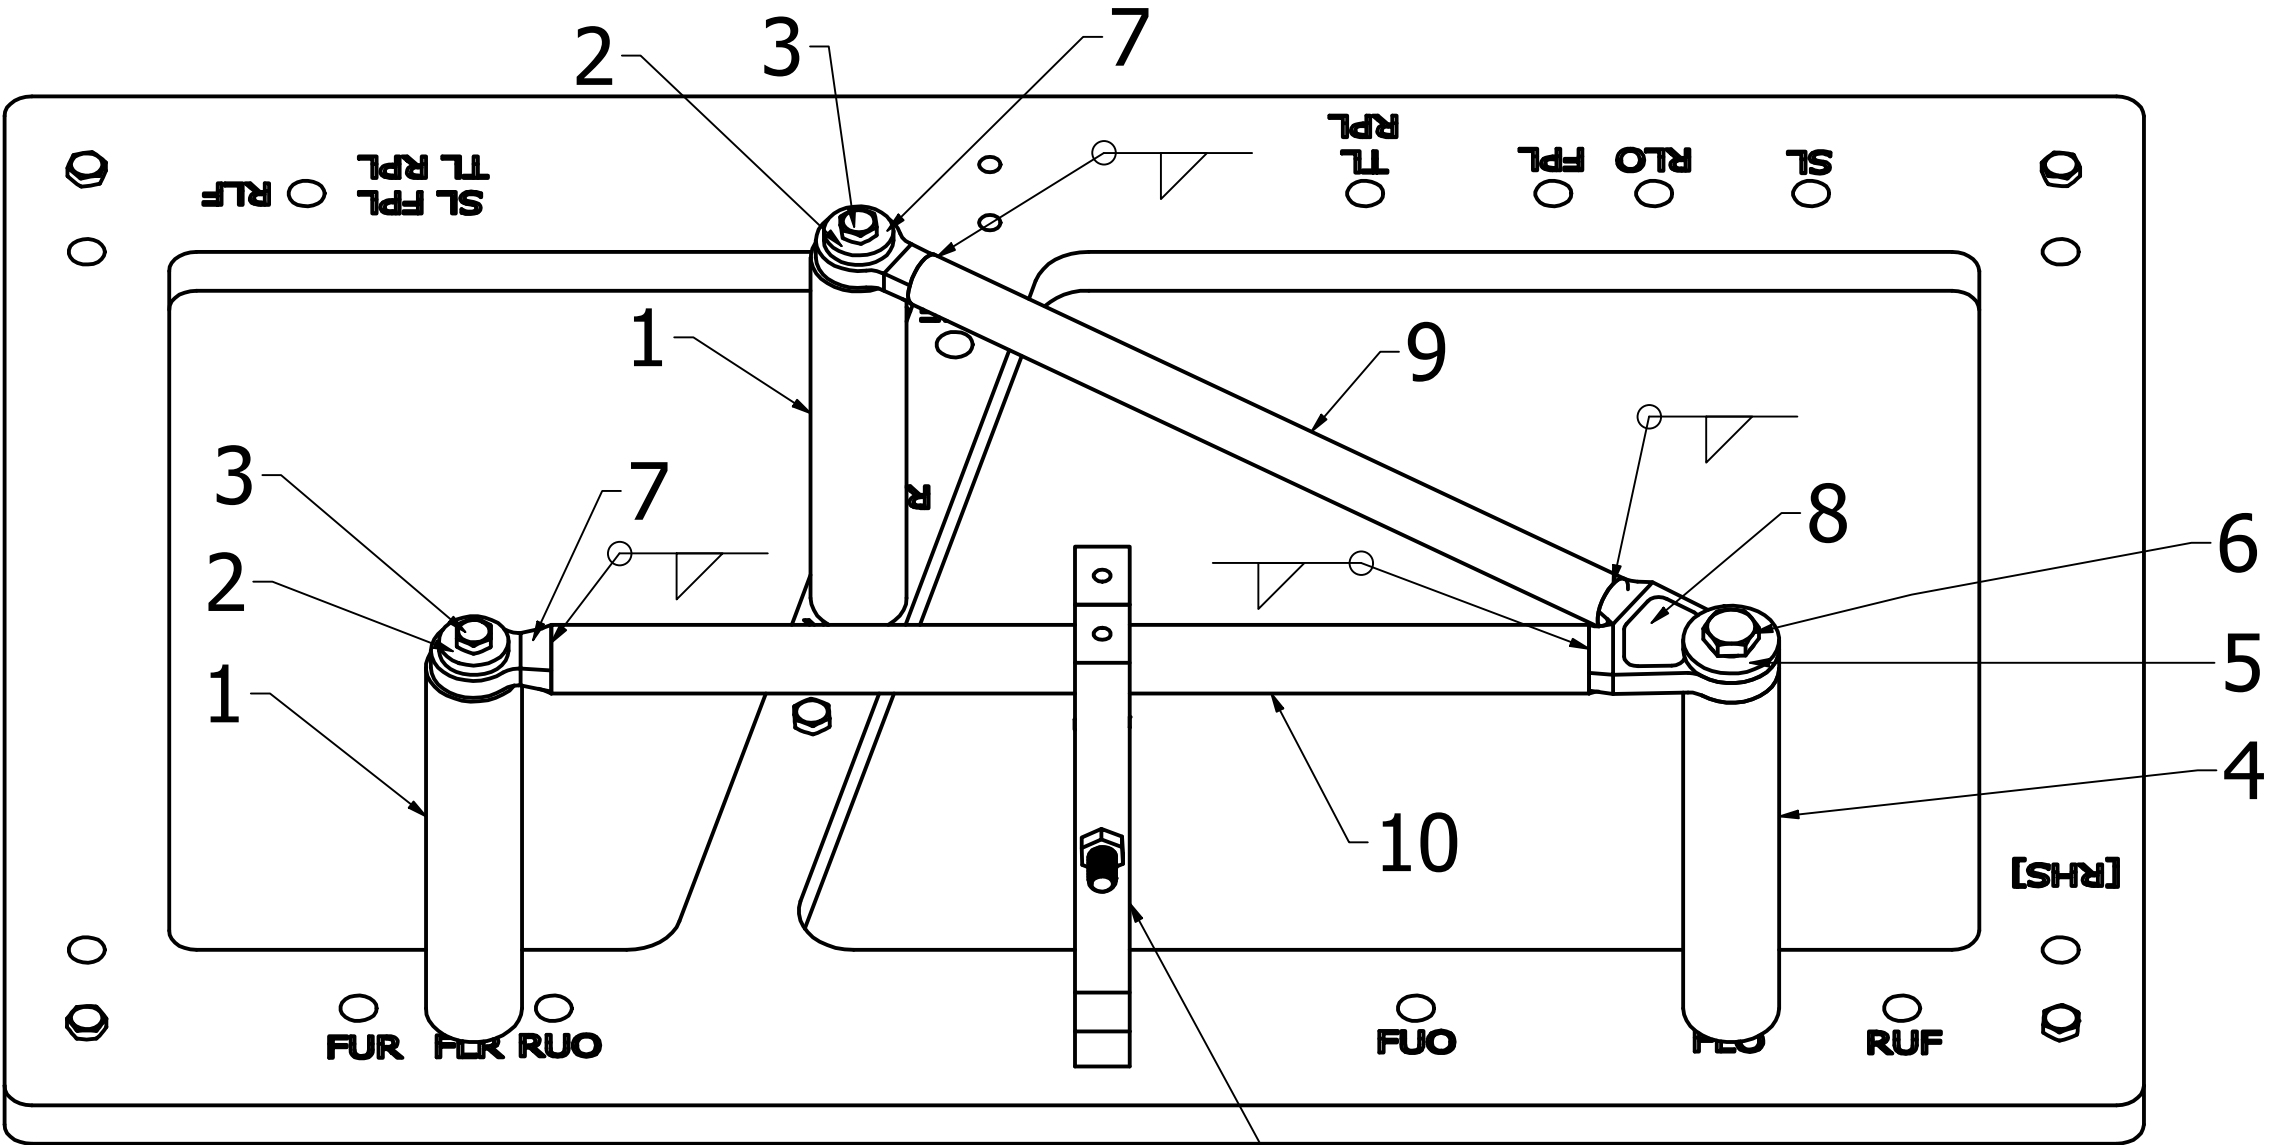


TABLE

PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	FRONT LOWER INBOARD ADAPTER	2
8	LINKS	FRONT LOWER OUTBOARD ADAPTER	1
9	LINKS	FRONT LOWER FRONT TUBE	1
10	LINKS	FRONT LOWER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION 	SUBSYSTEM: JIG PLATE	DATE 12/16/2025	 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 X.X ± 0.1 $\varnothing +0.006$ X.XX ± 0.02 -0.001 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE		DESCRIPTION SU-A5001-AA_(FRONT LOWER RHS)				
	INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING						
			DESIGNER D. RATTANAVIJAI	SIZE B	P/N SU26_A08		REV
			RESPONSIBLE ENGINEER D. RATTANAVIJAI	SCALE 1/1.75			
DRAWN BY							
APPROVAL							

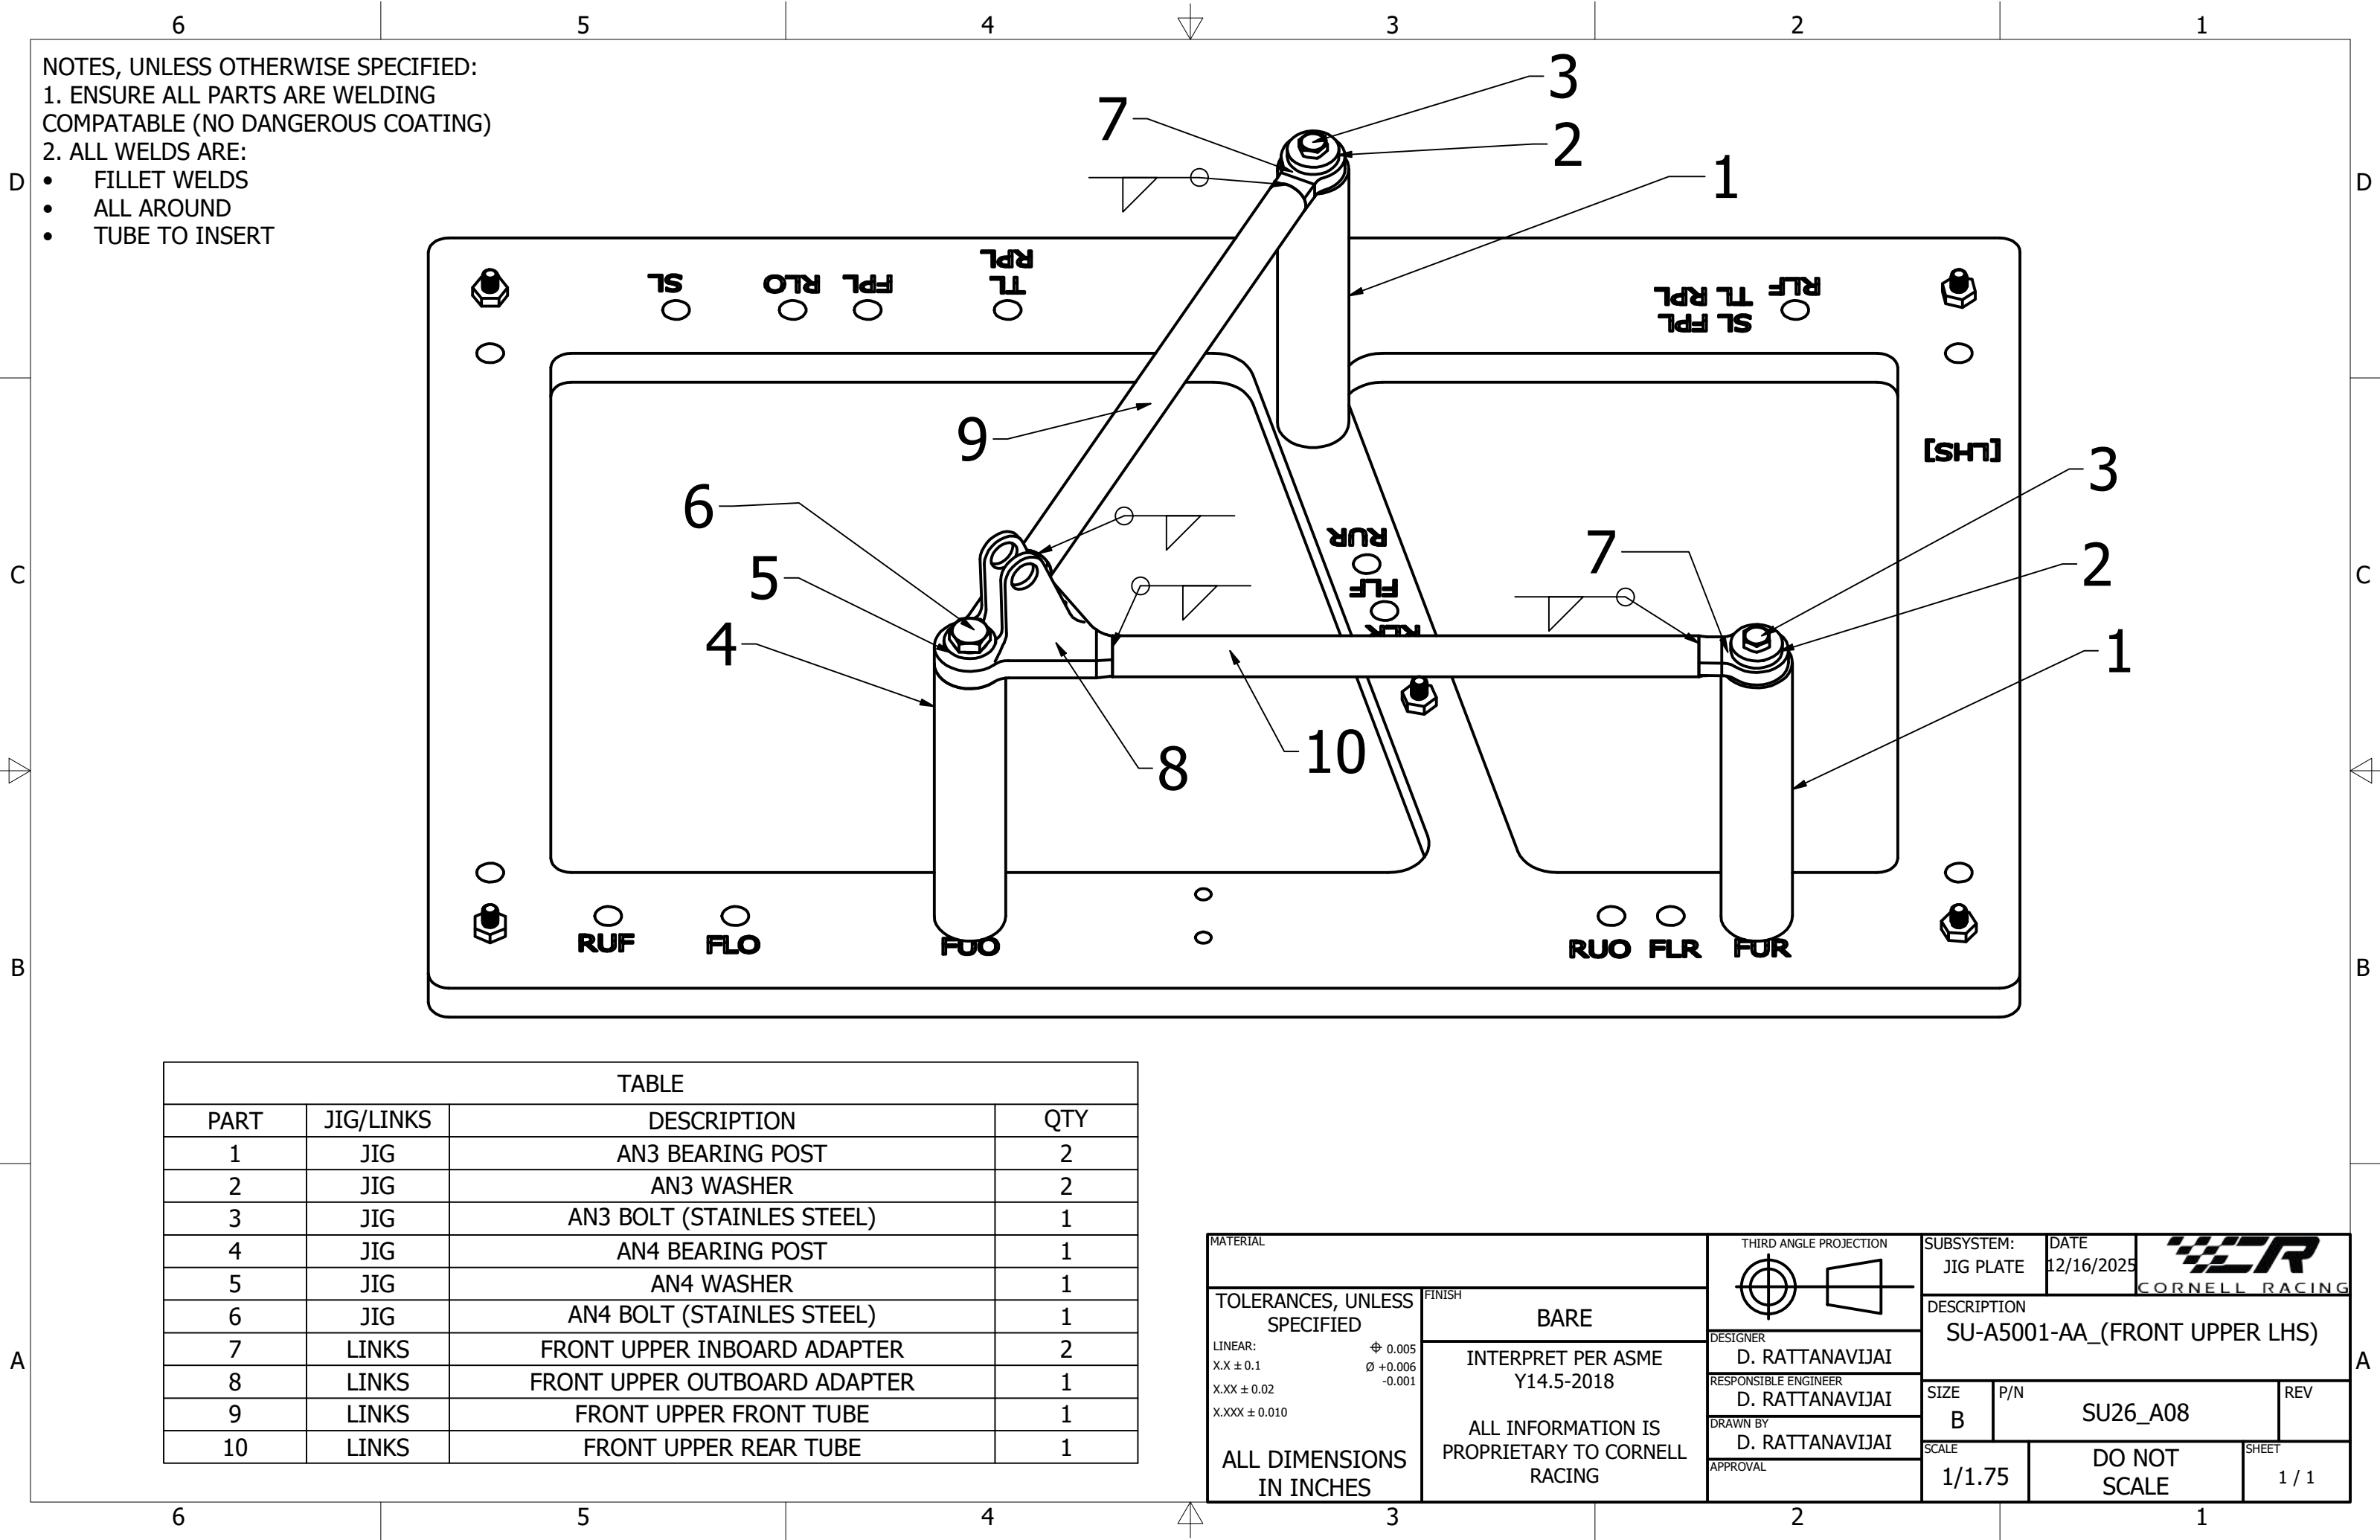

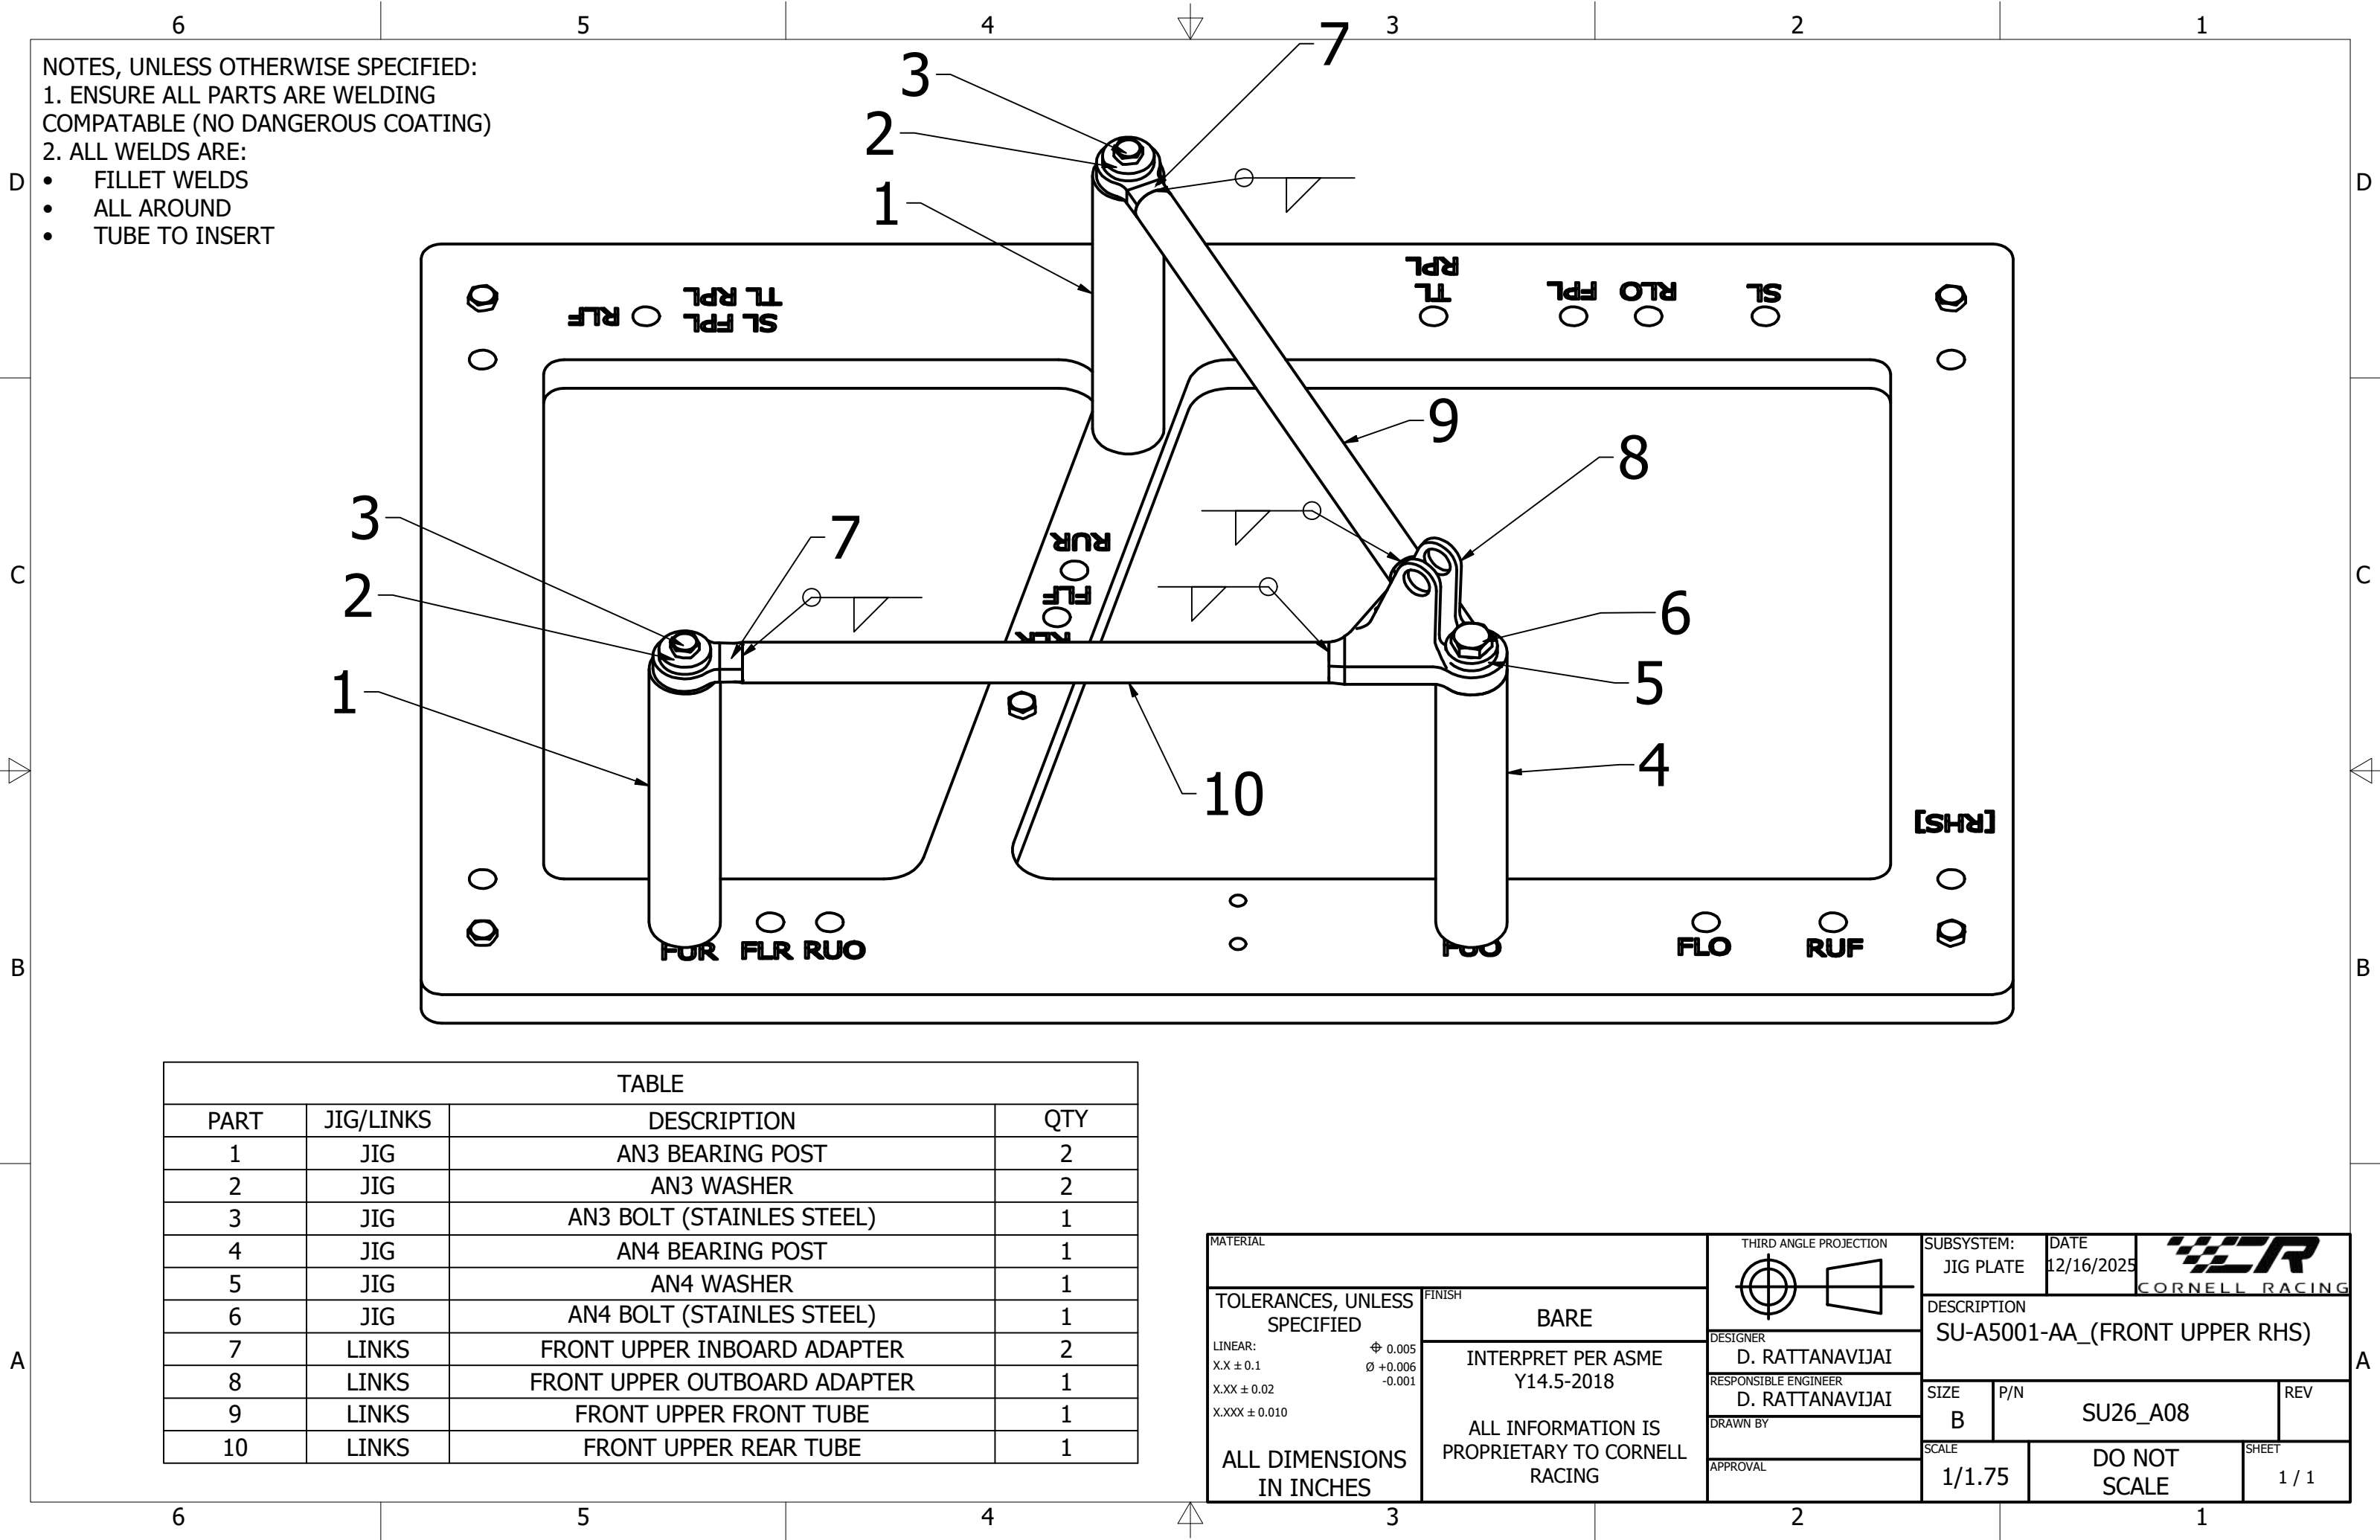

NOTES, UNLESS OTHERWISE SPECIFIED:

1. ENSURE ALL PARTS ARE WELDING COMPATABLE (NO DANGEROUS COATING)

2. ALL WELDS ARE:

- FILLET WELDS
- ALL AROUND
- TUBE TO INSERT

TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	FRONT UPPER INBOARD ADAPTER	2
8	LINKS	FRONT UPPER OUTBOARD ADAPTER	1
9	LINKS	FRONT UPPER FRONT TUBE	1
10	LINKS	FRONT UPPER REAR TUBE	1

MATERIAL		THIRD ANGLE PROJECTION 	SUBSYSTEM: JIG PLATE	DATE 12/16/2025	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE		DESCRIPTION SU-A5001-AA_(FRONT UPPER RHS)			
	INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING					
			RESPONSIBLE ENGINEER D. RATTANAVIJAI	DO NOT SCALE		
		DRAWN BY	SCALE 1/1.75			
APPROVAL						

NOTES, UNLESS OTHERWISE SPECIFIED:

1. ENSURE ALL PARTS ARE WELDING COMPATABLE (NO DANGEROUS COATING)

2. ALL WELDS ARE:

- FILLET WELDS
- ALL AROUND
- TUBE TO INSERT

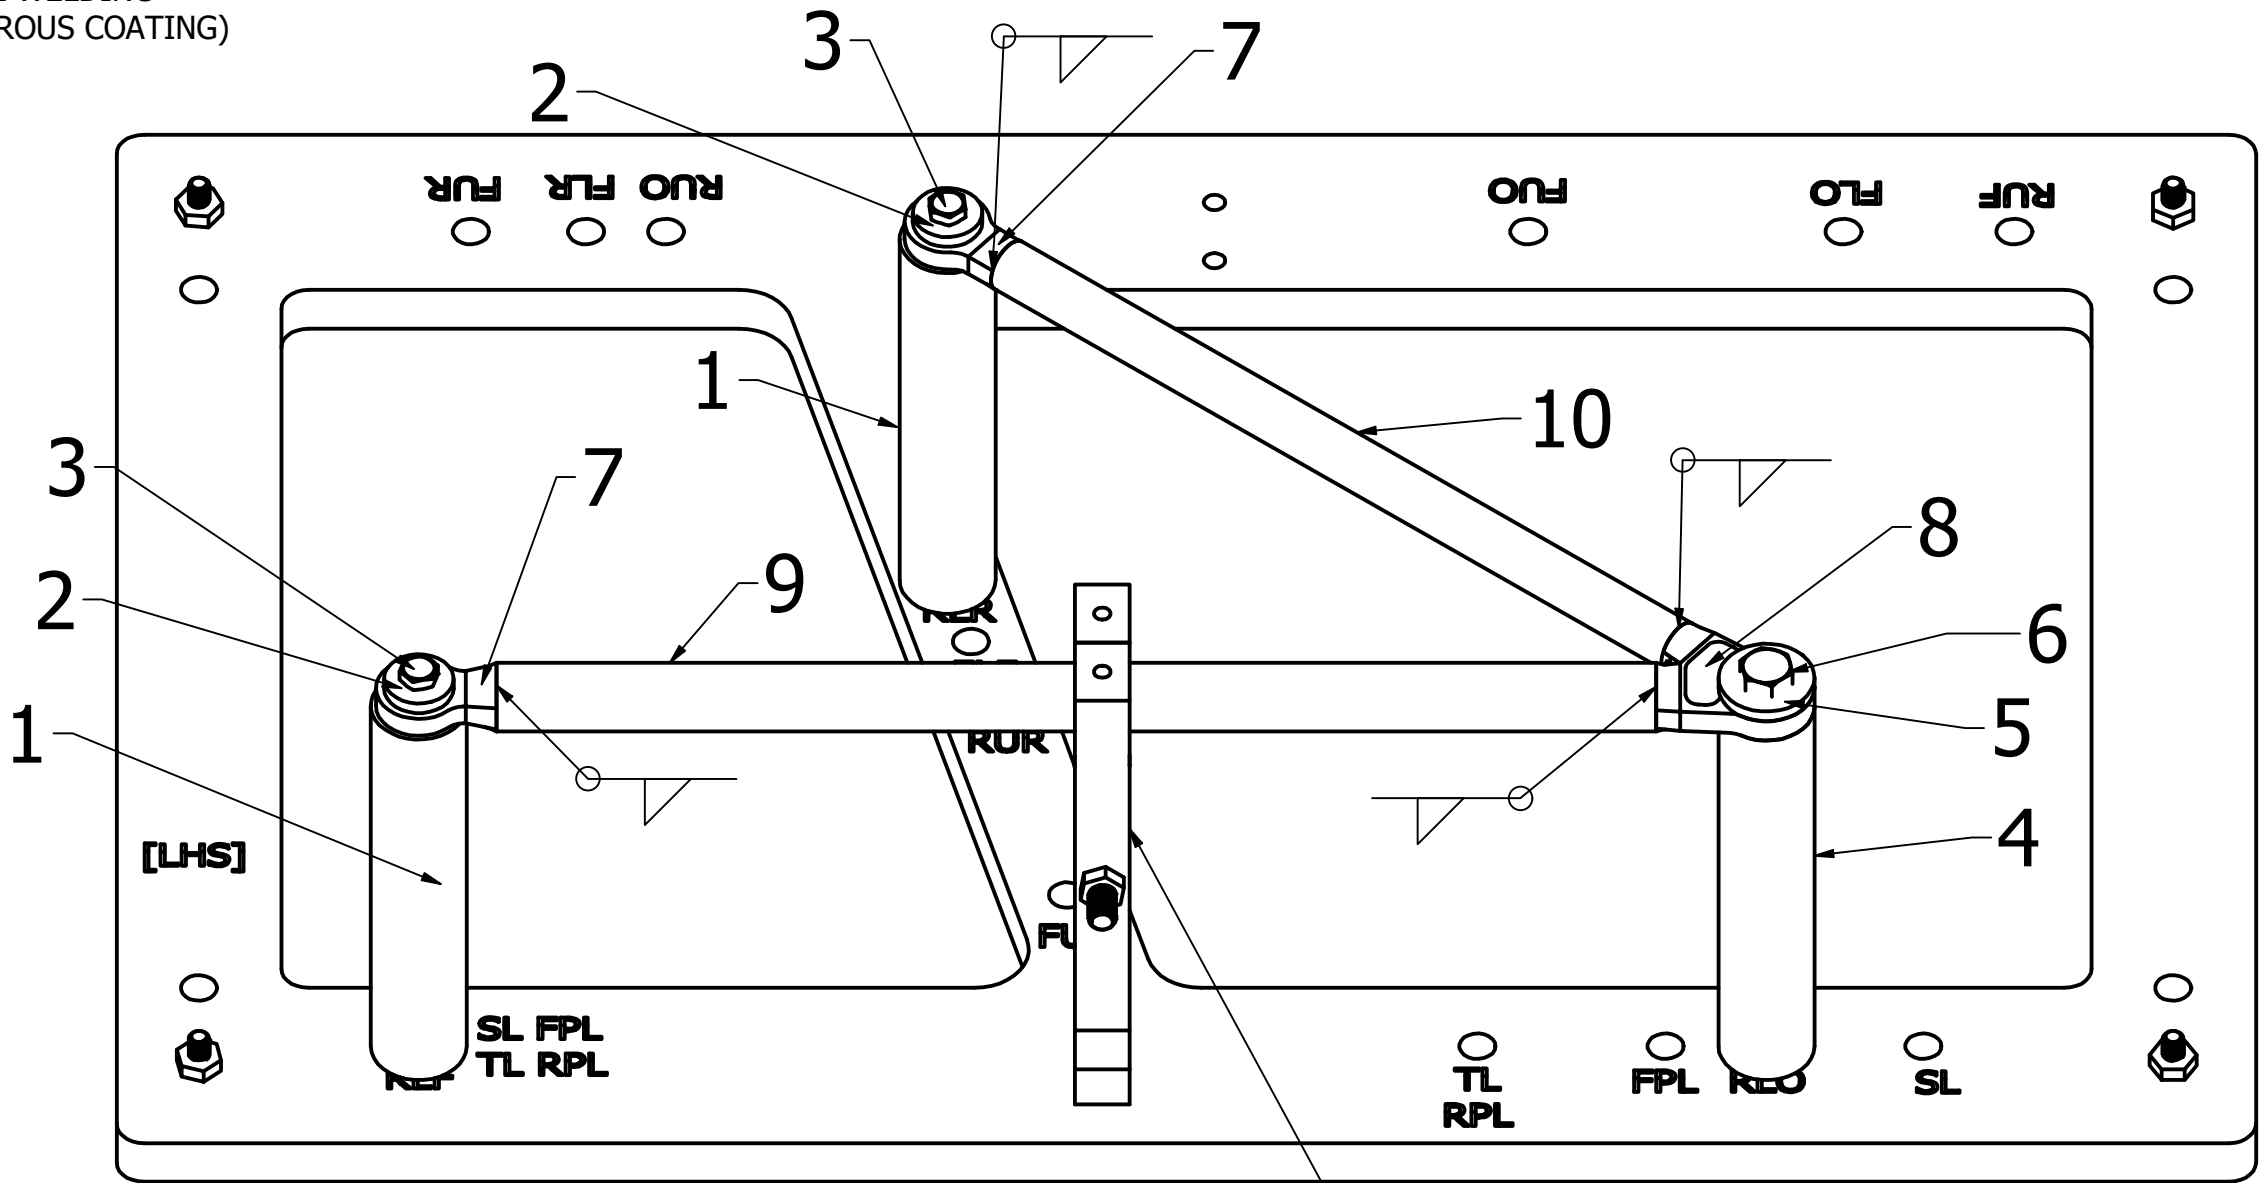


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	REAR LOWER INBOARD ADAPTER	2
8	LINKS	REAR LOWER OUTBOARD ADAPTER	1
9	LINKS	REAR LOWER FRONT TUBE	1
10	LINKS	REAR LOWER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:	DATE		
TOLERANCES, UNLESS SPECIFIED		FINISH		JIG PLATE	12/16/2025		
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER D. RATTANAVIJAI		DESCRIPTION SU-A5001-AA_(REAR LOWER LHS)	
ALL DIMENSIONS IN INCHES		APPROVAL		RESPONSIBLE ENGINEER D. RATTANAVIJAI		SIZE B	P/N SU26_A08
				DRAWN BY D. RATTANAVIJAI		SCALE 1/1.75	REV DO NOT SCALE
						SHEET 1 / 1	

NOTES, UNLESS OTHERWISE SPECIFIED:

1. ALL WELDS ARE:
- FILLET WELDS
 - ALL AROUND
 - TUBE TO INSERT

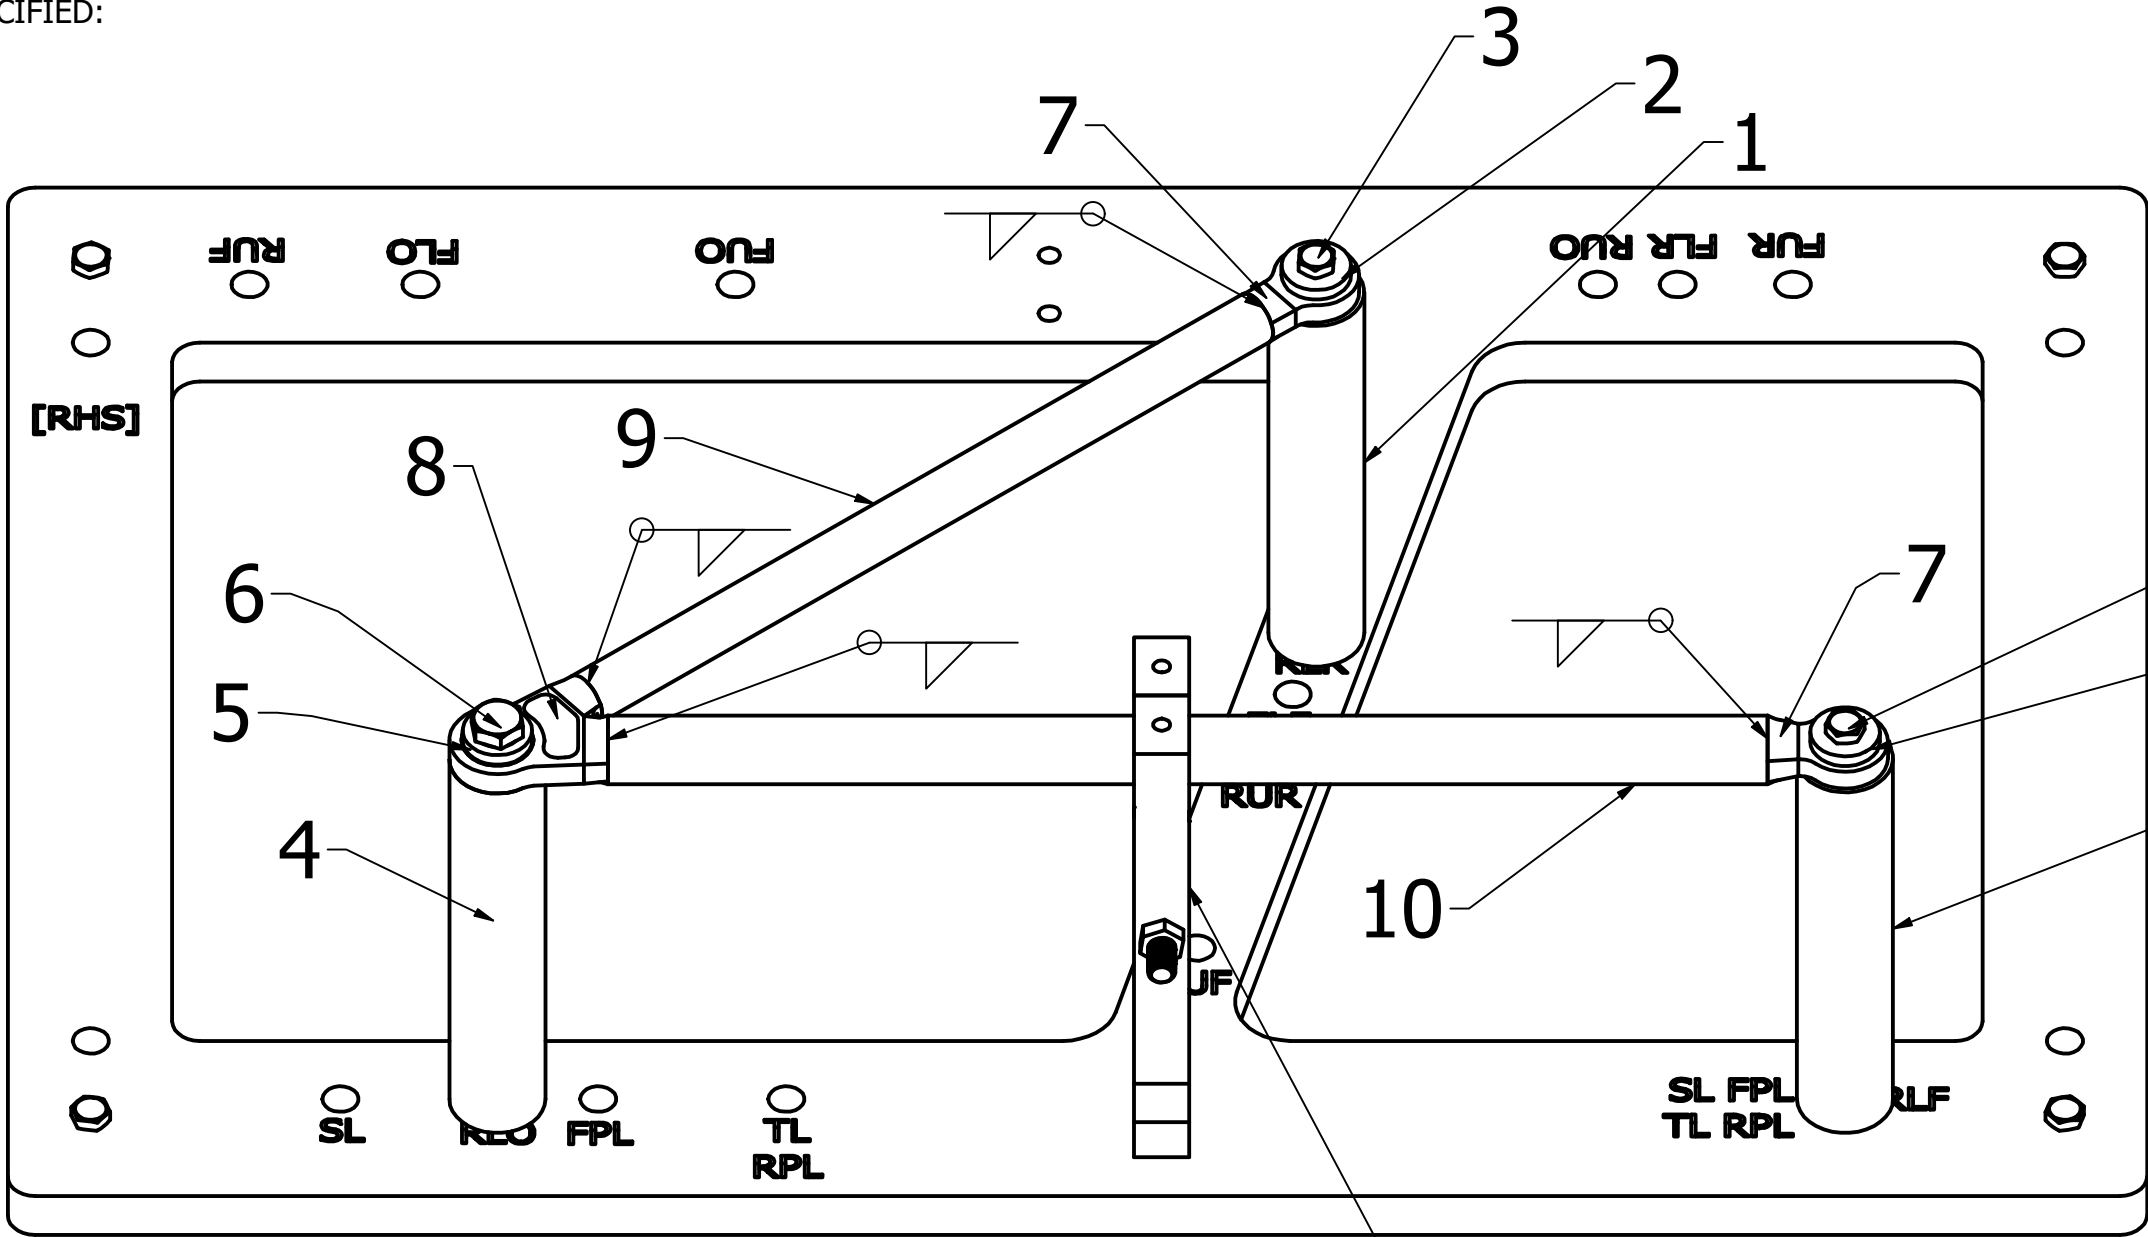


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	REAR LOWER INBOARD ADAPTER	2
8	LINKS	REAR LOWER OUTBOARD ADAPTER	1
9	LINKS	REAR LOWER FRONT TUBE	1
10	LINKS	REAR LOWER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION 	SUBSYSTEM: JIG PLATE	DATE 12/16/2025	 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED	FINISH BARE		DESCRIPTION SU-A5001-AA_(REAR LOWER RHS)					
	INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING					SIZE B	P/N SU26_A08	REV
			ALL DIMENSIONS IN INCHES	SCALE 1/1.75		DO NOT SCALE	SHEET 1 / 1	
				LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		⌀ 0.005 ⌀ +0.006 -0.001		

NOTES, UNLESS OTHERWISE SPECIFIED:

1. ALL WELDS ARE:

- FILLET WELDS
- ALL AROUND
- TUBE TO INSERT

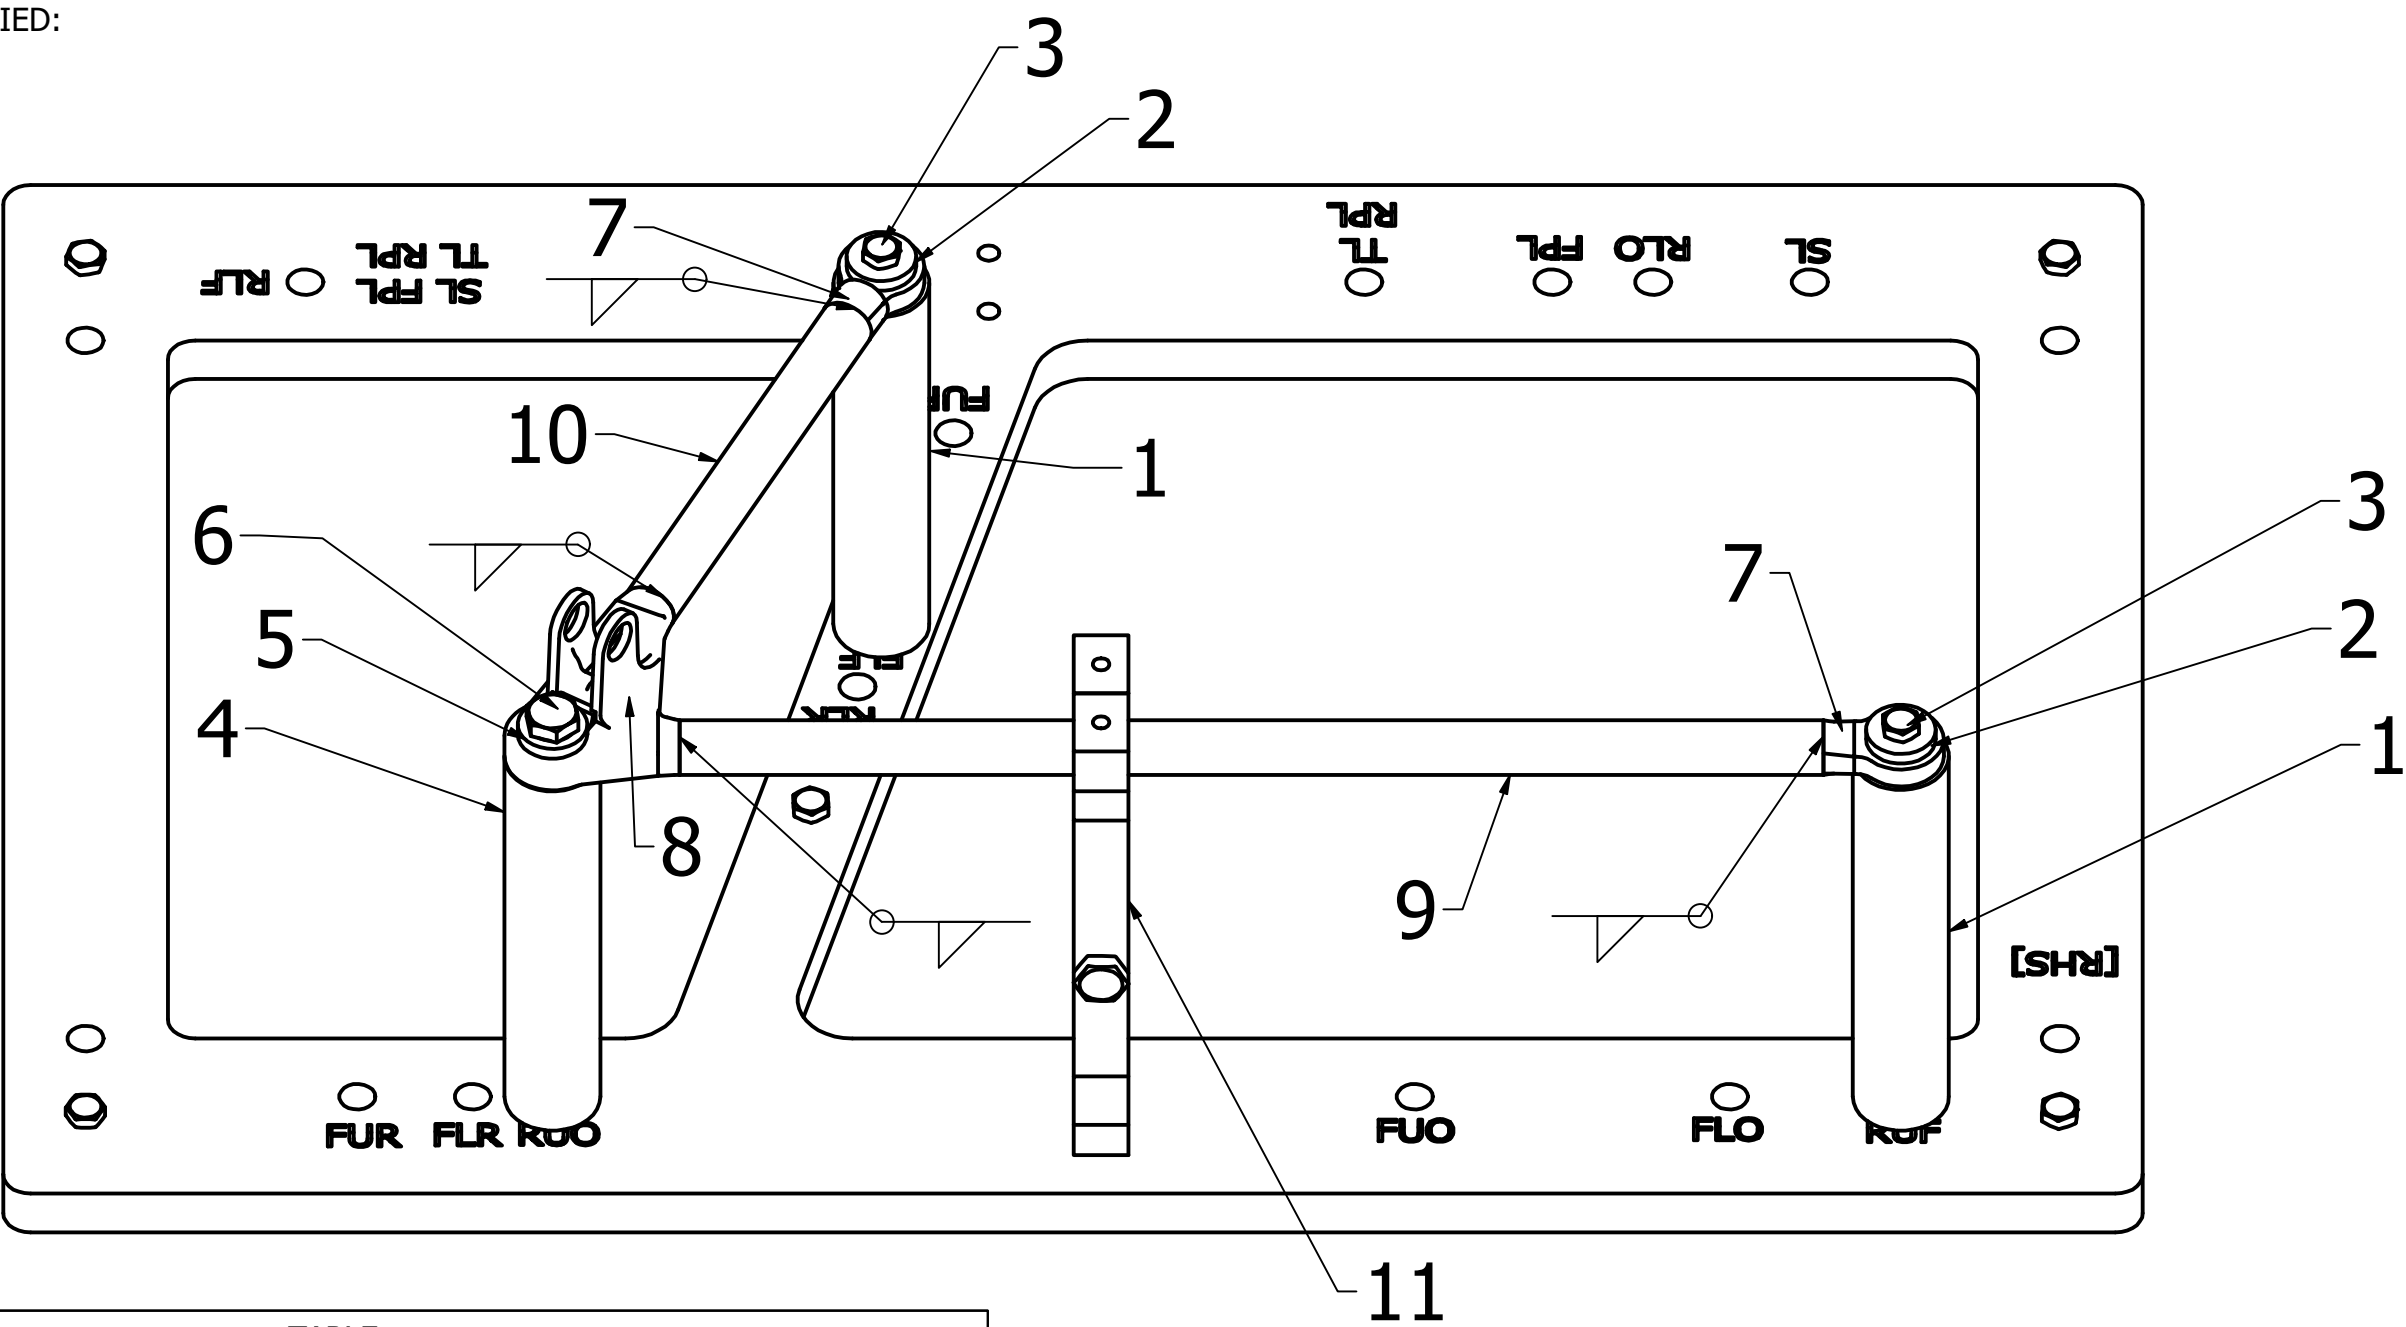


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	REAR UPPER INBOARD ADAPTER	2
8	LINKS	REAR UPPER OUTBOARD ADAPTER	1
9	LINKS	REAR UPPER FRONT TUBE	1
10	LINKS	REAR UPPER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL

TOLERANCES, UNLESS SPECIFIED

LINEAR:
X.X ± 0.1
X.XX ± 0.02
X.XXX ± 0.010

Ø 0.005
+0.006
-0.001

ALL DIMENSIONS IN INCHES

THIRD ANGLE PROJECTION

DESIGNER
D. RATTANAVIJAI

RESPONSIBLE ENGINEER
D. RATTANAVIJAI

DRAWN BY

APPROVAL

SUBSYSTEM:
JIG PLATE

DATE
12/16/2025

DESCRIPTION
SU-A5001-AA_(REAR UPPER RHS)

SIZE
B

SCALE
1/1.75

CORNELL RACING

REV

DO NOT SCALE

SHEET
1 / 1

NOTES, UNLESS OTHERWISE SPECIFIED:
ENSURE ALL PARTS ARE WELDING COMPATABLE
(NO DANGEROUS COATING)
2. ALL WELDS ARE:
FILLET WELDS
ALL AROUND
TUBE TO INSERT




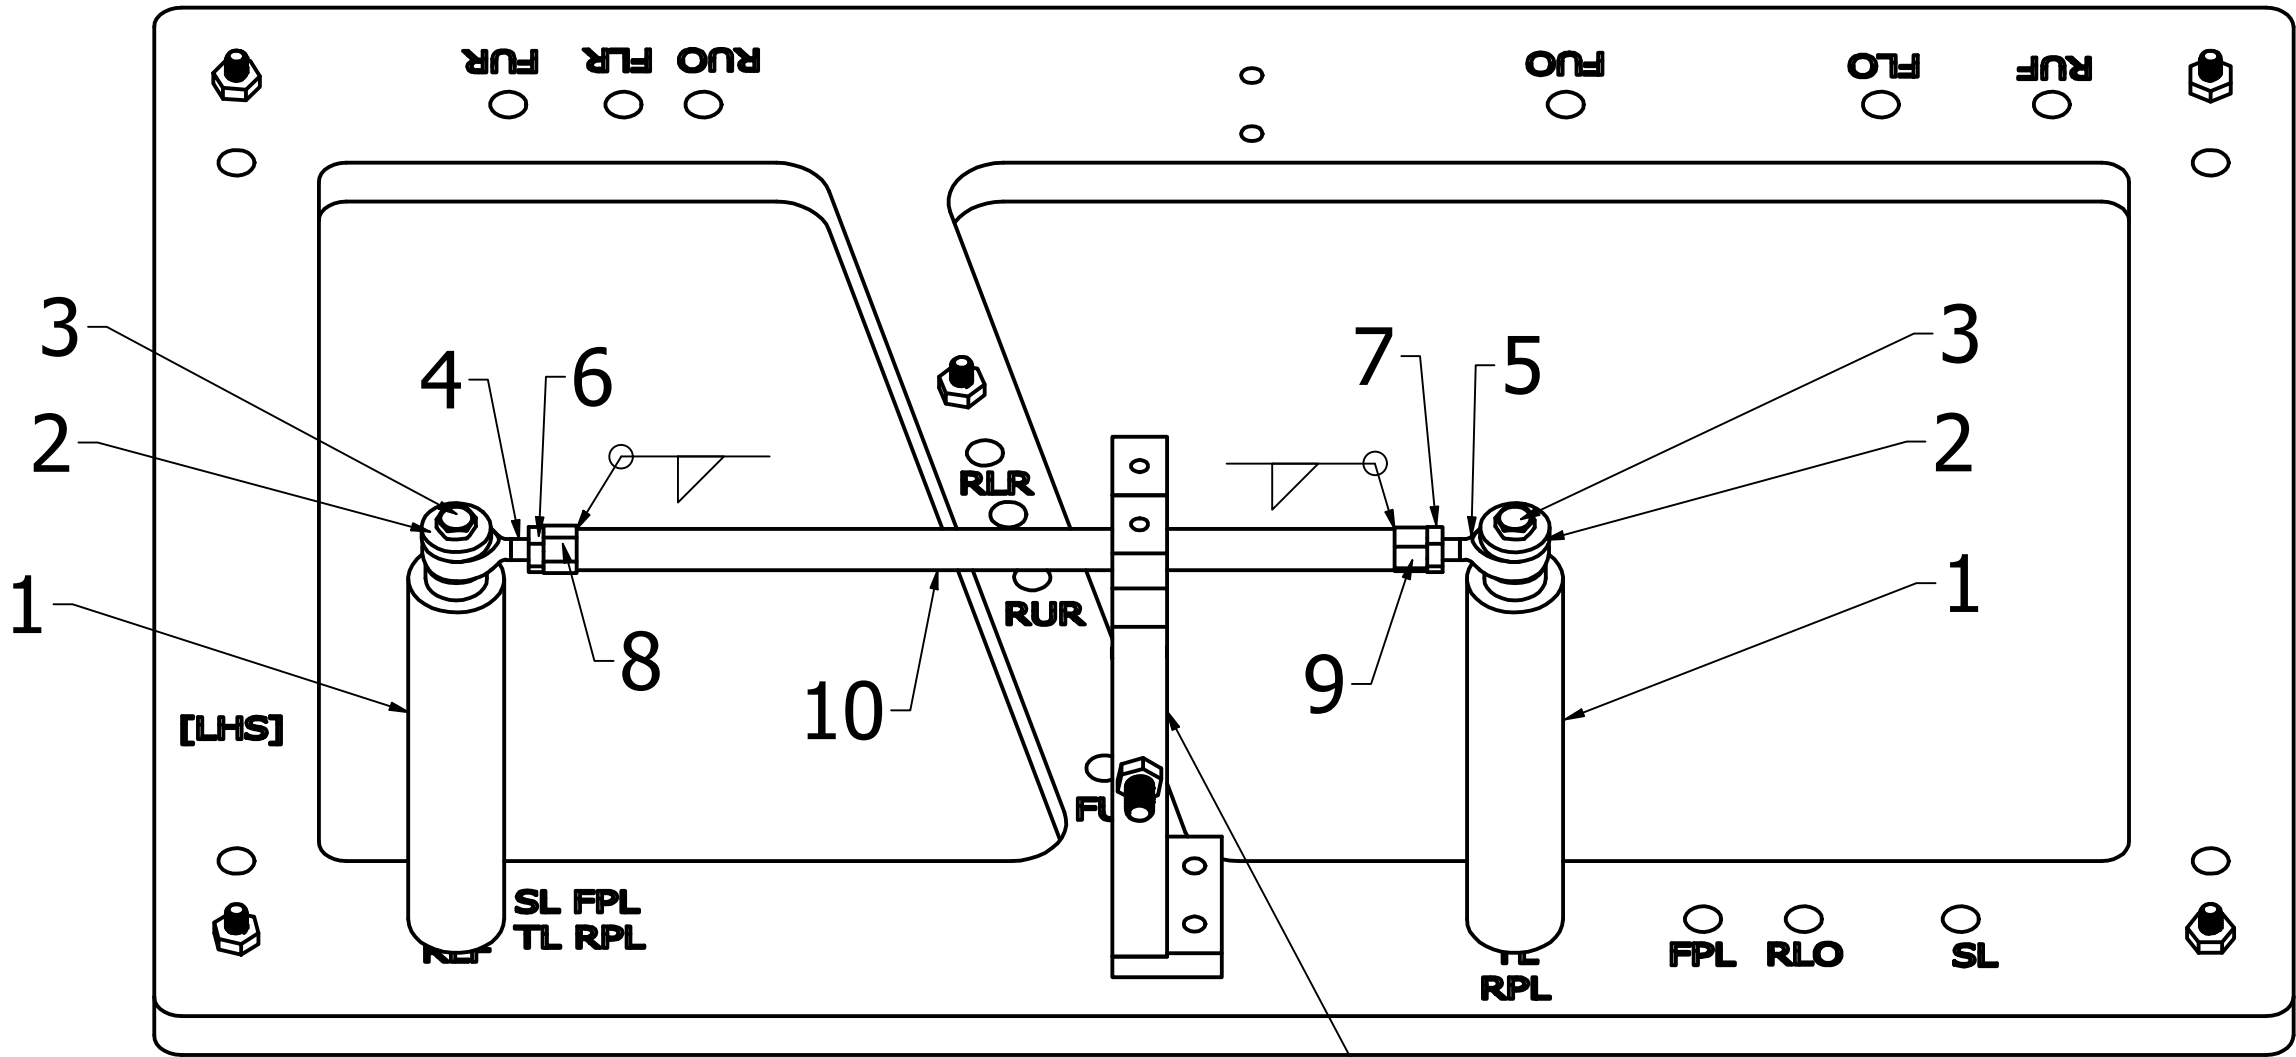



TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLESS STEEL)	2
4	JIG	AN3 ROD LH (NON PLATED)	1
5	JIG	AN3 ROD END RH (NON PLATED)	1
6	JIG	AN3 NUT LH (STAINLESS STEEL)	1
7	JIG	AN3 NUT RH (STAINLESS STEEL)	1
8	LINKS	TOE LINK INSERT LH	1
9	LINKS	TOE LINK INSERT RH	1
10	LINKS	TOE LINK TUBE	1
11	JIG	MIDPOINT SUPPORT x2, SHIM x1, AN3 BOLT 2" x1, AN3 NUT x1	1


MATERIAL		THIRD ANGLE PROJECTION 	SUBSYSTEM: JIG PLATE	DATE 6/1/2026	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH BARE		DESCRIPTION SU-A5001-AA_(TOE LINK)			
	DESIGNER D. RATTANAUIJAI					
	INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER D. RATTANAUIJAI	SIZE B	P/N SU26_A08	REV
	ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DRAWN BY D. RATTANAUIJAI	SCALE 1/1.75	DO NOT SCALE	SHEET 1 / 1
ALL DIMENSIONS IN INCHES		APPROVAL				

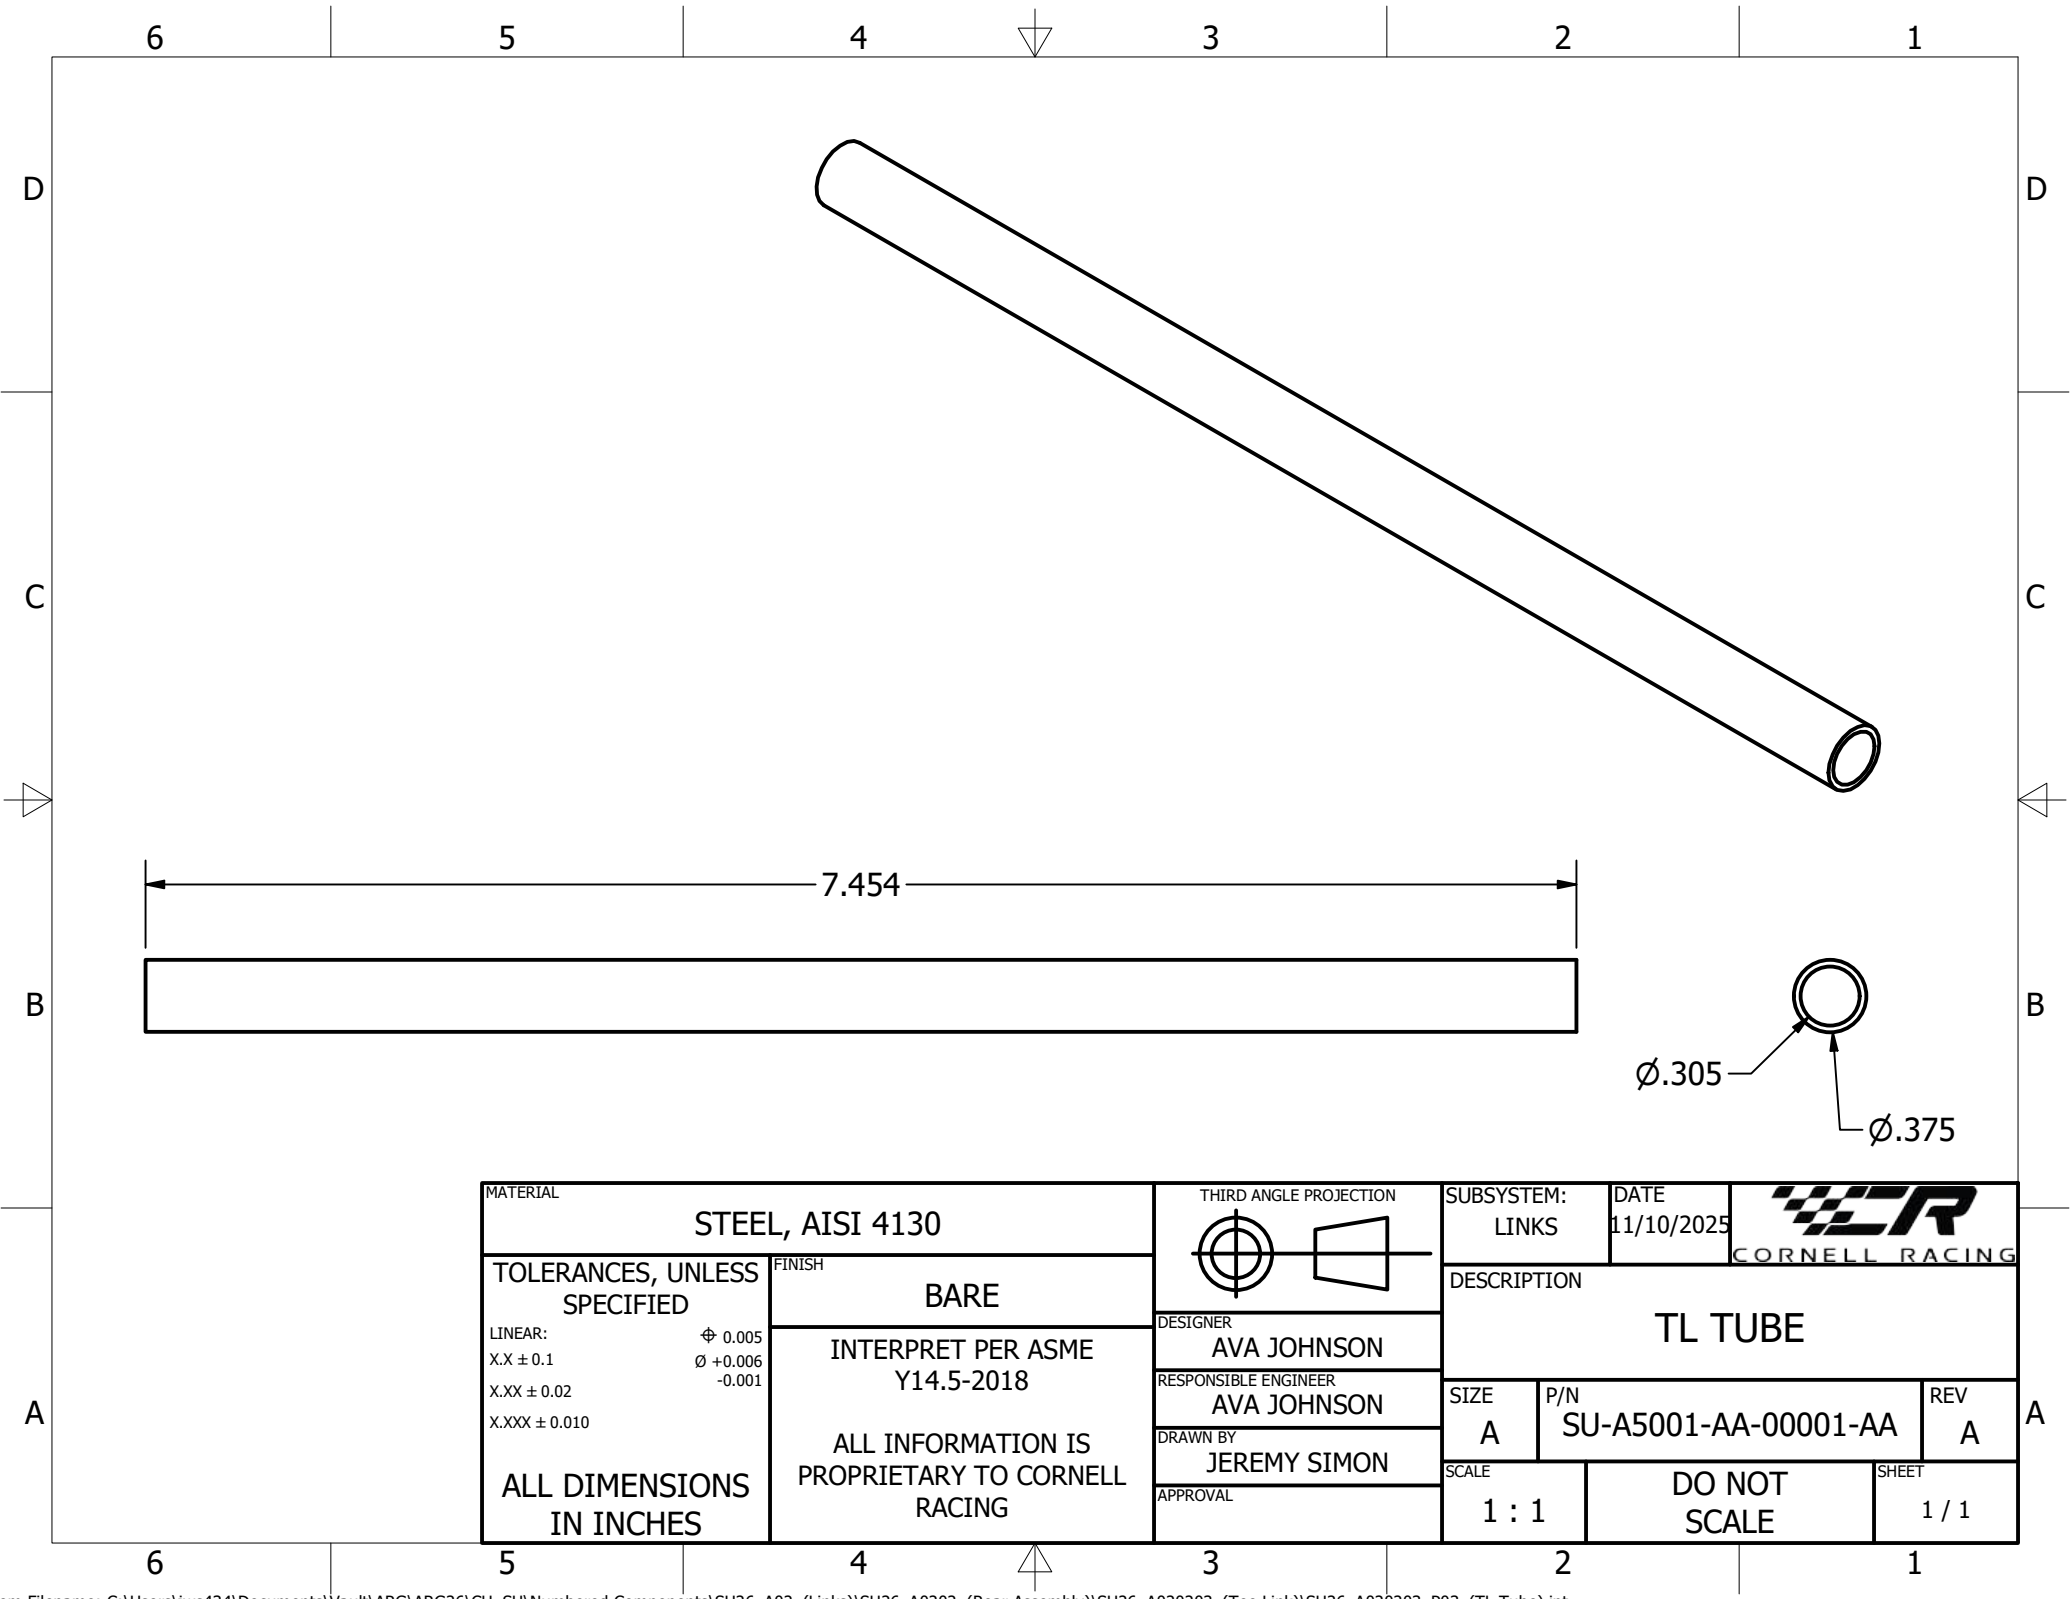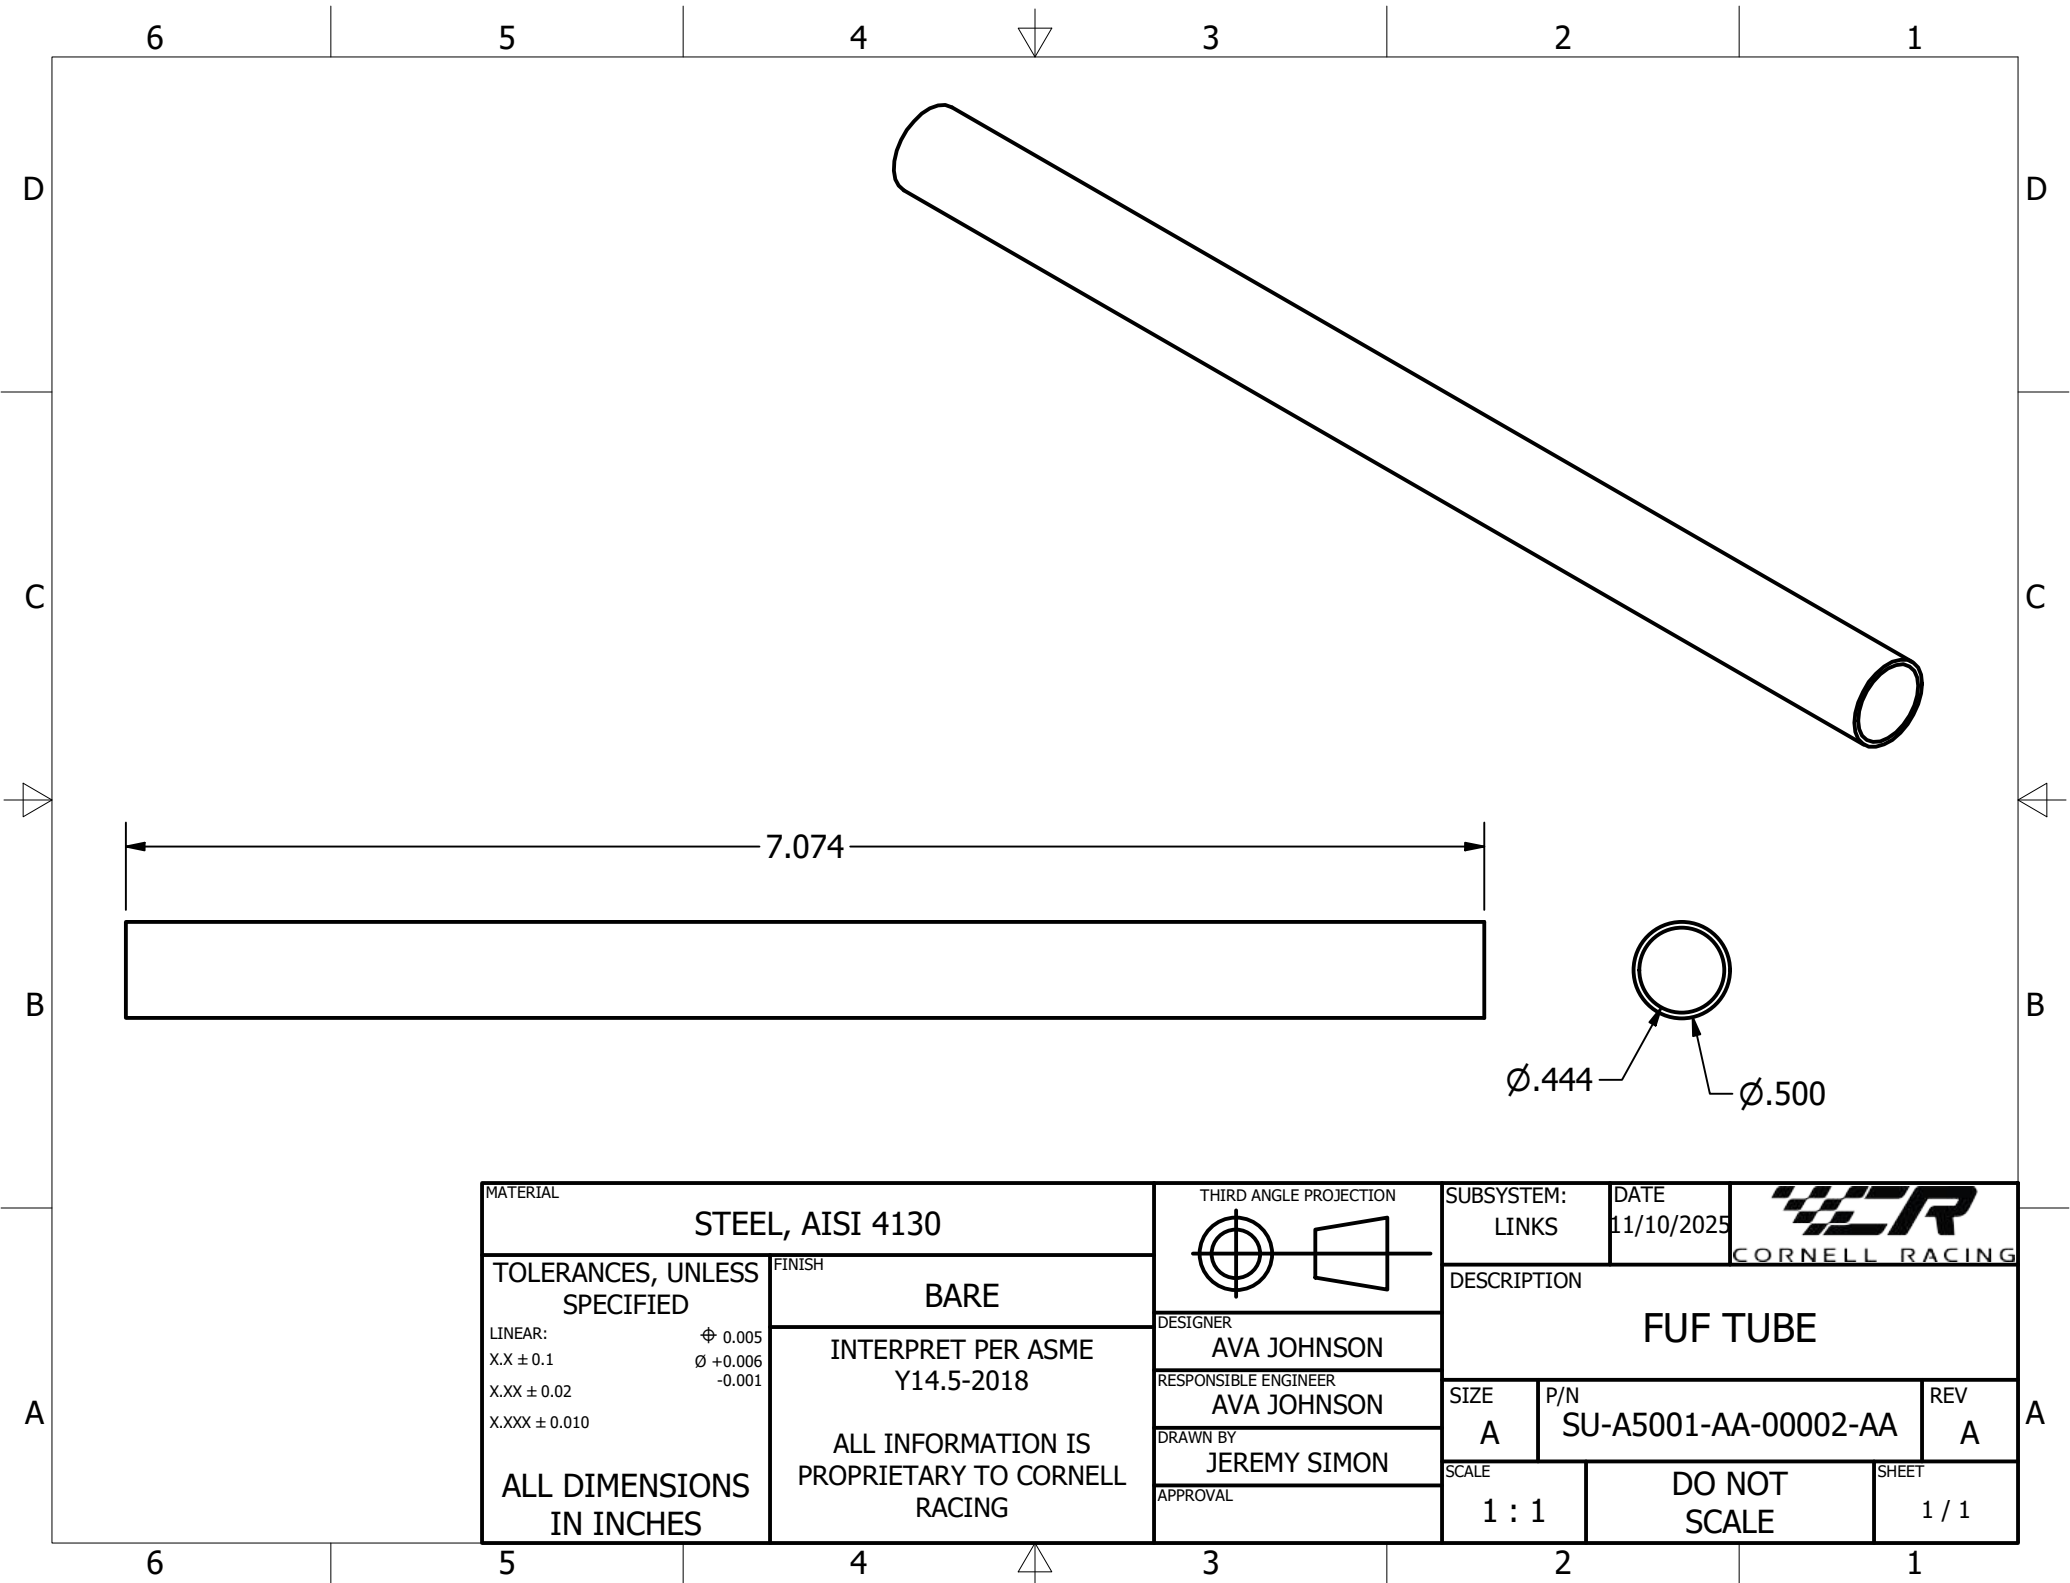





MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS		DATE 11/10/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION FUF TUBE					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		Ø 0.005 Ø +0.006 -0.001		DESIGNER AVA JOHNSON		SIZE A		P/N SU-A5001-AA-00002-AA		REV A	
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER AVA JOHNSON		SCALE 1 : 1		DO NOT SCALE		SHEET 1 / 1	
				DRAWN BY JEREMY SIMON							
				APPROVAL							

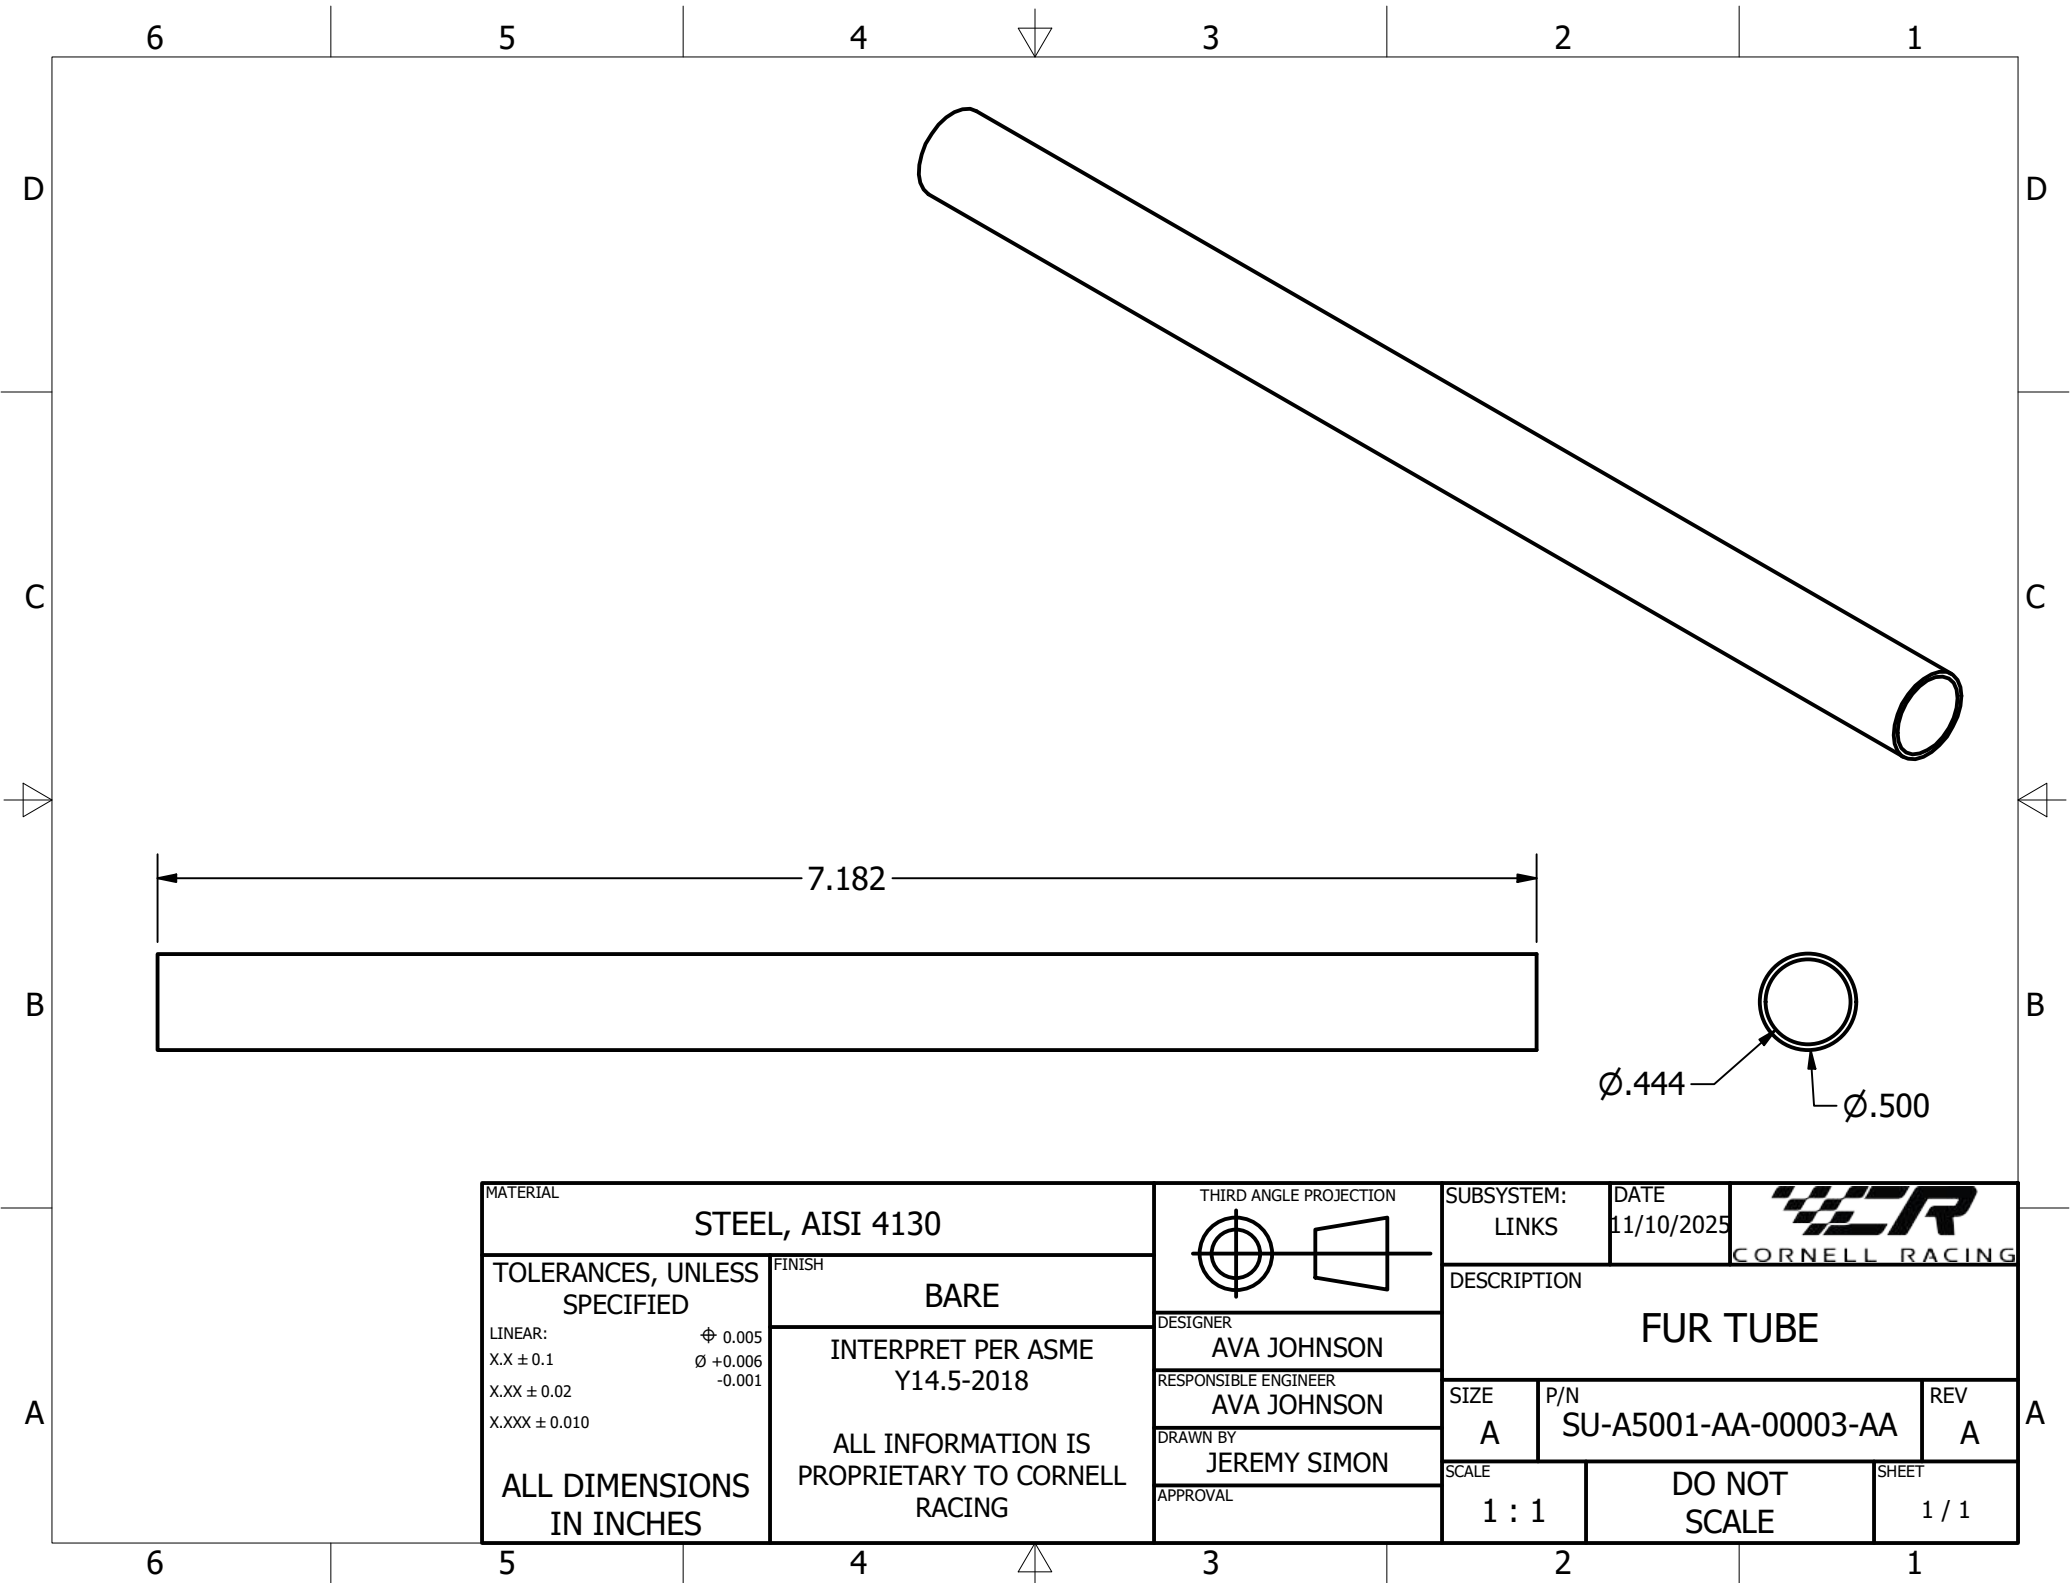



MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS		DATE 11/10/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION FUR TUBE					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		⌀ 0.005 ⌀ +0.006 -0.001		DESIGNER AVA JOHNSON		SIZE A		P/N SU-A5001-AA-00003-AA		REV A	
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER AVA JOHNSON		SCALE 1 : 1		DO NOT SCALE		SHEET 1 / 1	
				DRAWN BY JEREMY SIMON							
				APPROVAL							

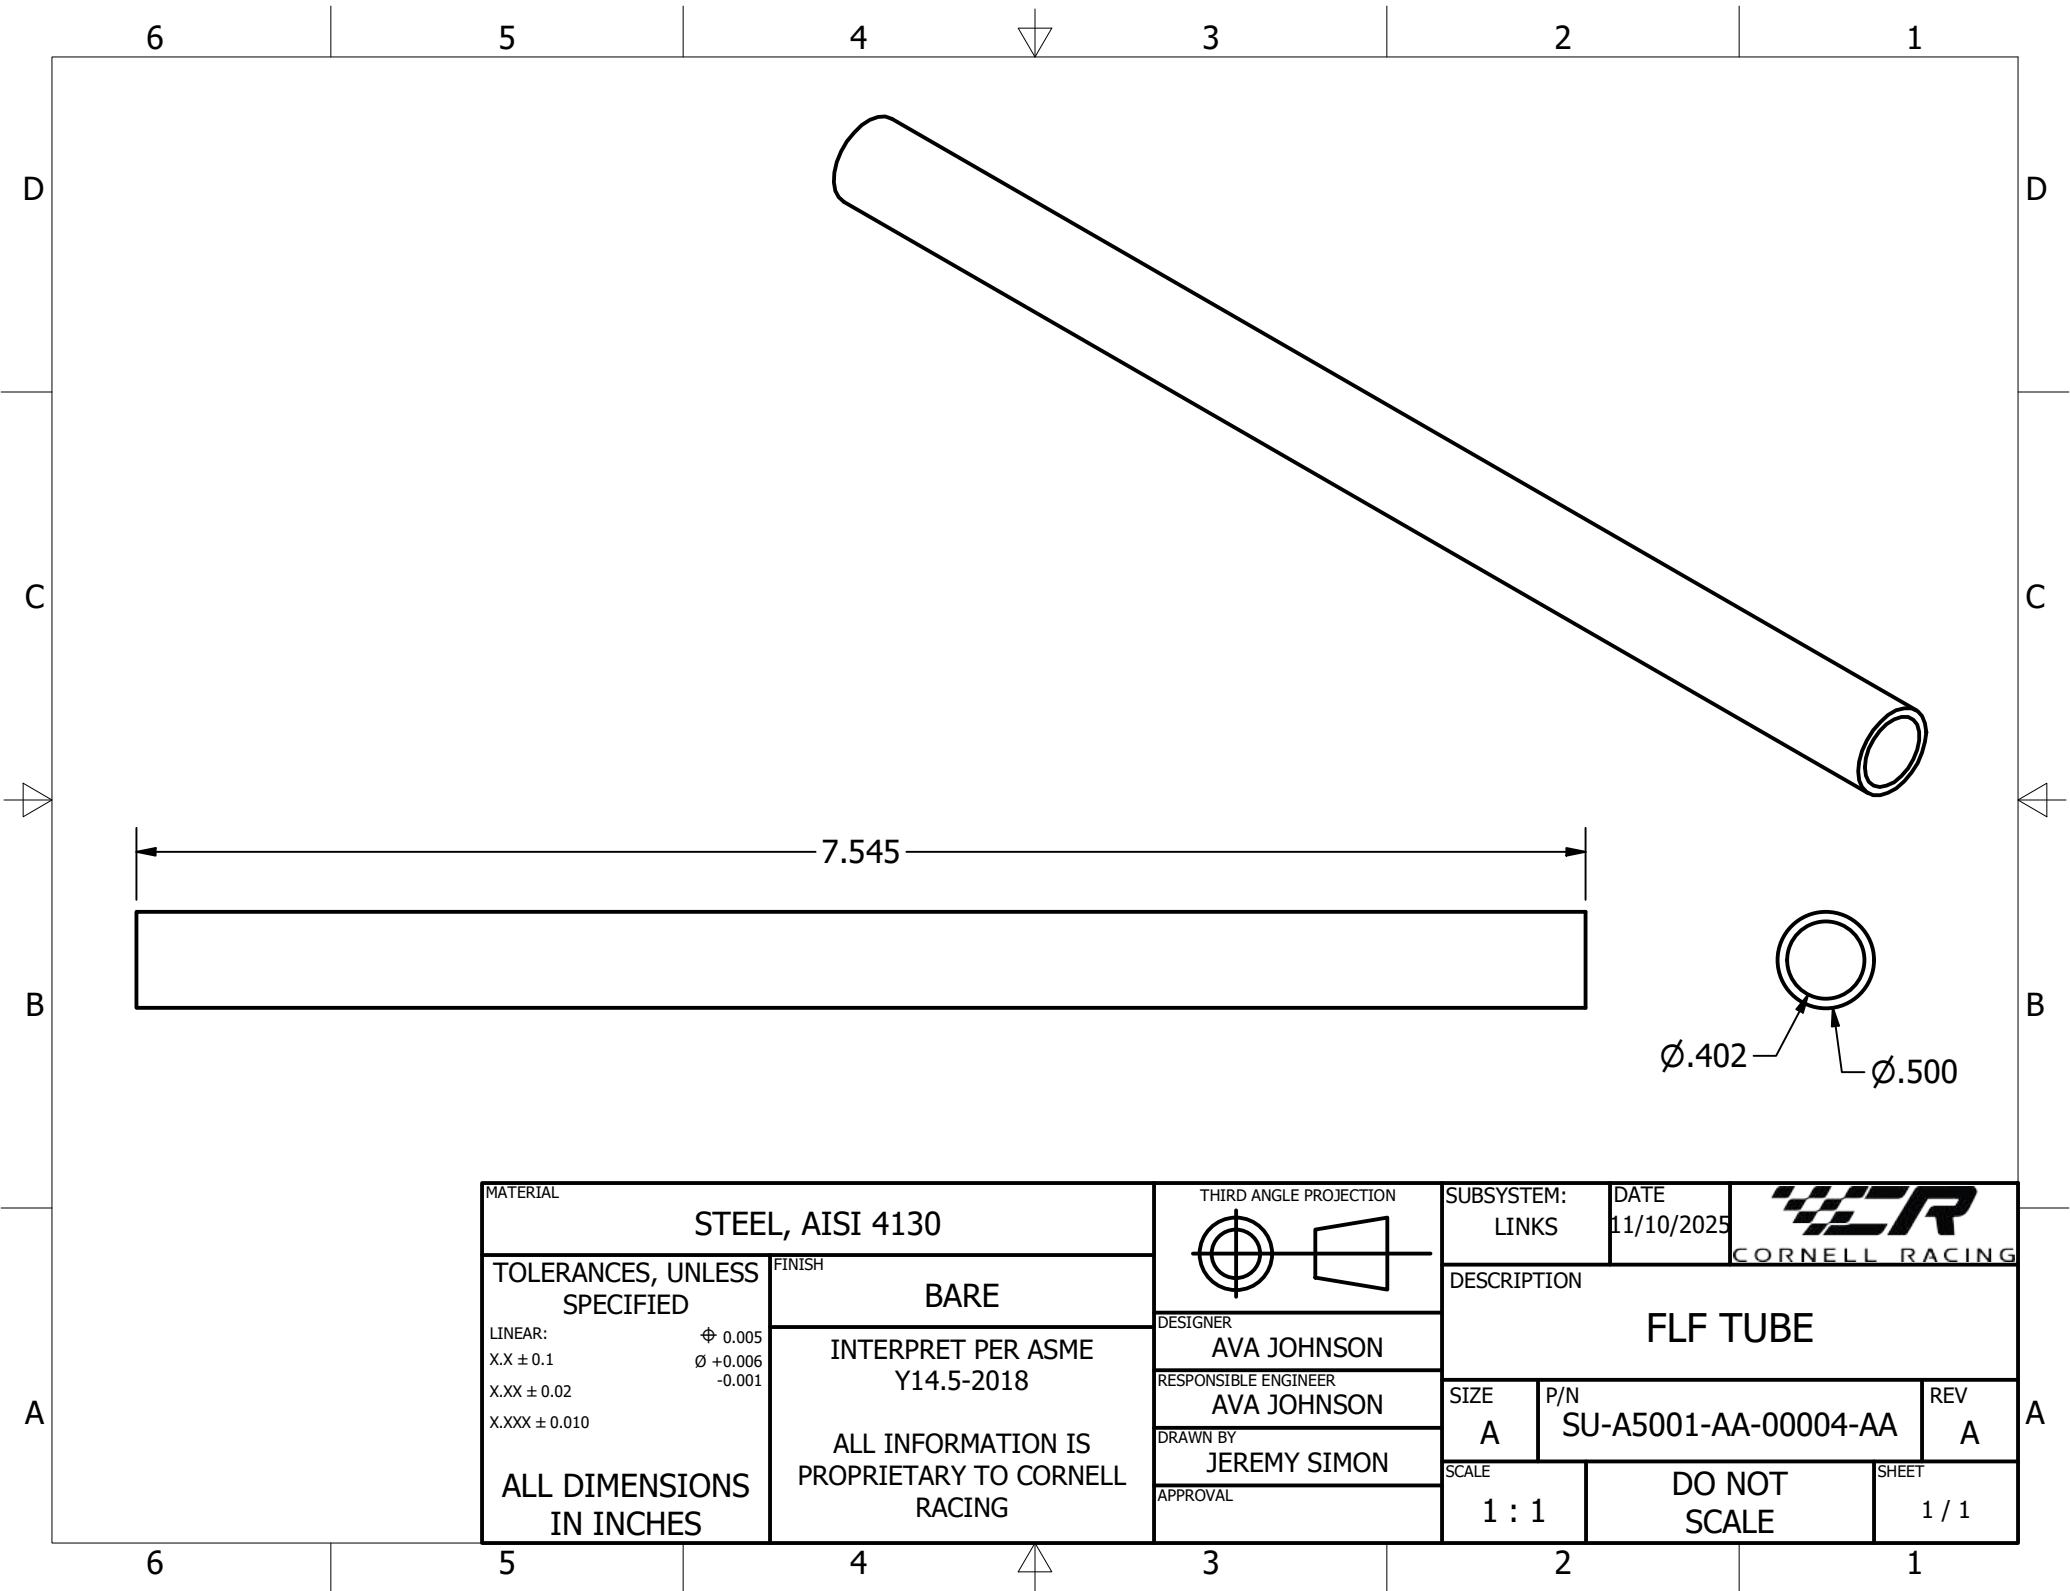



MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS		DATE 11/10/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION FLF TUBE					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		⌀ 0.005 ⌀ +0.006 -0.001		INTERPRET PER ASME Y14.5-2018		DESIGNER AVA JOHNSON		RESPONSIBLE ENGINEER AVA JOHNSON		DRAWN BY JEREMY SIMON	
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		APPROVAL		SIZE A		P/N SU-A5001-AA-00004-AA		REV A	
						SCALE 1 : 1		DO NOT SCALE		SHEET 1 / 1	

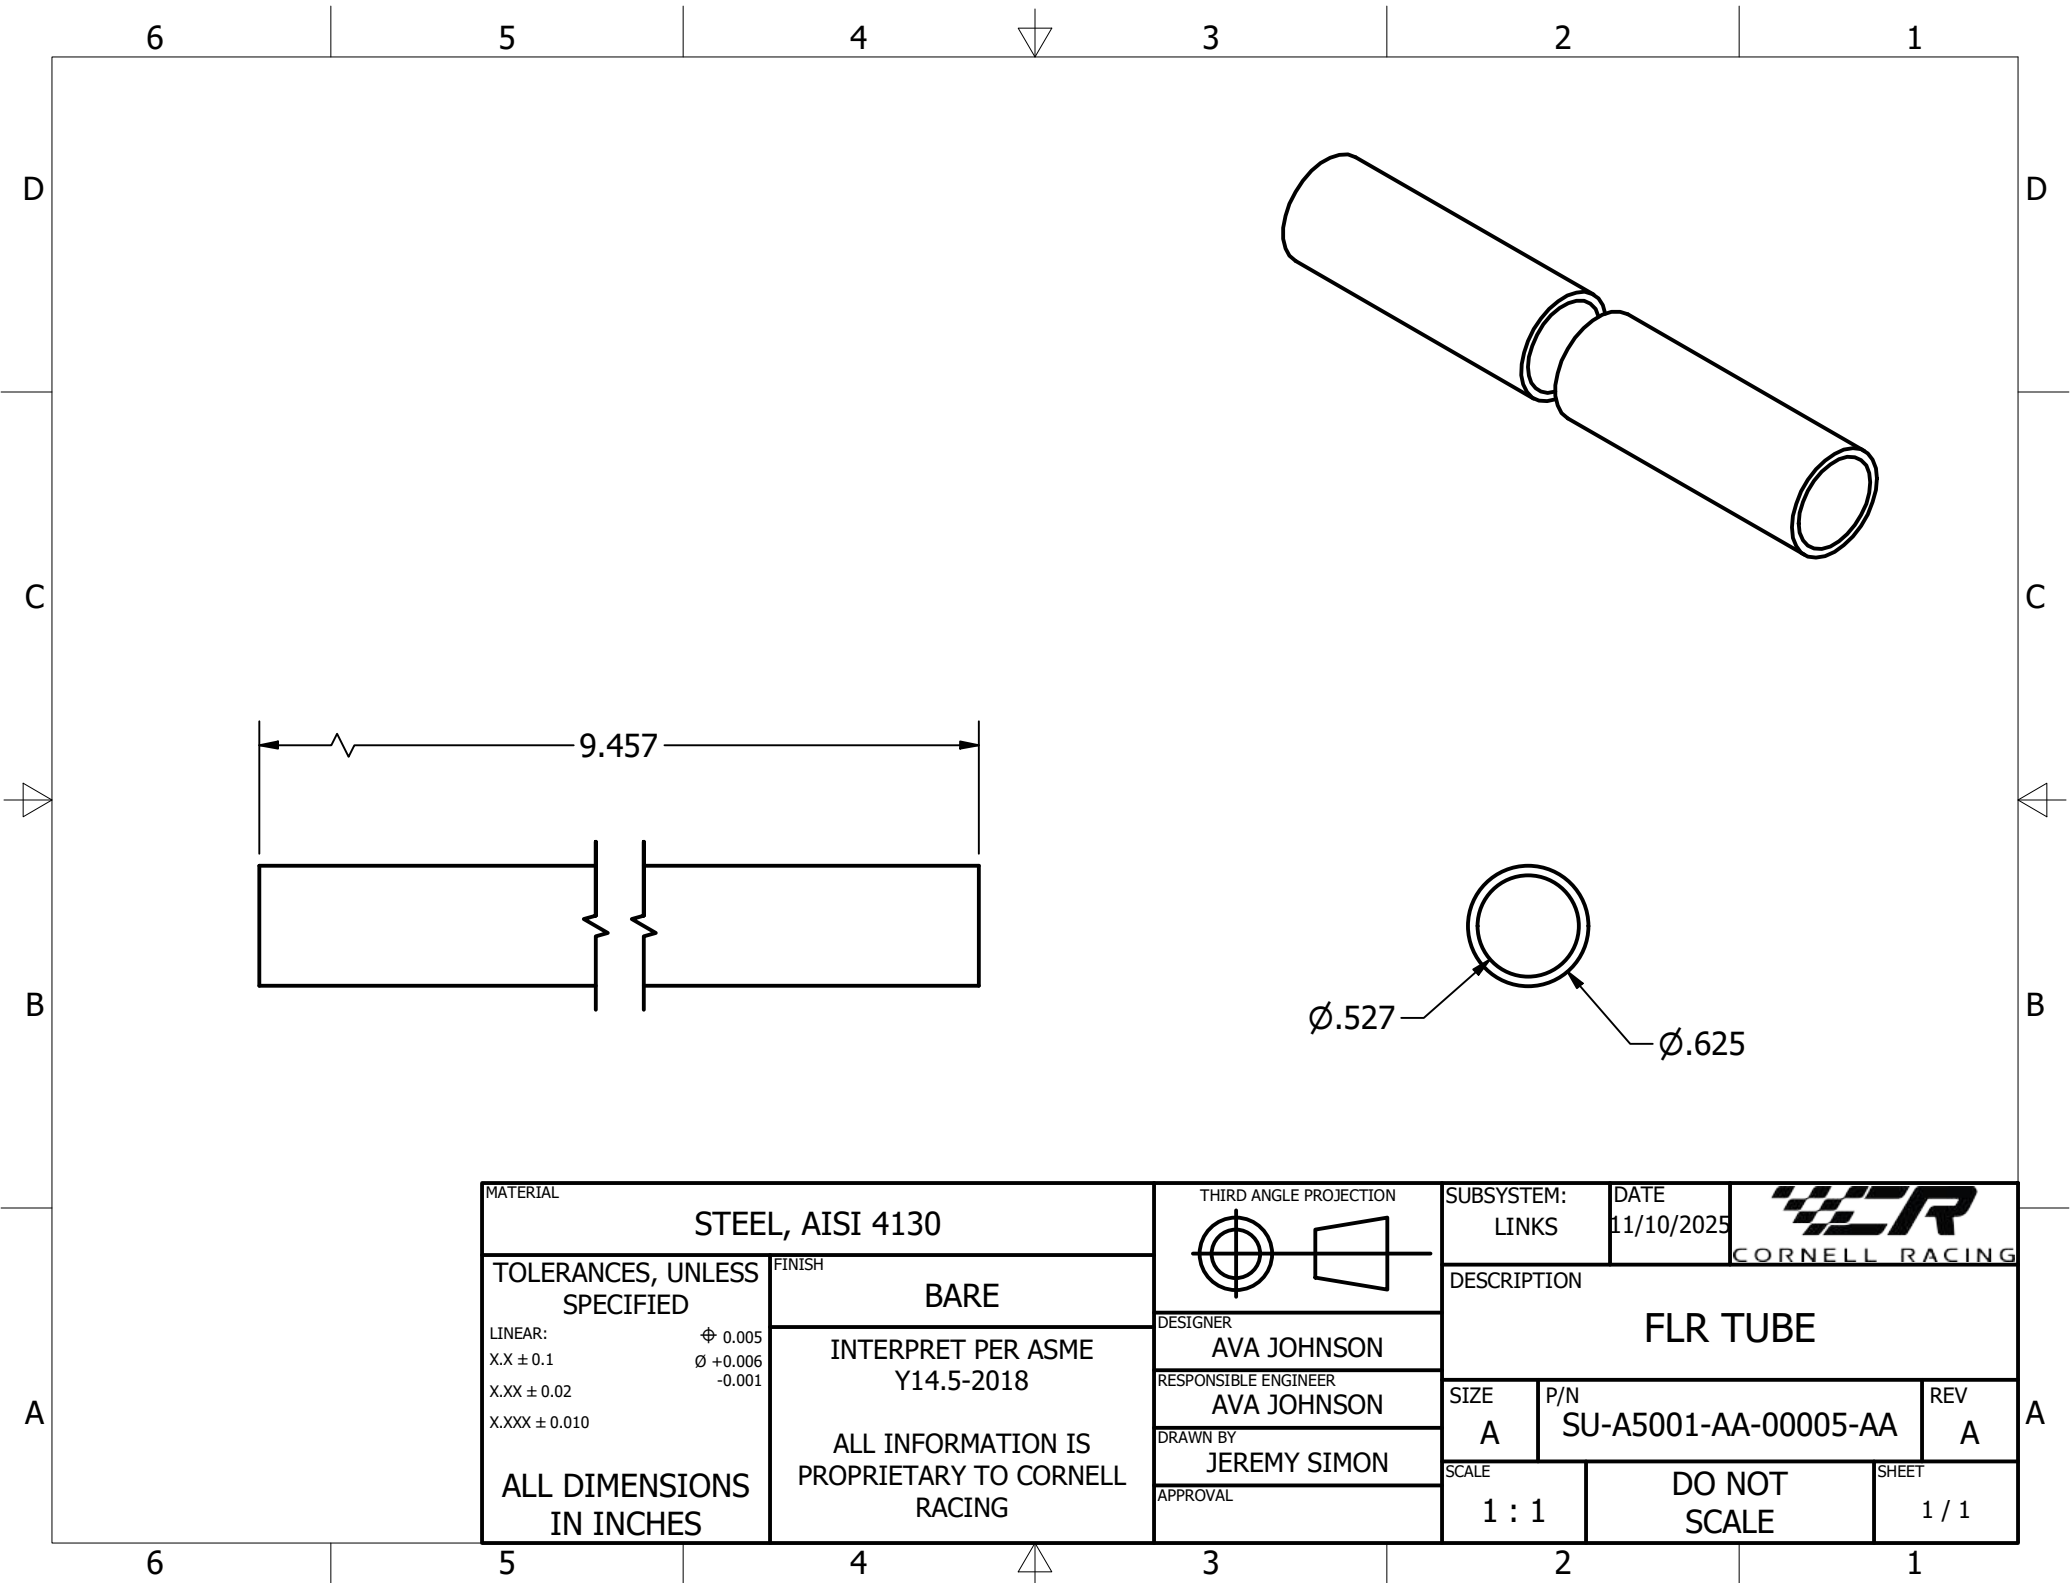


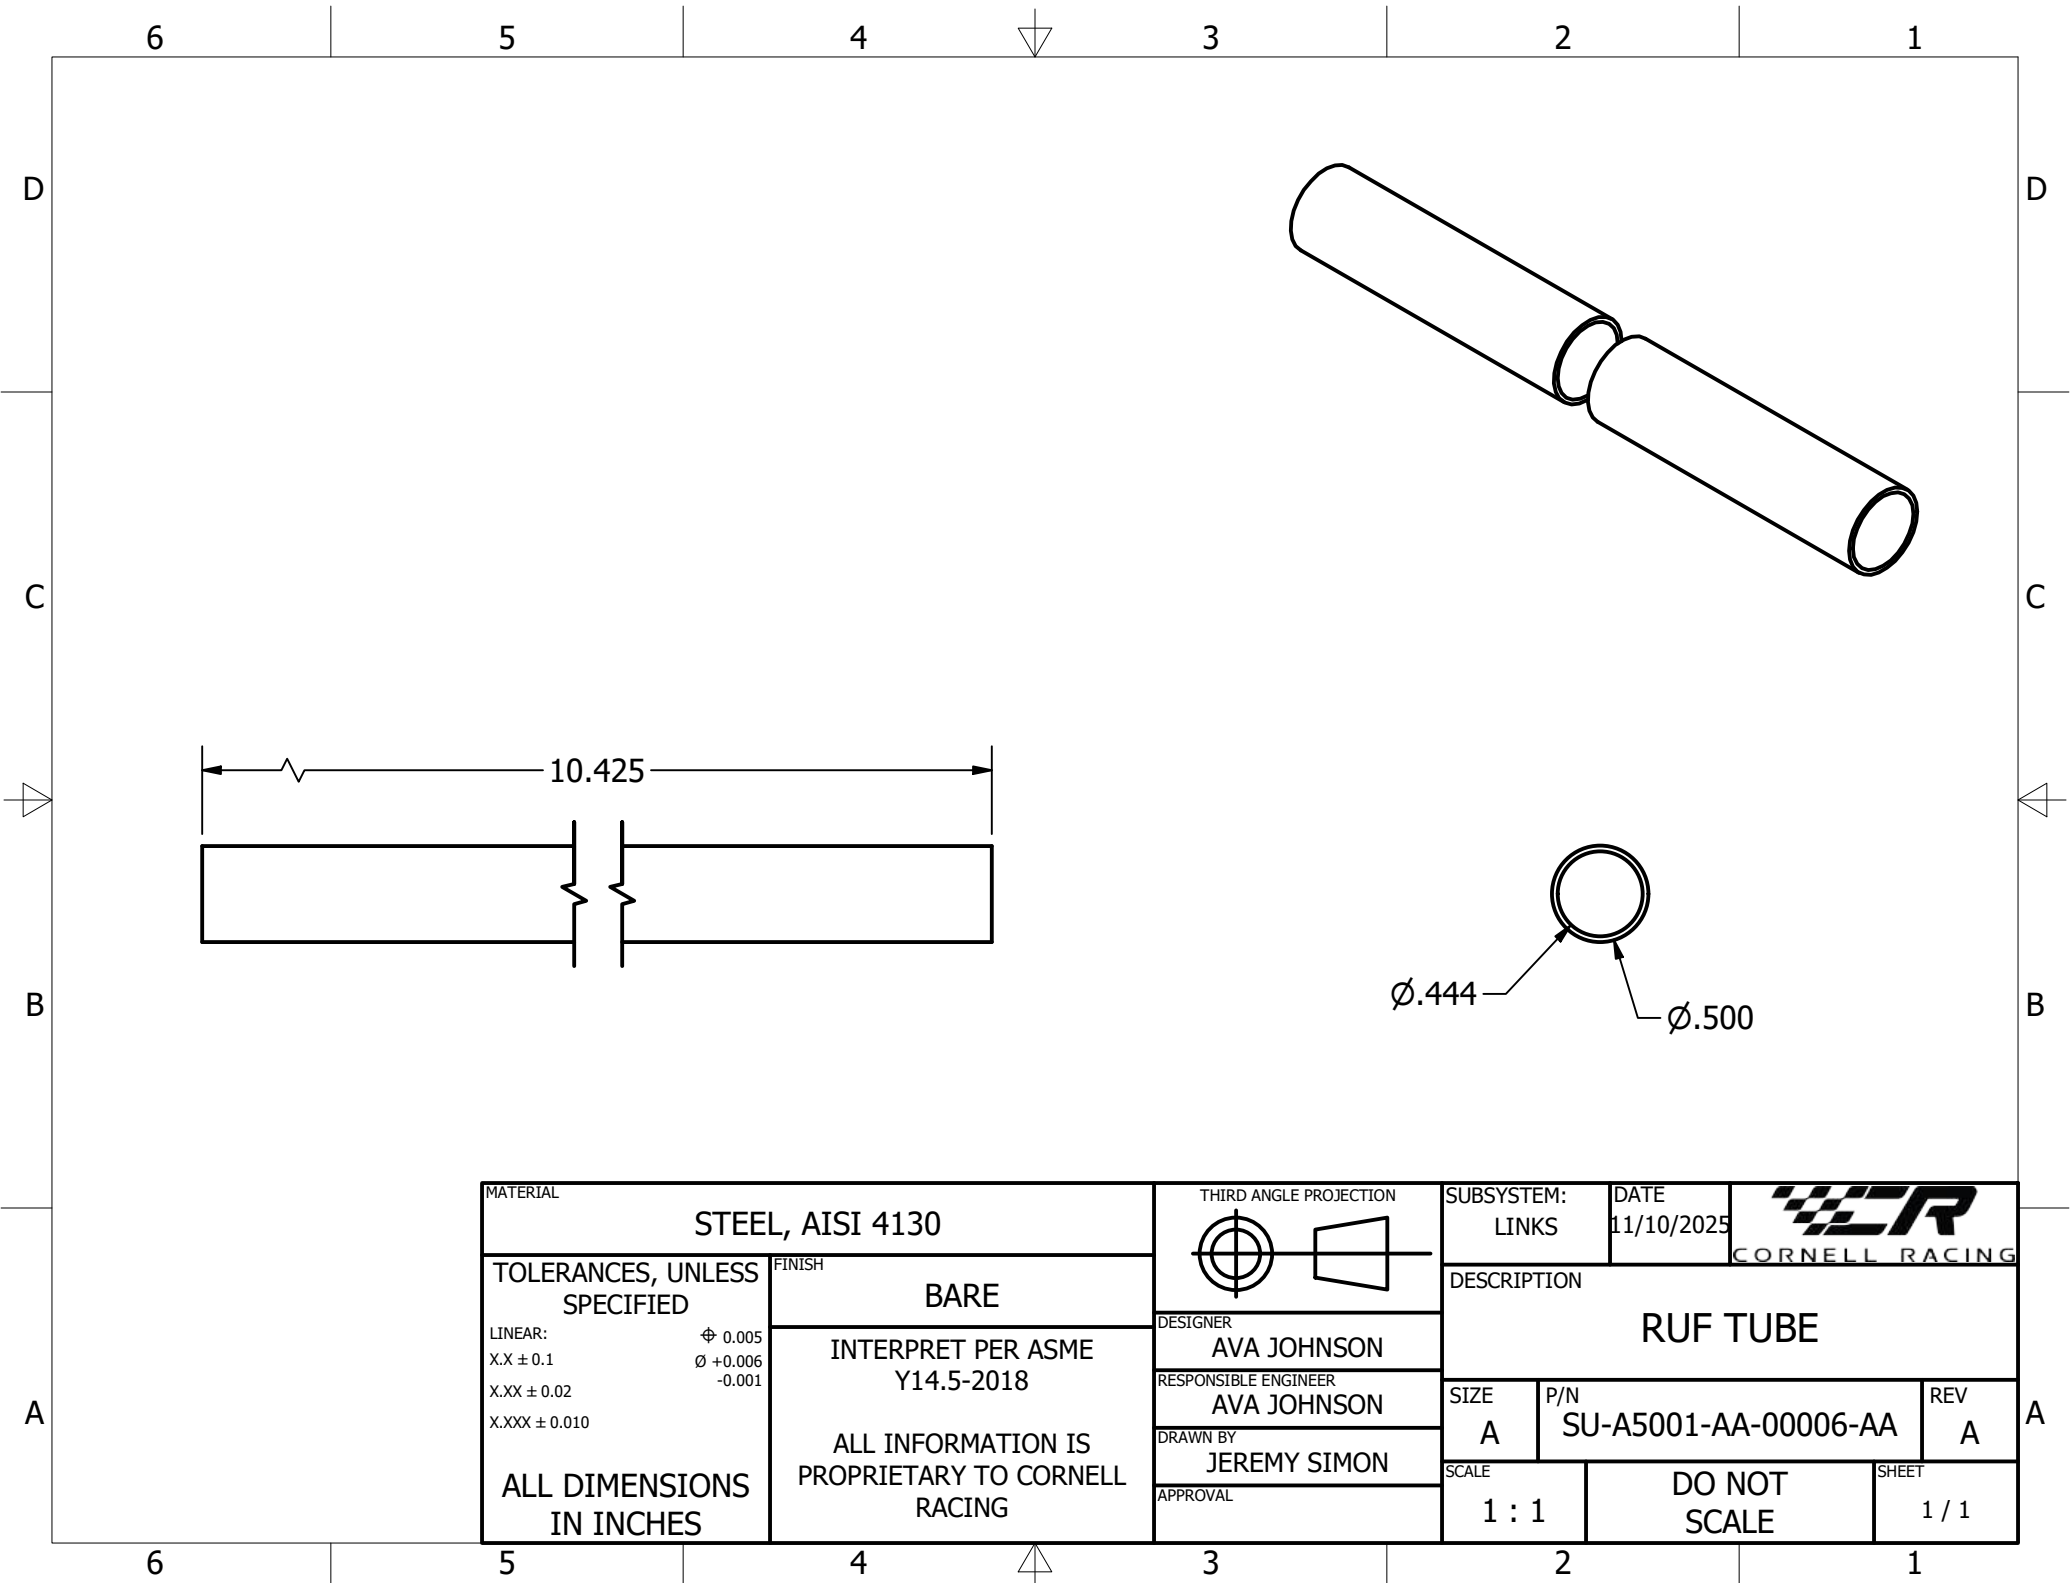

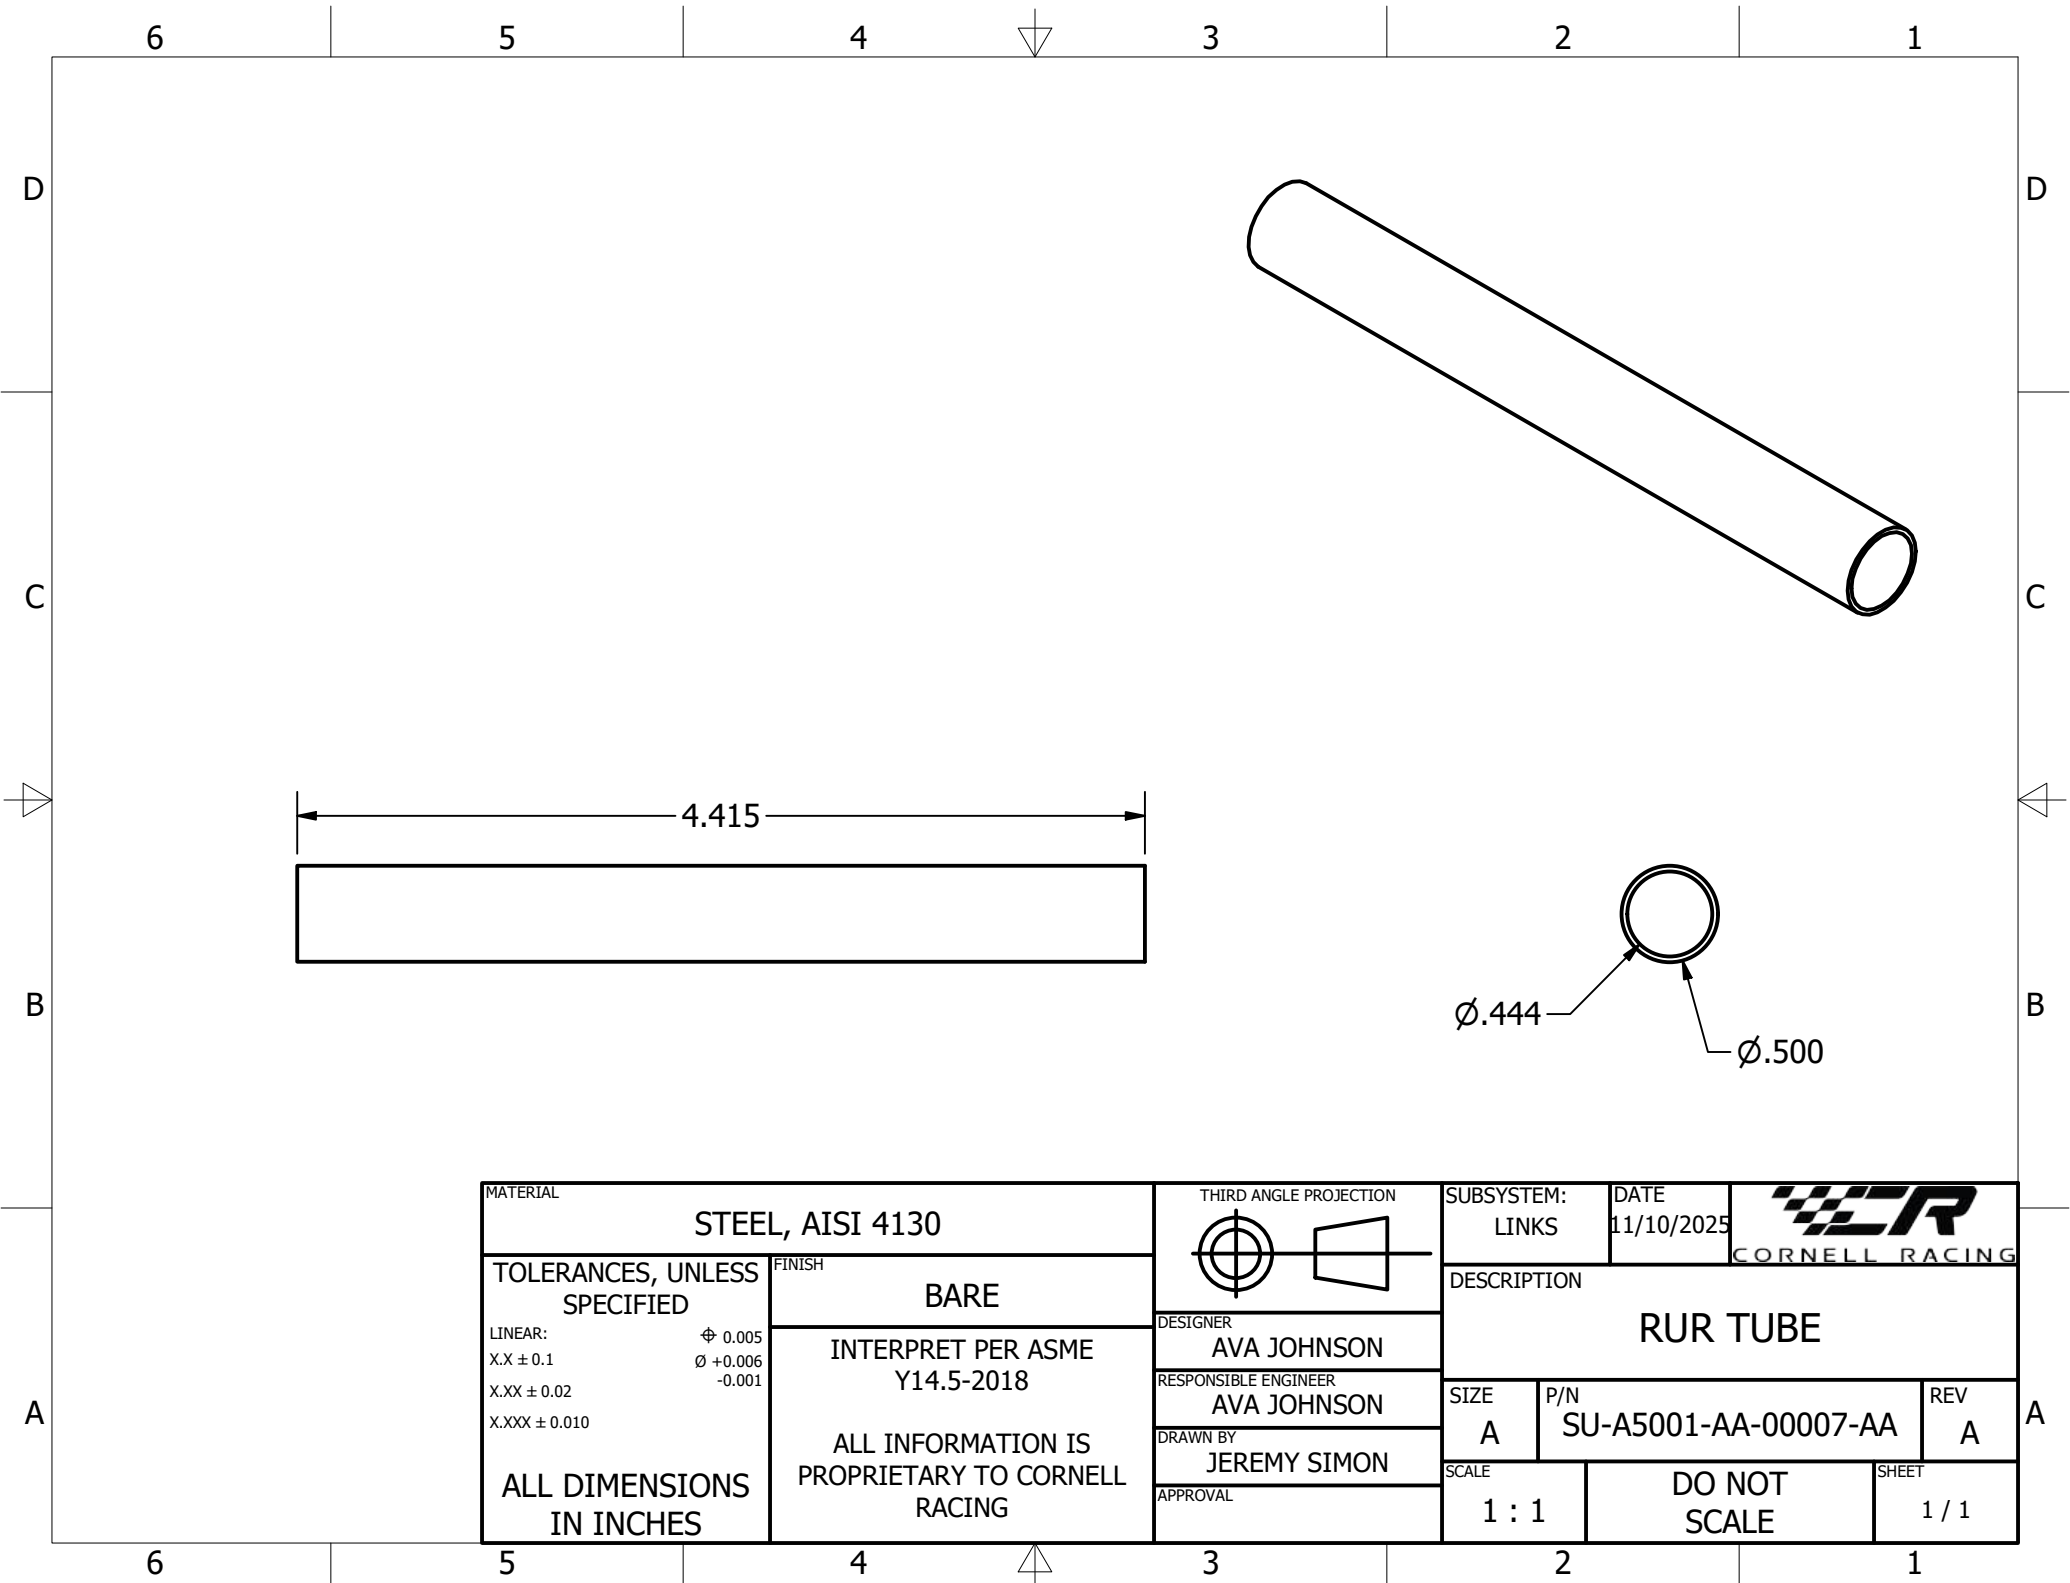




MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS	DATE 11/10/2025	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION RUR TUBE			
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		Ø 0.005 Ø +0.006 -0.001		DESIGNER AVA JOHNSON		SIZE A	P/N SU-A5001-AA-00007-AA		REV A
		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER AVA JOHNSON					
				DRAWN BY JEREMY SIMON		SCALE 1 : 1	DO NOT SCALE		SHEET 1 / 1
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		APPROVAL					

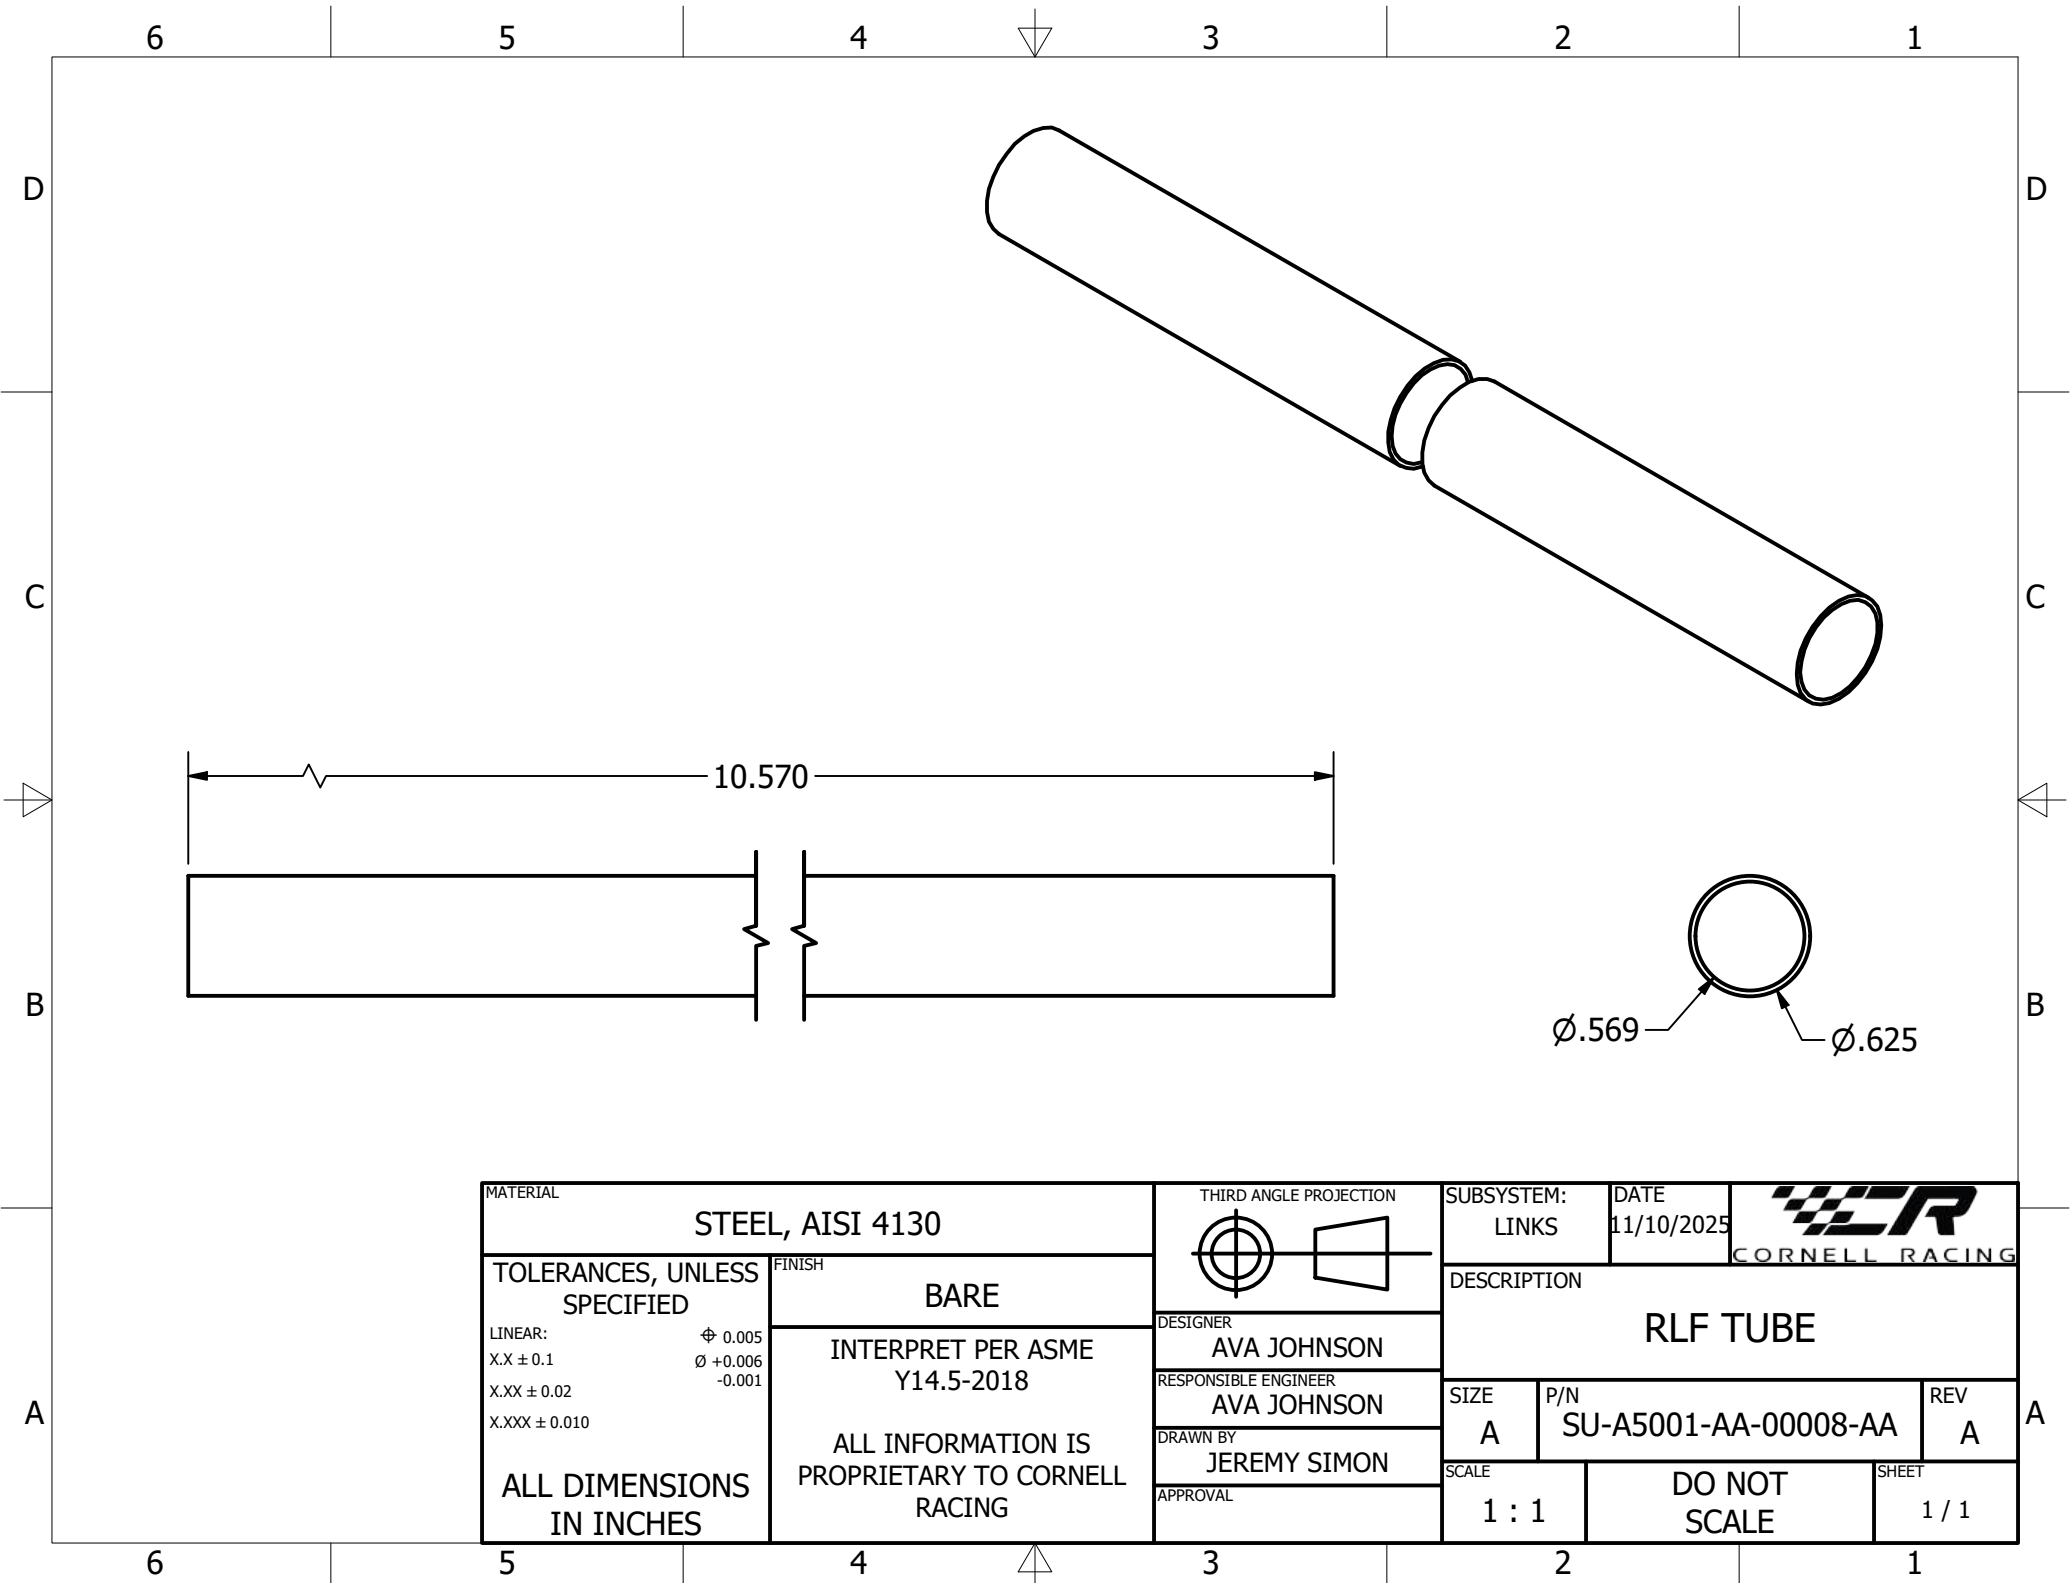


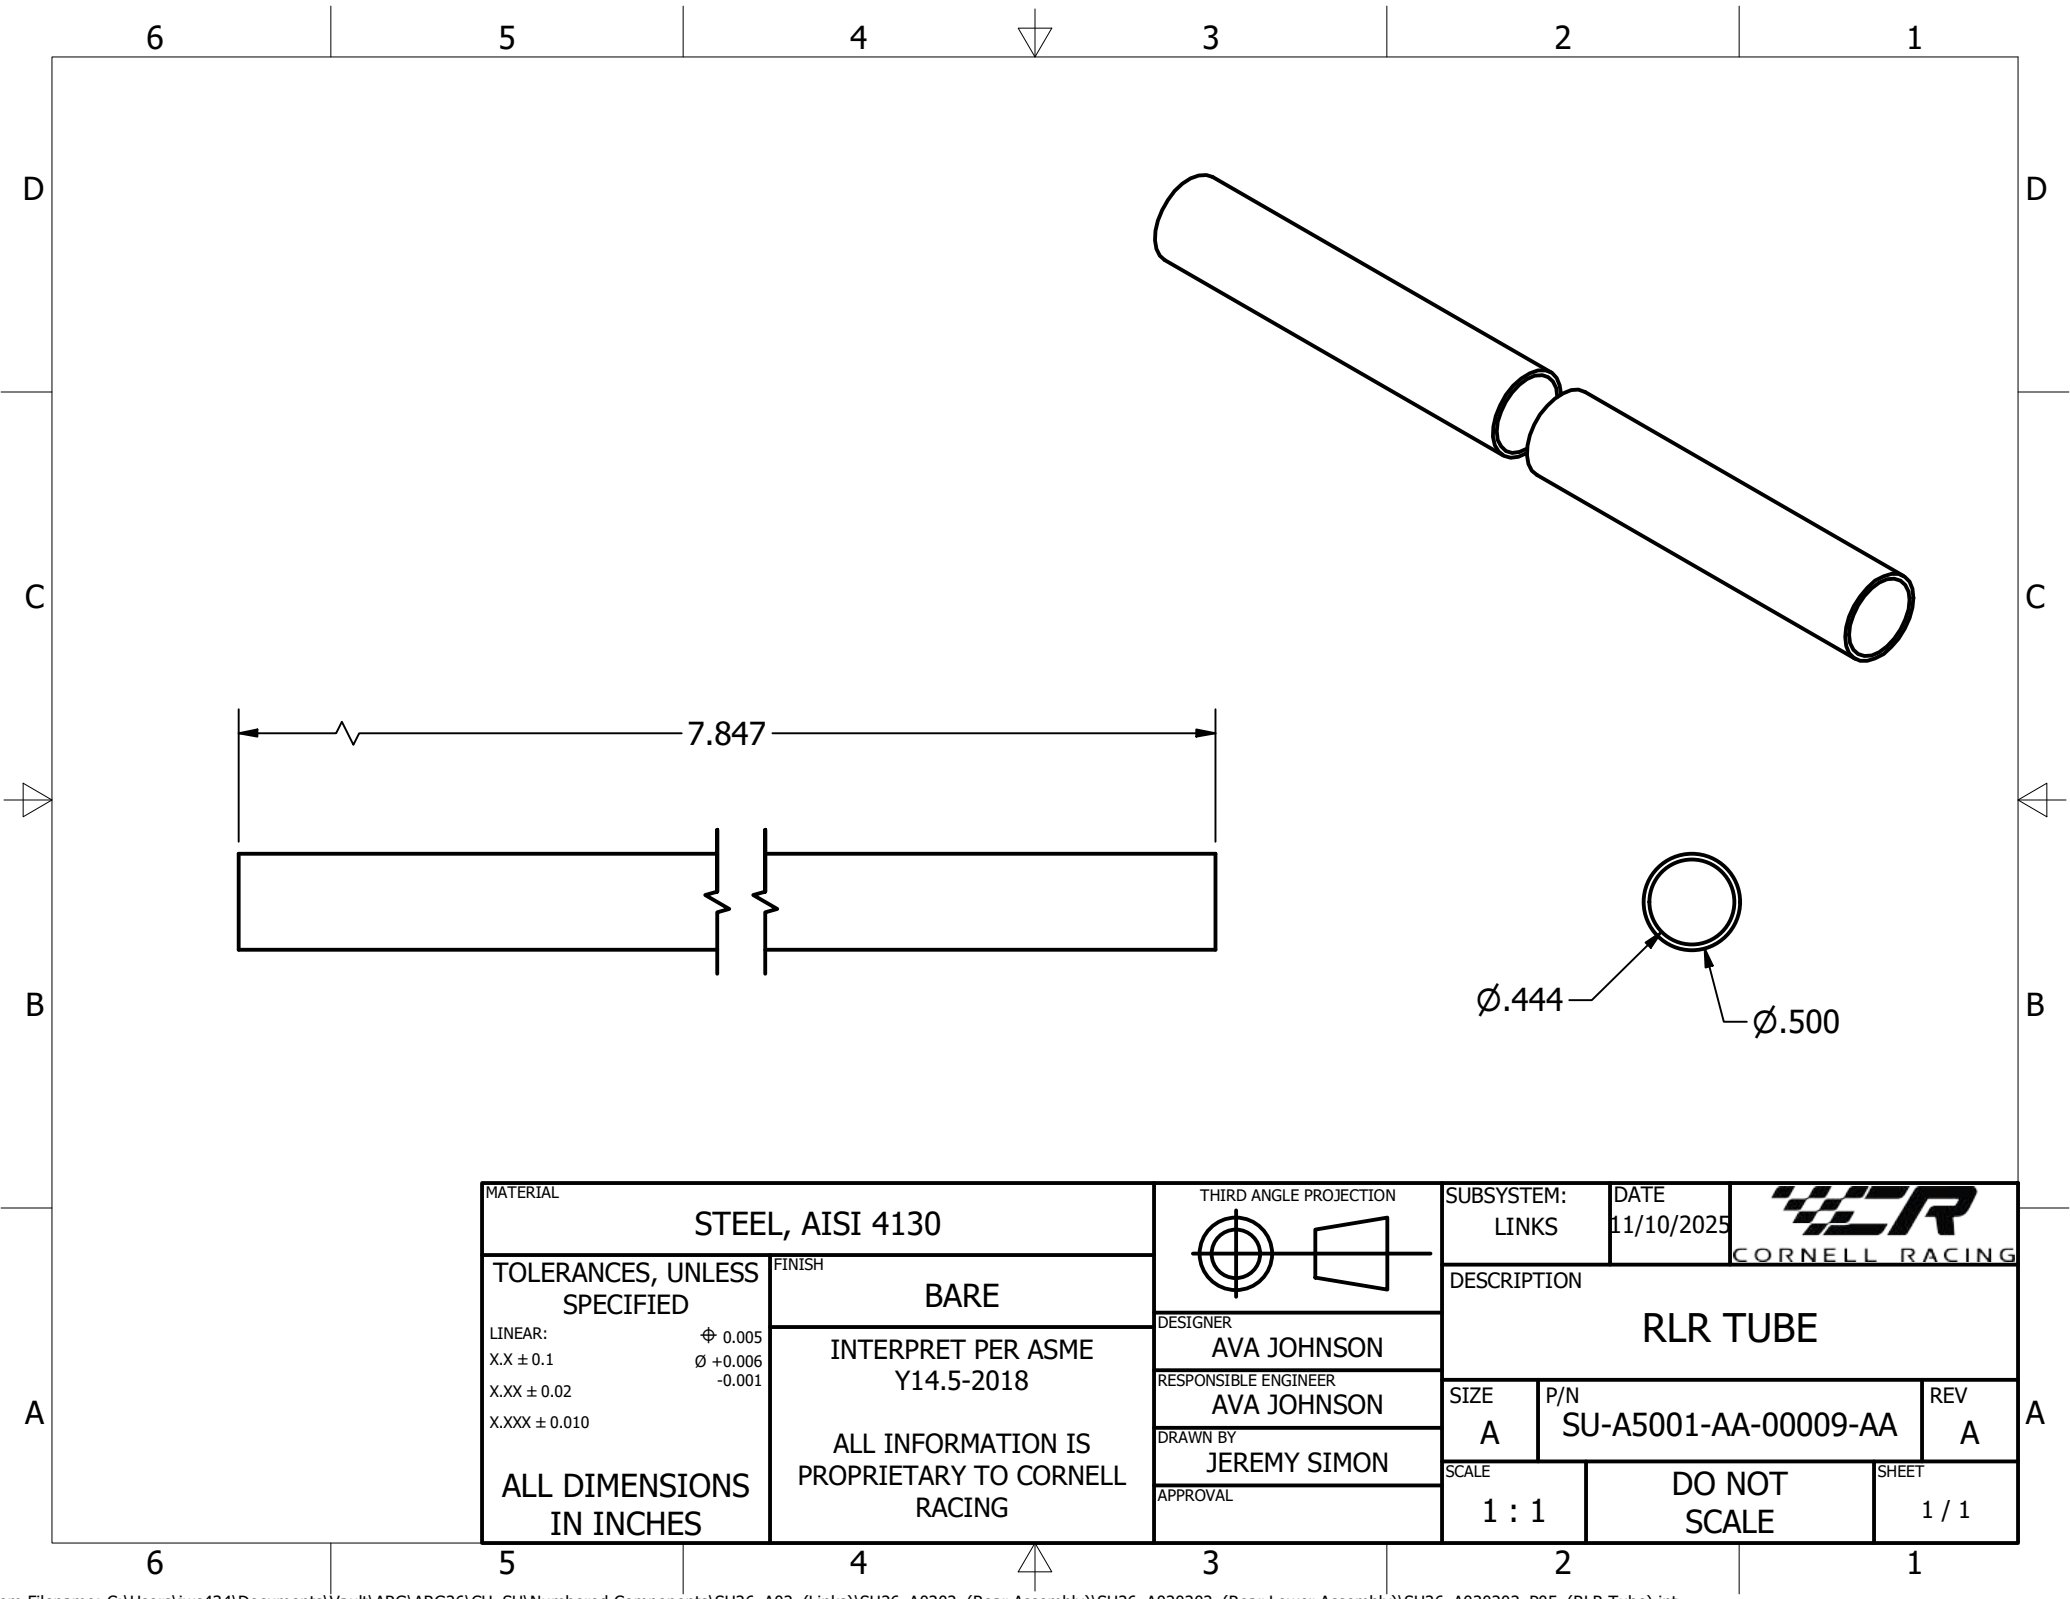

NOTES, UNLESS OTHERWISE SPECIFIED:
1. #21 TAP DRILL




10-32 UNF - 2B LH
THRU
NOTE 1

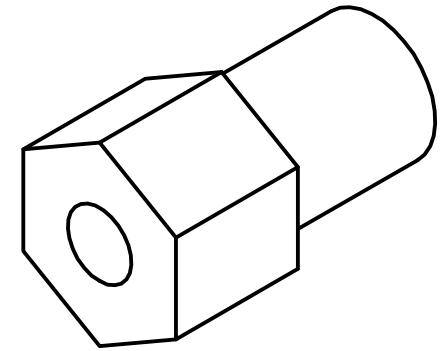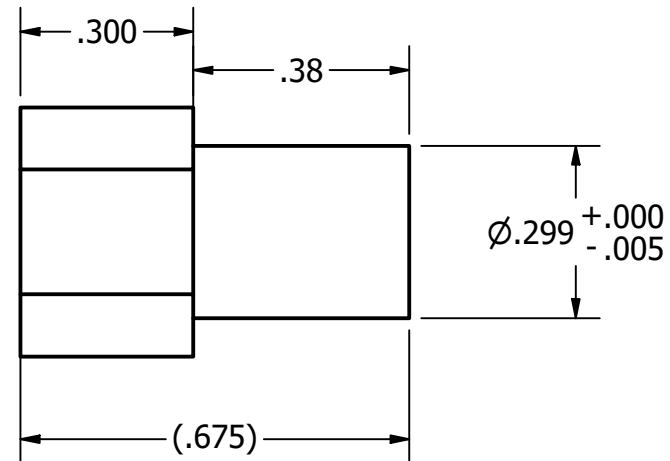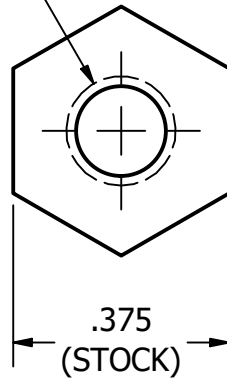


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE				
STEEL, AISI 4340				LINKS		3/22/2026		CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION				
BARE		INTERPRET PER ASME Y14.5-2018		AVA JOHNSON		TL INSERT LH				
LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER AVA JOHNSON		SIZE A		P/N SU-A5001-AA-00010-AA		REV A
ALL DIMENSIONS IN INCHES				DRAWN BY SUJAN MUNVER		SCALE 3:1		DO NOT SCALE		SHEET 1 / 1
				APPROVAL						

NOTES, UNLESS OTHERWISE SPECIFIED:
1. #21 TAP DRILL


10-32 UNF - 2B
NOTE 1

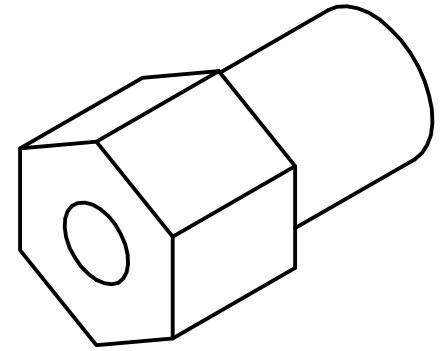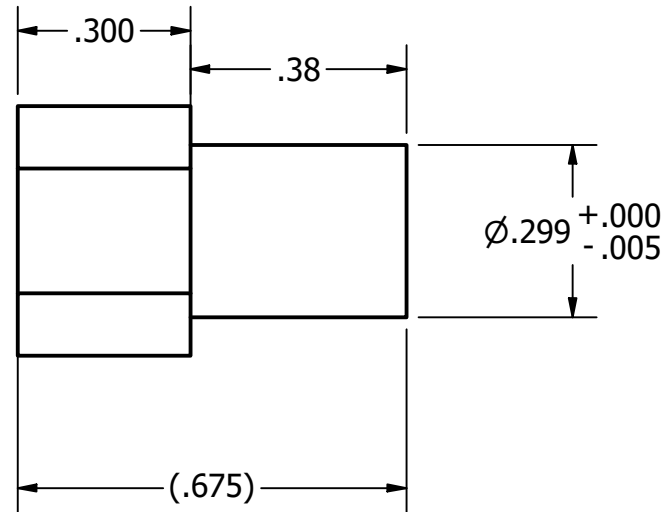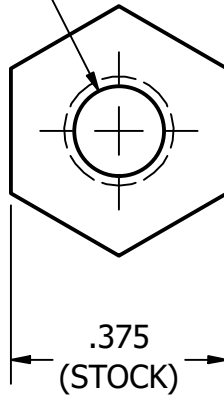


MATERIAL STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS	DATE 11/23/2025	 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 Ø 0.005 Ø +0.006 -0.001		FINISH BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER AVA JOHNSON RESPONSIBLE ENGINEER AVA JOHNSON DRAWN BY SUJAN MUNVER APPROVAL				DESCRIPTION TL INSERT RH	
ALL DIMENSIONS IN INCHES				SIZE A	P/N SU-A5001-AA-00011-AA	REV A			
				SCALE 3:1	DO NOT SCALE		SHEET 1 / 1		

NOTES, UNLESS OTHERWISE SPECIFIED:
THIS IS A MINIMUM DIMENSION DRAWING
CAD IS MASTER FOR ALL UNLISTED DIMENSIONS


SECTION A-A
SCALE 1 : 1

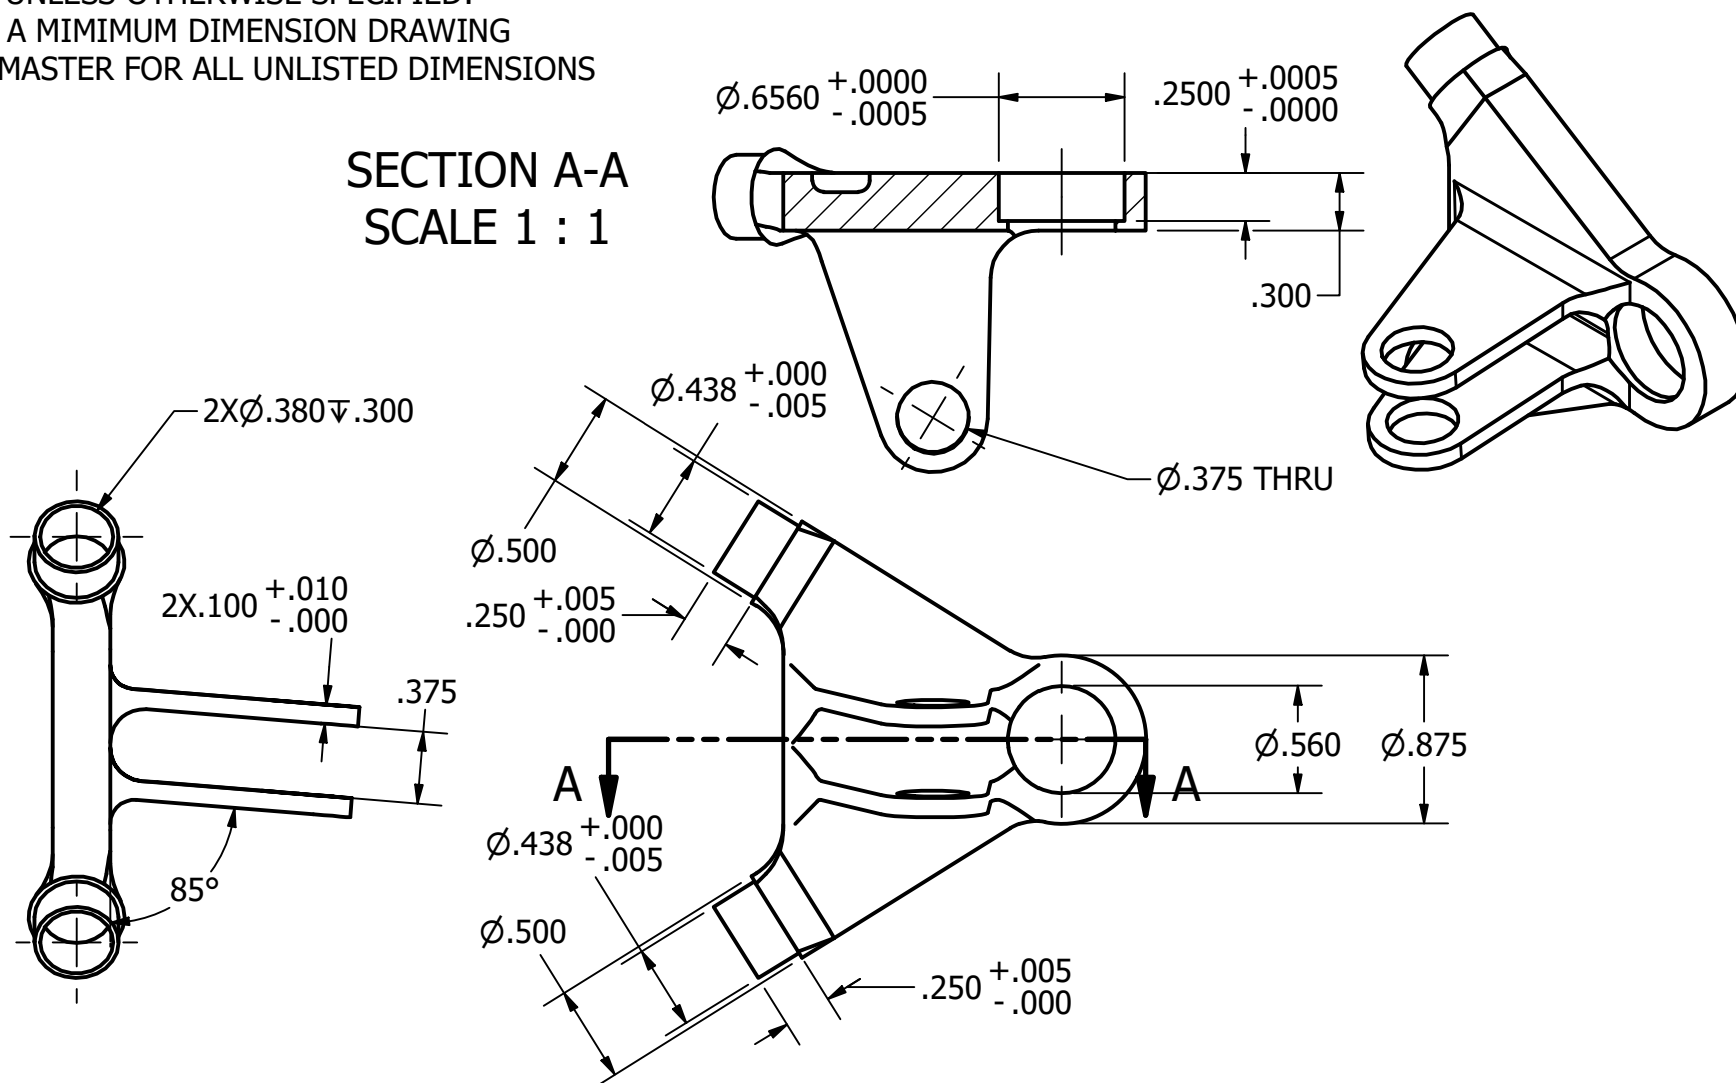


MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: LINKS		DATE 12/16/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018				DESIGNER AVA JOHNSON		FU OUTBOARD ADAPTER LHS			
Ø 0.005 Ø +0.006 -0.001		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING				RESPONSIBLE ENGINEER AVA JOHNSON					
						DRAWN BY A. BACKHOLM					
ALL DIMENSIONS IN INCHES						APPROVAL		SIZE A		P/N SU-A5001-AA-00012-AA	
		SCALE 1 : 1				DO NOT SCALE		SHEET 1 / 1			


NOTES, UNLESS OTHERWISE SPECIFIED:
THIS IS A MINIMUM DIMENSION DRAWING
CAD IS MASTER FOR ALL UNLISTED DIMENSIONS


SECTION A-A
SCALE 1 : 1

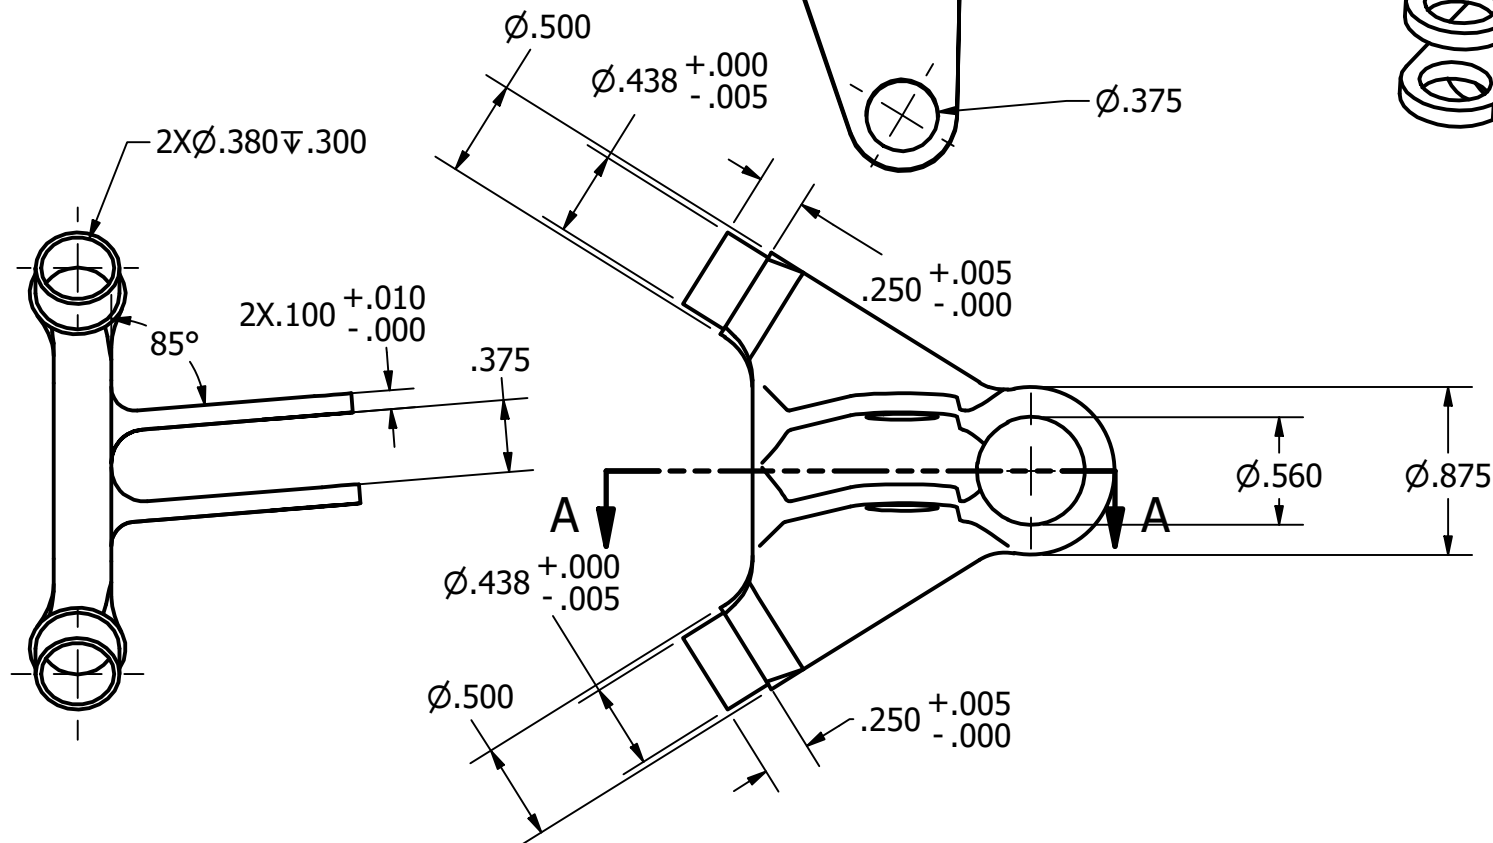

MATERIAL STEEL, AISI 4130		THIRD ANGLE PROJECTION 	SUBSYSTEM: LINKS		DATE 11/10/2025	 CORNELL RACING
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE		DESCRIPTION FU OUTBOARD ADAPTER RHS			
	INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER AVA JOHNSON	SIZE A	P/N SU-A5001-AA-00013-AA	REV A
			RESPONSIBLE ENGINEER AVA JOHNSON			
		DRAWN BY A. BACKHOLM	SCALE 1 : 1		DO NOT SCALE	SHEET 1 / 1
		APPROVAL				


NOTES, UNLESS OTHERWISE SPECIFIED:
THIS IS A MINIMUM DIMENSION DRAWING
CAD IS MASTER FOR ALL UNLISTED DIMENSIONS

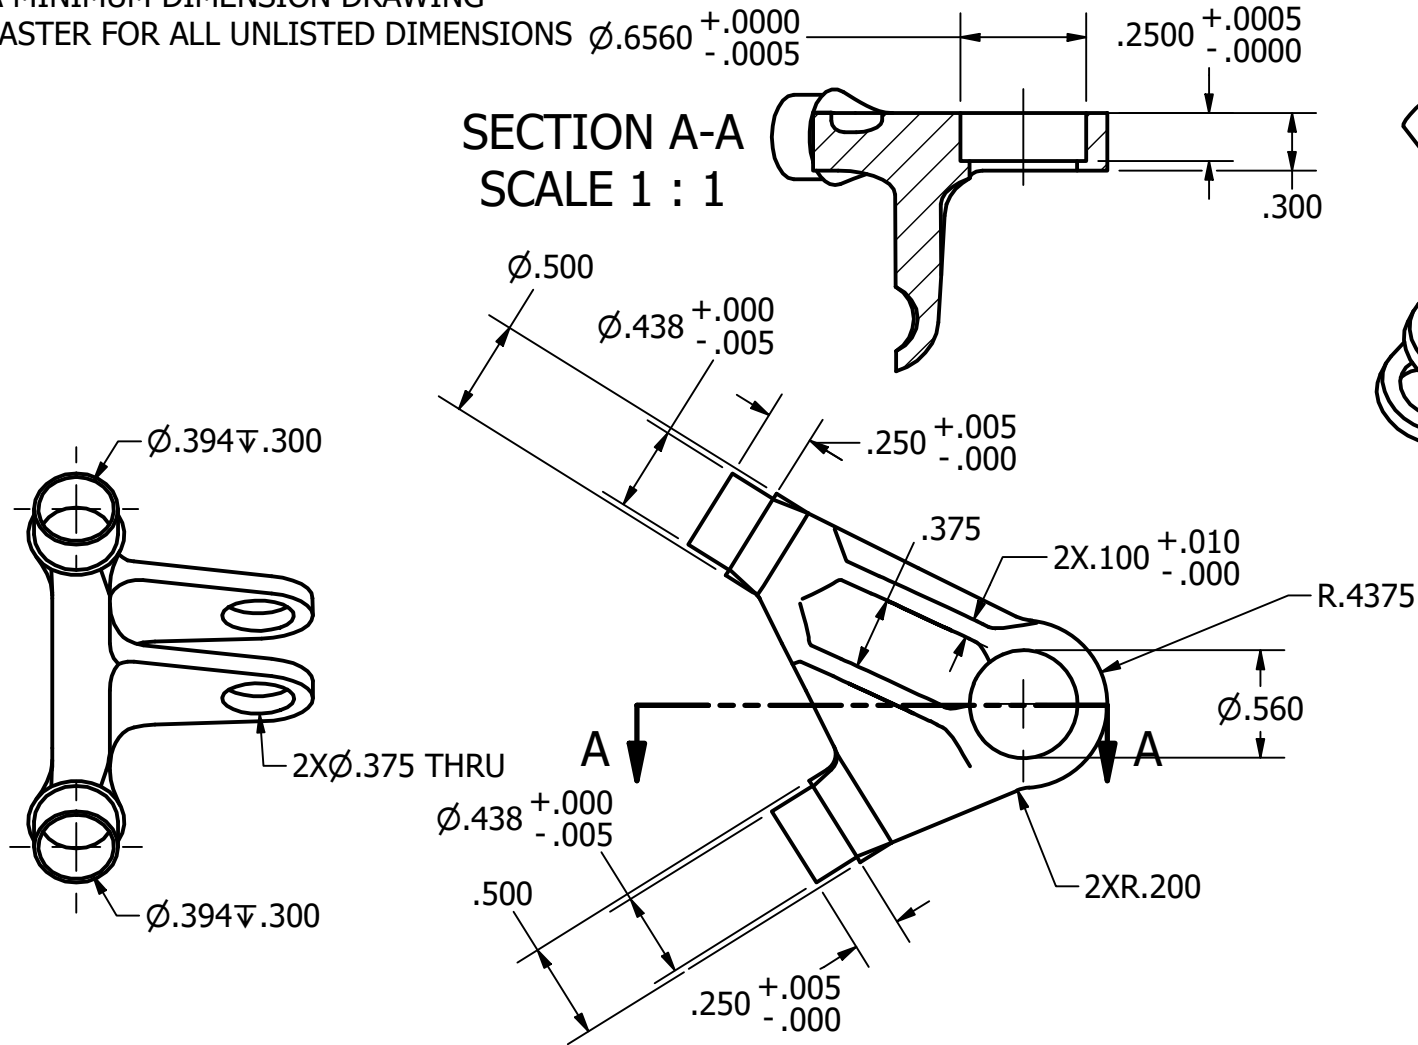


MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: LINKS		DATE 12/16/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH	BARE				DESCRIPTION					
		INTERPRET PER ASME Y14.5-2018		DESIGNER AVA JOHNSON		RU OUTBOARD ADAPTER LHS					
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER AVA JOHNSON		SIZE A		P/N SU-A5001-AA-00014-AA		REV A	
		ALL DIMENSIONS IN INCHES		DRAWN BY A. BACKHOLM		SCALE 1 : 1		DO NOT SCALE		SHEET 1 / 1	




NOTES, UNLESS OTHERWISE SPECIFIED:
THIS IS A MINIMUM DIMENSION DRAWING
CAD IS MASTER FOR ALL UNLISTED DIMENSIONS


SECTION A-A
SCALE 1 : 1

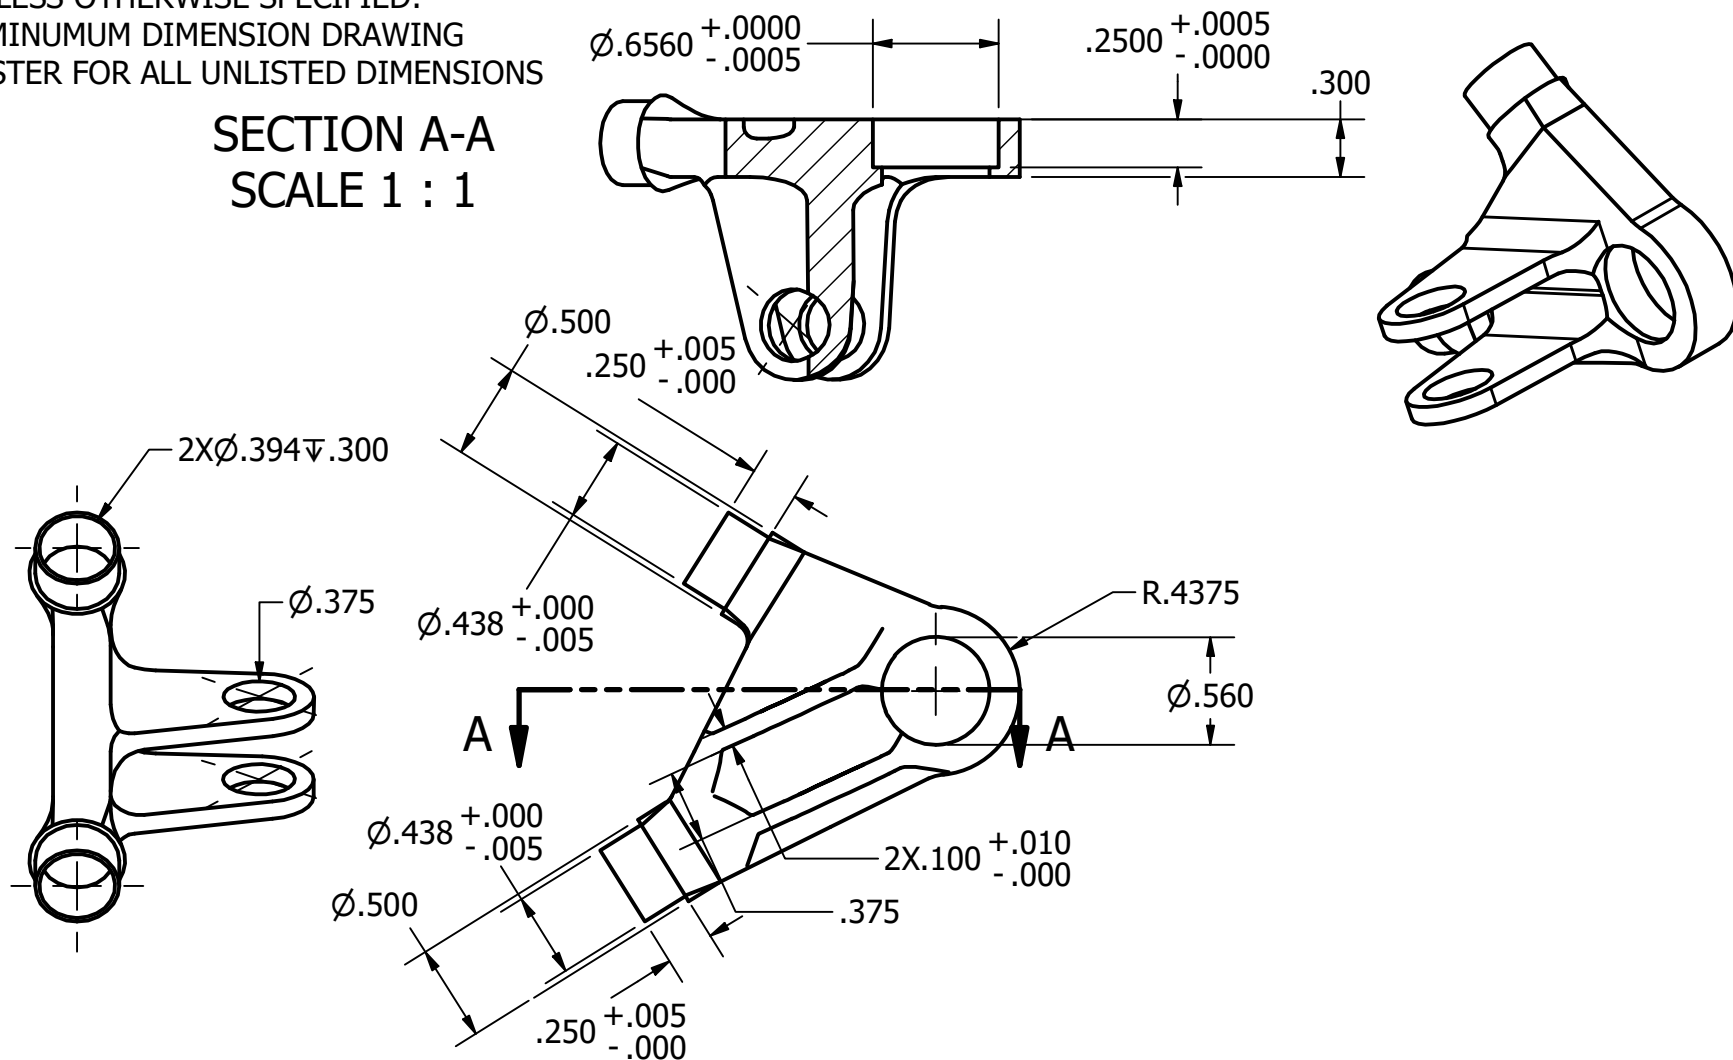

MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: LINKS		DATE 11/10/2025			
TOLERANCES, UNLESS SPECIFIED LINEAR: $\varnothing$ 0.005 X.X $\pm$ 0.1 $\varnothing$ +0.006 X.XX $\pm$ 0.02 -0.001 X.XXX $\pm$ 0.010 ALL DIMENSIONS IN INCHES		FINISH BARE				DESCRIPTION RU OUTBOARD ADAPTER RHS					
		INTERPRET PER ASME Y14.5-2018		DESIGNER AVA JOHNSON							
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER AVA JOHNSON		SIZE A		P/N SU-A5001-AA-00015-AA		REV A	
				DRAWN BY A. BACKHOLM		SCALE 1 : 1		DO NOT SCALE		SHEET 1 / 1	
				APPROVAL							





NOTES, UNLESS OTHERWISE SPECIFIED:
THIS IS A MINIMUM DIMENSION DRAWING
CAD IS MASTER FOR ALL UNLISTED DIMENSIONS

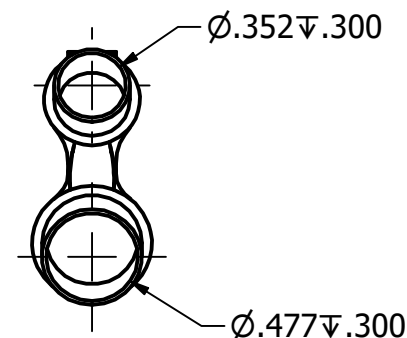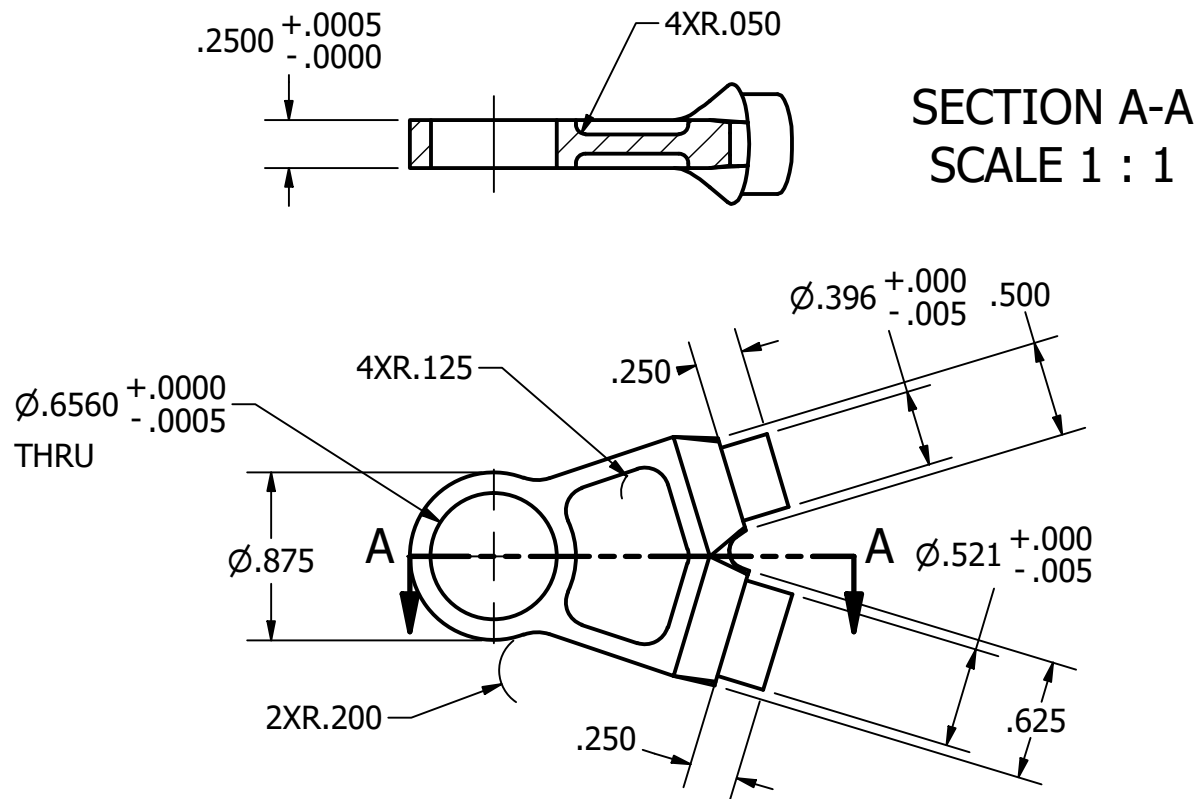


MATERIAL STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS		DATE 12/15/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED				FINISH BARE		DESCRIPTION FL OUTBOARD ADAPTER					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		Ø 0.005 Ø +0.006 -0.001		DESIGNER AVA JOHNSON		RESPONSIBLE ENGINEER AVA JOHNSON		DRAWN BY A. BACKHOLM			
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018		APPROVAL		SIZE A		P/N SU-A5001-AA-00016-AA		REV	
				SCALE 1 : 1		DO NOT SCALE		SHEET 1 / 1			
ALL INFORMATION IS PROPRIETARY TO CORNELL RACING											


NOTES, UNLESS OTHERWISE SPECIFIED:

1. THIS IS A MINIMUM DIMENSION DRAWING.
REFERENCE CAD FOR ALL UNLISTED DIMENSIONS.

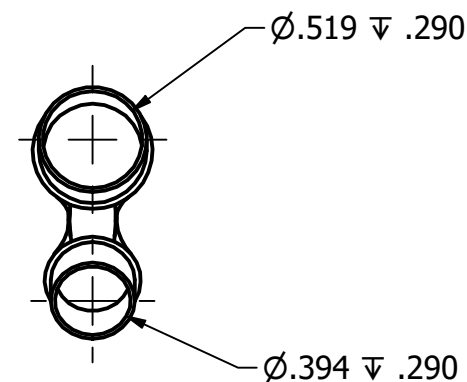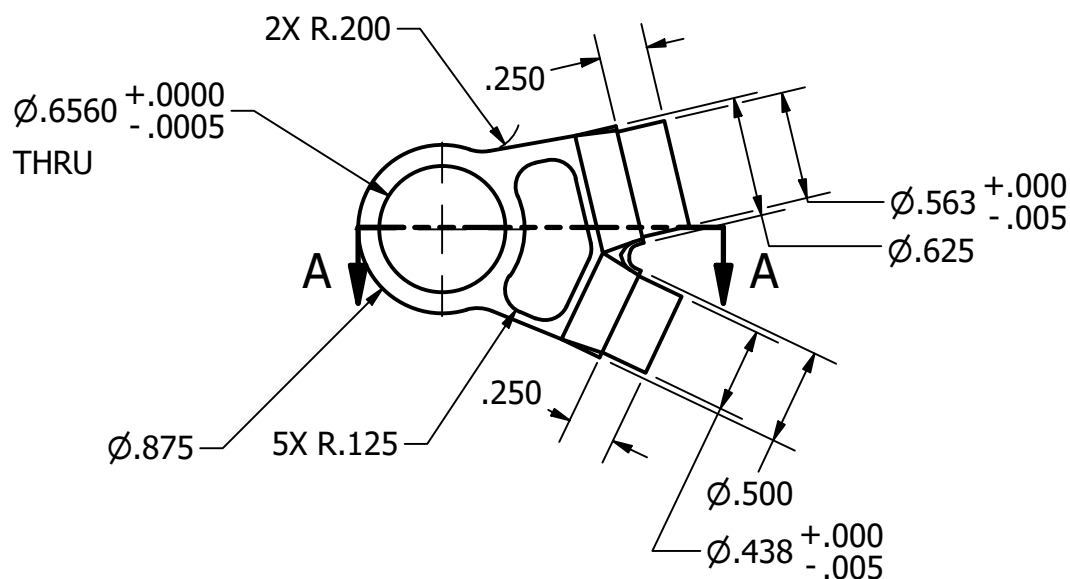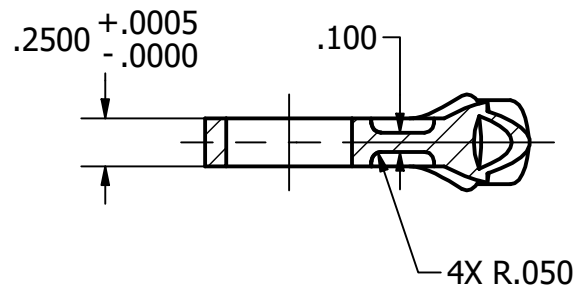



MATERIAL STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS		DATE 11/23/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010				FINISH BARE		DESCRIPTION RL OUTBOARD ADAPTER					
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018		DESIGNER AVA JOHNSON							SIZE A
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER AVA JOHNSON		SCALE 1:1		DO NOT SCALE		SHEET 1 / 1	
				DRAWN BY A. BACKHOLM							
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:
1. THIS IS A MINIMUM DIMENSION DRAWING.
REFERENCE CAD FOR ALL UNLISTED DIMENSIONS.

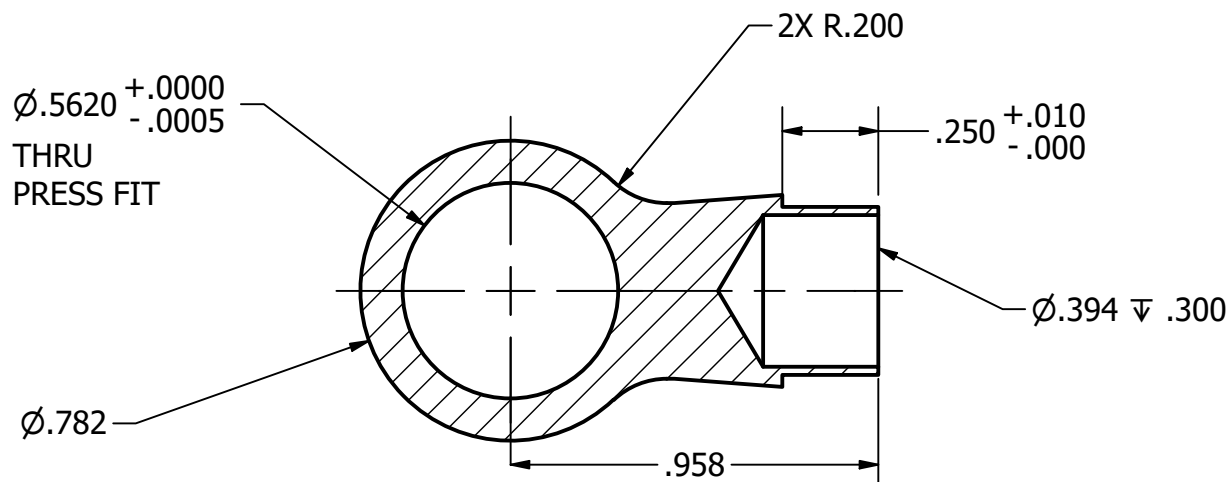


SECTION A-A
SCALE 2 : 1


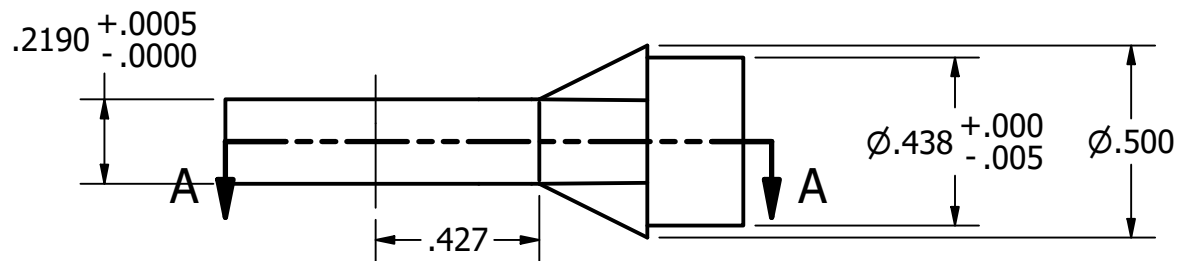


MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: LINKS		DATE 11/23/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION FRONT UPPER INBOARD ADAPTER							
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018										DESIGNER AVA JOHNSON	
Ø 0.005 Ø +0.006 -0.001		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING										RESPONSIBLE ENGINEER AVA JOHNSON	
												DRAWN BY SUJAN MUNVER	
ALL DIMENSIONS IN INCHES				APPROVAL		SIZE A		P/N SU-A5001-AA-00018-AA		REV A			
				SCALE 2 : 1		DO NOT SCALE		SHEET 1 / 1					

NOTES, UNLESS OTHERWISE SPECIFIED:
 1. THIS IS A MINIMUM DIMENSION DRAWING.
 REFERENCE CAD FOR ALL UNLISTED DIMENSIONS.


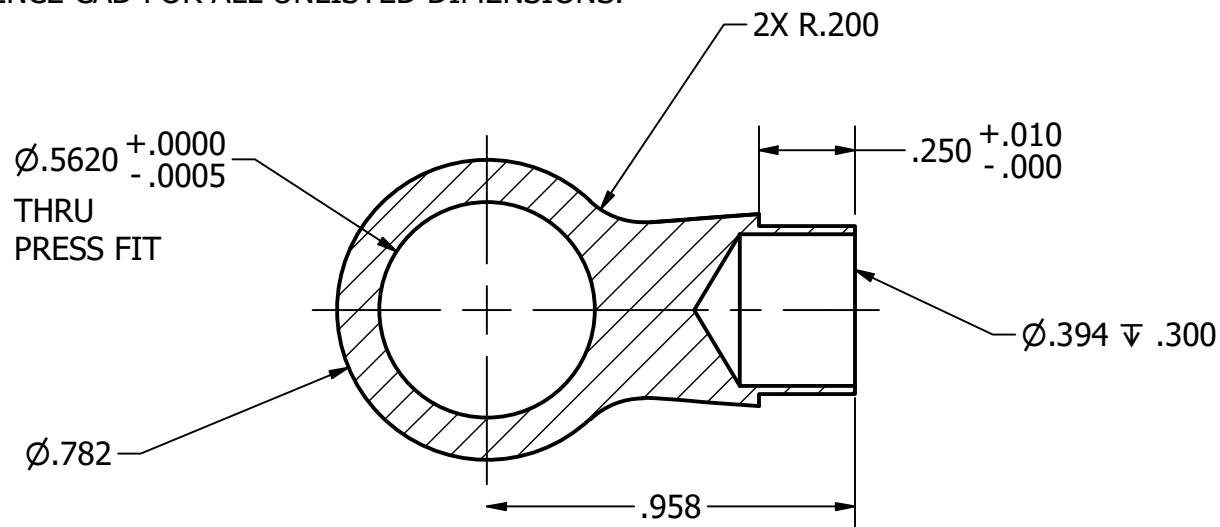


SECTION A-A
 SCALE 2 : 1

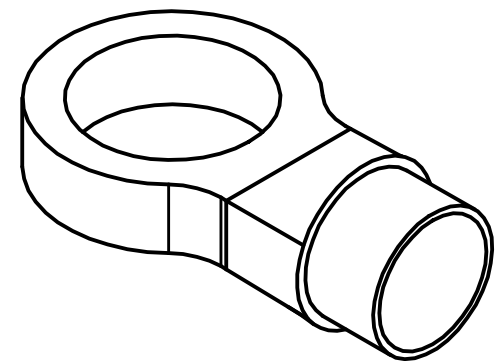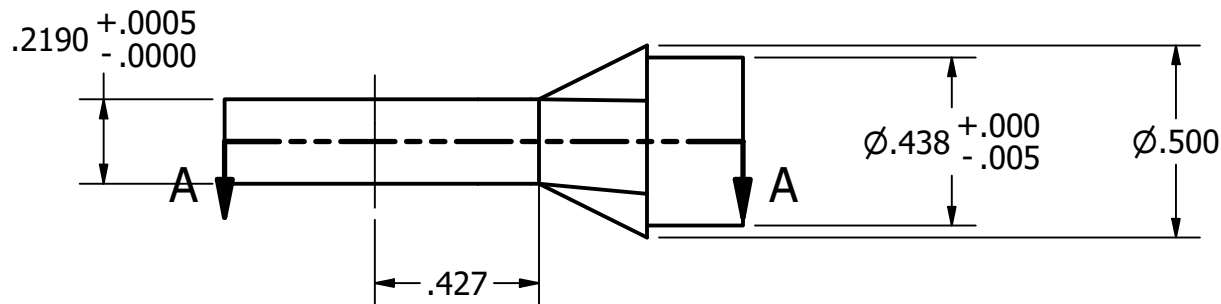



MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: LINKS		DATE 11/22/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 $X.X \pm 0.1$ $X.XX \pm 0.02$ $X.XXX \pm 0.010$ ALL DIMENSIONS IN INCHES		FINISH		DESIGNER		DESCRIPTION REAR UPPER INBOARD ADAPTER							
		BARE		AVA JOHNSON									
		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER		SIZE		P/N				REV	
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		SUJAN MUNVER		A		SU-A5001-AA-00019-AA				A	
				APPROVAL		SCALE		DO NOT SCALE				SHEET	
						2 : 1						1 / 1	

NOTES, UNLESS OTHERWISE SPECIFIED:
 1. THIS IS A MINIMUM DIMENSION DRAWING.
 REFERENCE CAD FOR ALL UNLISTED DIMENSIONS.

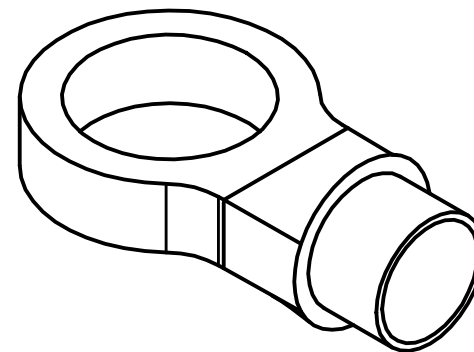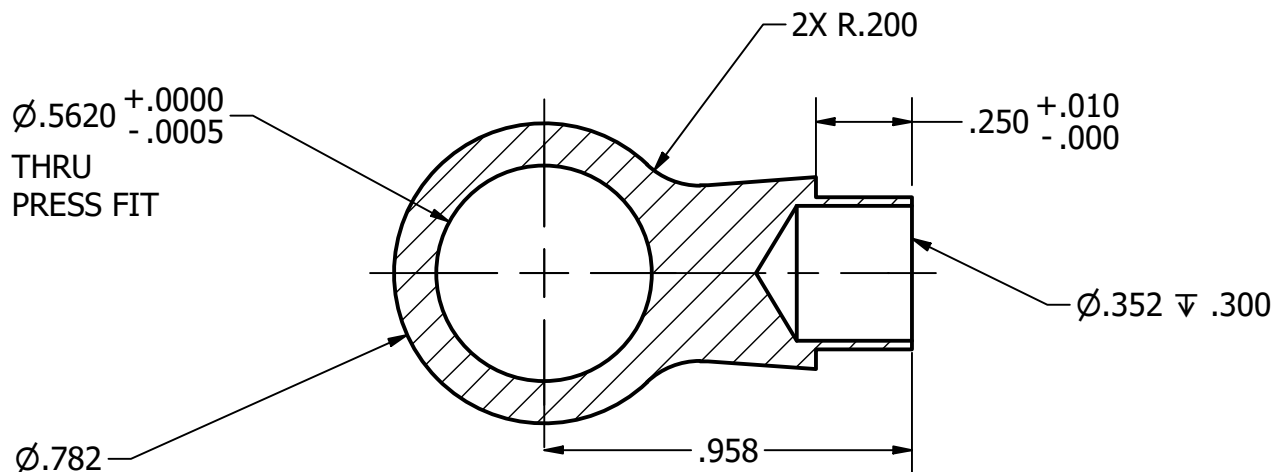

SECTION A-A
 SCALE 2 : 1


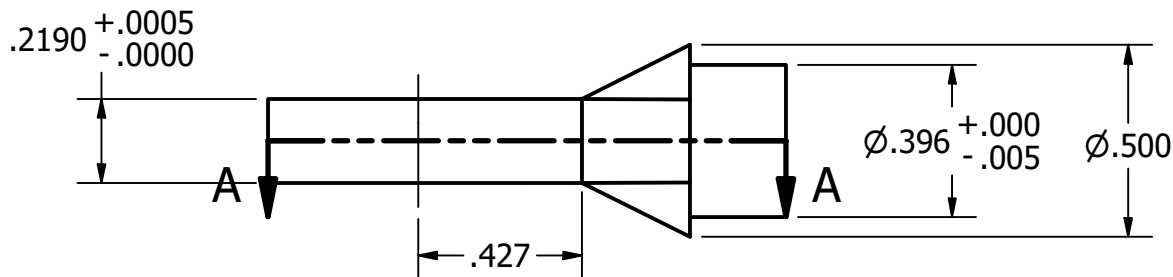



MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: LINKS		DATE 11/22/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: $\varnothing$ 0.005 X.X $\pm$ 0.1 $\varnothing$ +0.006 X.XX $\pm$ 0.02 -0.001 X.XXX $\pm$ 0.010 ALL DIMENSIONS IN INCHES		FINISH BARE				DESCRIPTION FRONT LOWER FRONT INBOARD ADAPTER					
		INTERPRET PER ASME Y14.5-2018		DESIGNER AVA JOHNSON							
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER AVA JOHNSON		SIZE A		P/N SU-A5001-AA-00020-AA		REV A	
				DRAWN BY SUJAN MUNVER		SCALE 2 : 1		DO NOT SCALE		SHEET 1 / 1	
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:

1. THIS IS A MINIMUM DIMENSION DRAWING.

REFERENCE CAD FOR ALL UNLISTED DIMENSIONS.

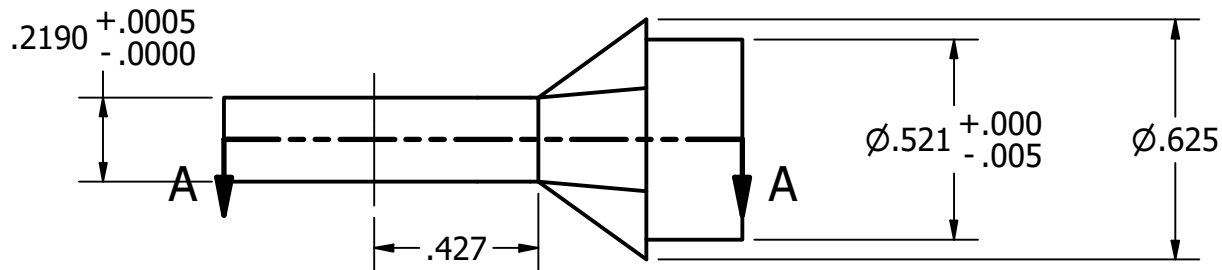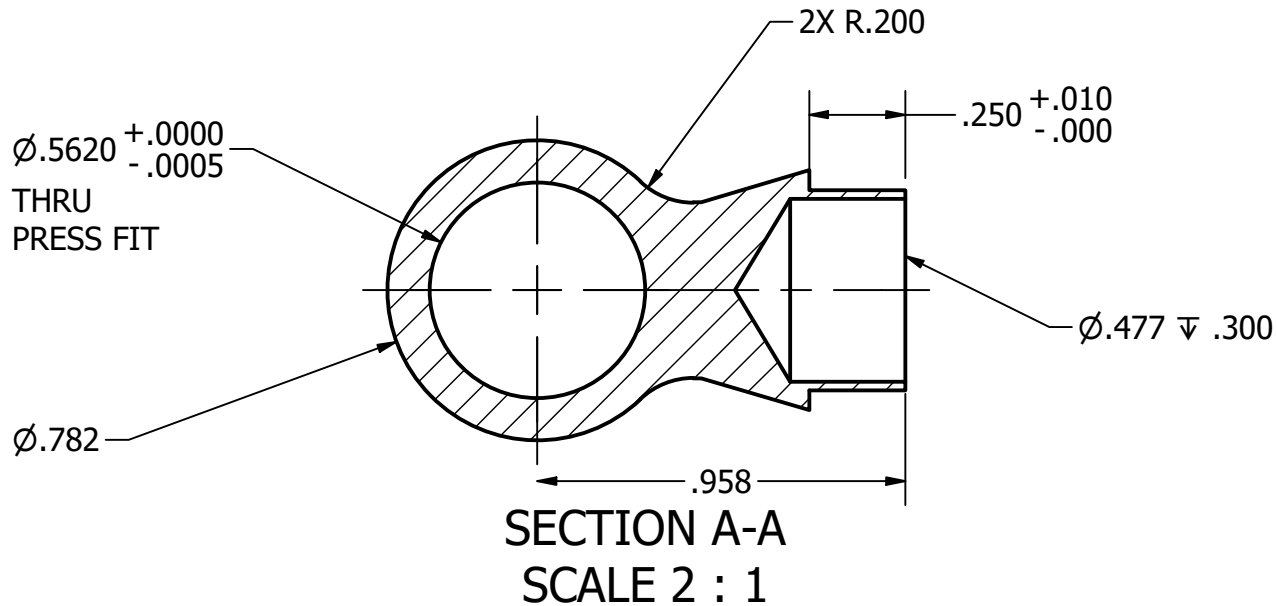


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE		 CORNELL RACING			
STEEL, AISI 4130				LINKS		11/22/2025					
TOLERANCES, UNLESS SPECIFIED LINEAR: $\varnothing \pm 0.005$ $X.X \pm 0.1$ $X.XX \pm 0.02$ $X.XXX \pm 0.010$ ALL DIMENSIONS IN INCHES		FINISH		DESIGNER		DESCRIPTION FRONT LOWER REAR INBOARD ADAPTER					
		BARE		AVA JOHNSON							
		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		AVA JOHNSON		A		SU-A5001-AA-00021-AA		A	
		DRAWN BY		APPROVAL		SCALE		DO NOT SCALE		SHEET	
		SUJAN MUNVER				2 : 1				1 / 1	


NOTES, UNLESS OTHERWISE SPECIFIED:


1. THIS IS A MINIMUM DIMENSION DRAWING.

REFERENCE CAD FOR ALL UNLISTED DIMENSIONS.

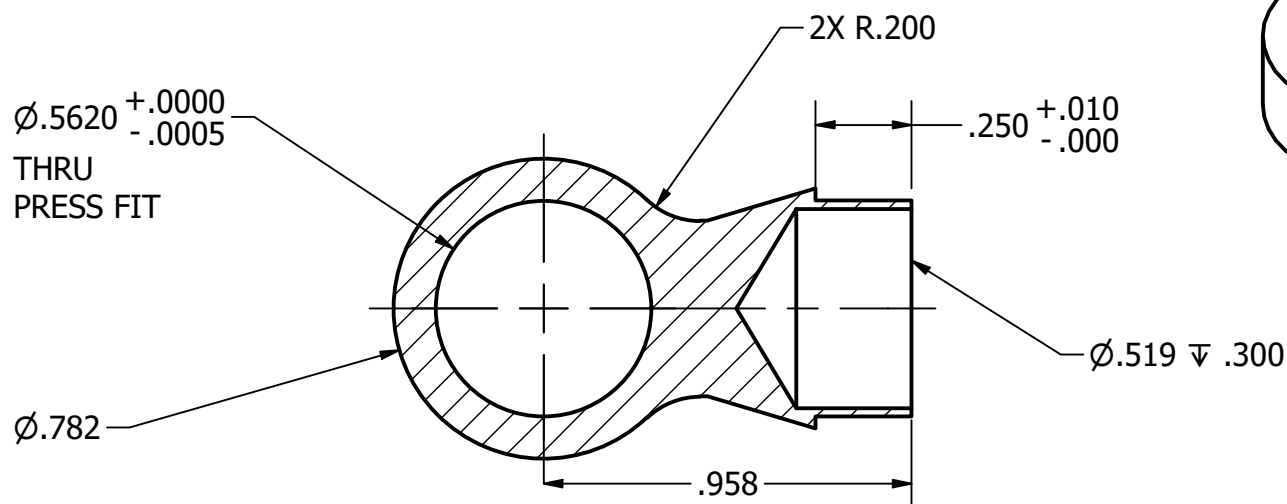

SECTION A-A
SCALE 2 : 1

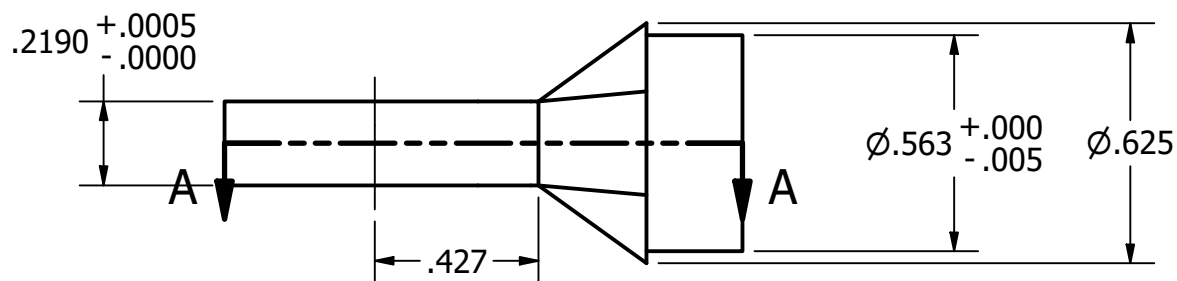


MATERIAL STEEL, AISI 4130		THIRD ANGLE PROJECTION 	SUBSYSTEM: LINKS		DATE 11/22/2025	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE		DESCRIPTION REAR LOWER FRONT INBOARD ADAPTER				
	INTERPRET PER ASME Y14.5-2018						
	ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER AVA JOHNSON	RESPONSIBLE ENGINEER AVA JOHNSON	SIZE A	P/N SU-A5001-AA-00022-AA	REV A
		DRAWN BY SUJAN MUNVER	SCALE 2 : 1		DO NOT SCALE		SHEET 1 / 1
		APPROVAL					


NOTES, UNLESS OTHERWISE SPECIFIED:


1. THIS IS A MINIMUM DIMENSION DRAWING.

REFERENCE CAD FOR ALL UNLISTED DIMENSIONS.

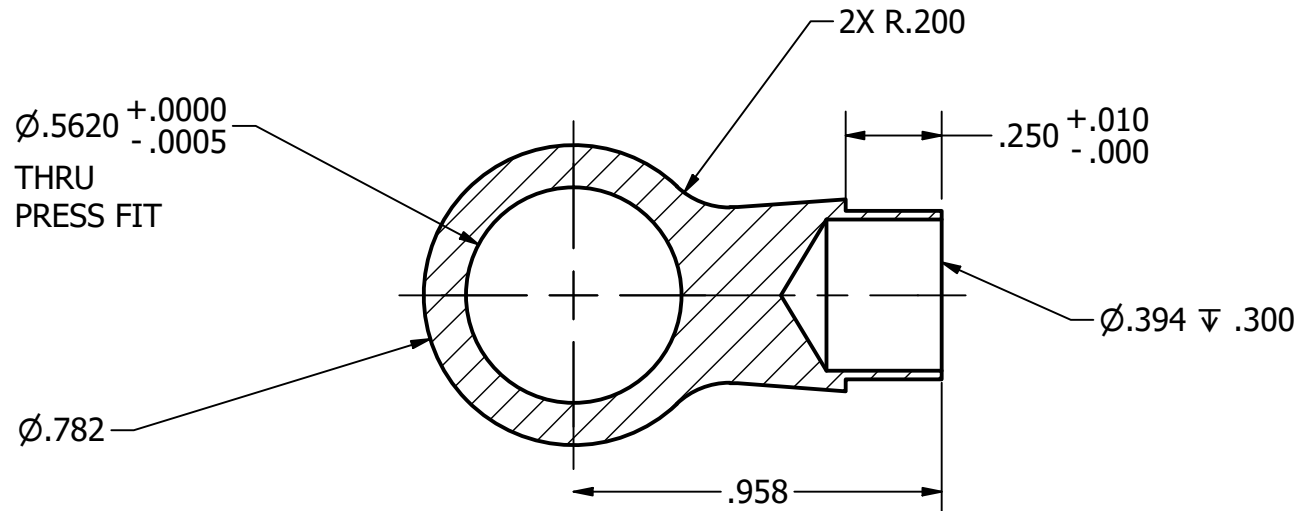


SECTION A-A
SCALE 2 : 1

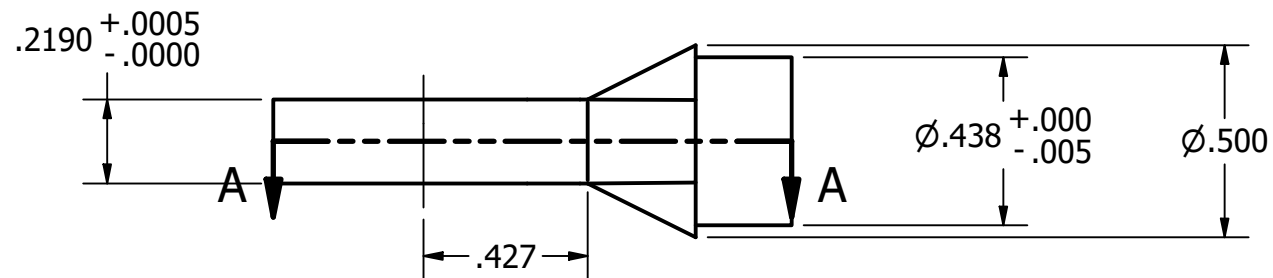



MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: LINKS		DATE 11/22/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES		FINISH				DESCRIPTION REAR LOWER REAR INBOARD ADAPTER							
		BARE											
		INTERPRET PER ASME Y14.5-2018				DESIGNER AVA JOHNSON		SIZE A		P/N SU-A5001-AA-00023-AA		REV A	
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING				RESPONSIBLE ENGINEER AVA JOHNSON		DO NOT SCALE					
						DRAWN BY SUJAN MUNVER							
APPROVAL													

NOTES, UNLESS OTHERWISE SPECIFIED:

1. F DRILL

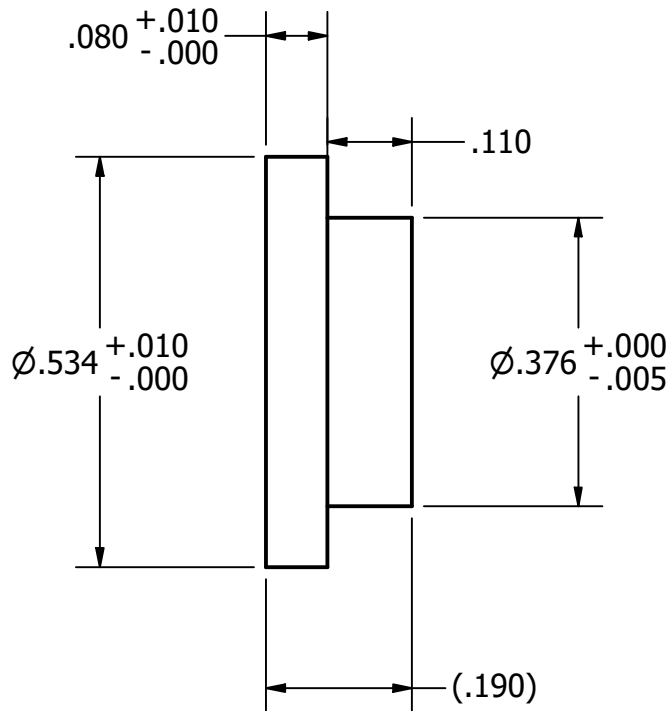

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE				
ALUMINUM, 7075-T651				LINKS		12/11/2025		CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION				
BARE		INTERPRET PER ASME Y14.5-2018		AVA JOHNSON		TAB CONE				
LINEAR: $\varnothing \pm 0.005$ X.X ± 0.1 $\varnothing \pm 0.006$ X.XX ± 0.02 $\varnothing -0.001$ X.XXX ± 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER AVA JOHNSON		SIZE A		P/N SU-A5001-AA-00024-AA		REV A
ALL DIMENSIONS IN INCHES				DRAWN BY SUJAN MUNVER		SCALE 4 : 1		DO NOT SCALE		SHEET 1 / 1
				APPROVAL						

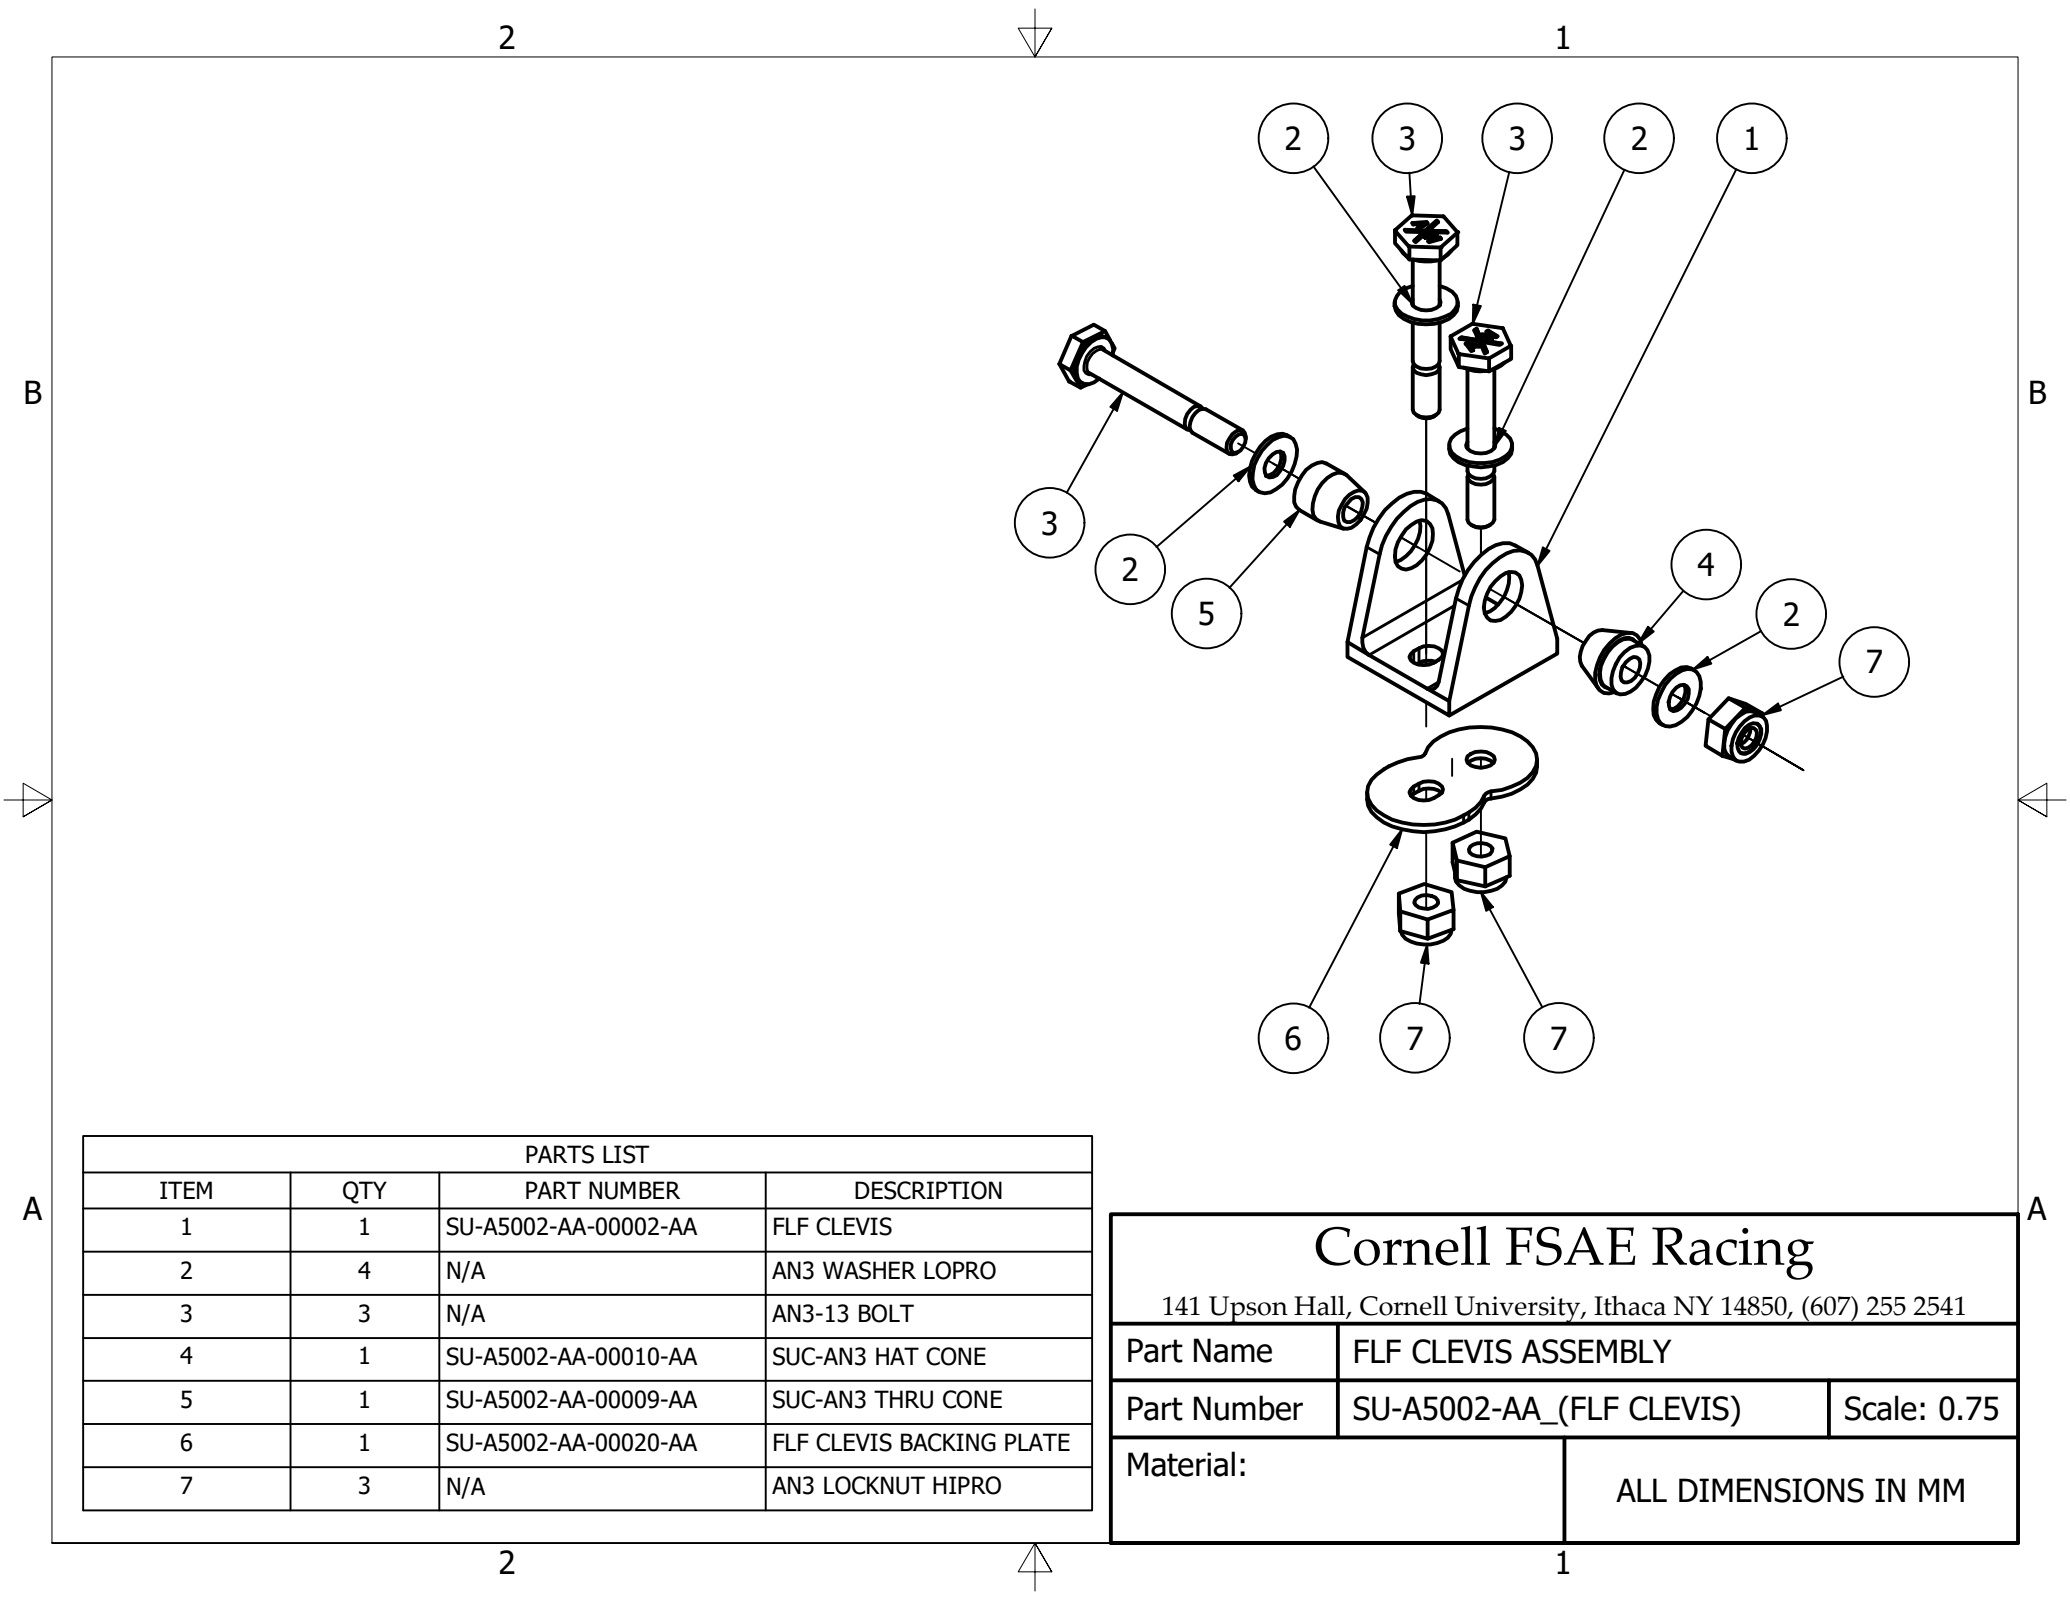

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5002-AA-00002-AA	FLF CLEVIS
2	4	N/A	AN3 WASHER LOPRO
3	3	N/A	AN3-13 BOLT
4	1	SU-A5002-AA-00010-AA	SUC-AN3 HAT CONE
5	1	SU-A5002-AA-00009-AA	SUC-AN3 THRU CONE
6	1	SU-A5002-AA-00020-AA	FLF CLEVIS BACKING PLATE
7	3	N/A	AN3 LOCKNUT HIPRO





Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	FLF CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(FLF CLEVIS)	Scale: 0.75
Material:		ALL DIMENSIONS IN MM

2

1

B

B

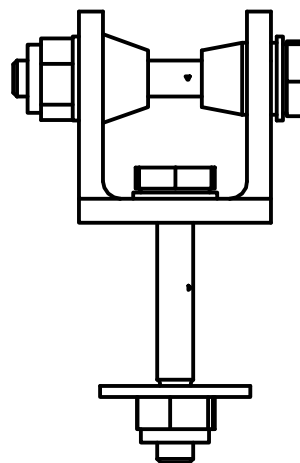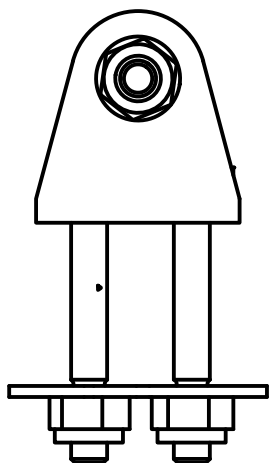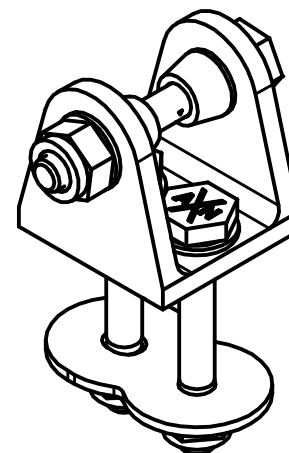

A

A


2

1

Cornell FSAE Racing

141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	FLF CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(FLF CLEVIS)	Scale: 1 : 1
Material:	ALL DIMENSIONS IN MM	

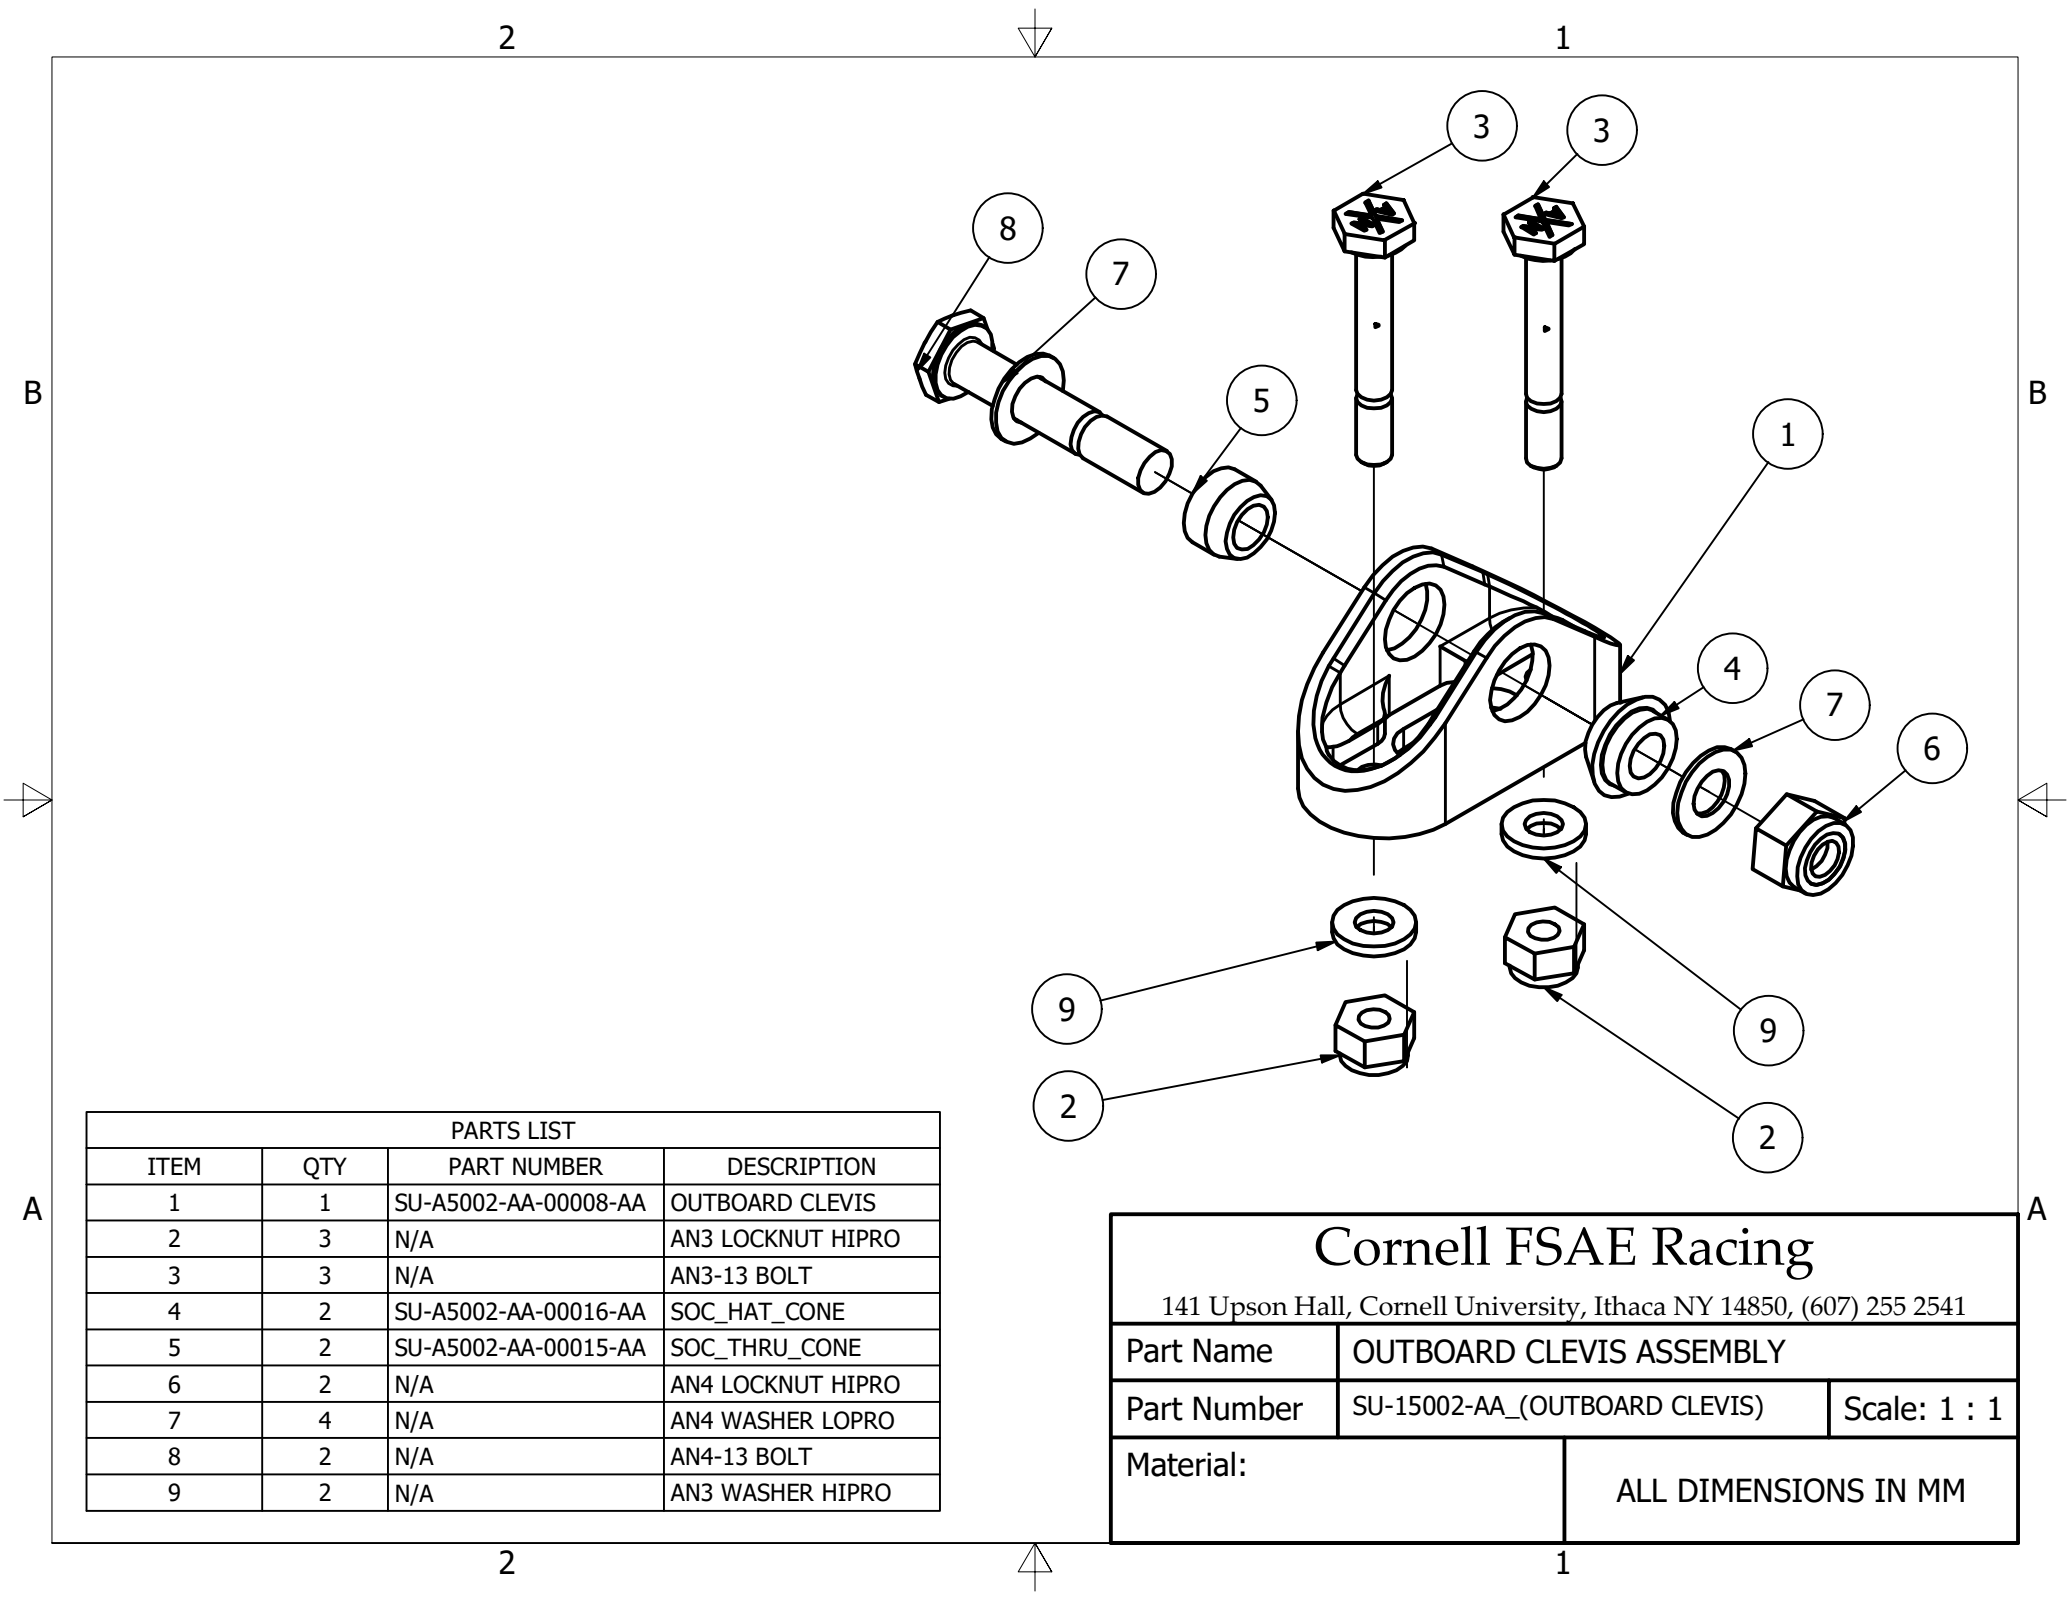

2

1

B

B

A





A

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5002-AA-00008-AA	OUTBOARD CLEVIS
2	3	N/A	AN3 LOCKNUT HIPRO
3	3	N/A	AN3-13 BOLT
4	2	SU-A5002-AA-00016-AA	SOC_HAT_CONE
5	2	SU-A5002-AA-00015-AA	SOC_THRU_CONE
6	2	N/A	AN4 LOCKNUT HIPRO
7	4	N/A	AN4 WASHER LOPRO
8	2	N/A	AN4-13 BOLT
9	2	N/A	AN3 WASHER HIPRO


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	OUTBOARD CLEVIS ASSEMBLY	
Part Number	SU-15002-AA_(OUTBOARD CLEVIS)	Scale: 1 : 1
Material:		ALL DIMENSIONS IN MM

2

1

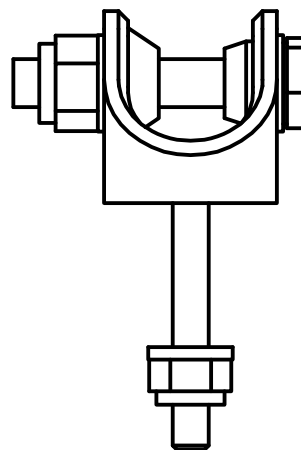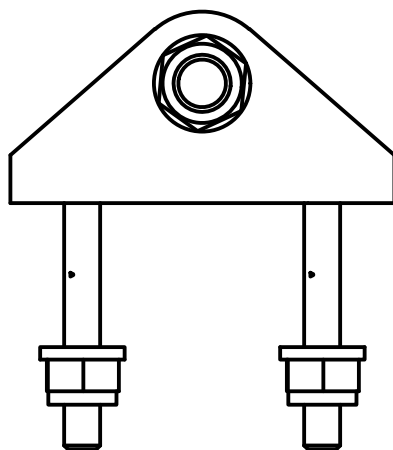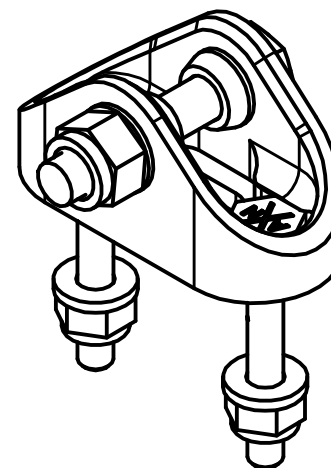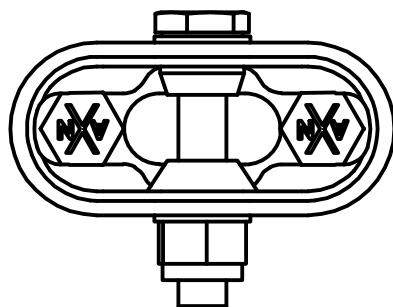

Cornell FSAE Racing 141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	OUTBOARD CLEVIS ASSEMBLY	
Part Number	SU-15002-AA_(OUTBOARD CLEVIS)	Scale: 1 : 1
Material:	ALL DIMENSIONS IN MM	




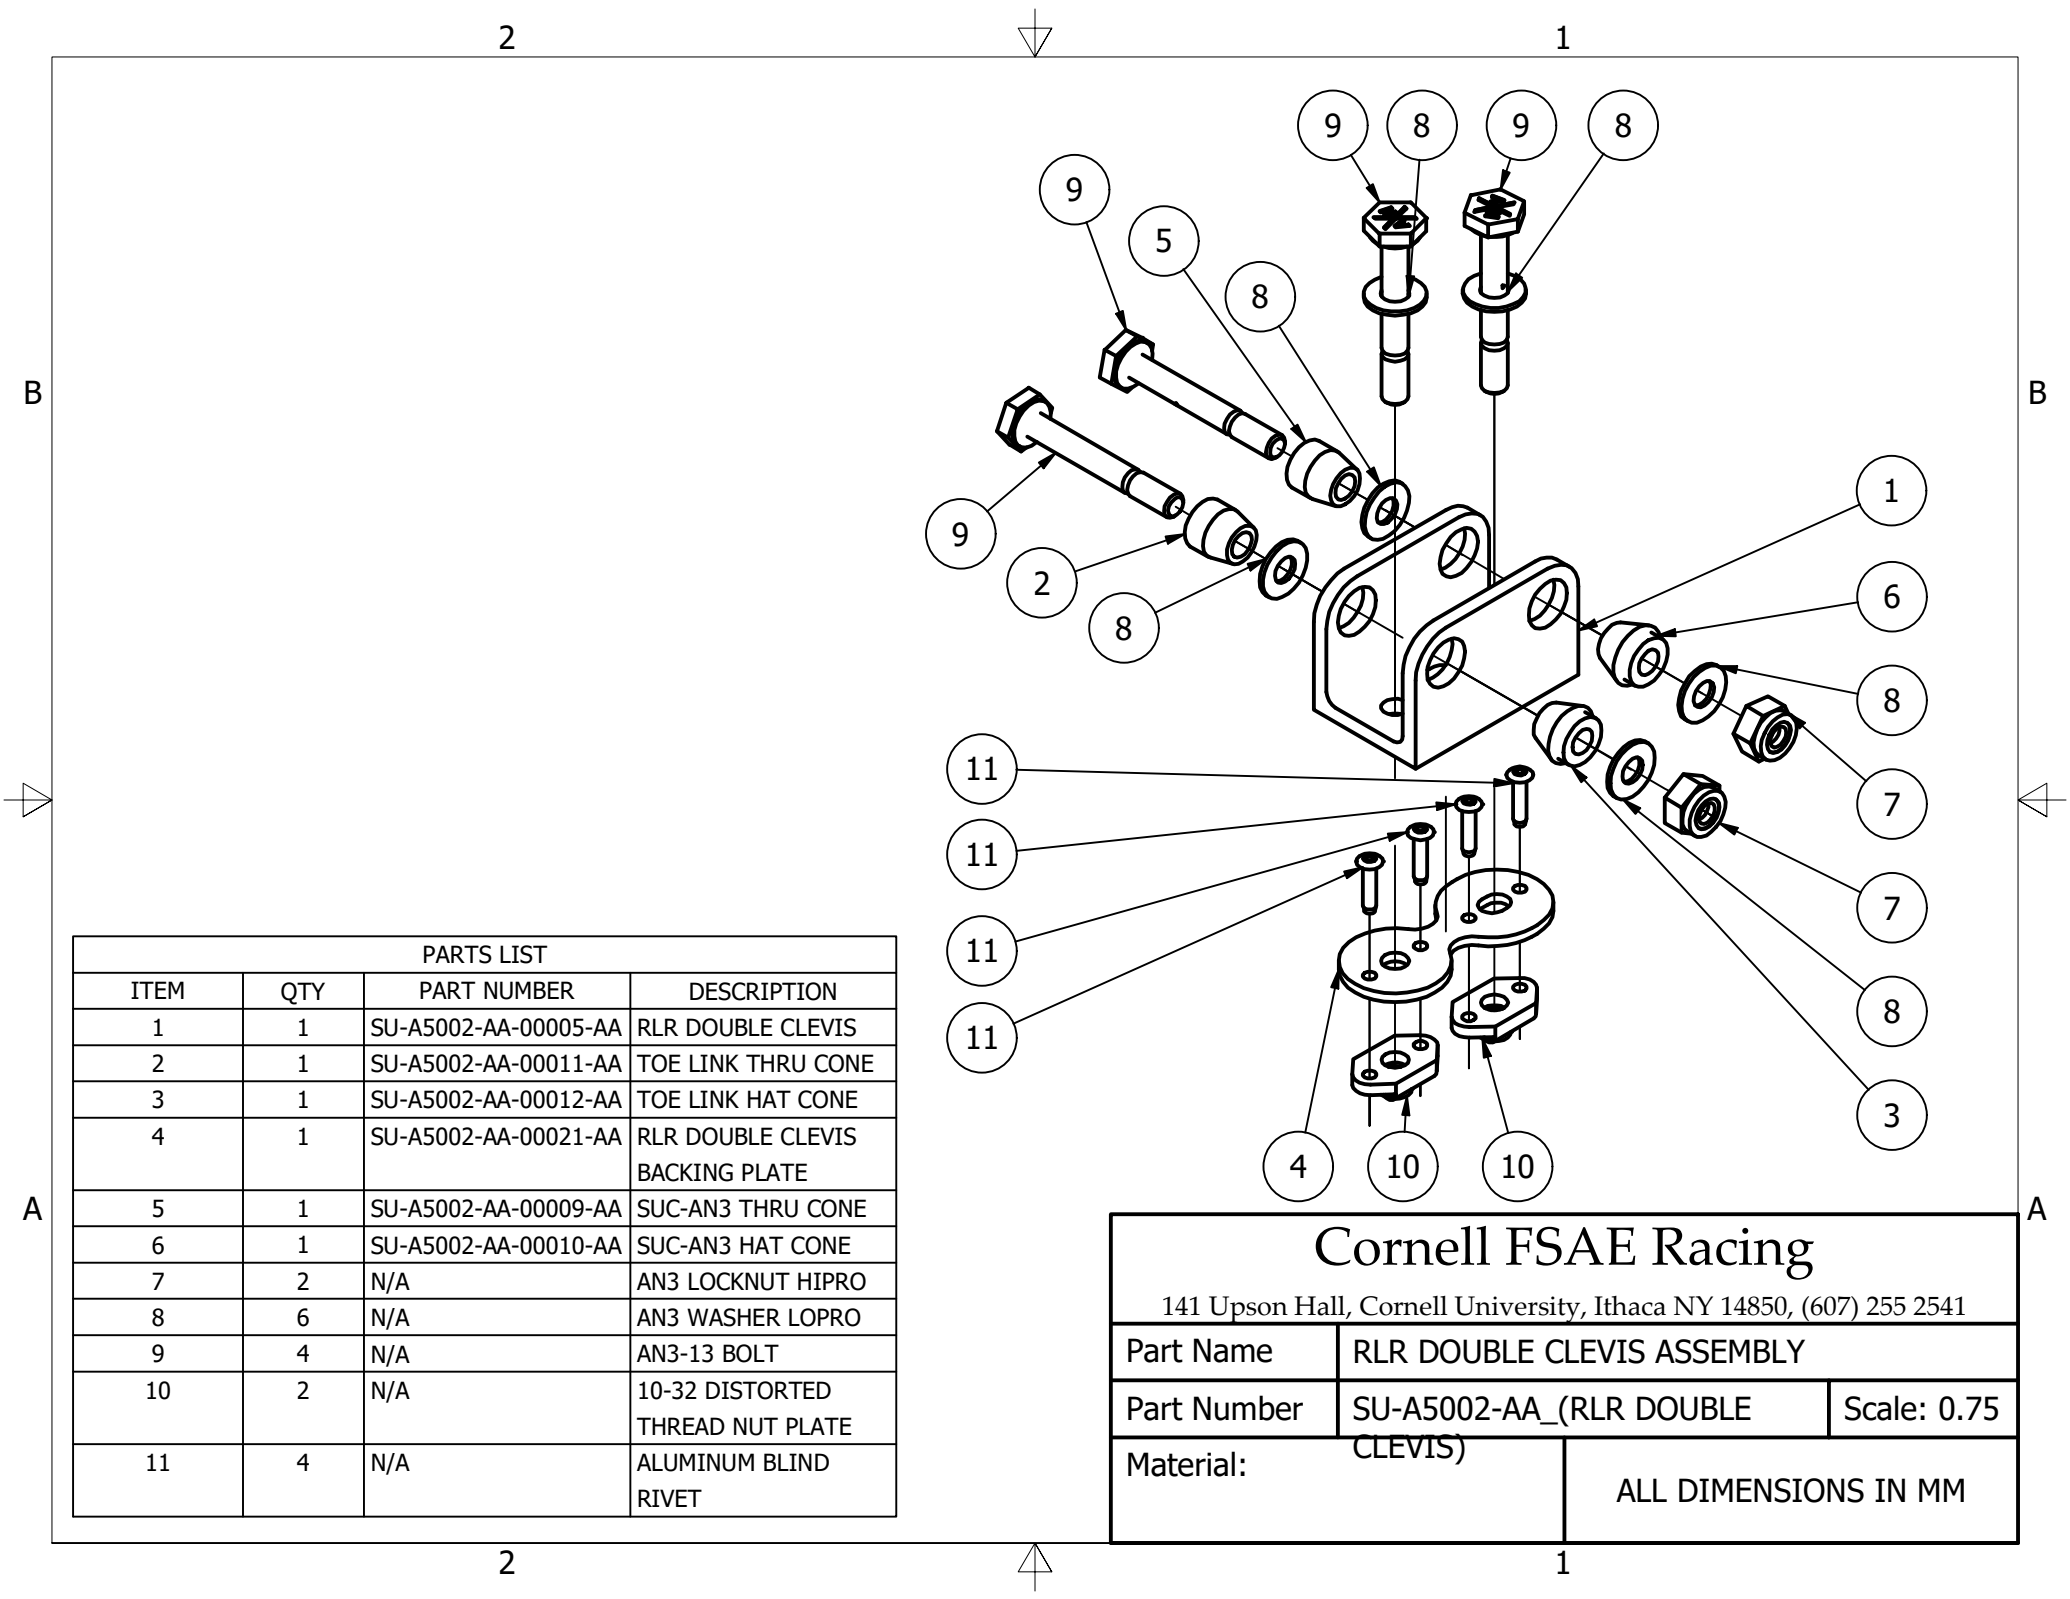


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5002-AA-00005-AA	RLR DOUBLE CLEVIS
2	1	SU-A5002-AA-00011-AA	TOE LINK THRU CONE
3	1	SU-A5002-AA-00012-AA	TOE LINK HAT CONE
4	1	SU-A5002-AA-00021-AA	RLR DOUBLE CLEVIS BACKING PLATE
5	1	SU-A5002-AA-00009-AA	SUC-AN3 THRU CONE
6	1	SU-A5002-AA-00010-AA	SUC-AN3 HAT CONE
7	2	N/A	AN3 LOCKNUT HIPRO
8	6	N/A	AN3 WASHER LOPRO
9	4	N/A	AN3-13 BOLT
10	2	N/A	10-32 DISTORTED THREAD NUT PLATE
11	4	N/A	ALUMINUM BLIND RIVET


Cornell FSAE Racing

141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	RLR DOUBLE CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(RLR DOUBLE CLEVIS)	Scale: 0.75
Material:	ALL DIMENSIONS IN MM	

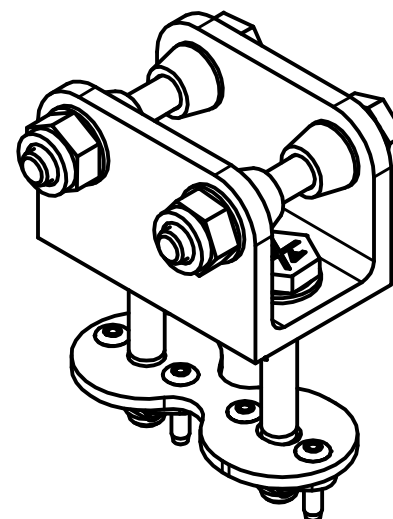
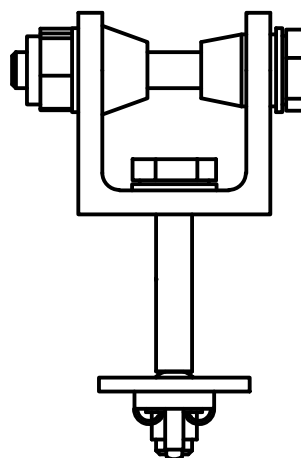
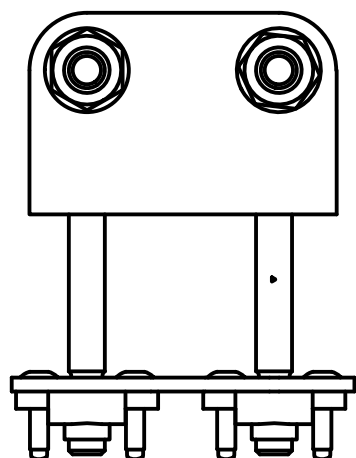
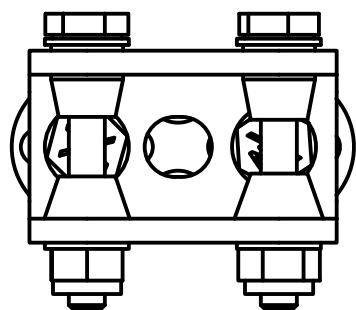


Cornell FSAE Racing 141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RLR DOUBLE CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(RLR DOUBLE CLEVIS)	Scale: 1 : 1
Material:	ALL DIMENSIONS IN MM	

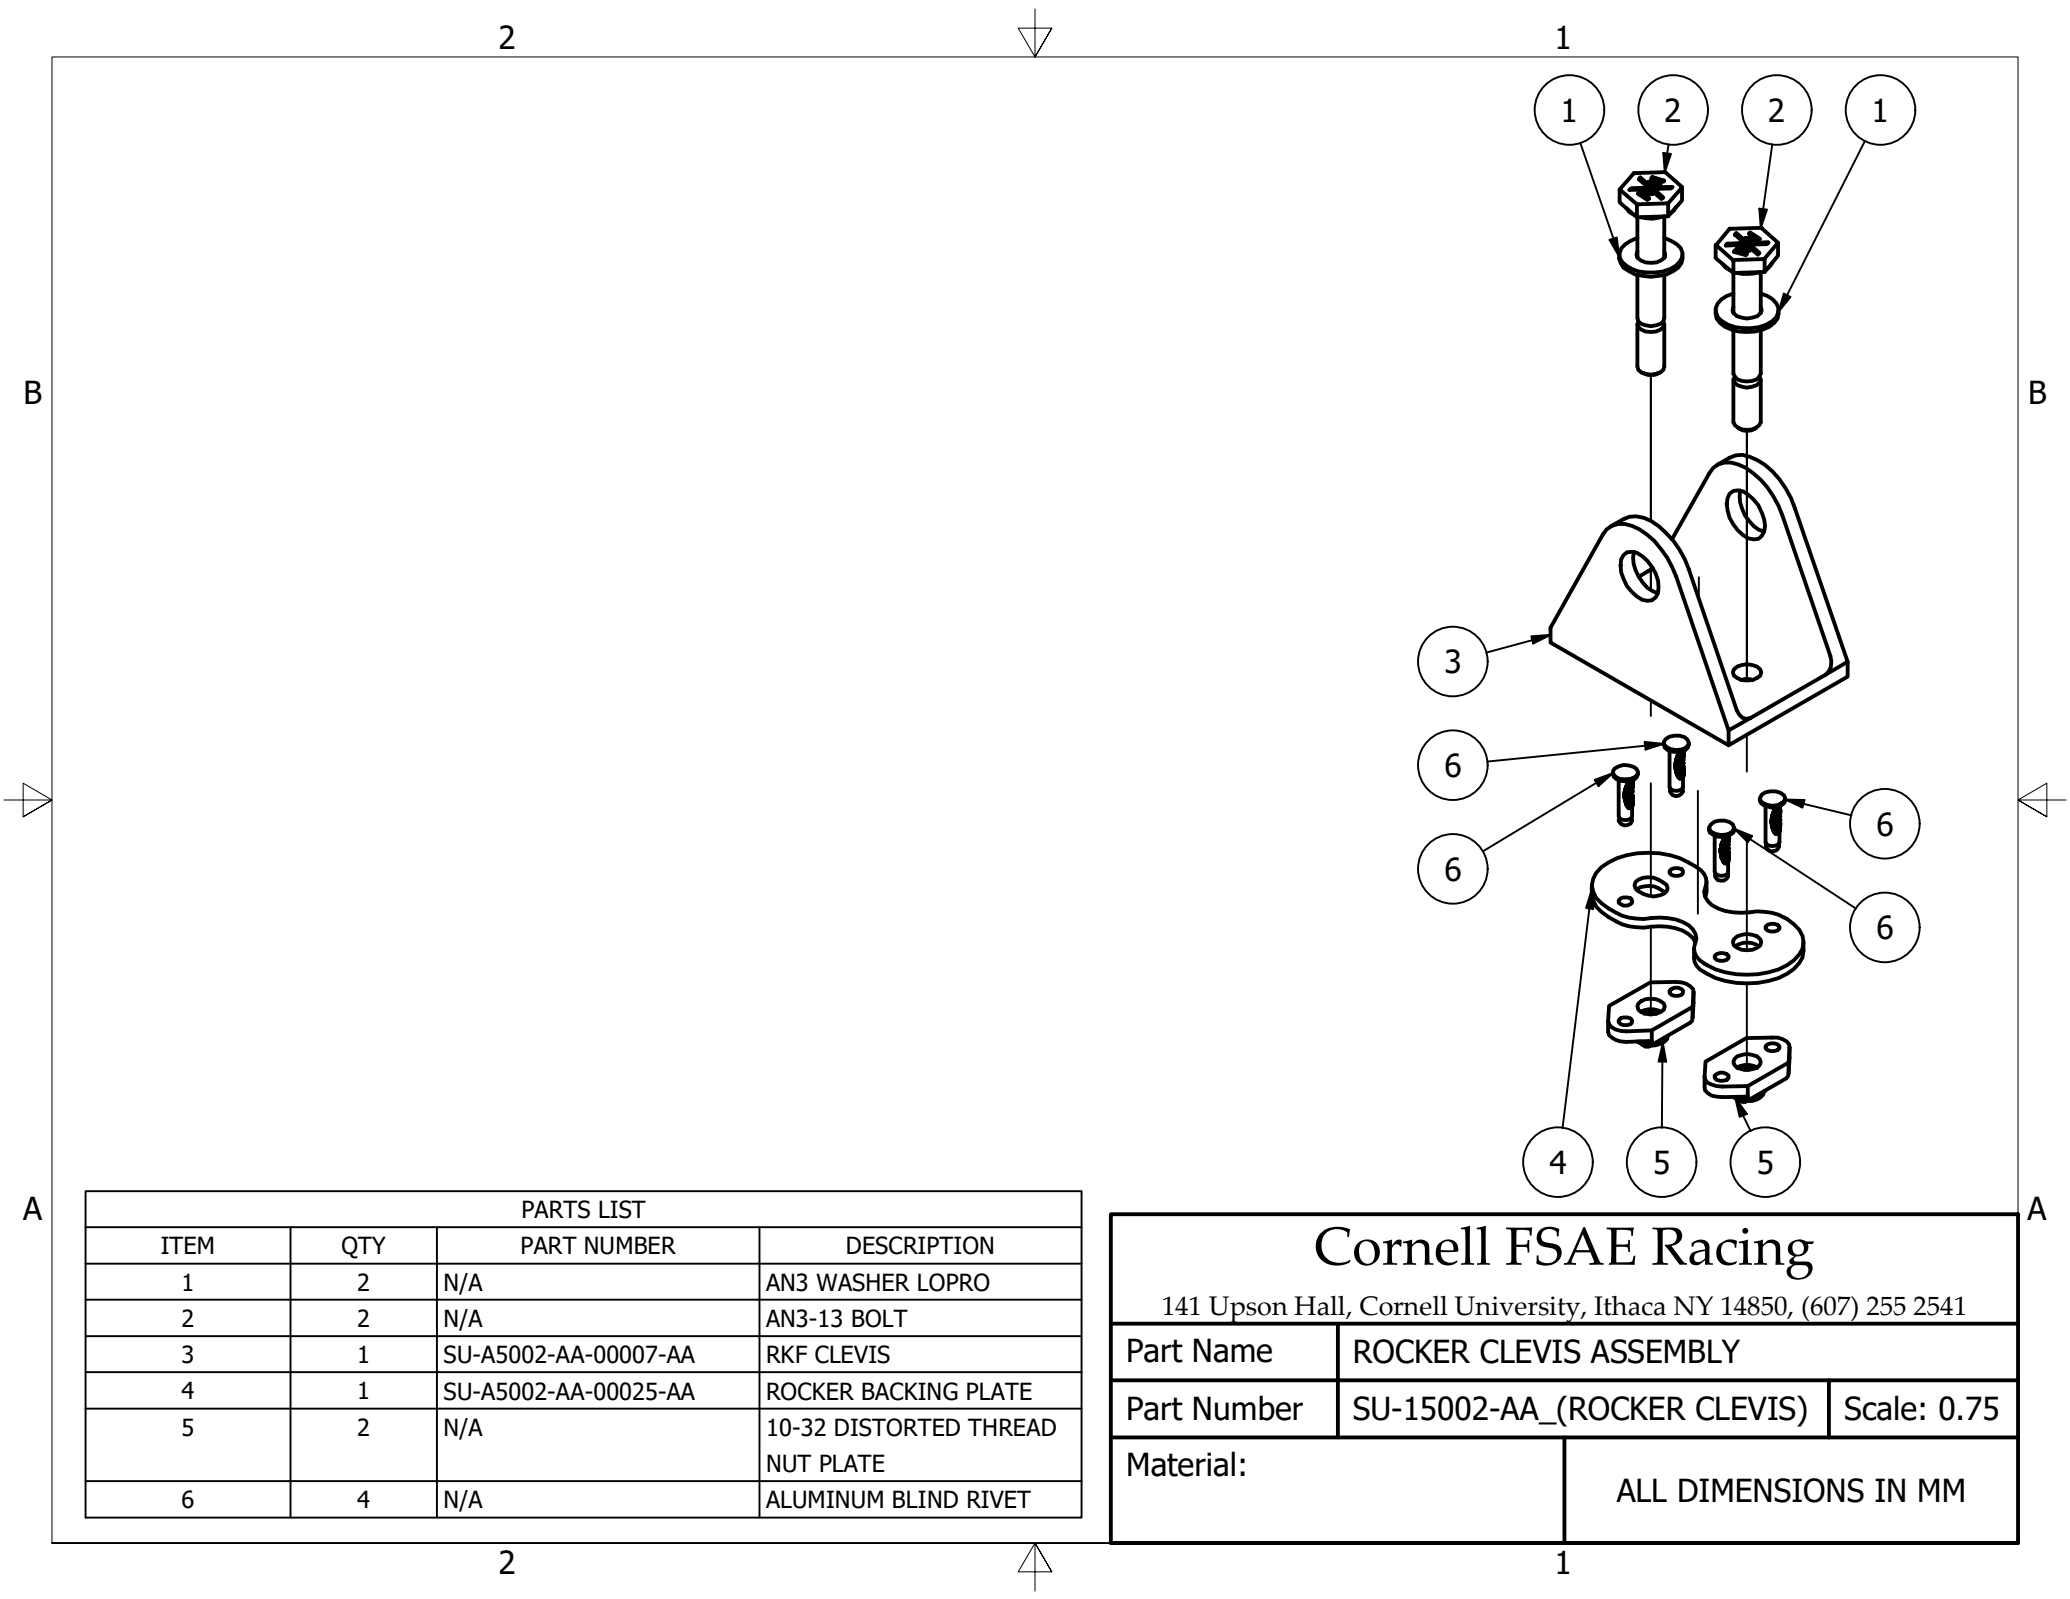


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	N/A	AN3 WASHER LOPRO
2	2	N/A	AN3-13 BOLT
3	1	SU-A5002-AA-00007-AA	RKF CLEVIS
4	1	SU-A5002-AA-00025-AA	ROCKER BACKING PLATE
5	2	N/A	10-32 DISTORTED THREAD NUT PLATE
6	4	N/A	ALUMINUM BLIND RIVET

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	ROCKER CLEVIS ASSEMBLY	
Part Number	SU-15002-AA_(ROCKER CLEVIS)	Scale: 0.75
Material:		ALL DIMENSIONS IN MM

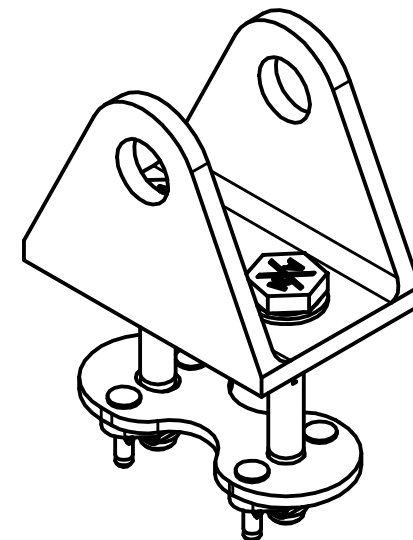
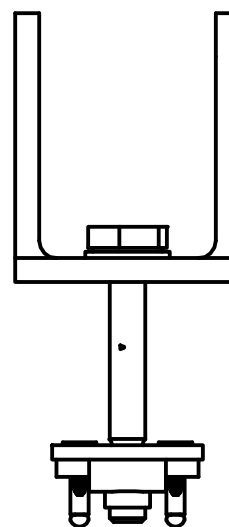
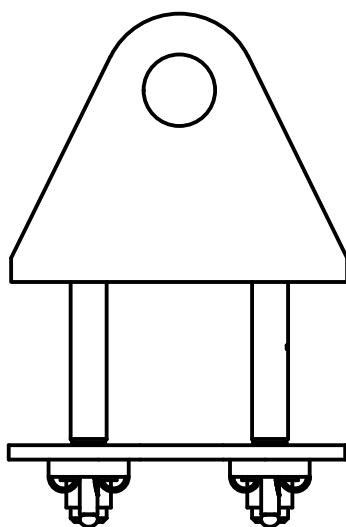



Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	ROCKER CLEVIS ASSEMBLY	
Part Number	SU-15002-AA_(ROCKER CLEVIS)	Scale: 1 : 1
Material:	ALL DIMENSIONS IN MM	

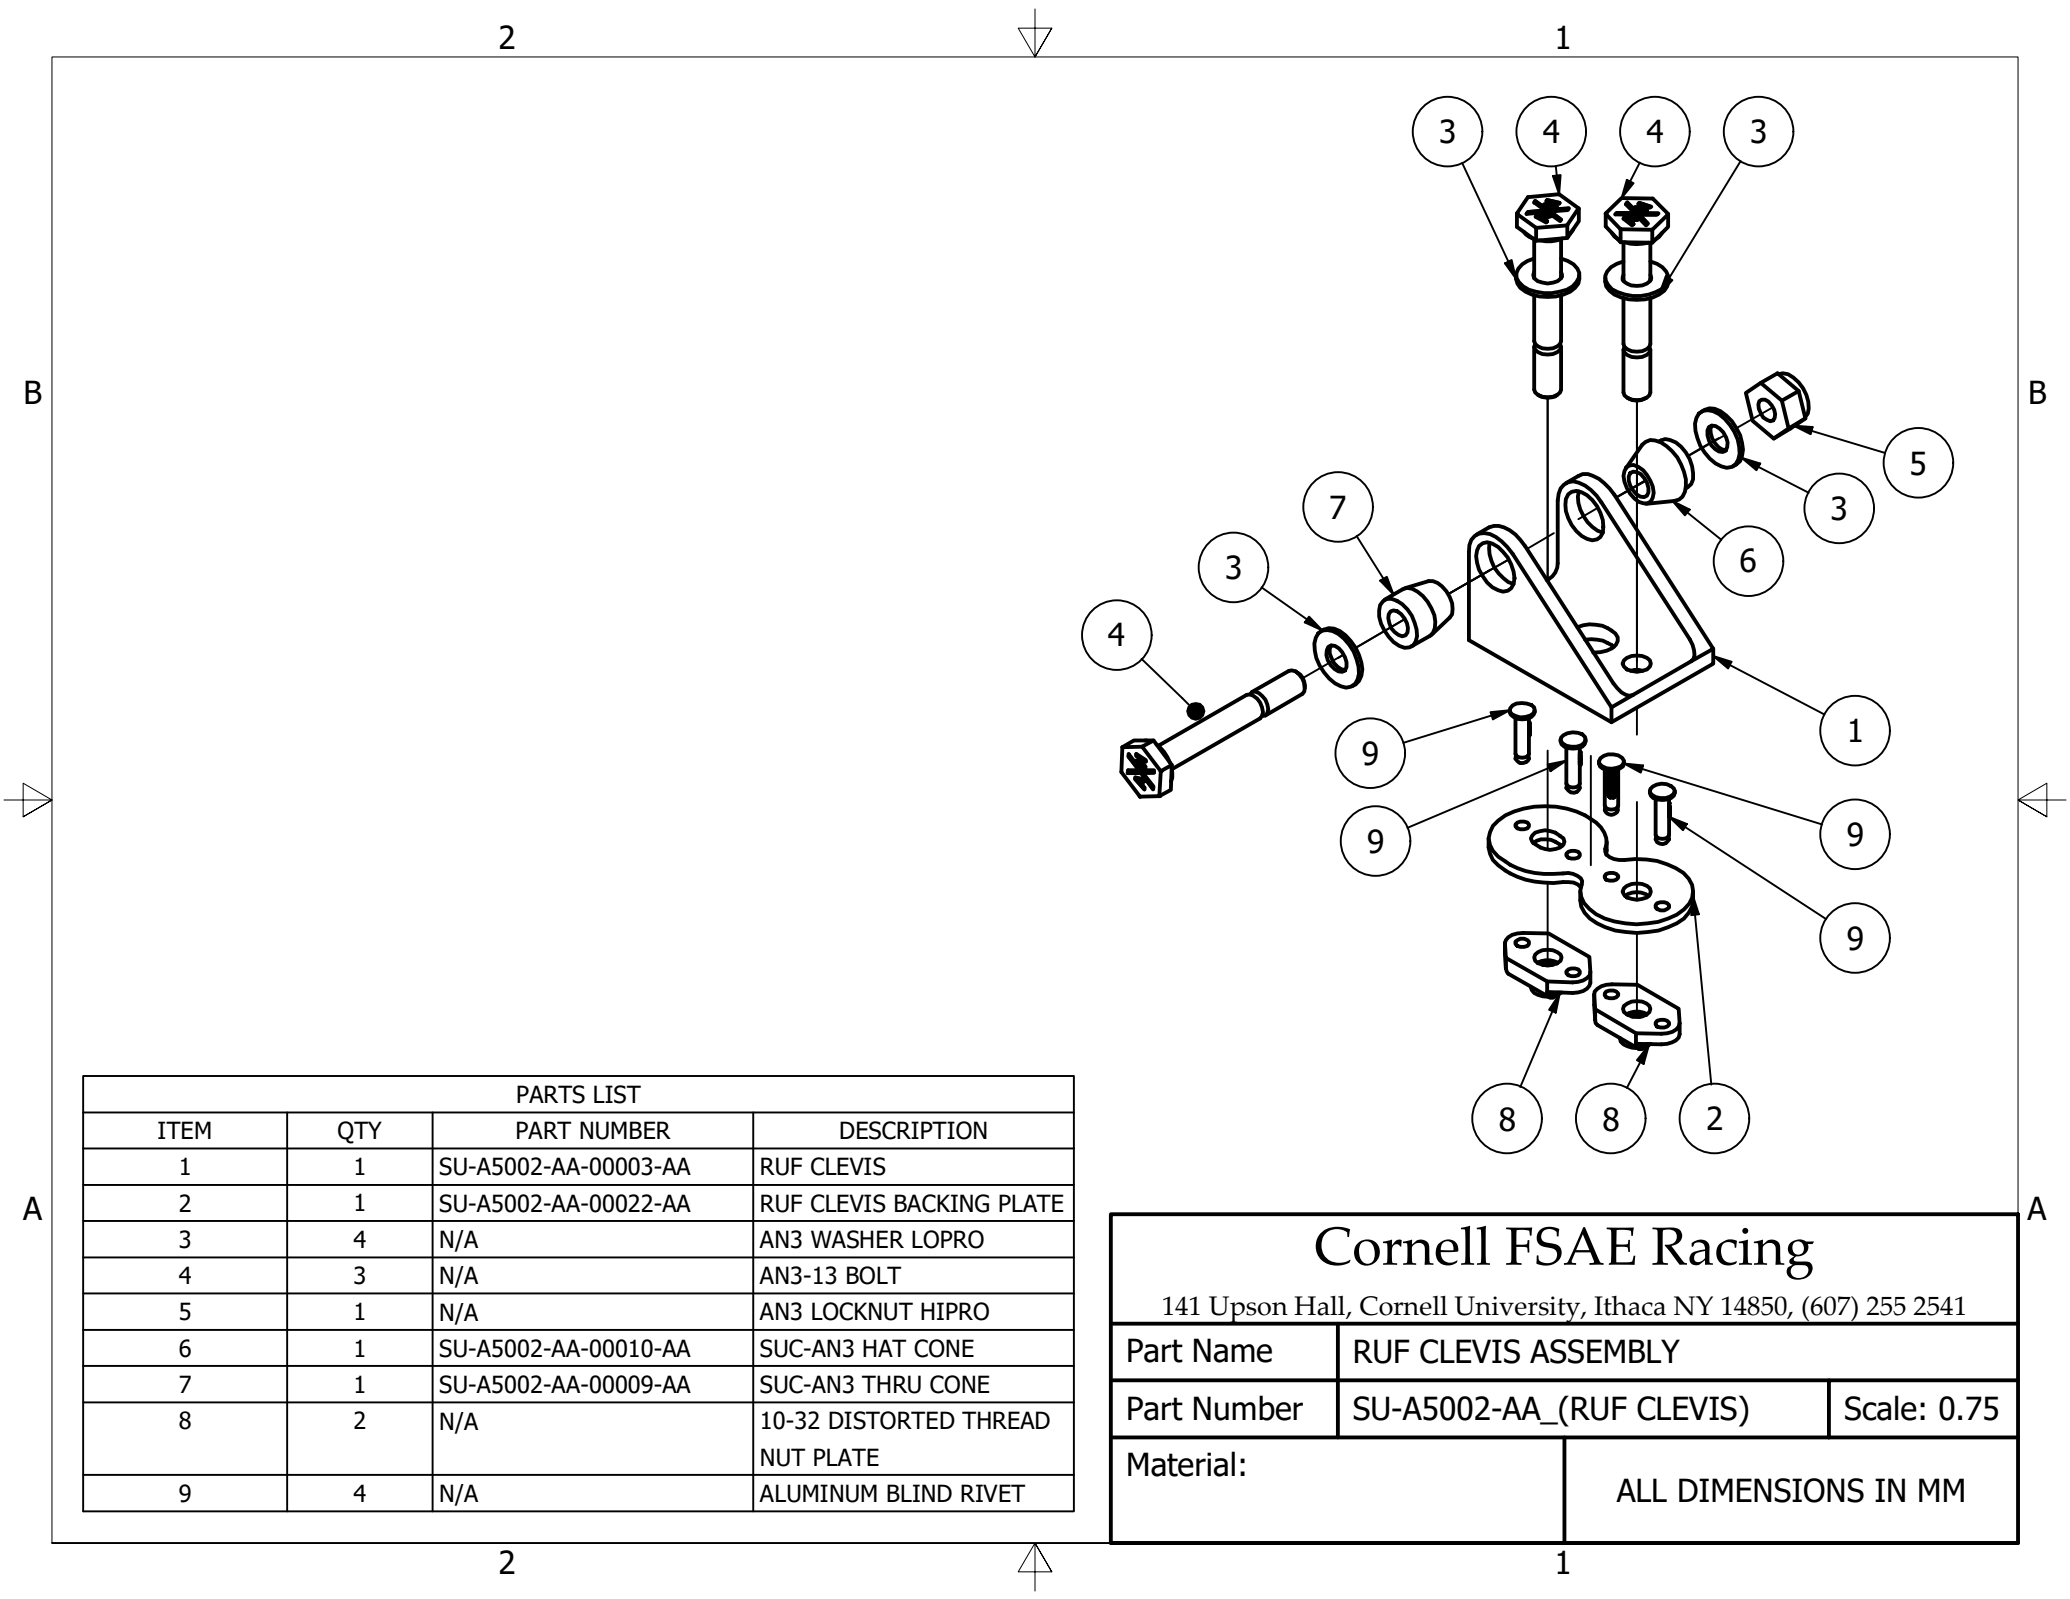


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5002-AA-00003-AA	RUF CLEVIS
2	1	SU-A5002-AA-00022-AA	RUF CLEVIS BACKING PLATE
3	4	N/A	AN3 WASHER LOPRO
4	3	N/A	AN3-13 BOLT
5	1	N/A	AN3 LOCKNUT HIPRO
6	1	SU-A5002-AA-00010-AA	SUC-AN3 HAT CONE
7	1	SU-A5002-AA-00009-AA	SUC-AN3 THRU CONE
8	2	N/A	10-32 DISTORTED THREAD NUT PLATE
9	4	N/A	ALUMINUM BLIND RIVET

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RUF CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(RUF CLEVIS)	Scale: 0.75
Material:		ALL DIMENSIONS IN MM

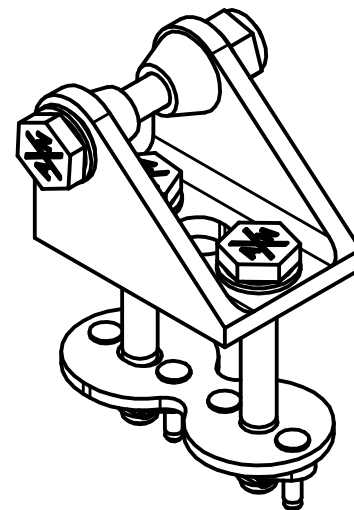
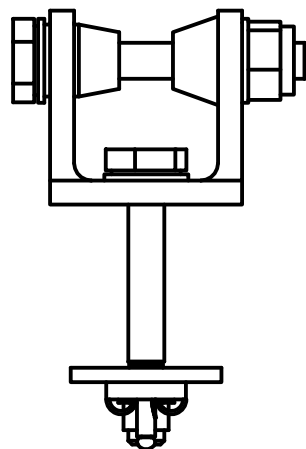
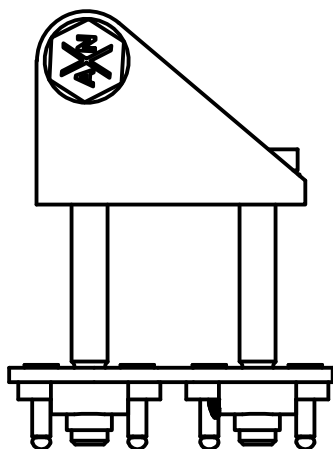



Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RUF CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(RUF CLEVIS)	Scale: 1 : 1
Material:	ALL DIMENSIONS IN MM	

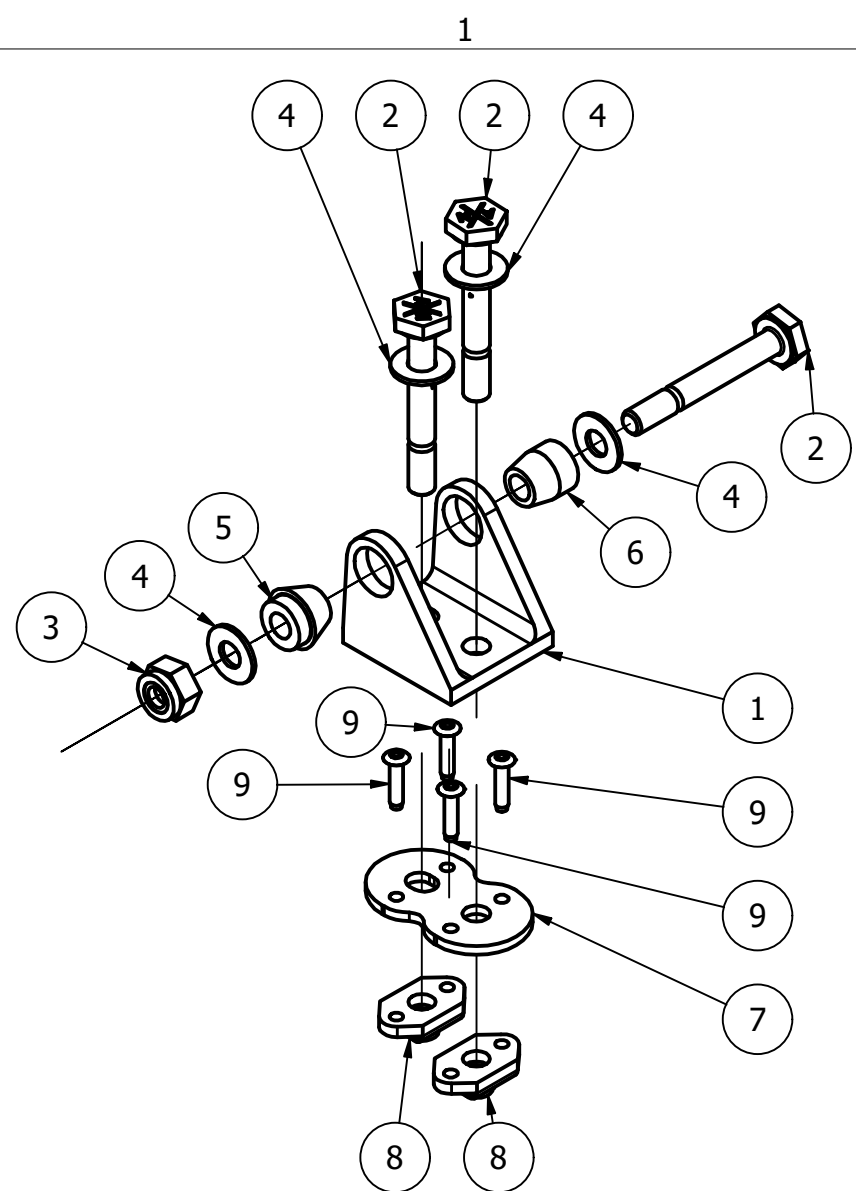


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5002-AA-00004-AA	RUR CLEVIS
2	3	N/A	AN-13 BOLT
3	1	N/A	AN3 LOCKNUT HIPRO
4	3	N/A	AN3 WASHER LOPRO
5	1	SU-A5002-AA-00010-AA	SUC-AN3 HAT CONE
6	1	SU-A5002-AA-00009-AA	SUC-AN3 THRU CONE
7	1	SU-A5002-AA-00023-AA	RUR CLEVIS BACKING PLATE
8	2	N/A	10-32 DISTORTED THREAD NUT PLATE
9	4	N/A	ALUMINUM BLIND RIVET

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RUR CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(RUR CLEVIS)	Scale: 0.75
Material:		ALL DIMENSIONS IN MM

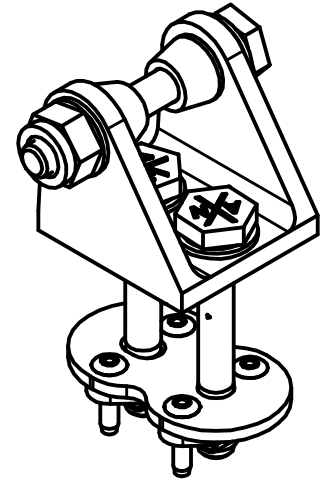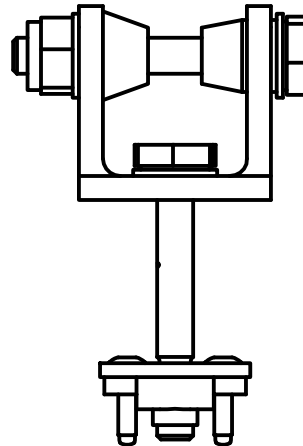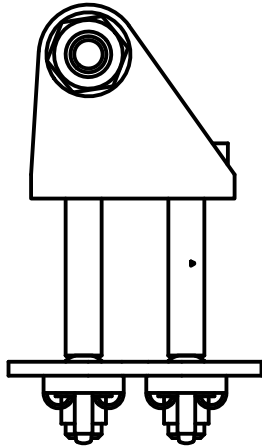


Cornell FSAE Racing 141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RUR CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(RUR CLEVIS)	Scale: 1 : 1
Material:	ALL DIMENSIONS IN MM	

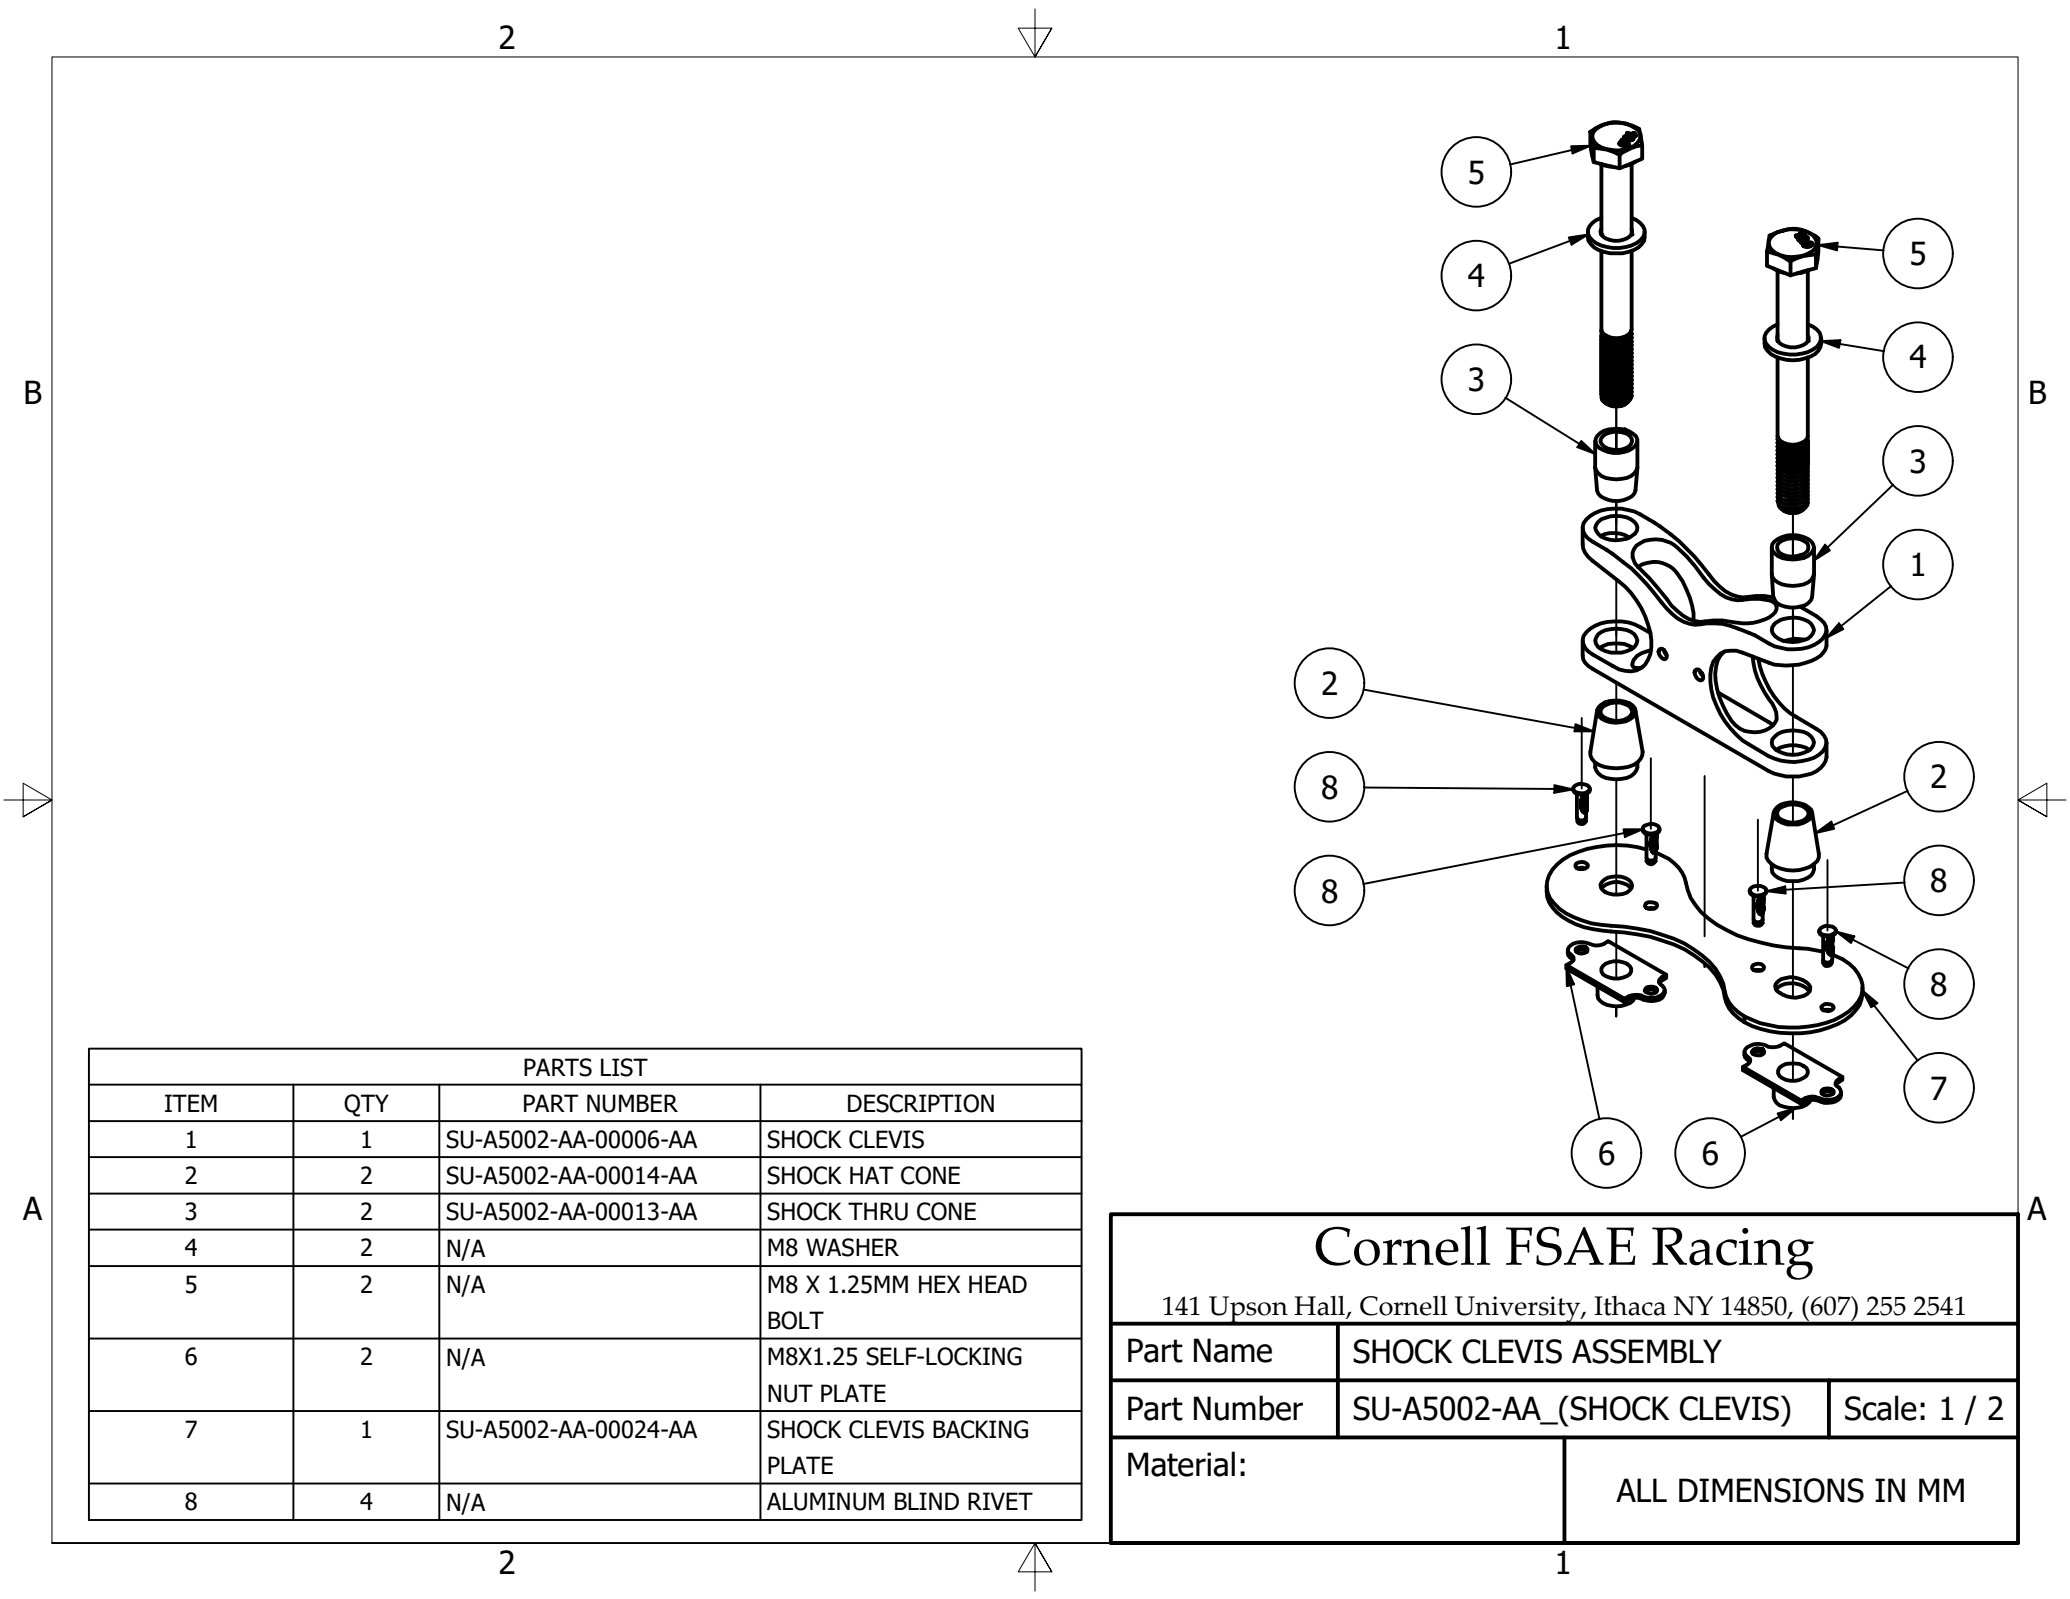


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5002-AA-00006-AA	SHOCK CLEVIS
2	2	SU-A5002-AA-00014-AA	SHOCK HAT CONE
3	2	SU-A5002-AA-00013-AA	SHOCK THRU CONE
4	2	N/A	M8 WASHER
5	2	N/A	M8 X 1.25MM HEX HEAD BOLT
6	2	N/A	M8X1.25 SELF-LOCKING NUT PLATE
7	1	SU-A5002-AA-00024-AA	SHOCK CLEVIS BACKING PLATE
8	4	N/A	ALUMINUM BLIND RIVET

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	SHOCK CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(SHOCK CLEVIS)	Scale: 1 / 2
Material:		ALL DIMENSIONS IN MM




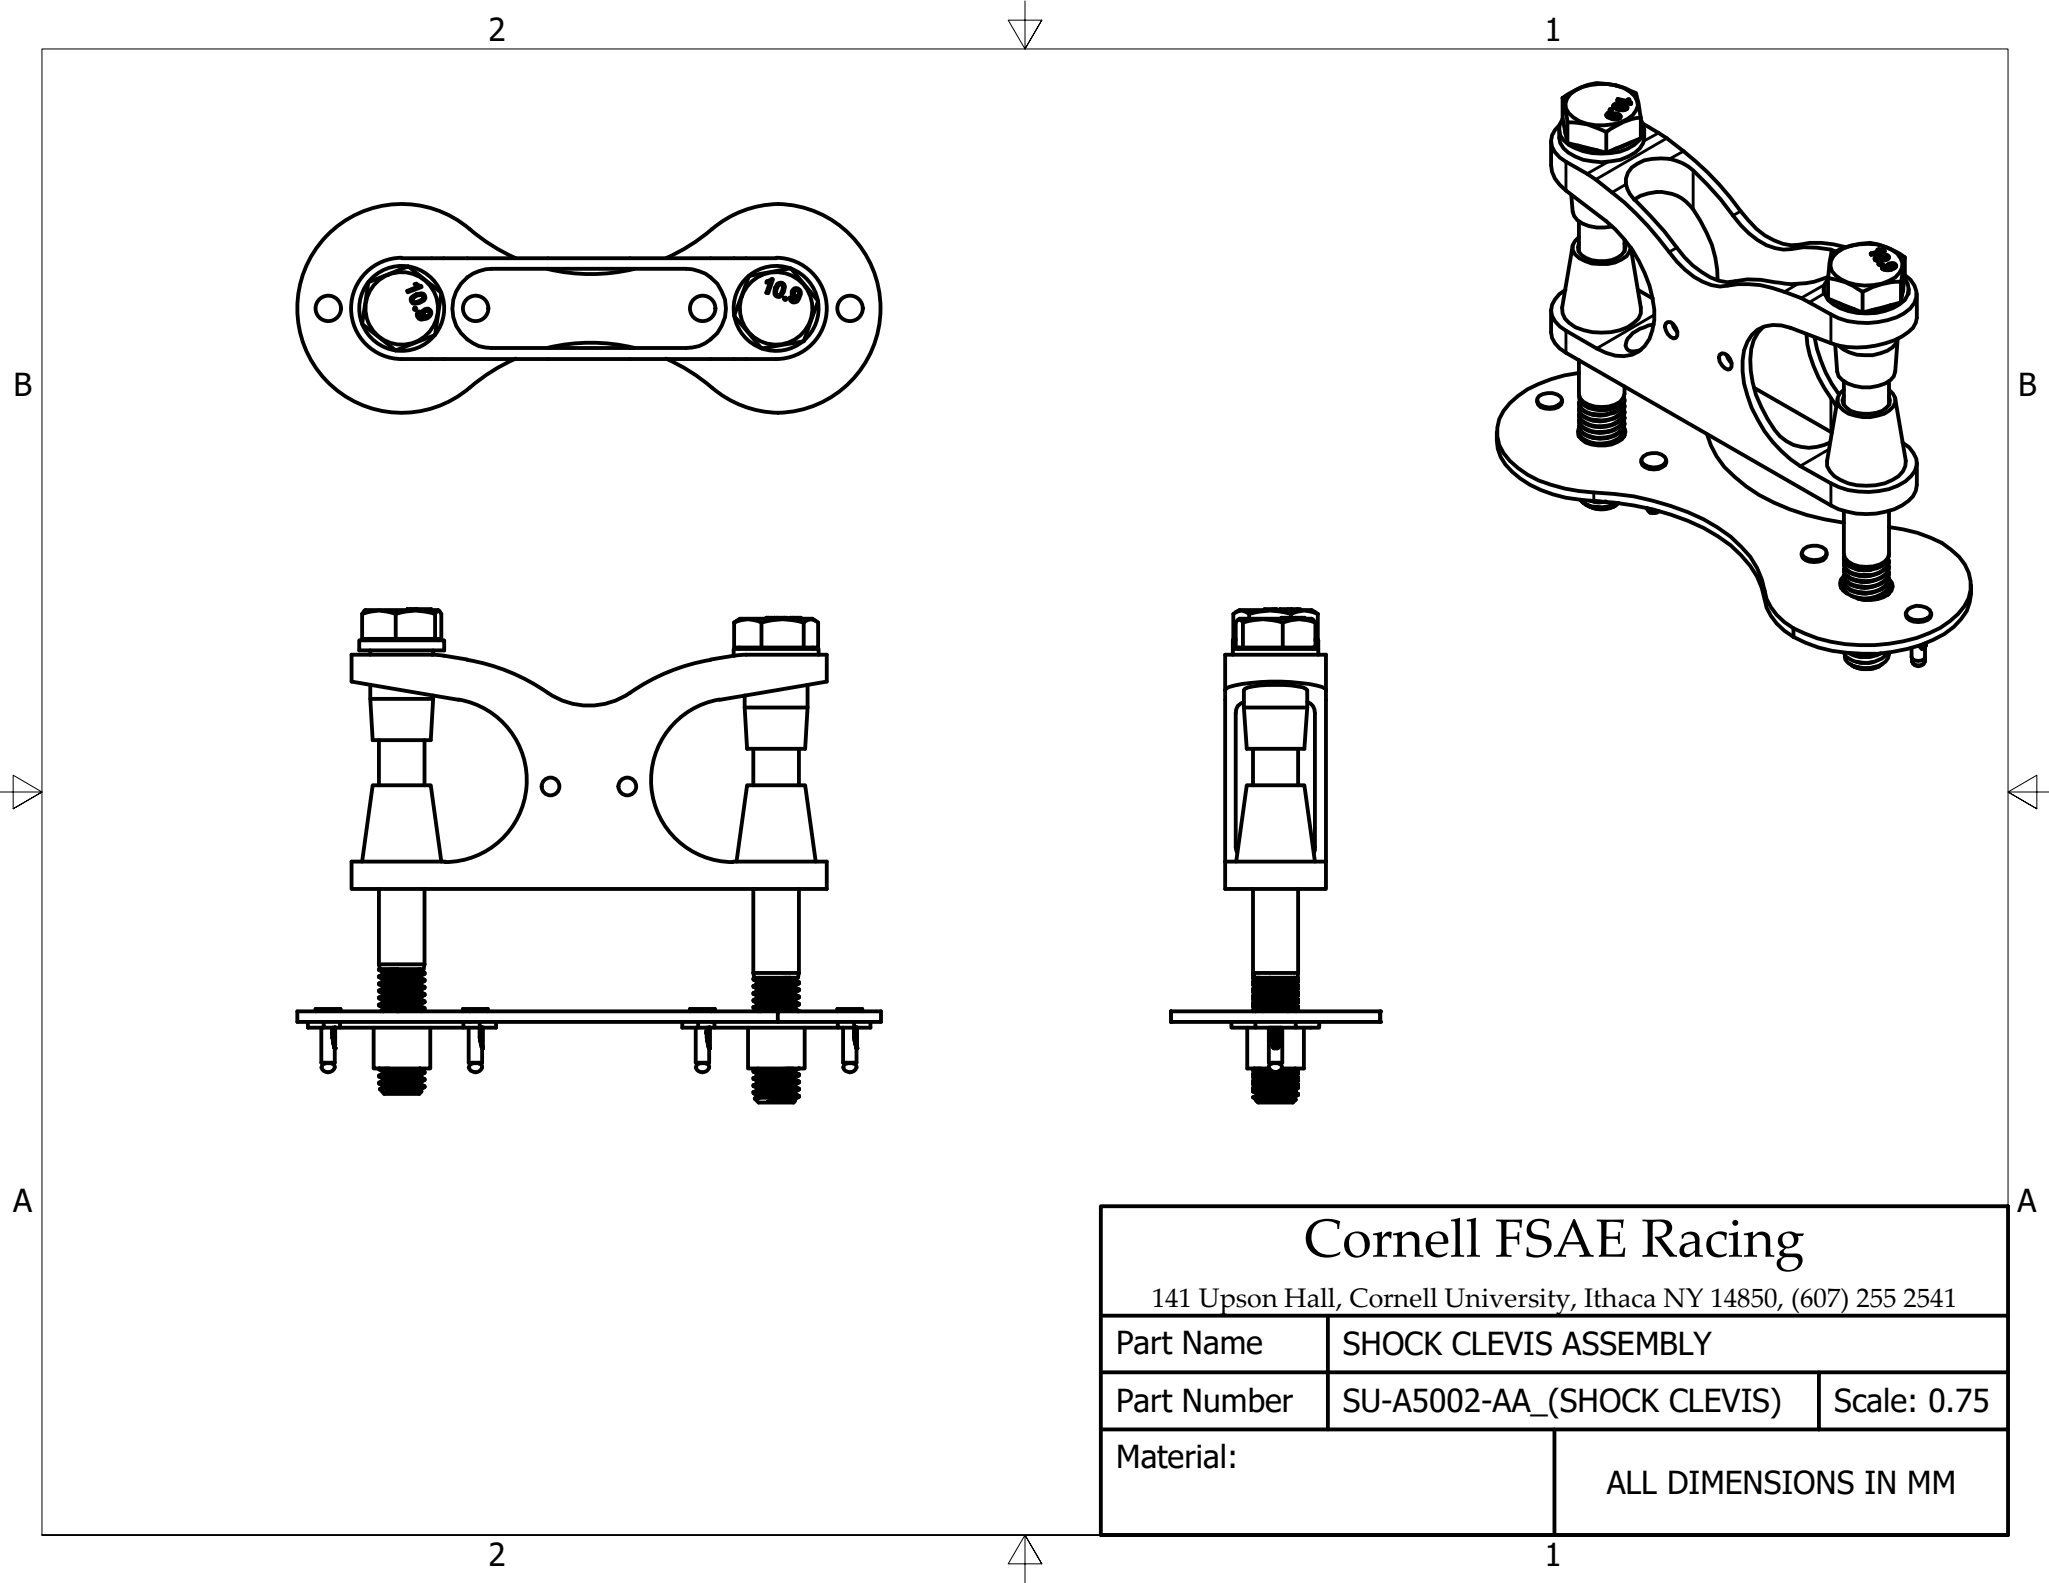


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	SHOCK CLEVIS ASSEMBLY	
Part Number	SU-A5002-AA_(SHOCK CLEVIS)	Scale: 0.75
Material:		ALL DIMENSIONS IN MM

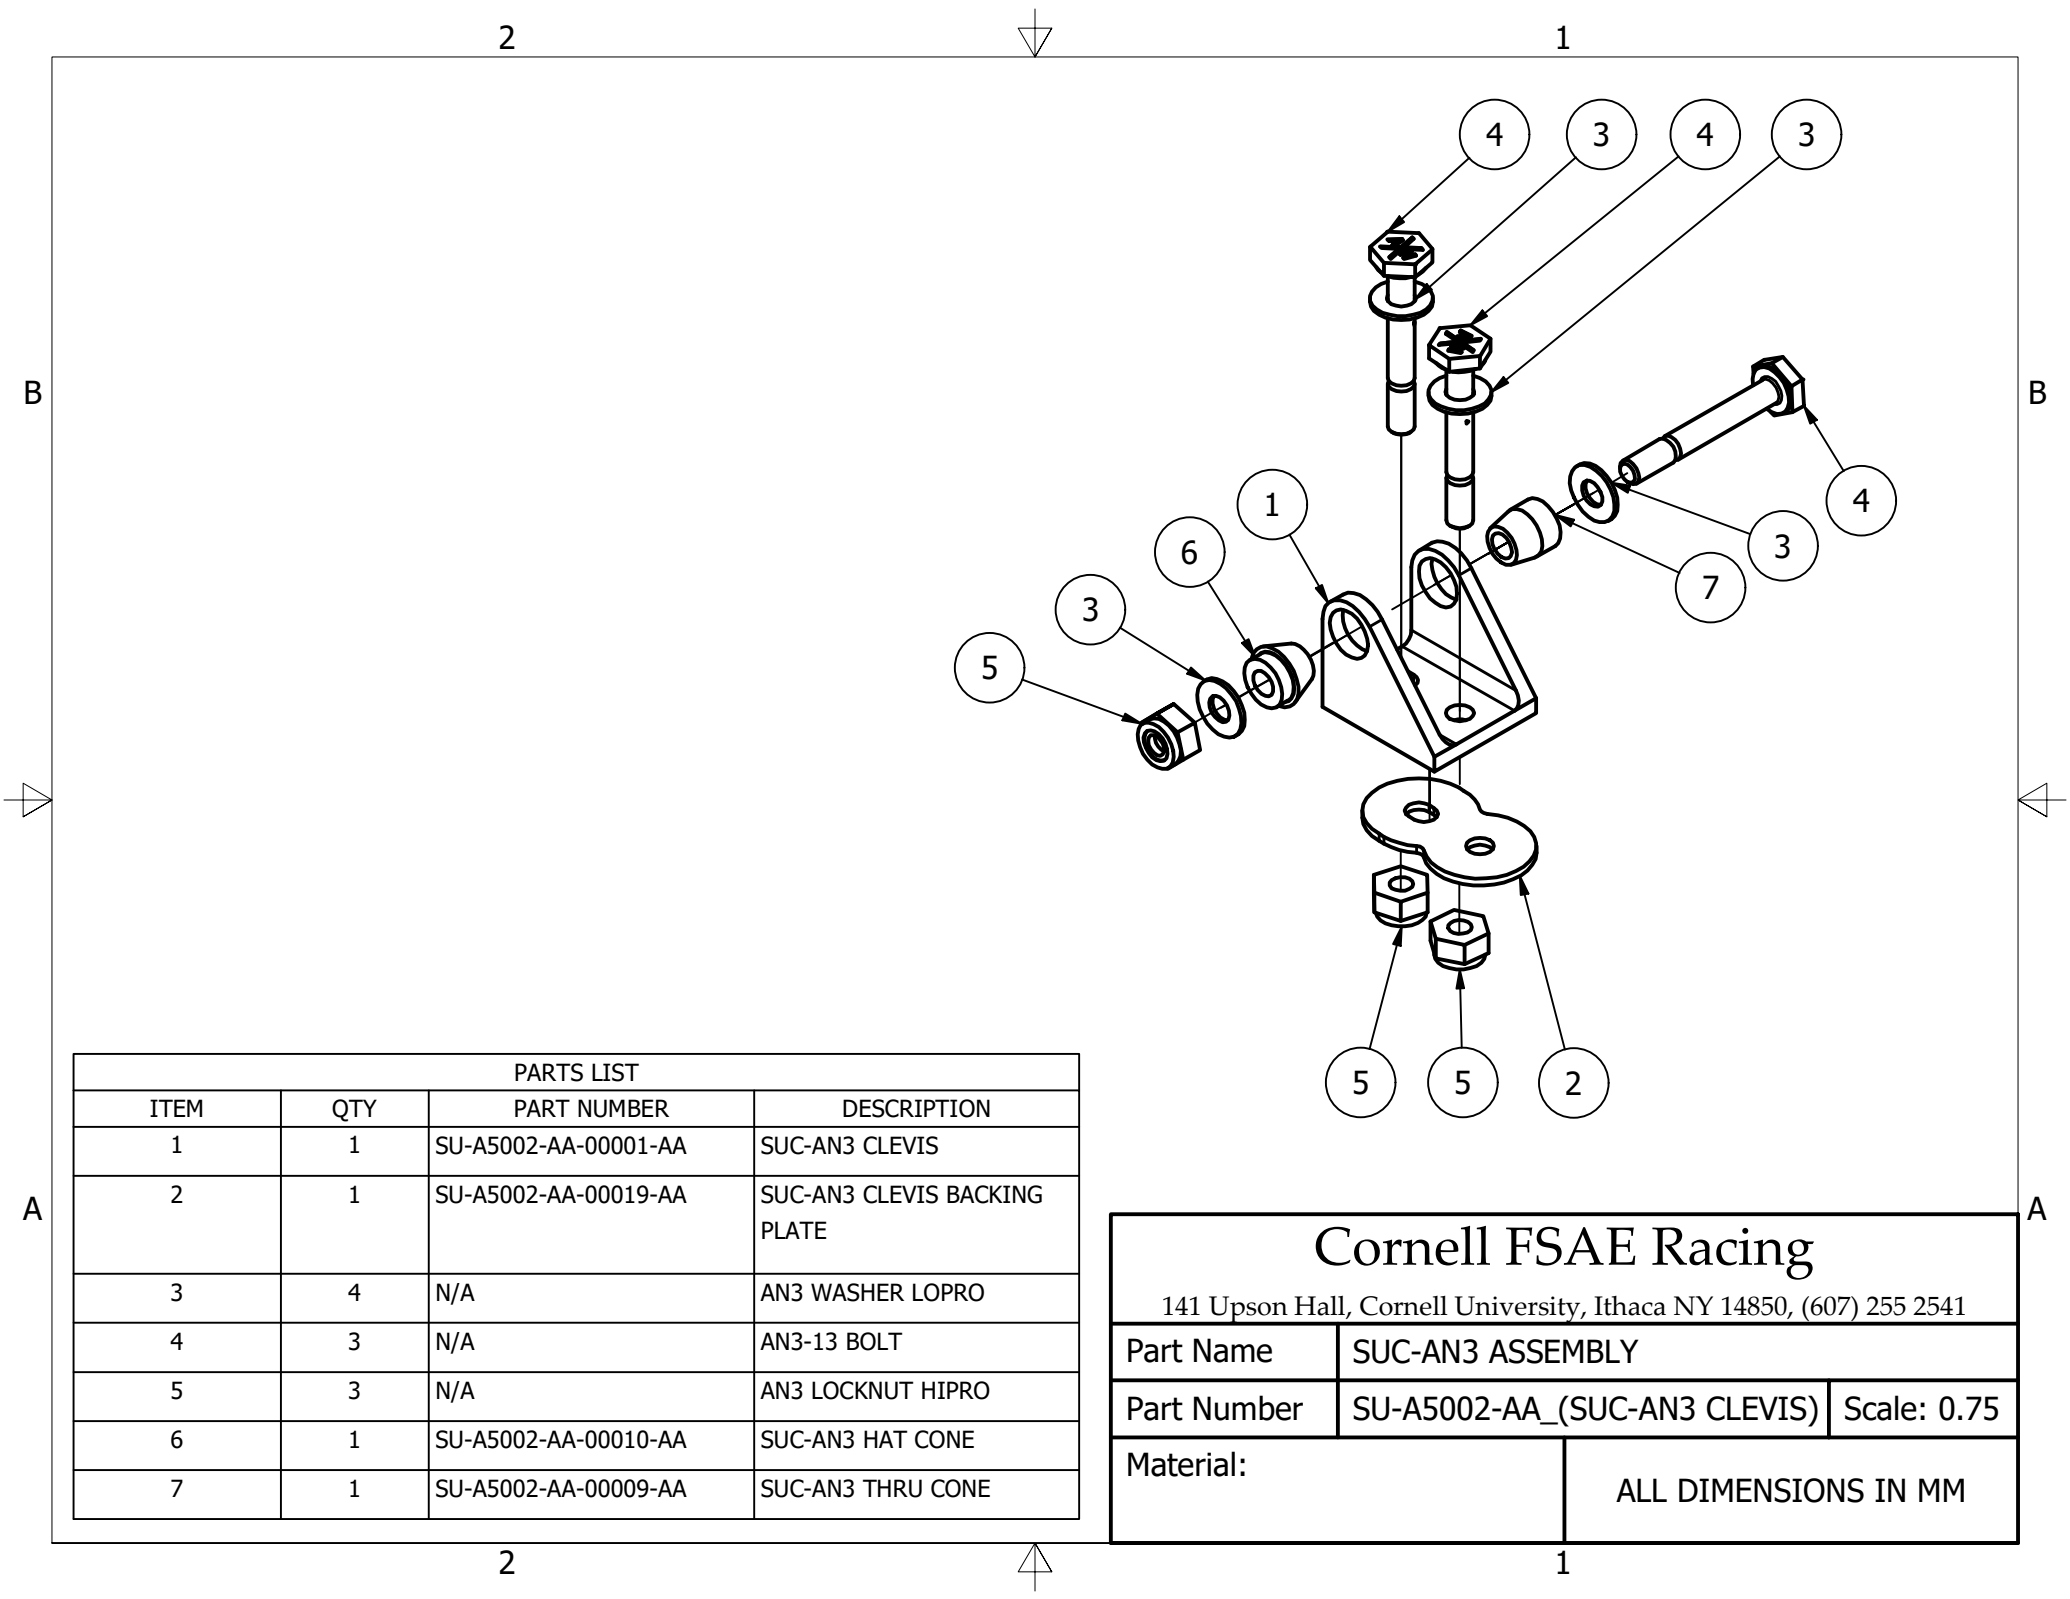





PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5002-AA-00001-AA	SUC-AN3 CLEVIS
2	1	SU-A5002-AA-00019-AA	SUC-AN3 CLEVIS BACKING PLATE
3	4	N/A	AN3 WASHER LOPRO
4	3	N/A	AN3-13 BOLT
5	3	N/A	AN3 LOCKNUT HIPRO
6	1	SU-A5002-AA-00010-AA	SUC-AN3 HAT CONE
7	1	SU-A5002-AA-00009-AA	SUC-AN3 THRU CONE


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	SUC-AN3 ASSEMBLY	
Part Number	SU-A5002-AA_(SUC-AN3 CLEVIS)	Scale: 0.75
Material:		ALL DIMENSIONS IN MM

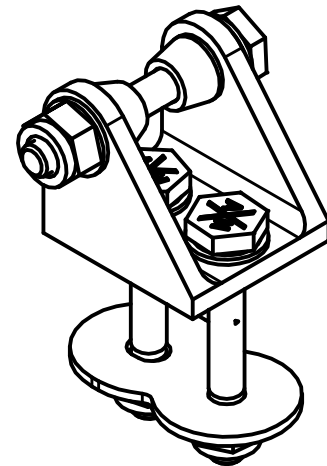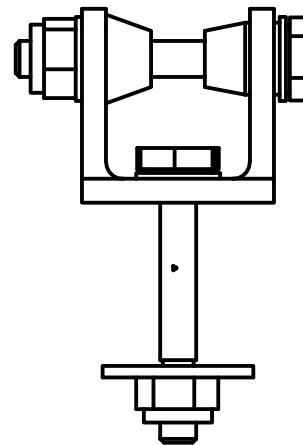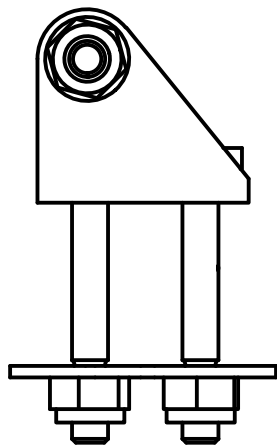





Cornell FSAE Racing 141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	SUC-AN3 ASSEMBLY	
Part Number	SU-A5002-AA_(SUC-AN3 CLEVIS)	Scale: 1 : 1
Material:	ALL DIMENSIONS IN MM	


NOTES, UNLESS OTHERWISE SPECIFIED:

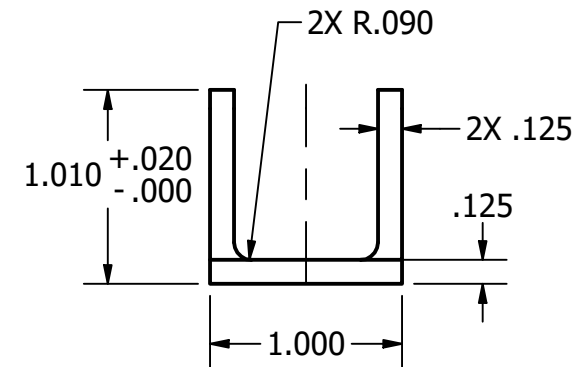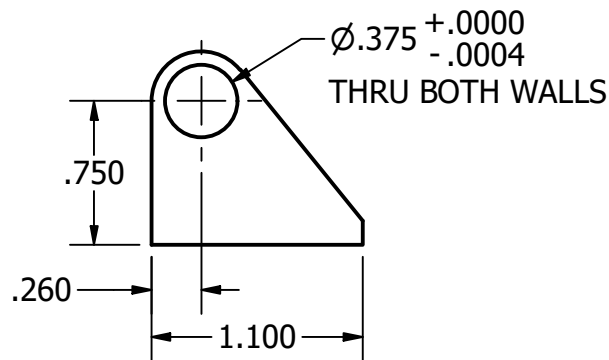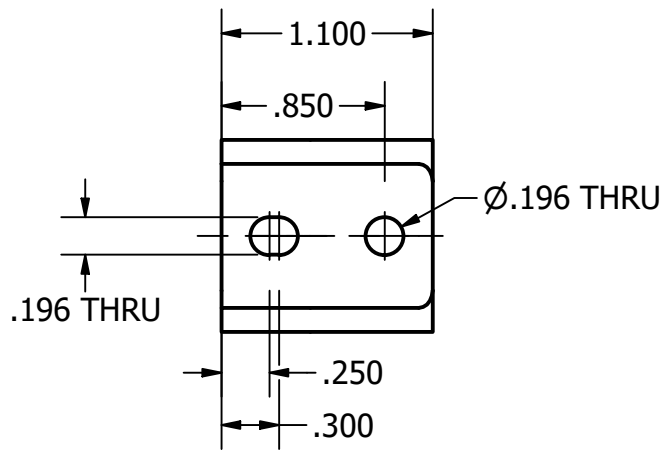





MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: CLEVISES	DATE 11/12/2025	 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 Ø $+0.006$ -0.001		FINISH BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER KEIRA HE RESPONSIBLE ENGINEER KEIRA HE DRAWN BY KEIRA HE APPROVAL				DESCRIPTION SUC-AN3 CLEVIS
ALL DIMENSIONS IN INCHES				SIZE A	P/N SU-A5002-AA-00001-AA	REV A		
				SCALE 1 : 1	DO NOT SCALE		SHEET 1 / 1	


NOTES, UNLESS OTHERWISE SPECIFIED:

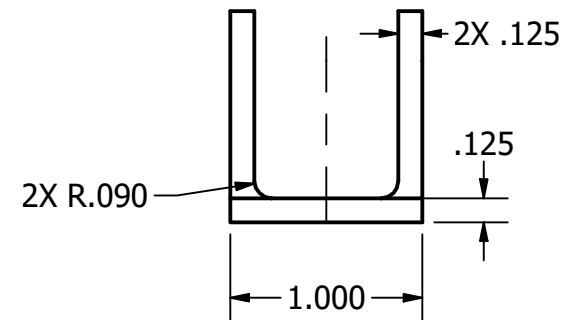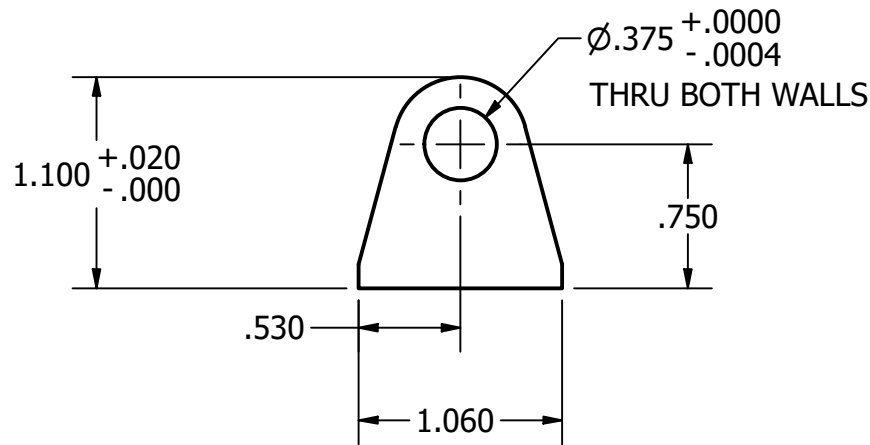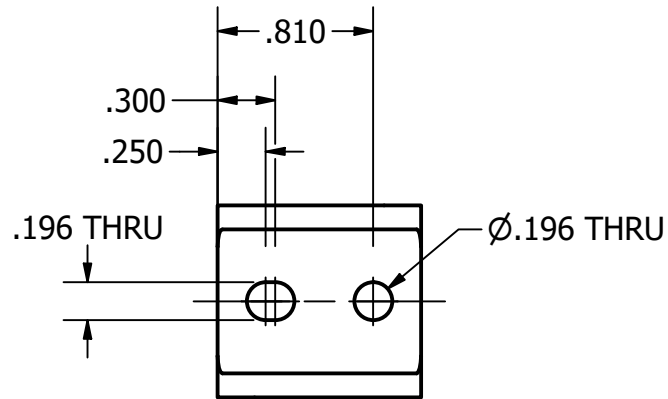





MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 7075-T651				CLEVISES		12/3/2025		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH	BARE			DESCRIPTION				
	LINEAR:	$\varnothing$ 0.005 $\varnothing$ +0.006 -0.001	DESIGNER		FLF CLEVIS				
	X.X $\pm$ 0.1		KEIRA HE		SIZE		P/N		REV
	X.XX $\pm$ 0.02		RESPONSIBLE ENGINEER		A	SU-A5002-AA-00002-AA		A	
	X.XXX $\pm$ 0.010		KEIRA HE		SCALE		DO NOT SCALE		SHEET
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		KEIRA HE		1 : 1		1 / 1	
		APPROVAL							


NOTES, UNLESS OTHERWISE SPECIFIED:

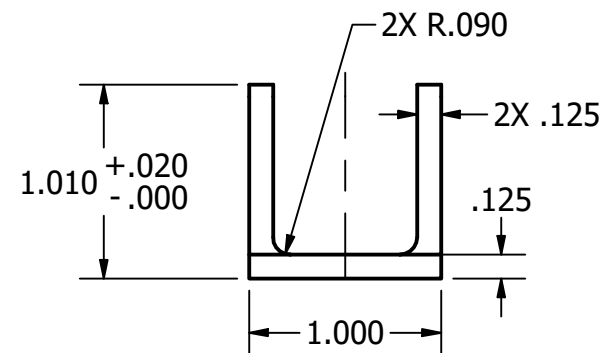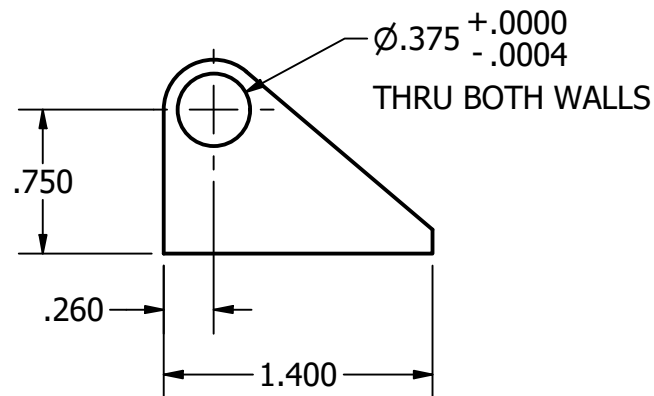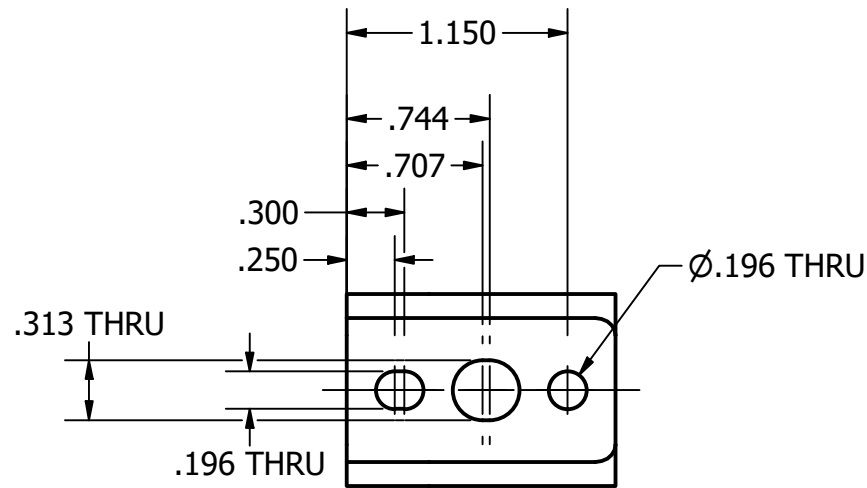





MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE					
ALUMINUM, 7075-T651				CLEVISES		11/20/2025		CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION					
BARE		INTERPRET PER ASME Y14.5-2018		KEIRA HE		RUF CLEVIS					
LINEAR: ± 0.005 X.X ± 0.1 $\varnothing \pm 0.006$ X.XX ± 0.02 -0.001 X.XXX ± 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
				KEIRA HE		A		SU-A5002-AA-00003-AA		A	
ALL DIMENSIONS IN INCHES				DRAWN BY		SCALE		DO NOT SCALE		SHEET	
				KEIRA HE		1 : 1				1 / 1	
				APPROVAL							


NOTES, UNLESS OTHERWISE SPECIFIED:

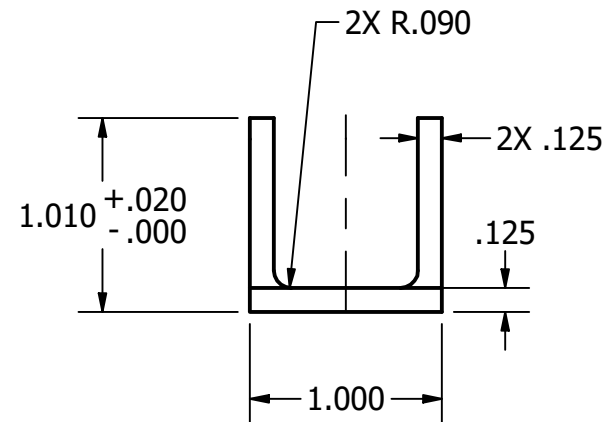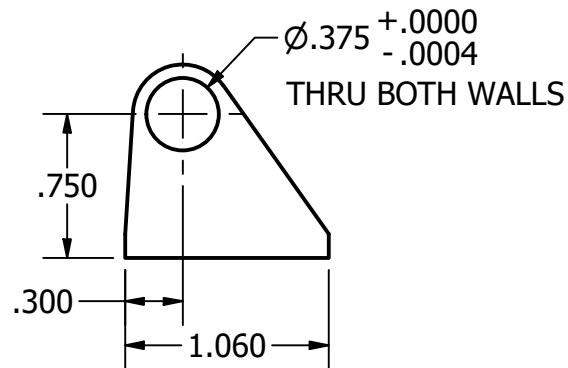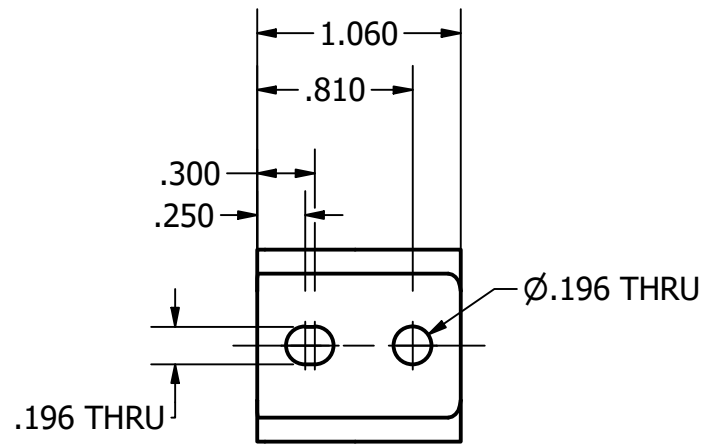

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 7075-T651				CLEVISES		11/12/2025		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH		DESCRIPTION		RUR CLEVIS			
BARE		DESIGNER		SIZE		P/N		REV	
LINEAR: $\varnothing$ 0.005		KEIRA HE		A		SU-A5002-AA-00004-AA		A	
X.X $\pm$ 0.1		RESPONSIBLE ENGINEER							
$\varnothing$ +0.006		KEIRA HE							
X.XX $\pm$ 0.02		DRAWN BY							
-0.001		KEIRA HE		SCALE		DO NOT SCALE		SHEET	
X.XXX $\pm$ 0.010		APPROVAL		1 : 1				1 / 1	
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018							
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING							

NOTES, UNLESS OTHERWISE SPECIFIED:

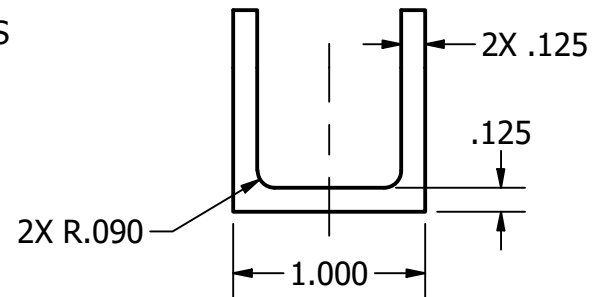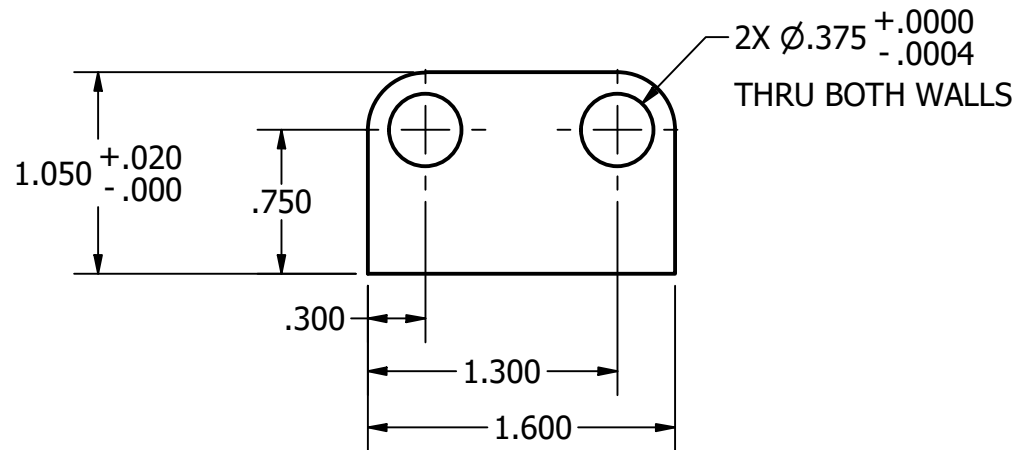
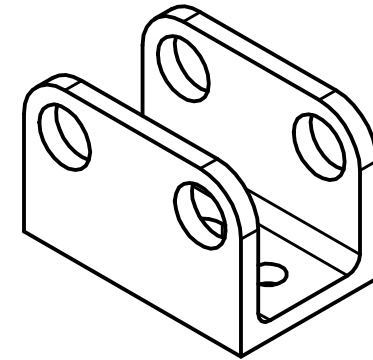
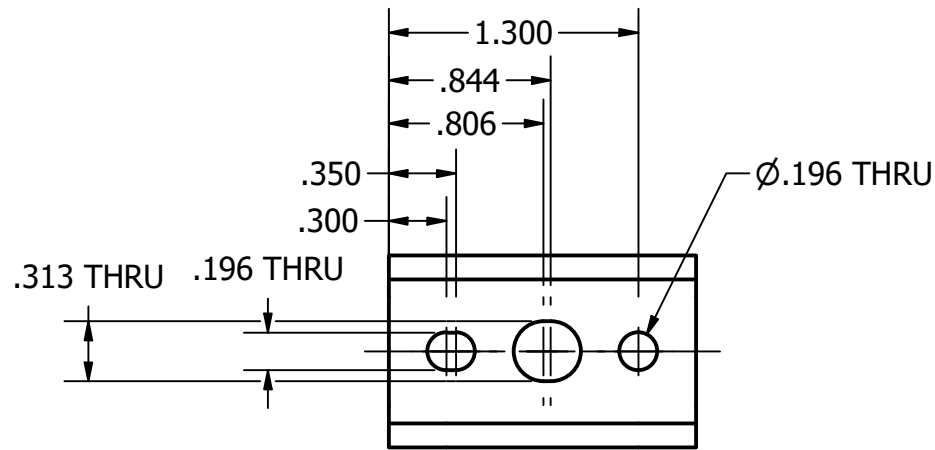



MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE					
ALUMINUM, 7075-T651				CLEVISES		11/12/2025		CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION					
BARE		INTERPRET PER ASME Y14.5-2018		KEIRA HE		RLR DOUBLE CLEVIS					
LINEAR: $\varnothing$ 0.005 X.X $\pm$ 0.1 $\varnothing$ +0.006 X.XX $\pm$ 0.02 -0.001 X.XXX $\pm$ 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
				KEIRA HE		A		SU-A5002-AA-00005-AA		A	
ALL DIMENSIONS IN INCHES				DRAWN BY		SCALE		DO NOT SCALE		SHEET	
				KEIRA HE		1 : 1				1 / 1	
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:





1. THIS IS A MINIMUM DIMENSION DRAWING.


REFERENCE CAD FOR ALL UNLISTED DIMENSIONS.

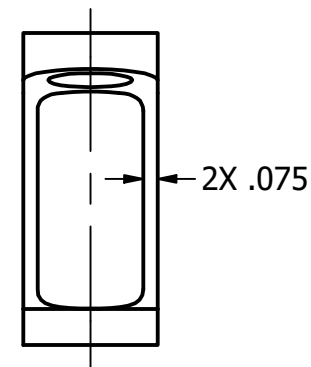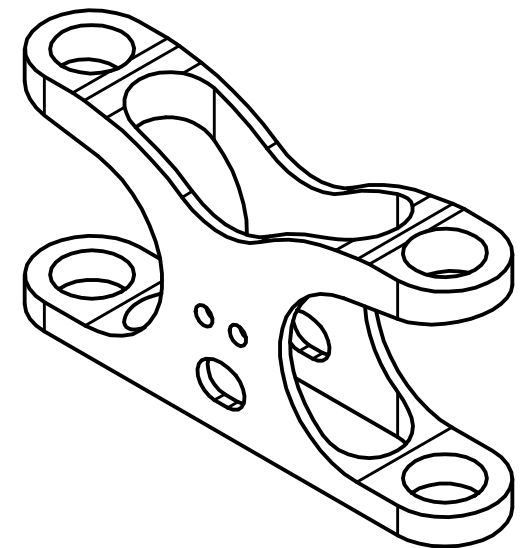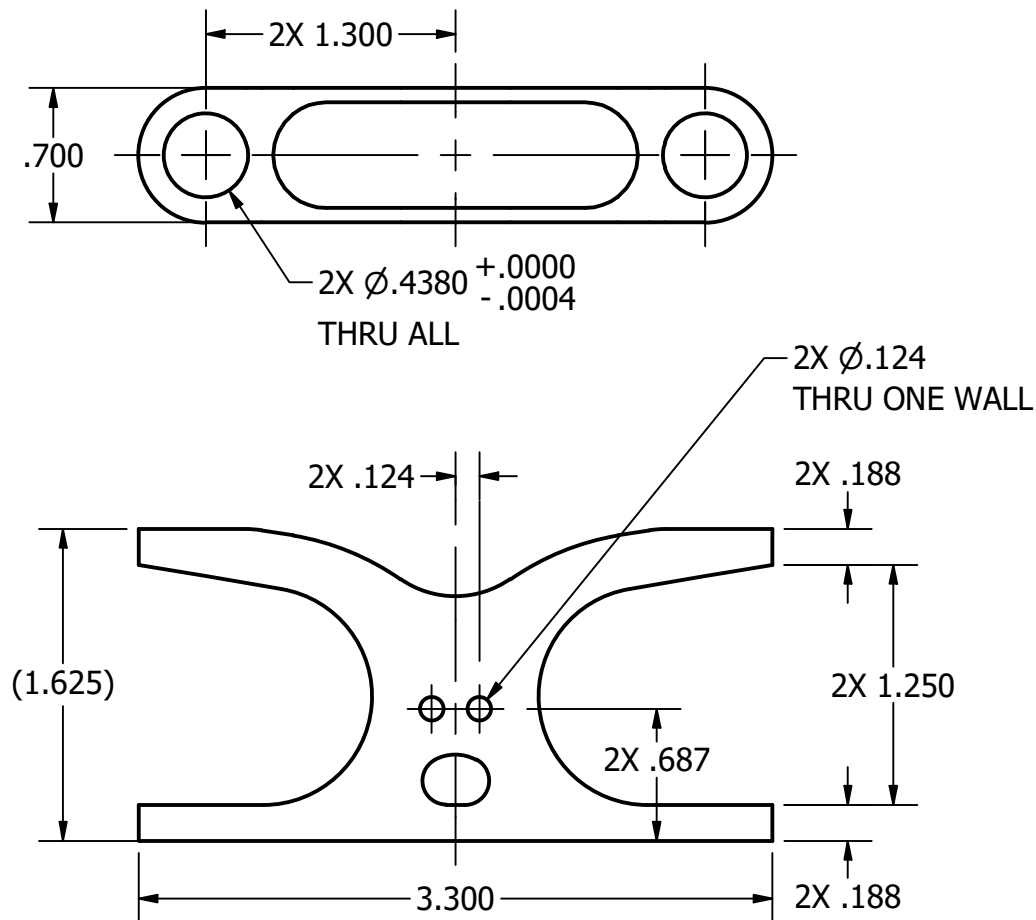



MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE					
ALUMINUM, 7075-T651				CLEVISES		12/3/2025		CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION					
BARE		INTERPRET PER ASME Y14.5-2018		JOE GLUSKER		SHOCK CLEVIS					
LINEAR: $\varnothing \pm 0.005$ $X.X \pm 0.1$ $X.XX \pm 0.02$ $X.XXX \pm 0.010$		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
				JOE GLUSKER		A		SU-A5002-AA-00006-AA		A	
ALL DIMENSIONS IN INCHES				DRAWN BY		SCALE		DO NOT SCALE		SHEET	
				SUJAN MUNVER		1 : 1				1 / 1	
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:
1. BELT SAND TO FINAL OUTER DIMENSIONS

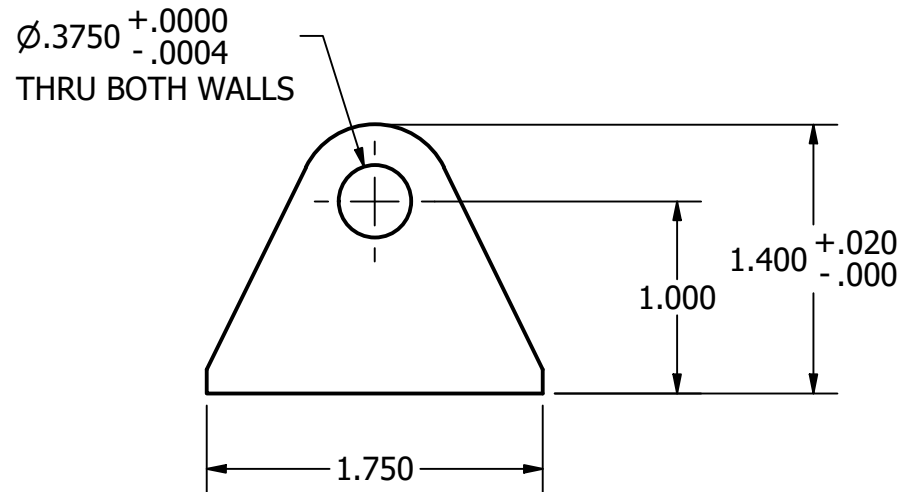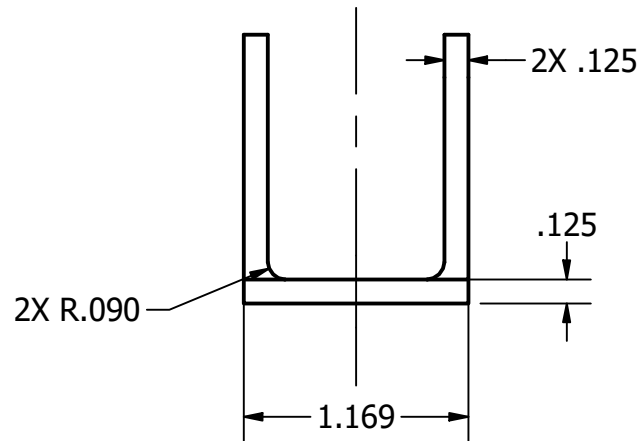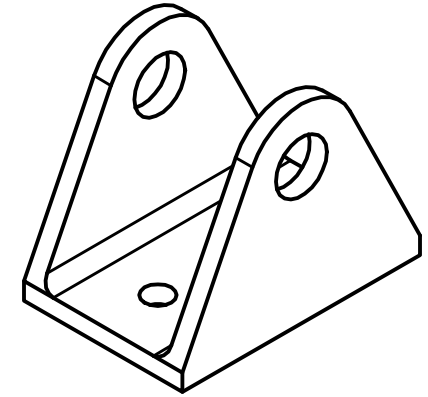
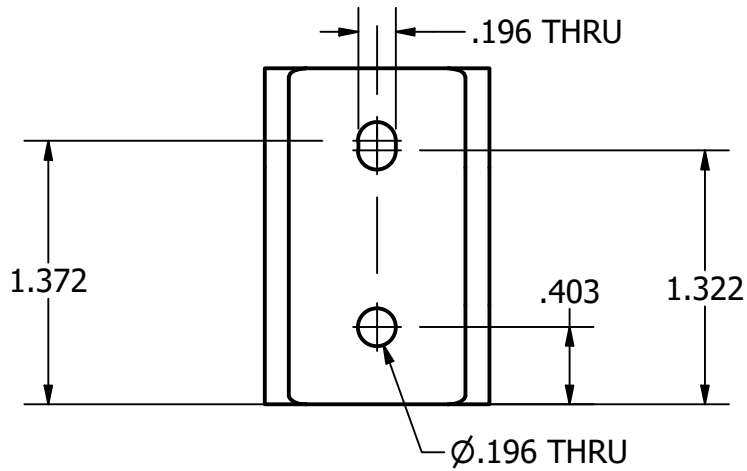


MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: ROCKERS		DATE 11/10/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED				DESCRIPTION RKF CLEVIS							
FINISH		DESIGNER YASSINE COULIBALY		SIZE A		P/N SU-A5002-AA-00007-AA			REV A		
BARE		RESPONSIBLE ENGINEER YASSINE COULIBALY		SCALE 1 : 1		DO NOT SCALE				SHEET 1 / 1	
LINEAR: ± 0.005 $\varnothing \pm 0.006$ $\varnothing -0.001$ X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018		DRAWN BY Y.COULIBALY							
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		APPROVAL							


NOTES, UNLESS OTHERWISE SPECIFIED:
MINIMALIST DRAWING, REFER TO CAD

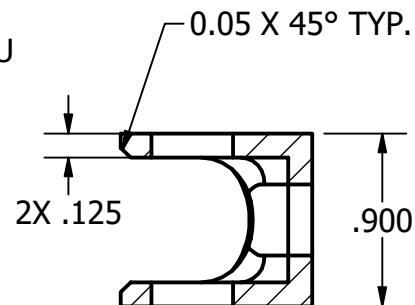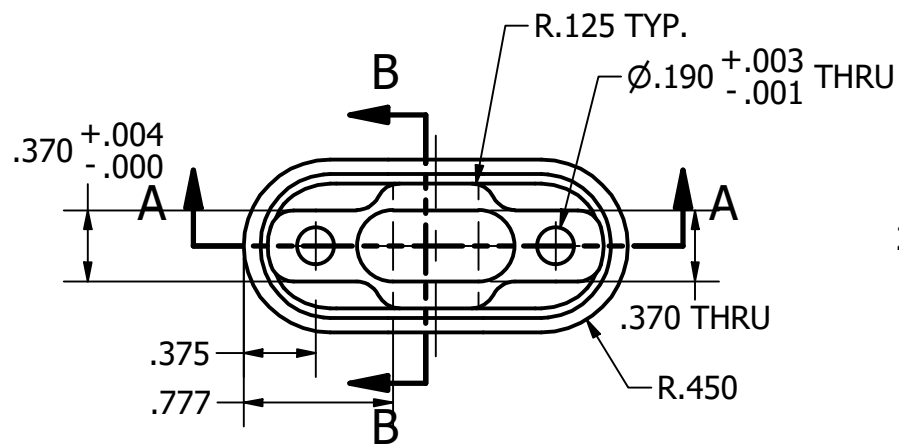



SECTION B-B
SCALE 1 : 1

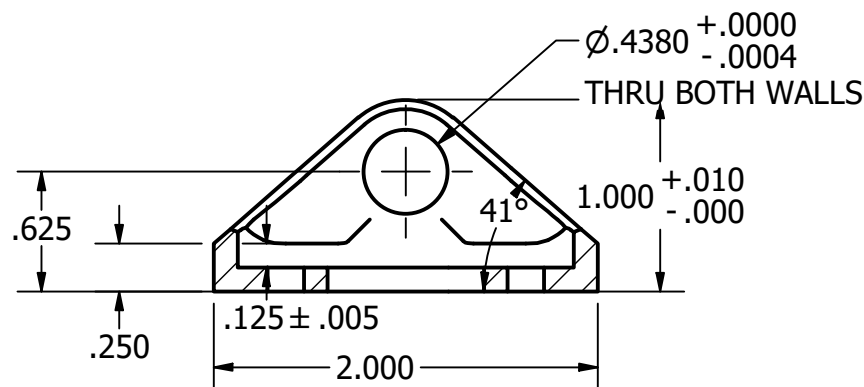


SECTION A-A
SCALE 1 : 1

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE					
ALUMINUM, 7075-T651				UPSRUNG		11/19/2025		CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION					
BARE		INTERPRET PER ASME Y14.5-2018		CAROLINE MOSKAL		OUTBOARD CLEVIS					
LINEAR: ± 0.005 X.X ± 0.1 $\varnothing \pm 0.006$ X.XX ± 0.02 -0.001 X.XXX ± 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER CAROLINE MOSKAL		SIZE A		P/N SU-A5002-AA-00008-AA		REV A	
ALL DIMENSIONS IN INCHES				DRAWN BY CAROLINE MOSKAL		SCALE 1 : 1		DO NOT SCALE		SHEET 1 / 1	
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:

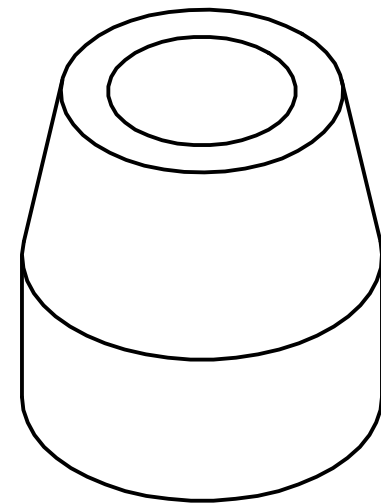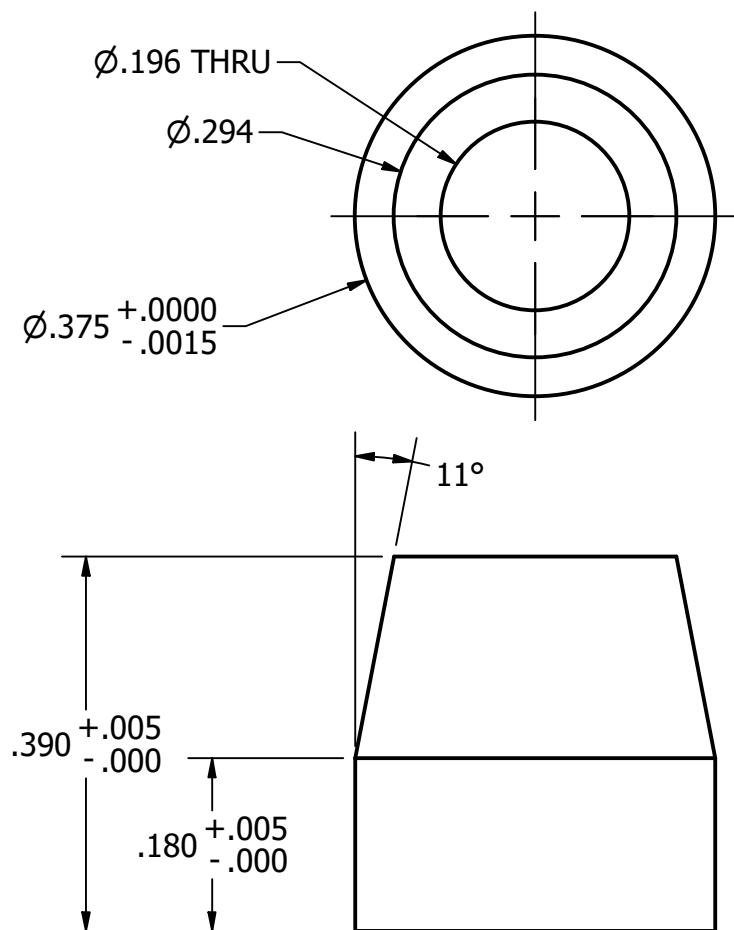

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE		 CORNELL RACING			
ALUMINUM, 7075-T651				CLEVISES		11/11/2025					
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION					
BARE		INTERPRET PER ASME Y14.5-2018		KEIRA HE		SUC-AN3 THRU CONE					
LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
				KEIRA HE		A		SU-A5002-AA-00009-AA		A	
ALL DIMENSIONS IN INCHES				DRAWN BY		SCALE		DO NOT SCALE		SHEET	
				KEIRA HE		5 : 1				1 / 1	
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:

1. USE TOOL WITH 1/128 R

Ø.463

Ø.196 THRU

Ø.294

.235 $\begin{smallmatrix} +.000 \\ -.005 \end{smallmatrix}$

.115 $\begin{smallmatrix} +.000 \\ -.005 \end{smallmatrix}$

Ø.3750 $\begin{smallmatrix} +.0000 \\ -.0015 \end{smallmatrix}$

R.008
NOTE 1

MATERIAL

ALUMINUM, 7075-T651

TOLERANCES, UNLESS
SPECIFIED

LINEAR:

X.X ± 0.1

X.XX ± 0.02

X.XXX ± 0.010

Ø 0.005

Ø +0.006

-0.001

ALL DIMENSIONS
IN INCHES


FINISH

BARE

INTERPRET PER ASME
Y14.5-2018

ALL INFORMATION IS
PROPRIETARY TO CORNELL
RACING

THIRD ANGLE PROJECTION



DESIGNER

KEIRA HE

RESPONSIBLE ENGINEER

KEIRA HE

DRAWN BY

KEIRA HE

APPROVAL

SUBSYSTEM:
CLEVISES

DATE
11/12/2025



DESCRIPTION

SUC-AN3 HAT CONE

SIZE
A

P/N
SU-A5002-AA-00010-AA



REV
A


SCALE
5 : 1

DO NOT
SCALE

SHEET
1 / 1


NOTES, UNLESS OTHERWISE SPECIFIED:

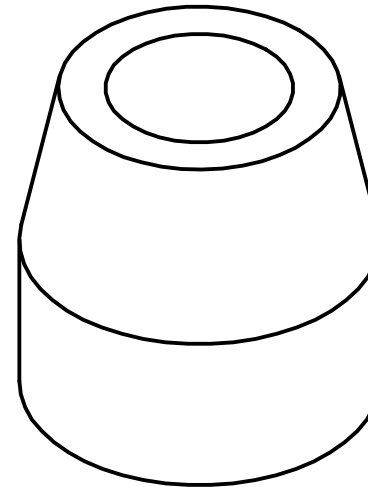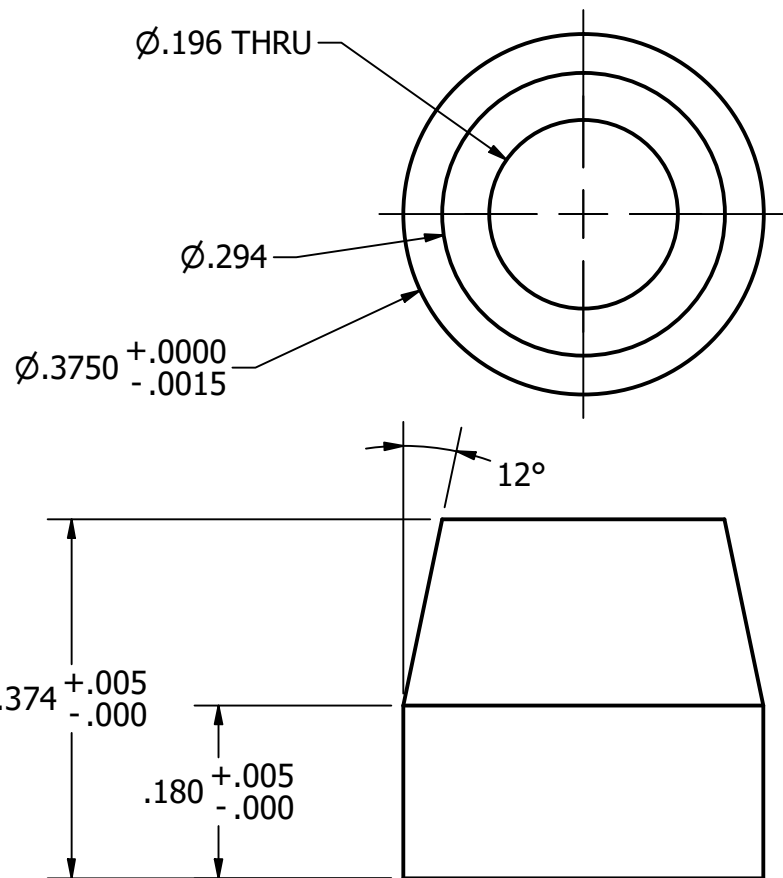


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 7075-T651				CLEVISES		11/12/2025		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH	BARE		DESIGNER		DESCRIPTION			
	LINEAR:	INTERPRET PER ASME		KEIRA HE		TOE LINK THRU CONE			
	X.X ± 0.1	Y14.5-2018		RESPONSIBLE ENGINEER		SIZE		P/N	
	X.XX ± 0.02	ALL INFORMATION IS		KEIRA HE		A		SU-A5002-AA-00011-AA	
	X.XXX ± 0.010	PROPRIETARY TO CORNELL RACING		DRAWN BY		REV		A	
ALL DIMENSIONS IN INCHES				KEIRA HE		SCALE		DO NOT SCALE	
				APPROVAL		5 : 1		SHEET	
								1 / 1	




NOTES, UNLESS OTHERWISE SPECIFIED:


1. USE TOOL WITH 1/128 R

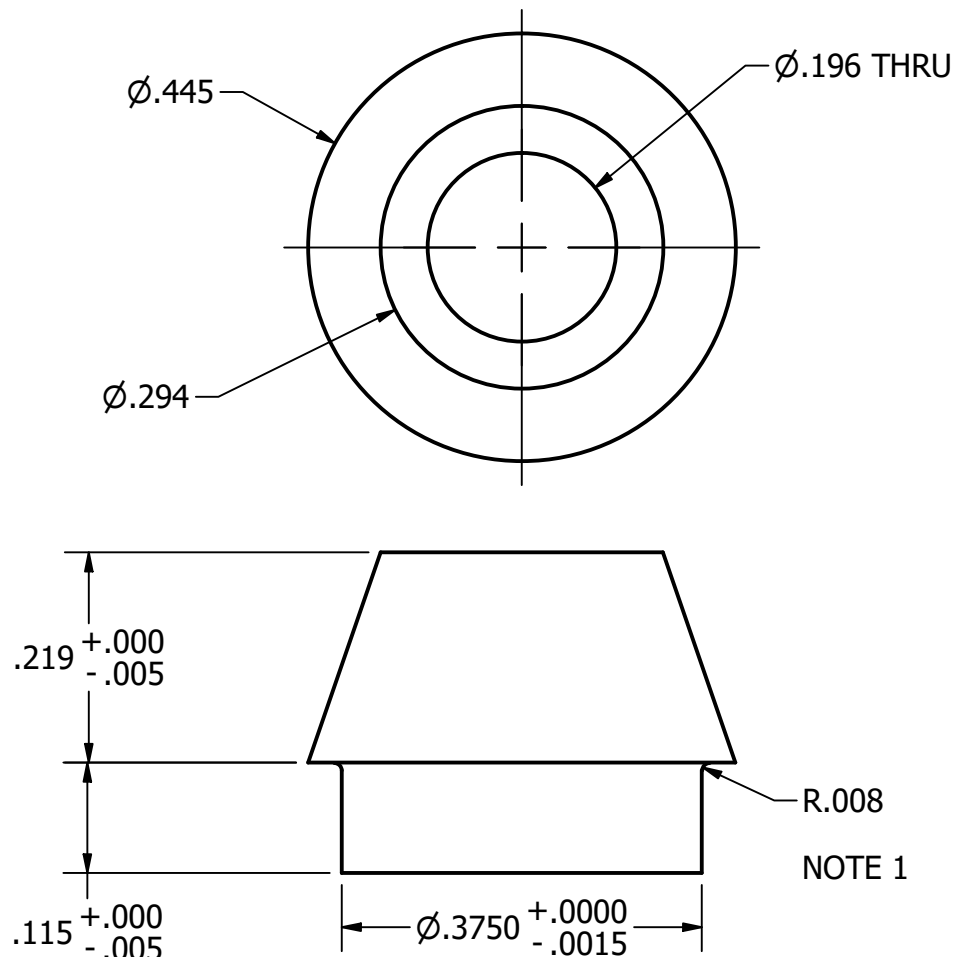




MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 7075-T651				CLEVISES		11/12/2025		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION			
BARE		KEIRA HE		TOE LINK HAT CONE					
LINEAR: $\varnothing$ 0.005 X.X $\pm$ 0.1 $\varnothing$ +0.006 X.XX $\pm$ 0.02 -0.001 X.XXX $\pm$ 0.010		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER		SIZE		P/N	
				KEIRA HE		A		SU-A5002-AA-00012-AA	
				DRAWN BY				REV	
				KEIRA HE				A	
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		APPROVAL		SCALE		DO NOT SCALE	
						5 : 1		SHEET 1 / 1	


NOTES, UNLESS OTHERWISE SPECIFIED:

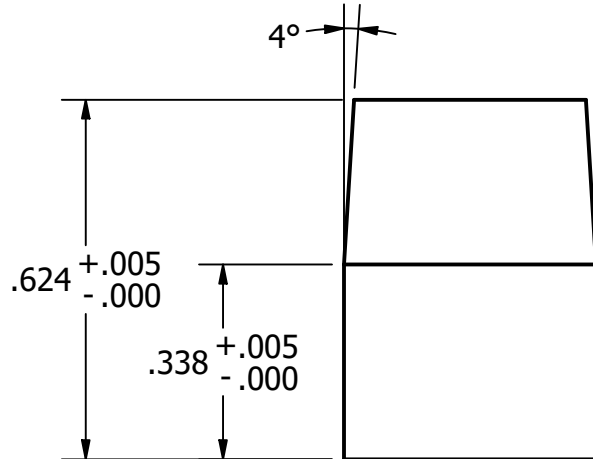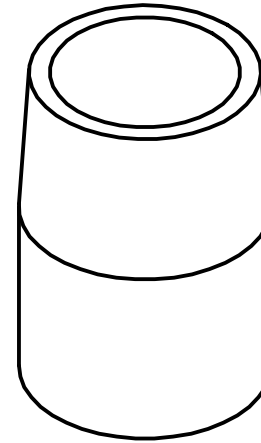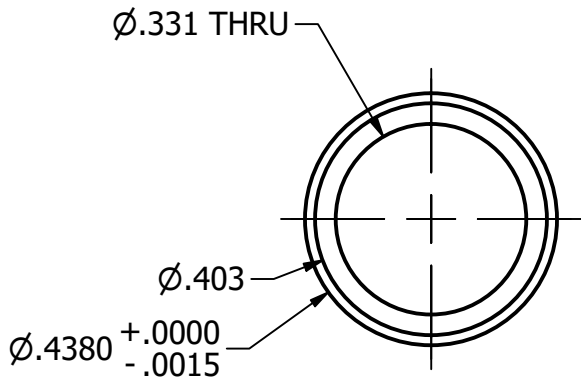




MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: CLEVISES	DATE 12/11/2025	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: $\text{X.X} \pm 0.1$ $\text{X.XX} \pm 0.02$ $\text{X.XXX} \pm 0.010$ FINISH: $\text{Ø} 0.005$ $\text{Ø} +0.006$ -0.001		BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER KEIRA HE RESPONSIBLE ENGINEER KEIRA HE DRAWN BY KEIRA HE APPROVAL			
ALL DIMENSIONS IN INCHES		SHOCK THRU CONE					
		SIZE A	P/N SU-A5002-AA-00013-AA	REV A		SHEET 1 / 1	
		SCALE 3 : 1		DO NOT SCALE			


NOTES, UNLESS OTHERWISE SPECIFIED:

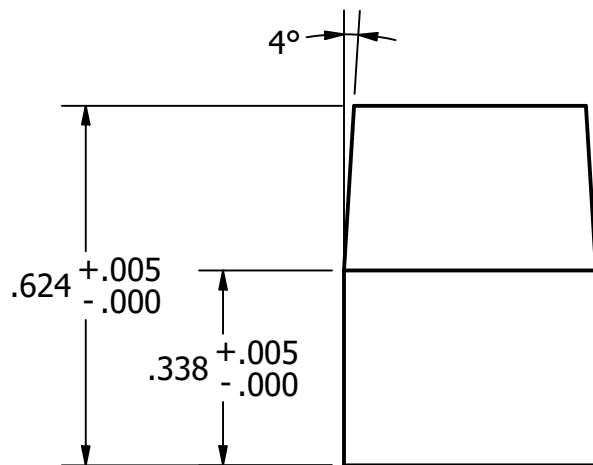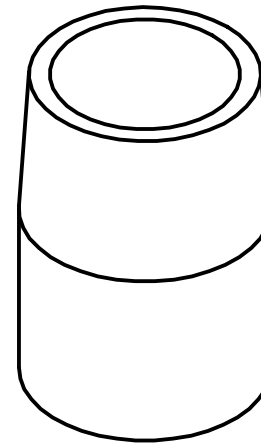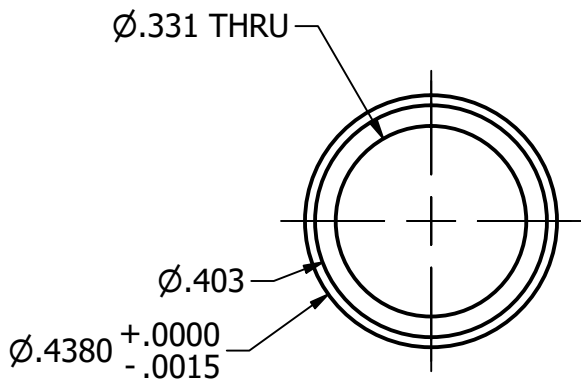

MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: CLEVISES		DATE 12/11/2025	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE			DESCRIPTION SHOCK THRU CONE				
	INTERPRET PER ASME Y14.5-2018	DESIGNER KEIRA HE		SIZE A	P/N SU-A5002-AA-00014-AA		REV A	
	ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	RESPONSIBLE ENGINEER KEIRA HE		SCALE 3 : 1		DO NOT SCALE		SHEET 1 / 1
		DRAWN BY KEIRA HE						
		APPROVAL						




NOTES, UNLESS OTHERWISE SPECIFIED:

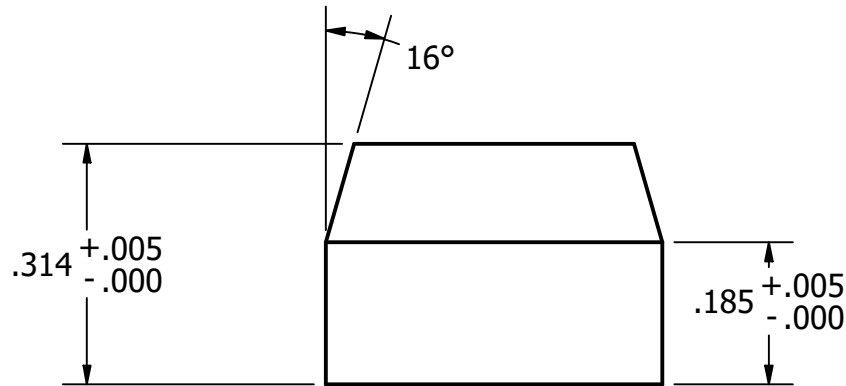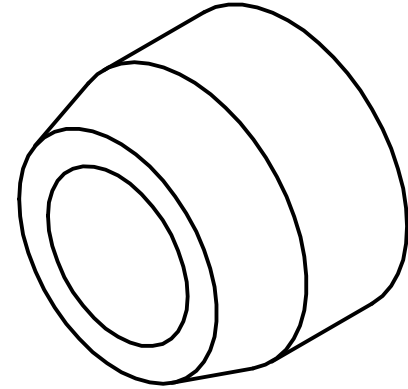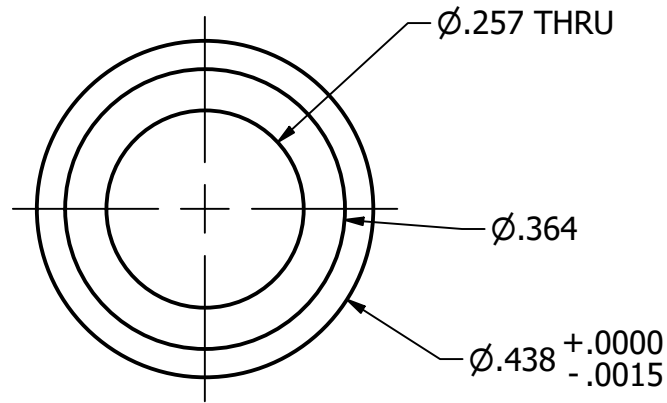


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 7075-T651				UNSPRUNG		11/20/2025		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH	BARE		DESCRIPTION					
		INTERPRET PER ASME Y14.5-2018		SOC_THRU_CONE					
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		SIZE		P/N		REV	
				A		SU-A5002-AA-00015-AA		A	
				SCALE		DO NOT SCALE		SHEET	
LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010				DESIGNER					
				CAROLINE MOSKAL					
				RESPONSIBLE ENGINEER					
				CAROLINE MOSKAL					
				DRAWN BY					
				CAROLINE MOSKAL					
ALL DIMENSIONS IN INCHES				APPROVAL					




NOTES, UNLESS OTHERWISE SPECIFIED:


1. USE TOOL WITH 1/128 R

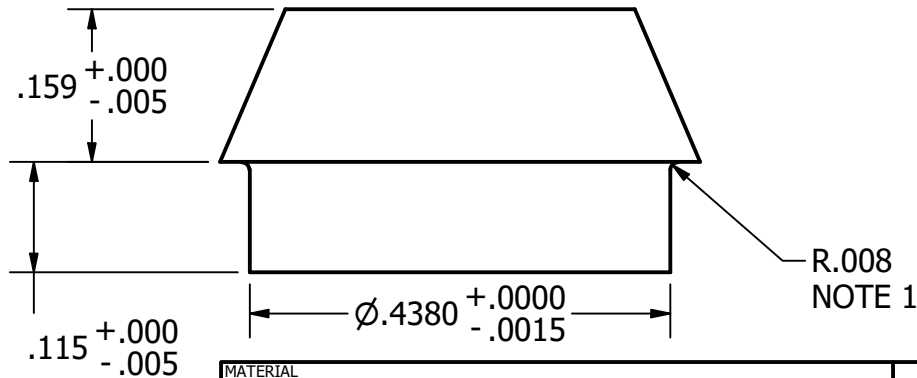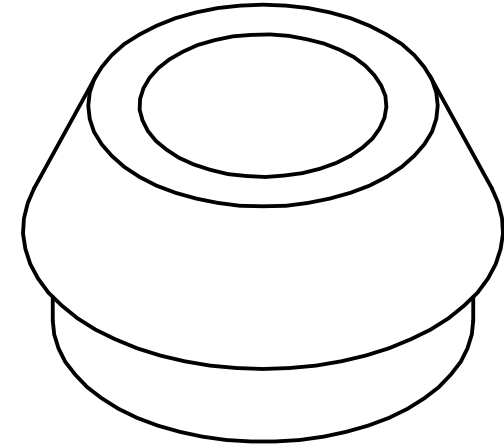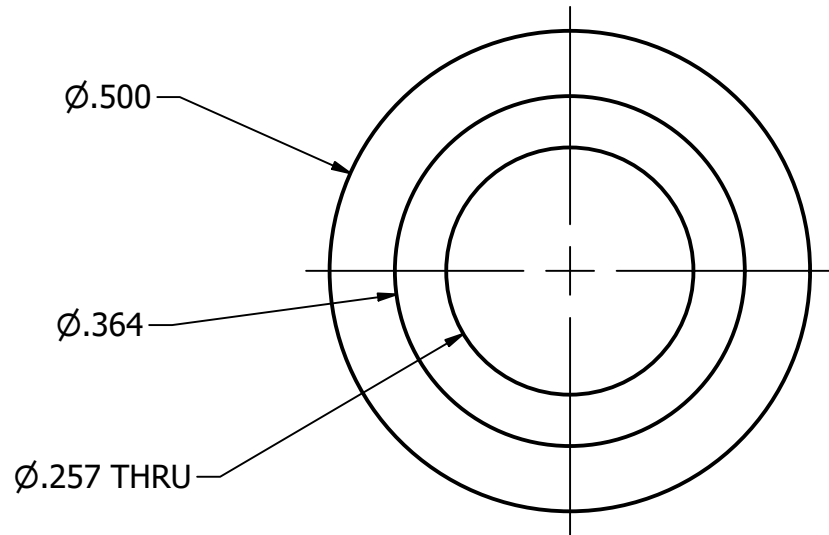




MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 7075-T651				UNSPRUNG		11/21/2025		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH	BARE		DESCRIPTION					
		INTERPRET PER ASME Y14.5-2018		SOC_HAT_CONE					
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		SIZE		P/N		REV	
				A		SU-A5002-AA-00016-AA		A	
				SCALE		DO NOT SCALE		SHEET	
LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		$\varnothing \pm 0.006$ -0.001		5 : 1				1 / 1	
ALL DIMENSIONS IN INCHES				APPROVAL					


NOTES, UNLESS OTHERWISE SPECIFIED:

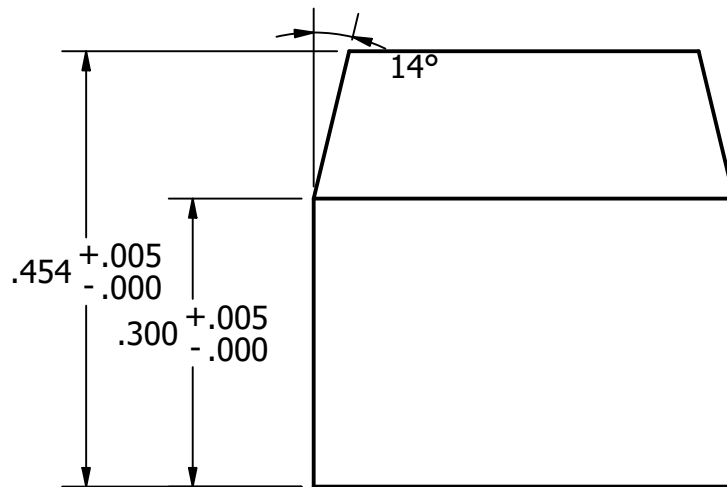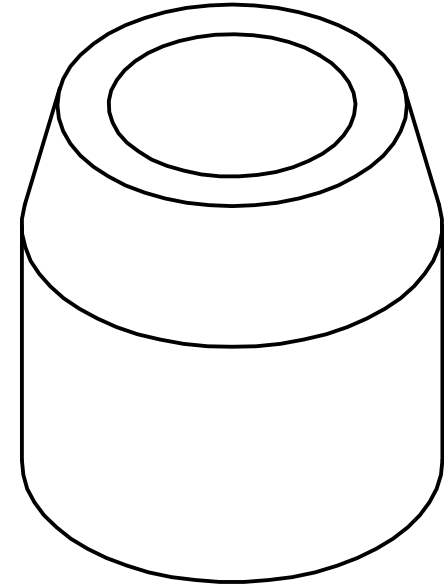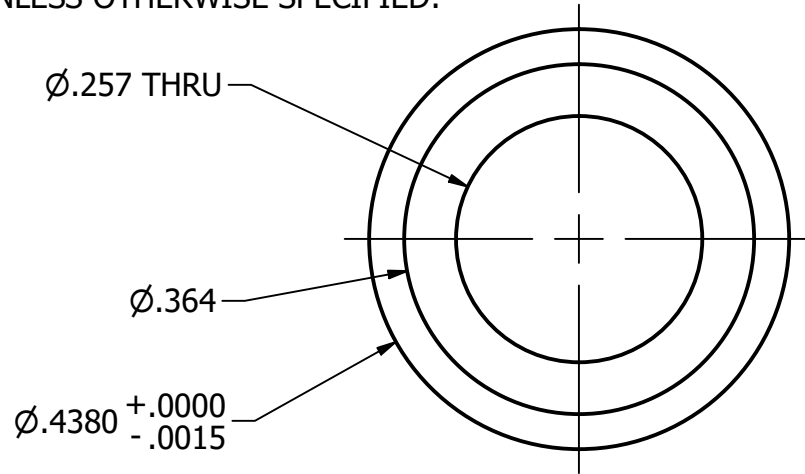


MATERIAL ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION 		SUBSYSTEM: UNSPRUNG		DATE 11/14/2025	 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED LINEAR: $\varnothing$ 0.005 X.X $\pm$ 0.1 $\varnothing$ +0.006 X.XX $\pm$ 0.02 -0.001 X.XXX $\pm$ 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE			DESCRIPTION RLBJ_THRU_CONE					
	INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	DESIGNER CAROLINE MOSKAL		SIZE A		P/N SU-A5002-AA-00017-AA		REV A	
		RESPONSIBLE ENGINEER CAROLINE MOSKAL							
		DRAWN BY CAROLINE MOSKAL		SCALE 5 : 1		DO NOT SCALE		SHEET 1 / 1	
		APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:

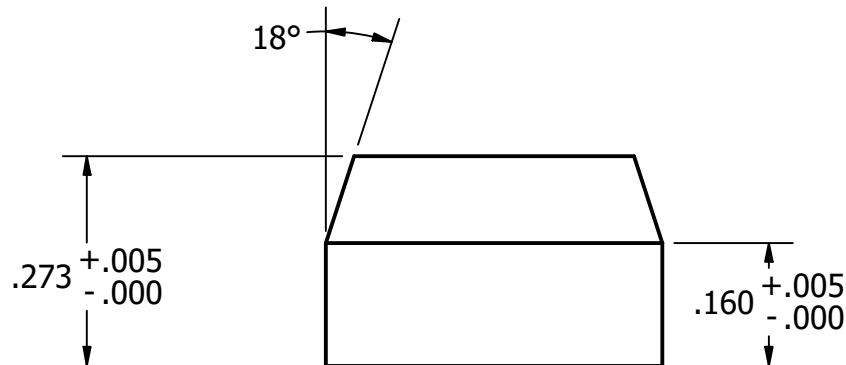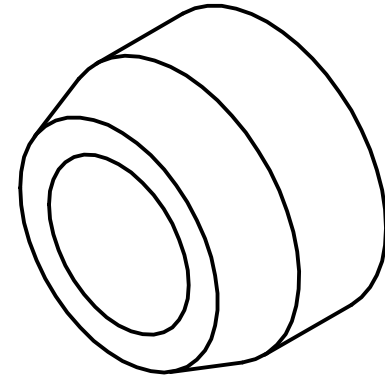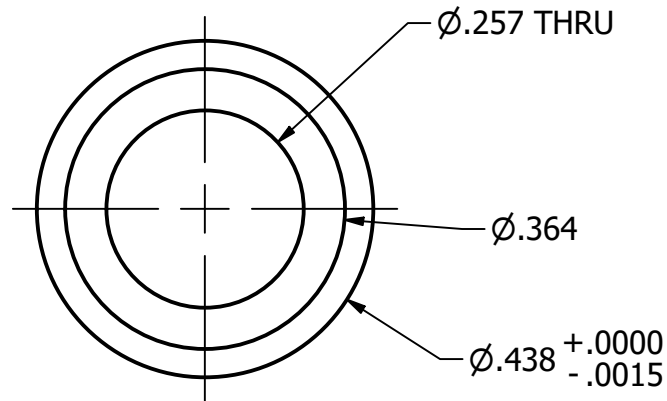

MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: UNSPRUNG	DATE 2/11/2026	 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: $\varnothing \pm 0.005$ X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		FINISH BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER CAROLINE MOSKAL RESPONSIBLE ENGINEER CAROLINE MOSKAL DRAWN BY CAROLINE MOSKAL APPROVAL				DESCRIPTION OUTBOARD_CLEVIS_THRU_CONE	
ALL DIMENSIONS IN INCHES				SIZE A	P/N SU-A5002-AA-00018-AA	REV A			
				SCALE 4 : 1	DO NOT SCALE		SHEET 1 / 1		

NOTES, UNLESS OTHERWISE SPECIFIED:

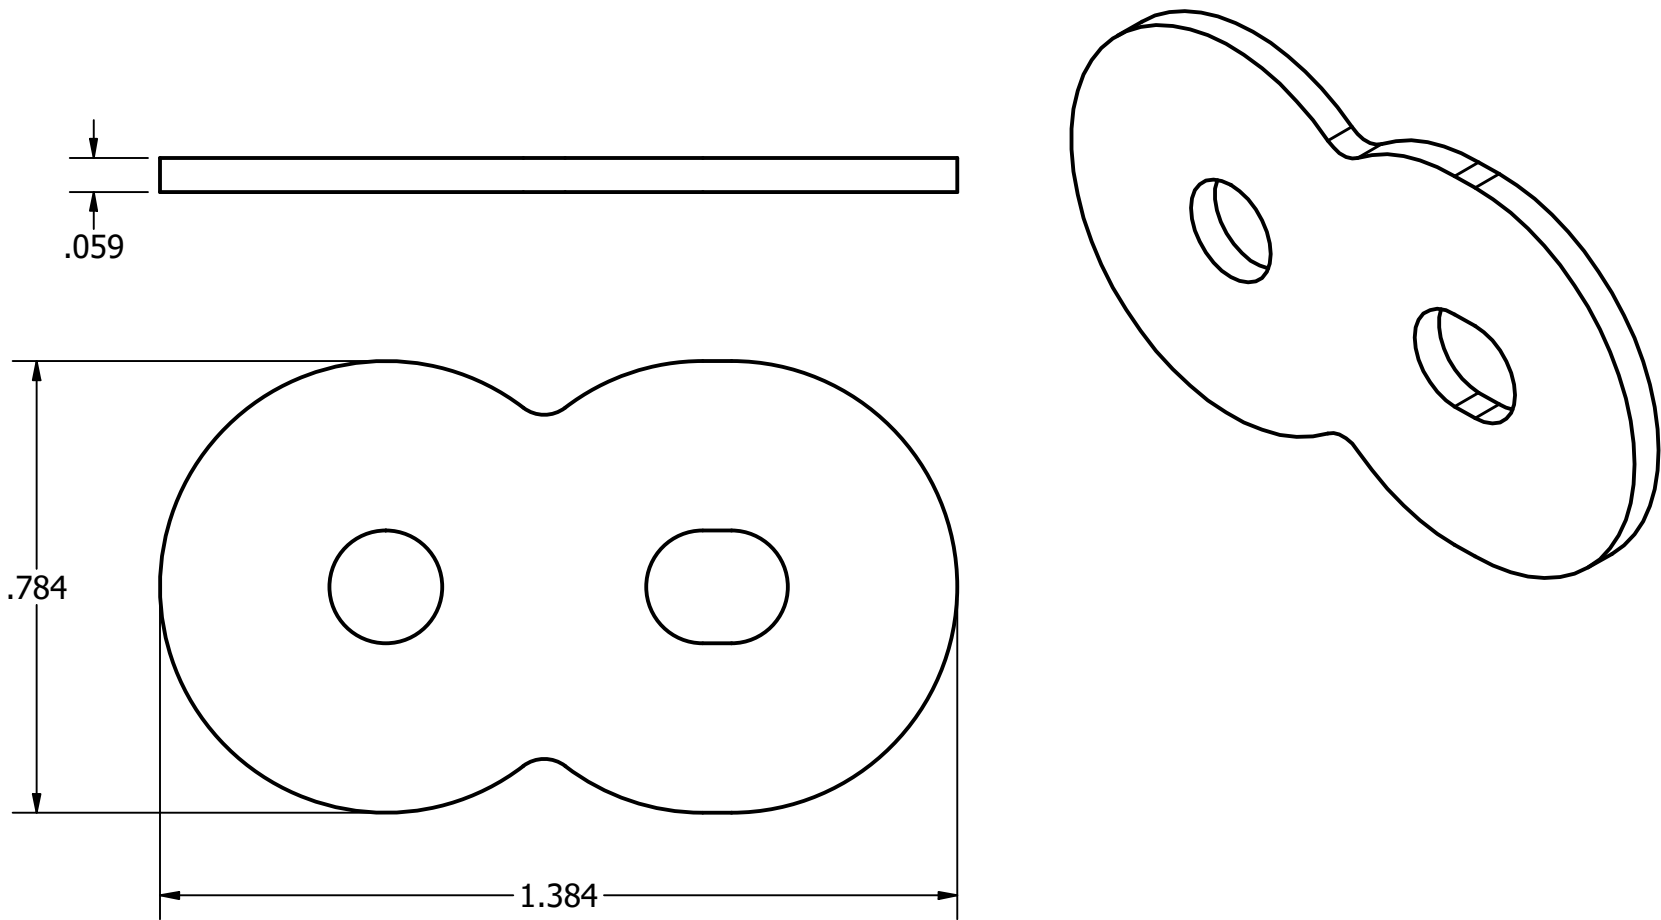


MATERIAL		STEEL, AISI 1018		THIRD ANGLE PROJECTION 		SUBSYSTEM: CLEVISES		DATE 11/12/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION SUC-AN3 CLEVIS BACKING PLATE					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		⌀ 0.005 ⌀ +0.006 -0.001		DESIGNER KEIRA HE		SIZE A		P/N SU-A5002-AA-00019-AA		REV A	
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER KEIRA HE		SCALE 3 : 1		DO NOT SCALE		SHEET 1 / 1	
				DRAWN BY KEIRA HE							
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:



.059


.784

1.344




MATERIAL STEEL, AISI 1018		THIRD ANGLE PROJECTION 		SUBSYSTEM: CLEVISES	DATE 11/12/2025	 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 $\phi \pm 0.005$ $\phi +0.006$ -0.001		FINISH BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER KEIRA HE RESPONSIBLE ENGINEER KEIRA HE DRAWN BY KEIRA HE APPROVAL				DESCRIPTION FLF CLEVIS BACKING PLATE	
ALL DIMENSIONS IN INCHES				SIZE A	P/N SU-A5002-AA-00020-AA	REV A			
				SCALE 3 : 1	DO NOT SCALE		SHEET 1 / 1		


NOTES, UNLESS OTHERWISE SPECIFIED:

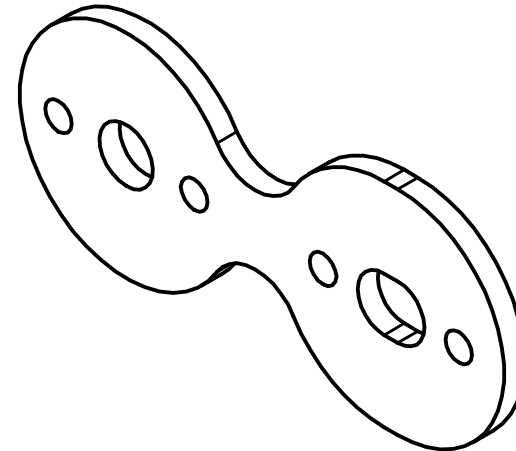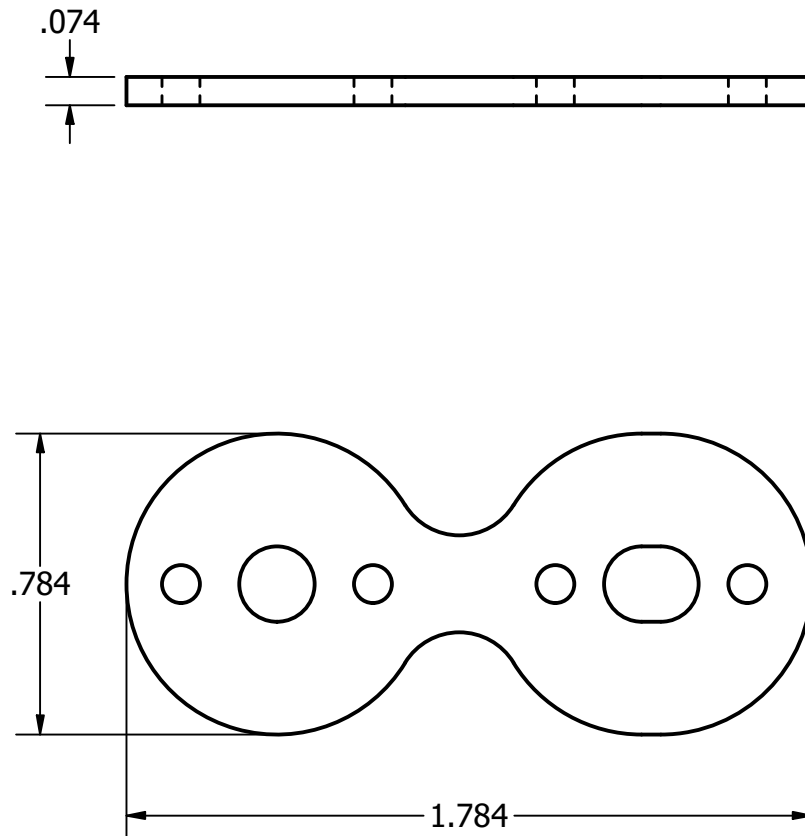




MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE				
STEEL, AISI 1018				CLEVISES		11/12/2025		CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION				
LINEAR: ± 0.005		BARE		KEIRA HE		RLR DOUBLE CLEVIS BACKING				
X.X ± 0.1		INTERPRET PER ASME		RESPONSIBLE ENGINEER		PLATE				
$\varnothing +0.006$		Y14.5-2018		KEIRA HE		SIZE		P/N		REV
-0.001		ALL INFORMATION IS		DRAWN BY		A		SU-A5002-AA-00021-AA		A
X.XX ± 0.02		PROPRIETARY TO CORNELL		KEIRA HE		SCALE		DO NOT		SHEET
X.XXX ± 0.010		RACING		APPROVAL		2 : 1		SCALE		1 / 1
ALL DIMENSIONS										
IN INCHES										


NOTES, UNLESS OTHERWISE SPECIFIED:

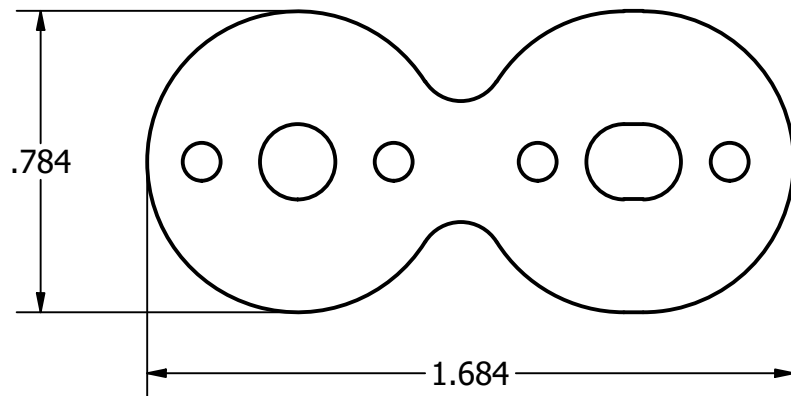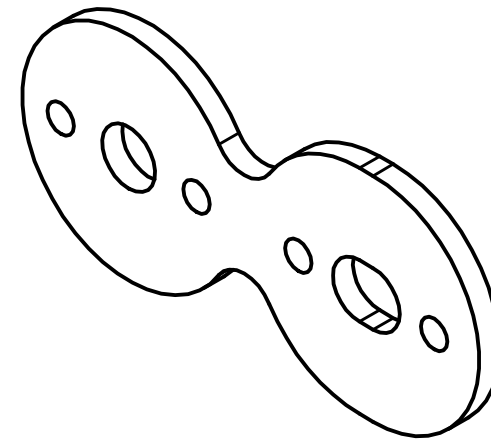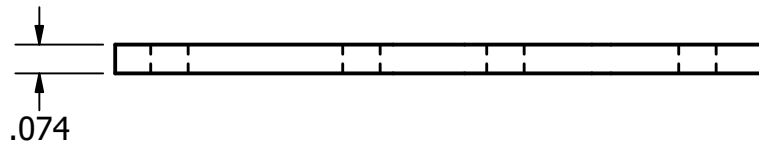




MATERIAL STEEL, AISI 1018		THIRD ANGLE PROJECTION 		SUBSYSTEM: CLEVISES	DATE 11/12/2025	 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.1 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 FINISH $\phi 0.005$ $\phi +0.006$ -0.001		BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER KEIRA HE					
ALL DIMENSIONS IN INCHES		APPROVAL		RESPONSIBLE ENGINEER KEIRA HE			SIZE A	P/N SU-A5002-AA-00022-AA	REV A
				DRAWN BY KEIRA HE					
				SCALE 2 : 1					
				DO NOT SCALE		SHEET 1 / 1			


NOTES, UNLESS OTHERWISE SPECIFIED:

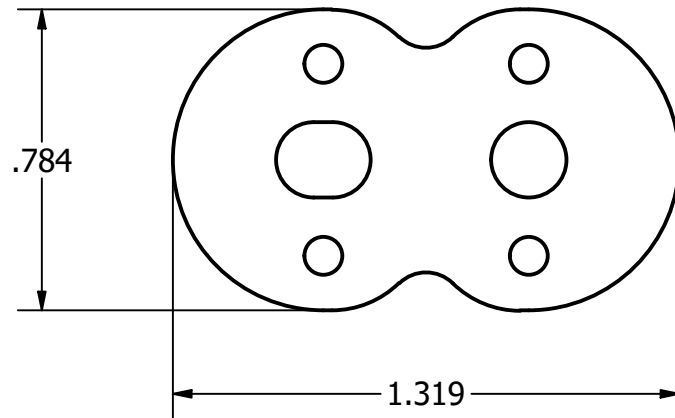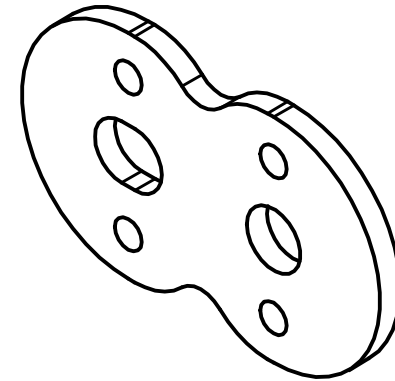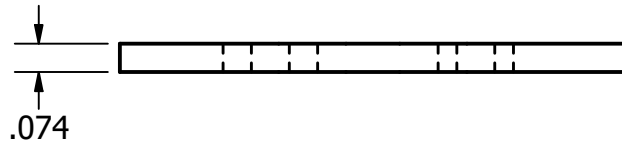


MATERIAL STEEL, AISI 1018		THIRD ANGLE PROJECTION 		SUBSYSTEM: CLEVISES	DATE 12/11/2025	 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.1 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 FINISH $\phi 0.005$ $\phi +0.006$ -0.001		BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER SUJAN MUNVER RESPONSIBLE ENGINEER SUJAN MUNVER DRAWN BY KEIRA HE APPROVAL				
ALL DIMENSIONS IN INCHES		RUR CLEVIS BACKING PLATE				SIZE A	P/N SU-A5002-AA-00023-AA	REV A
				SCALE 2 : 1		DO NOT SCALE		SHEET 1 / 1


NOTES, UNLESS OTHERWISE SPECIFIED:

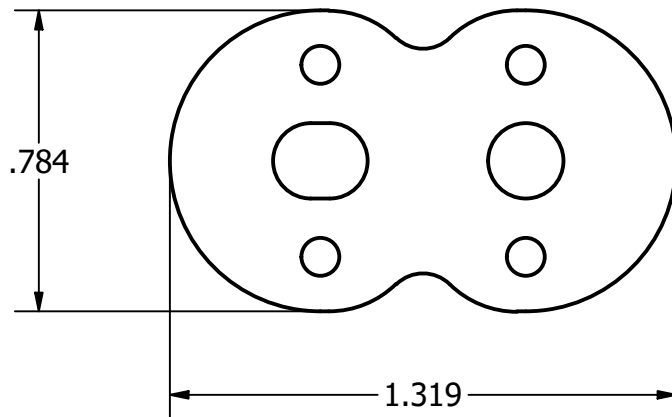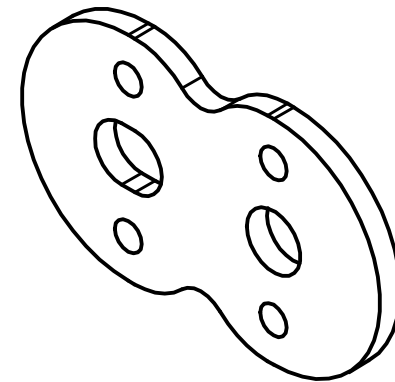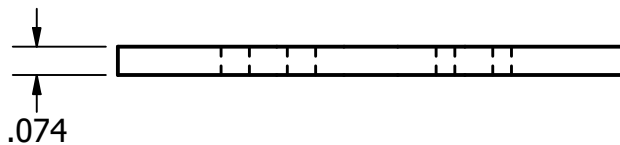


MATERIAL STEEL, AISI 1018		THIRD ANGLE PROJECTION 		SUBSYSTEM: CLEVISES	DATE 12/11/2025	 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 HOLE: Ø 0.005 Ø +0.006 -0.001		FINISH BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER SUJAN MUNVER RESPONSIBLE ENGINEER SUJAN MUNVER DRAWN BY KEIRA HE APPROVAL				DESCRIPTION RUR CLEVIS BACKING PLATE	
ALL DIMENSIONS IN INCHES				SIZE A	P/N SU-A5002-AA-00024-AA	REV A			
				SCALE 2 : 1	DO NOT SCALE		SHEET 1 / 1		

NOTES, UNLESS OTHERWISE SPECIFIED:

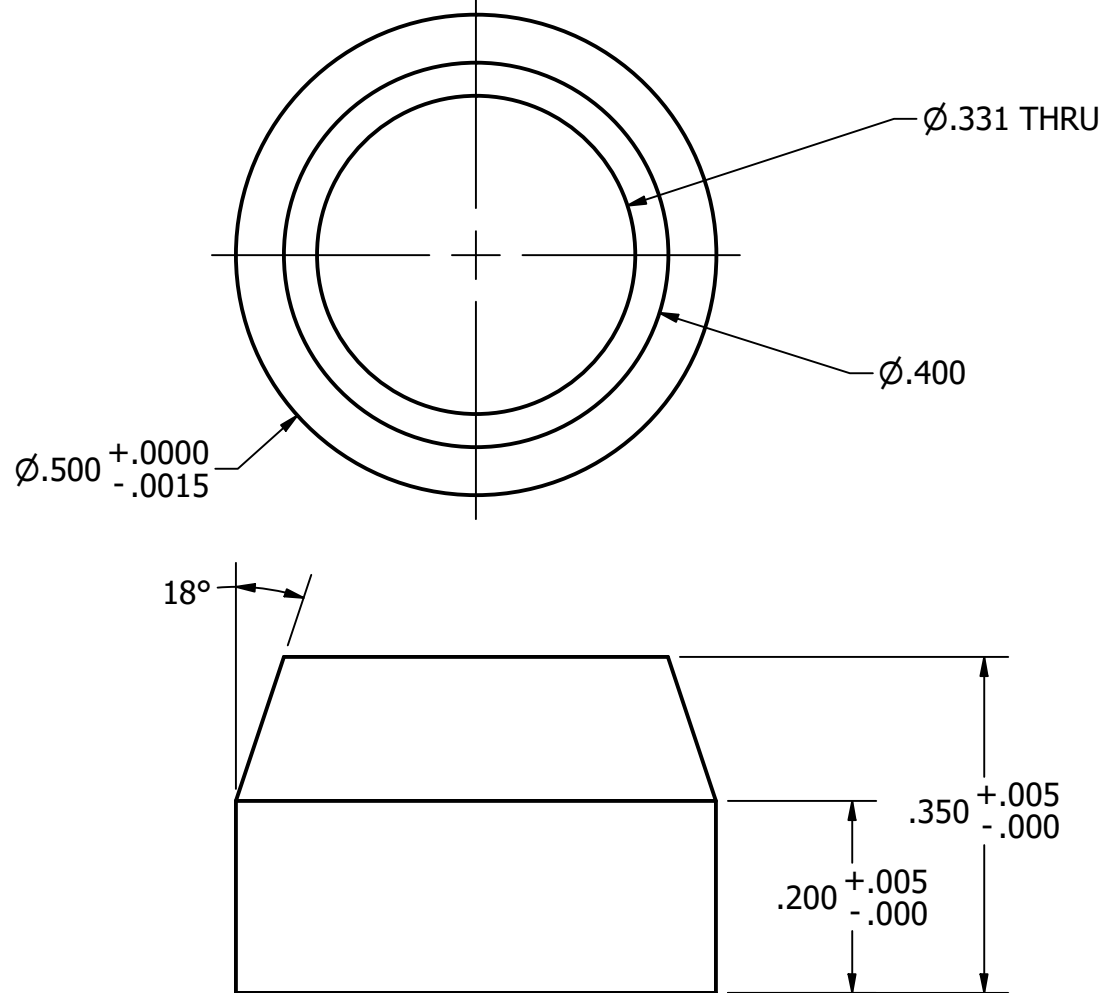


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 7075-T651				ROCKERS		11/12/2025		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION			
BARE		YASSINE COULIBALY		ROCKER SHOCK THRU CONE					
INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER		YASSINE COULIBALY		SIZE		P/N	
ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DRAWN BY		YASSINE COULIBALY		A		SU-A5002-AA-00025-AA	
ALL DIMENSIONS IN INCHES		APPROVAL		YASSINE COULIBALY		SCALE		DO NOT SCALE	
						5 : 1		SHEET	
								1 / 1	

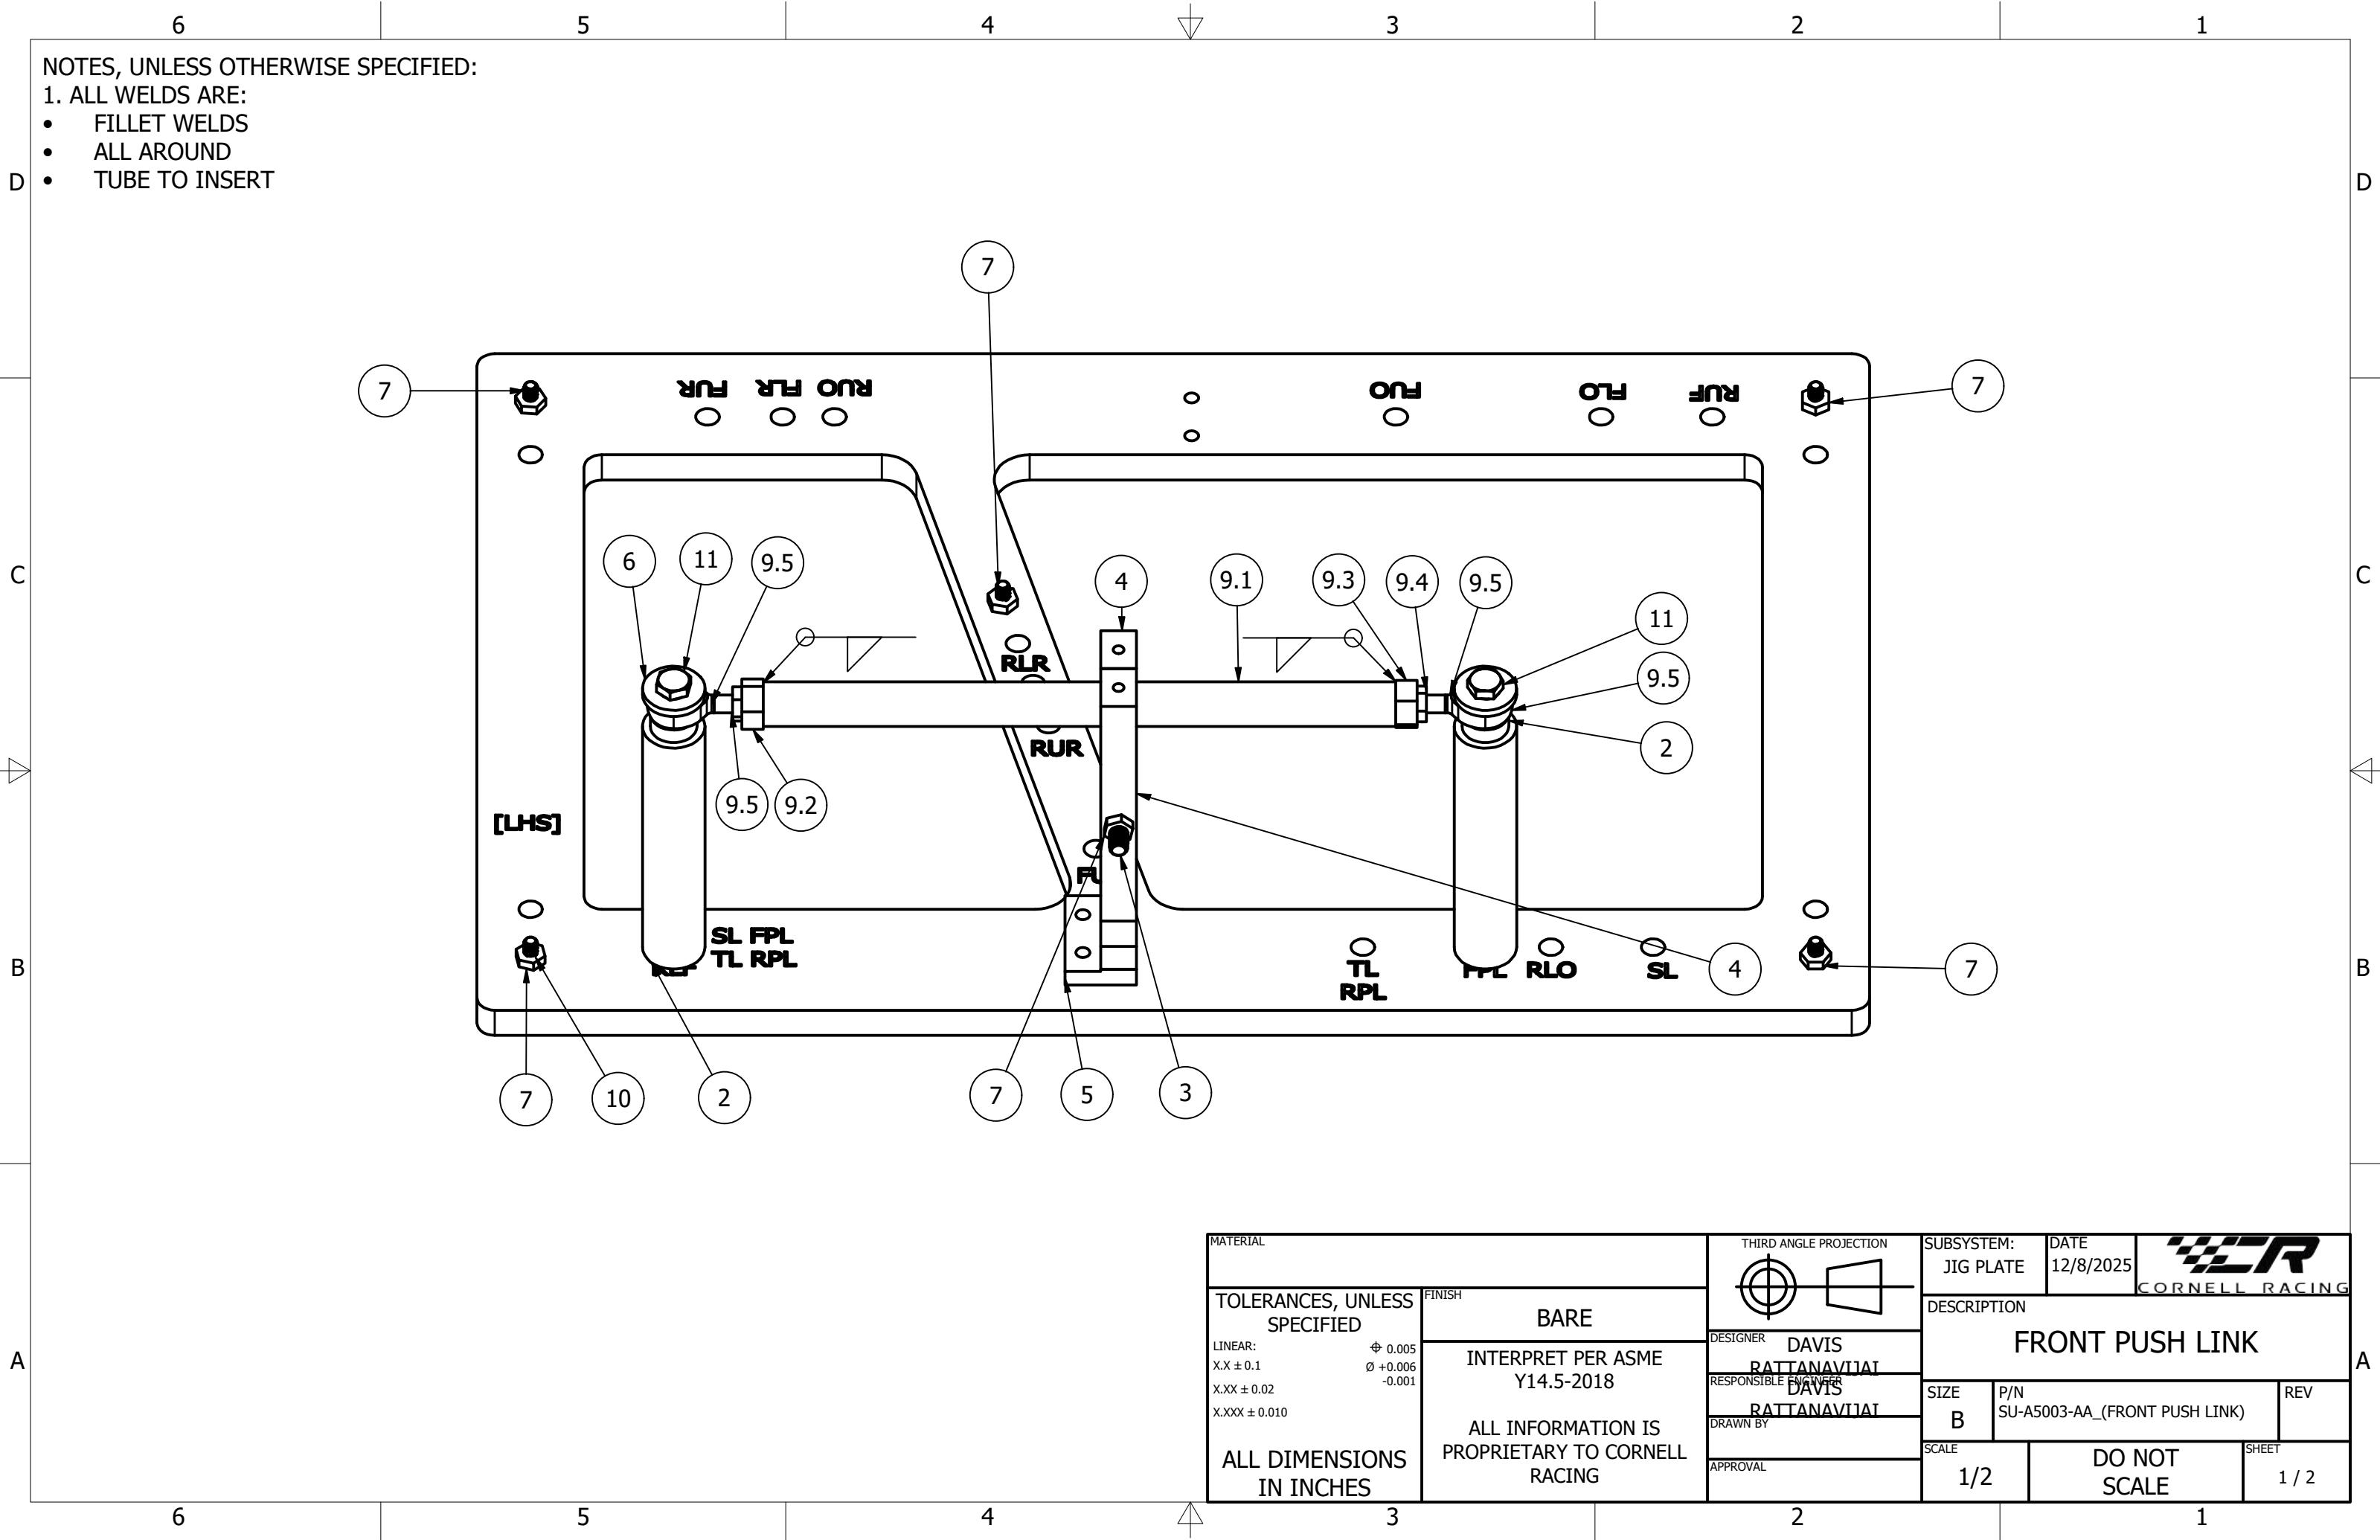


NOTES, UNLESS OTHERWISE SPECIFIED:


1. ALL WELDS ARE:
- FILLET WELDS
 - ALL AROUND
 - TUBE TO INSERT


MATERIAL		THIRD ANGLE PROJECTION 	SUBSYSTEM: JIG PLATE	DATE 12/8/2025	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH		DESIGNER	DESCRIPTION FRONT PUSH LINK		
	RESPONSIBLE ENGINEER					
	BARE		DAVIS RATTANAUTAT	DAVIS RATTANAUTAT	SIZE	P/N
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010	Ø 0.005 Ø +0.006 -0.001	INTERPRET PER ASME Y14.5-2018	DRAWN BY	B	SU-A5003-AA_(FRONT PUSH LINK)	
ALL DIMENSIONS IN INCHES	ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	APPROVAL	SCALE	DO NOT SCALE		SHEET
			1/2			1 / 2

[illegible]

MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE		DATE 12/8/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH BARE		DESIGNER DAVIS RATTANAVITAI		DESCRIPTION REAR PUSH LINK					
LINEAR: ± 0.005 X.X ± 0.1 $\emptyset +0.006$ X.XX ± 0.02 -0.001 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER DAVIS RATTANAVITAI							
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DRAWN BY		SIZE B		P/N SU-A5003-AA_(REAR PUSH LINK)		REV	
				APPROVAL		SCALE 1 / 1.5		DO NOT SCALE		SHEET 1 / 2	

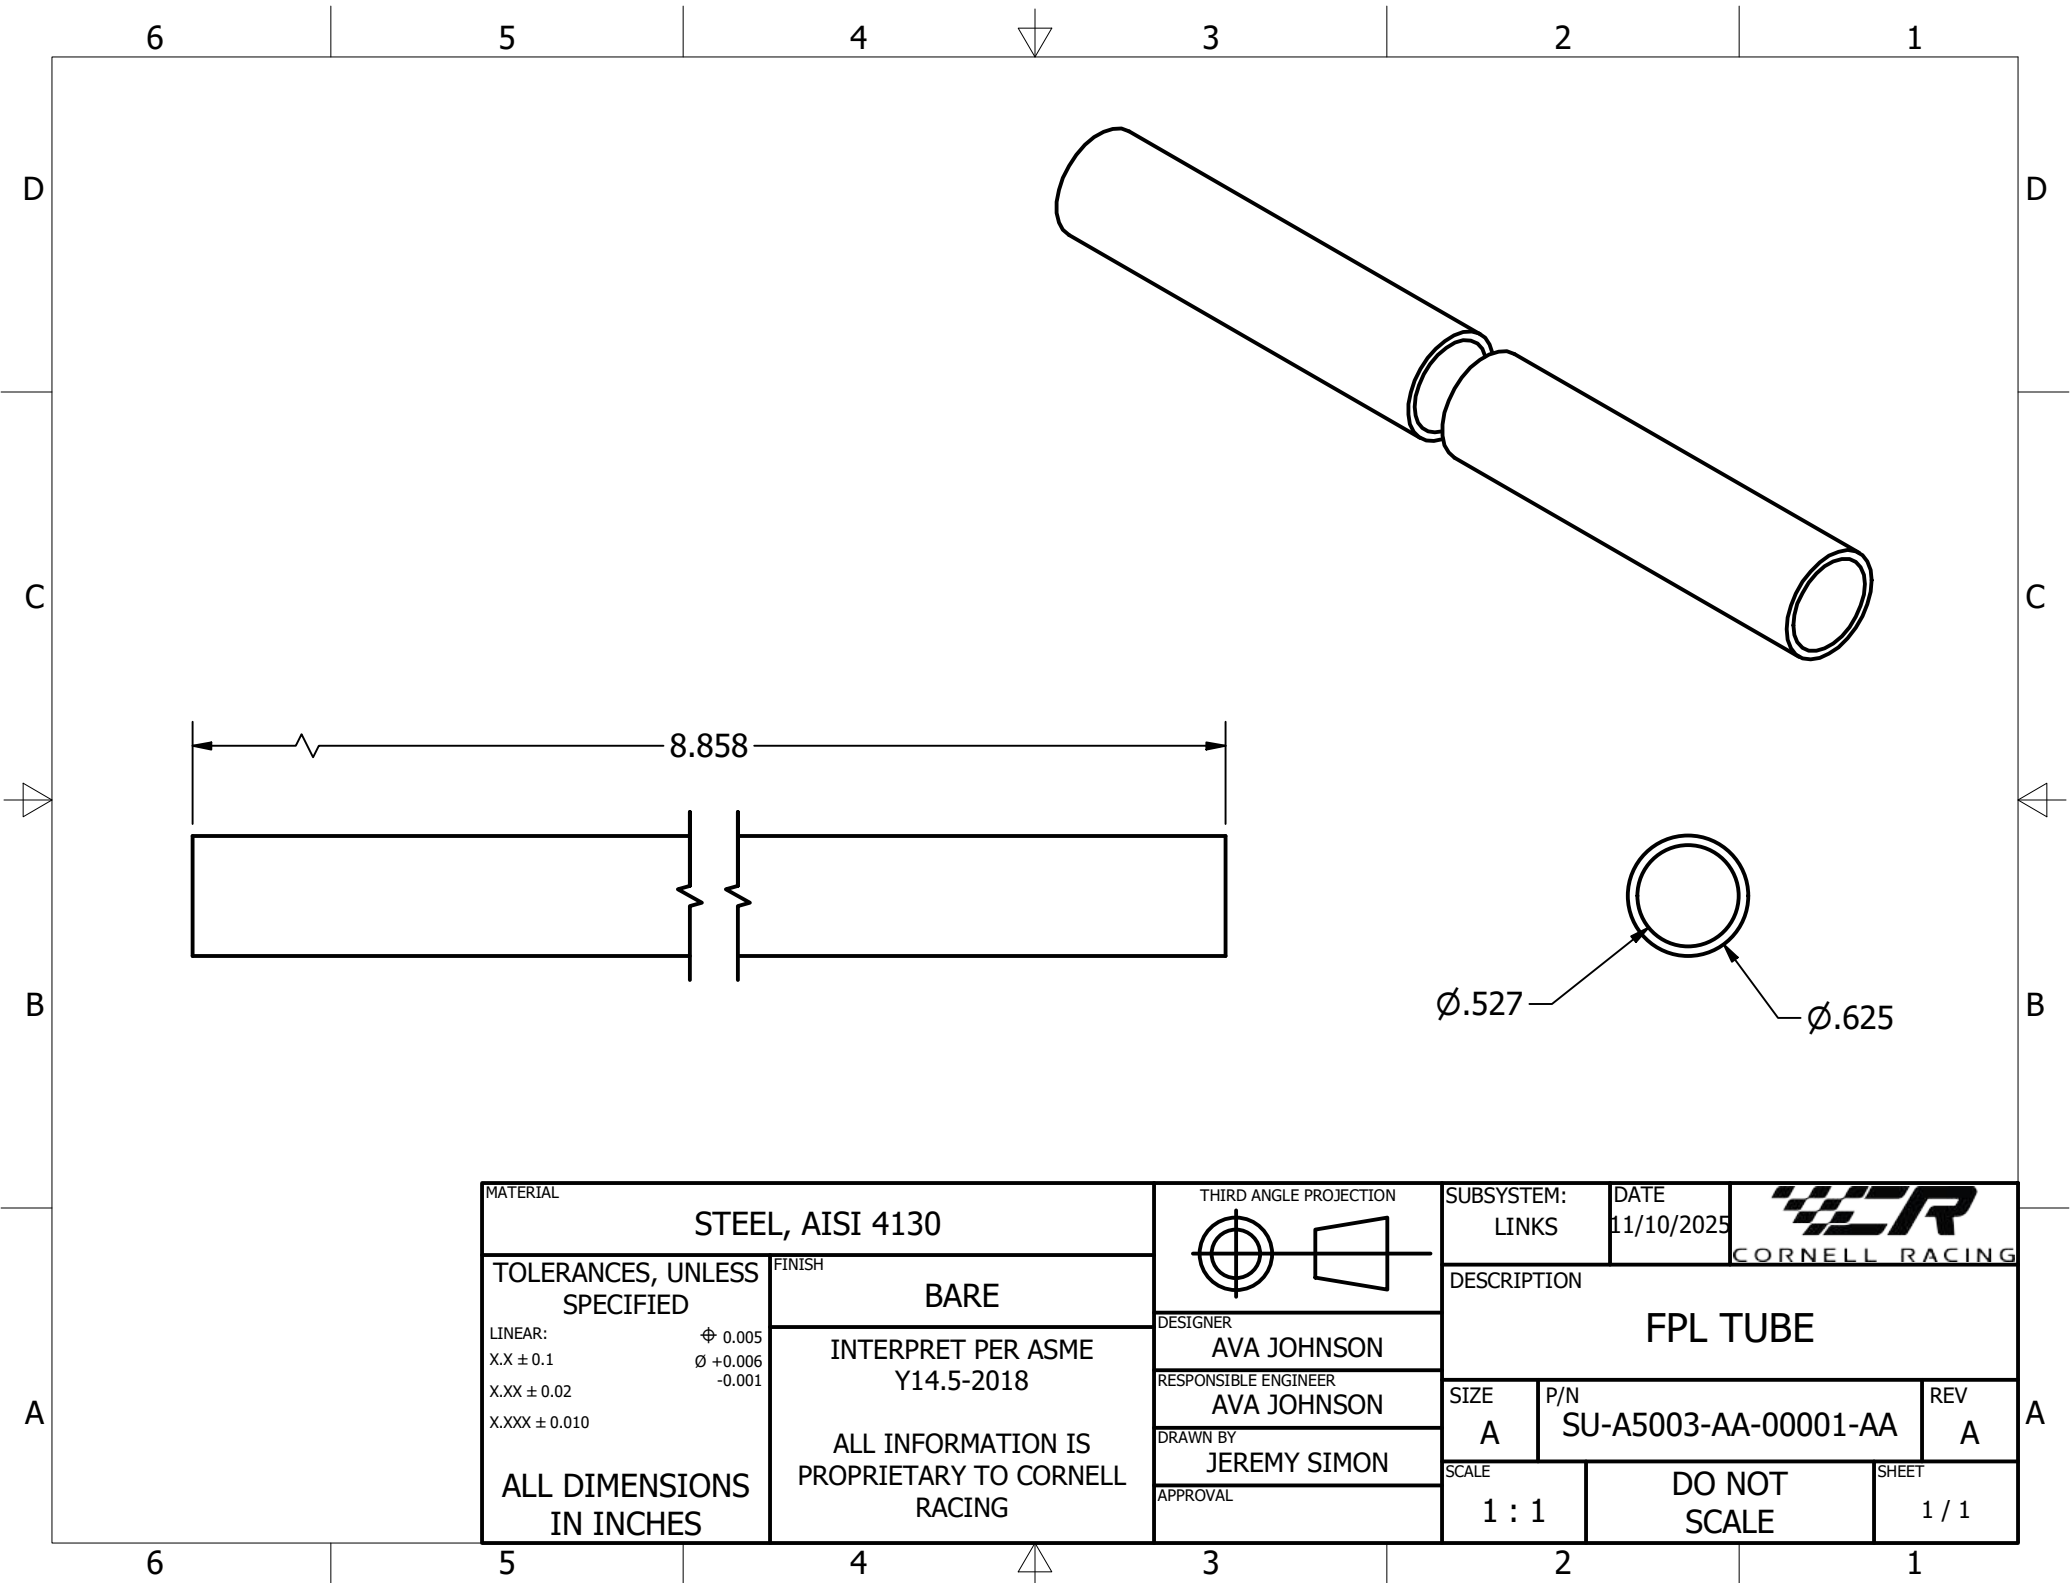



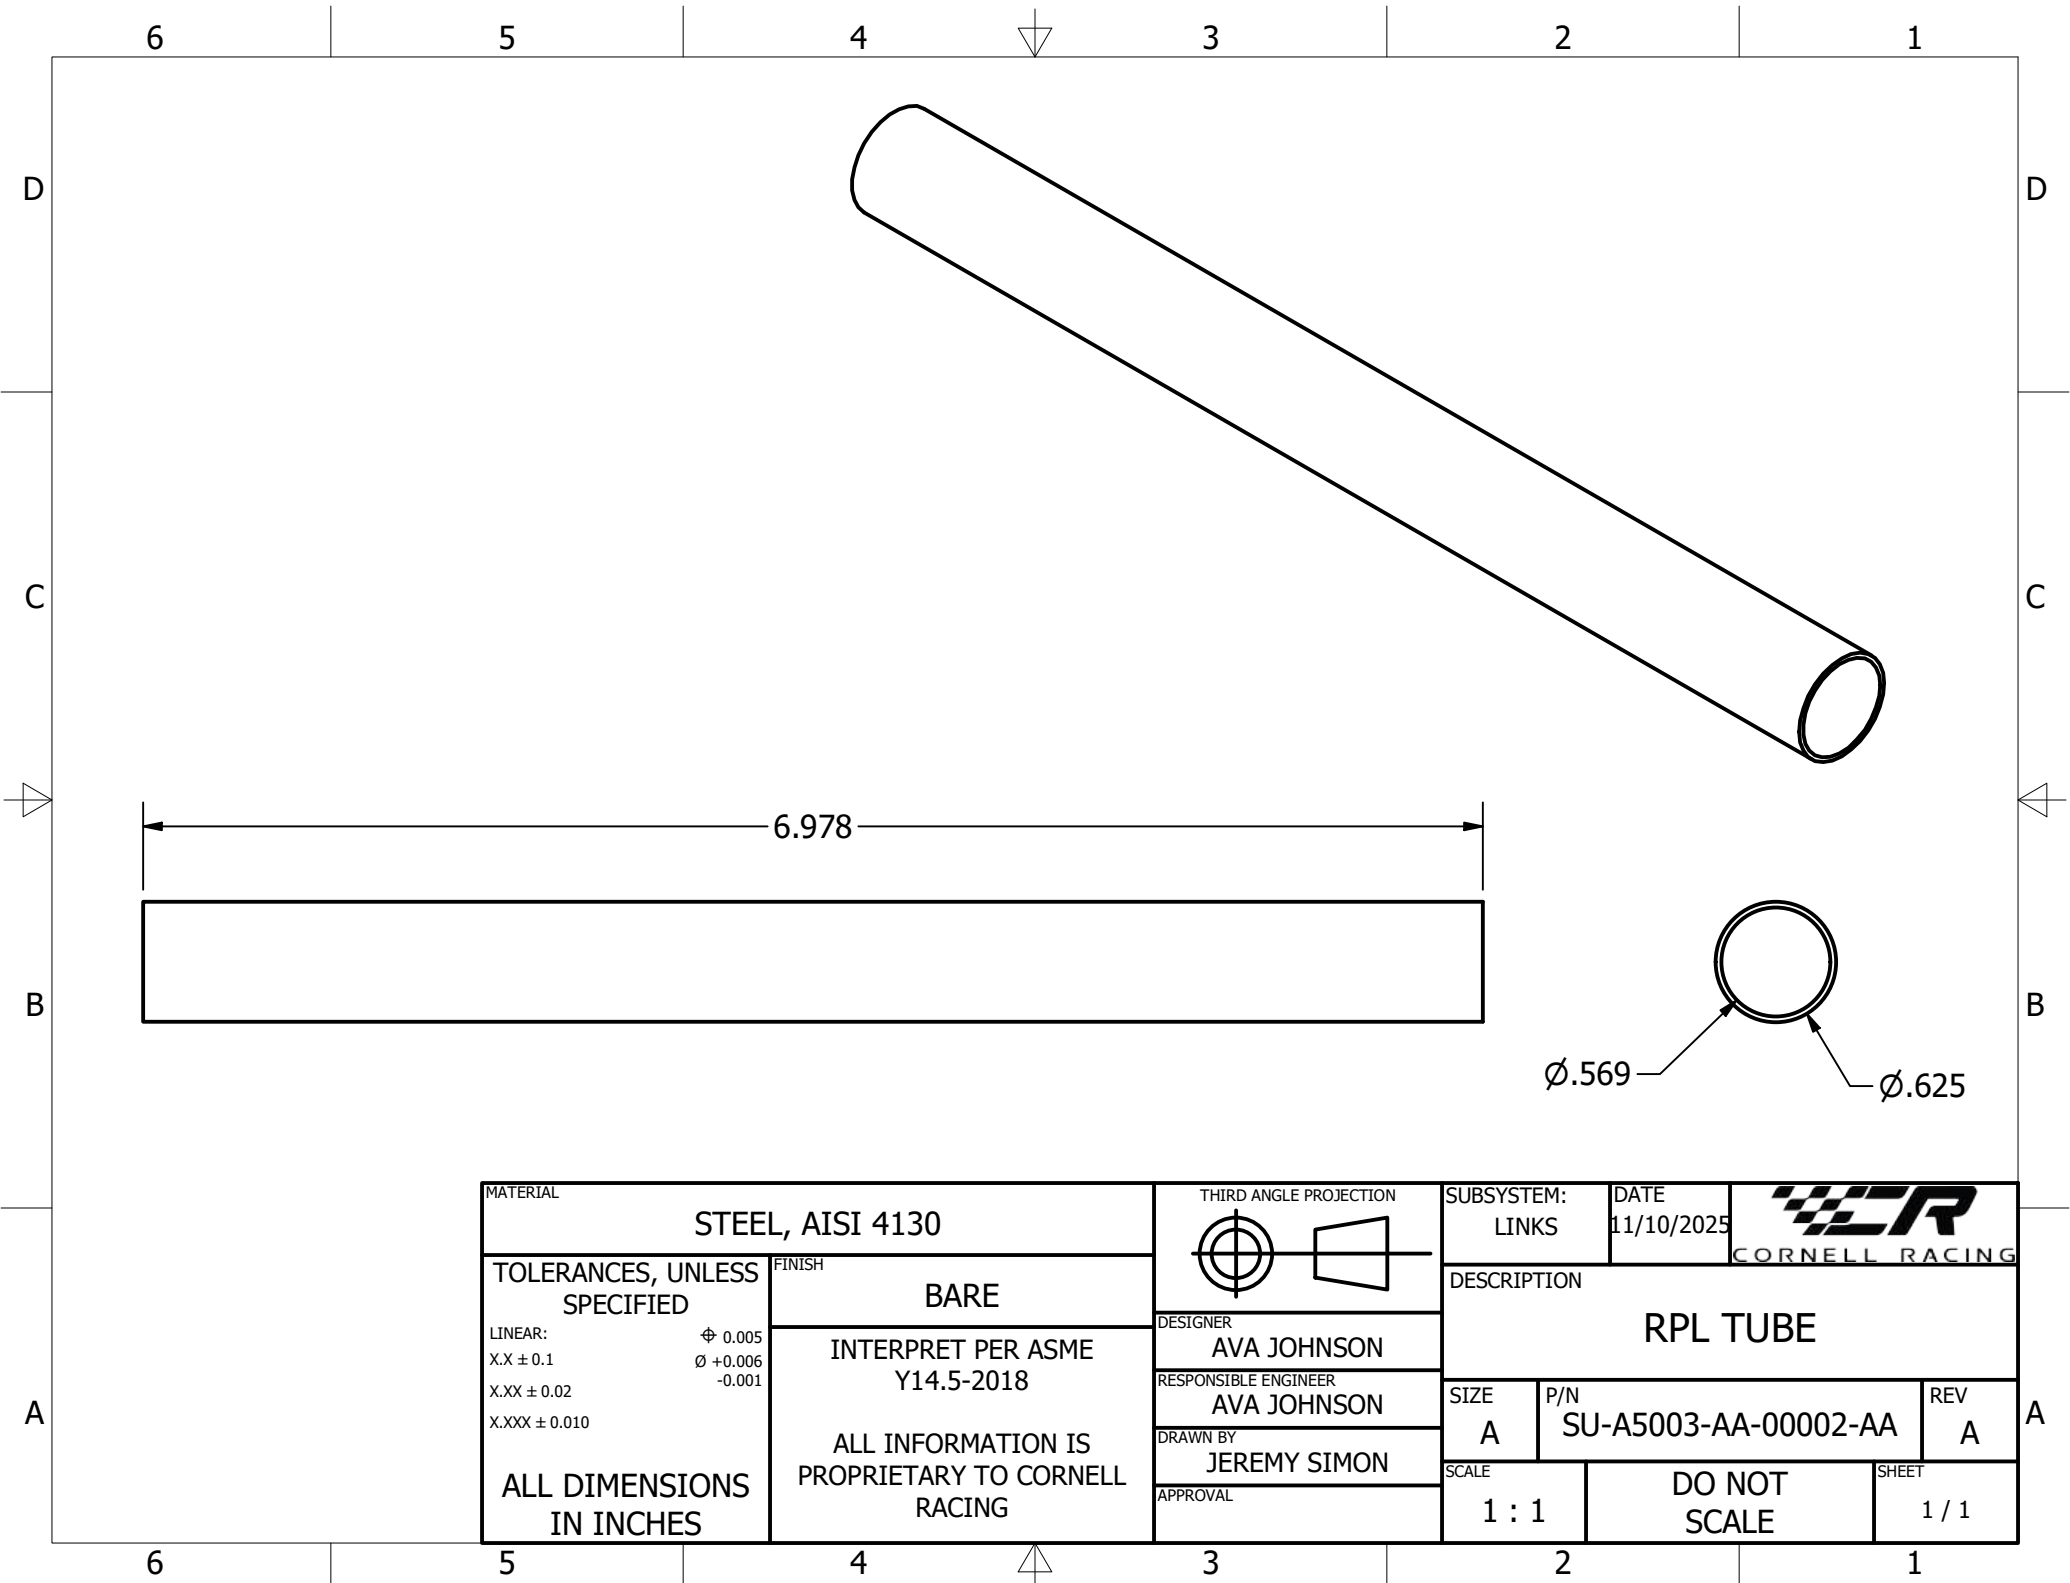



MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS		DATE 11/10/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION RPL TUBE					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		⌀ 0.005 ⌀ +0.006 -0.001		DESIGNER AVA JOHNSON		SIZE A		P/N SU-A5003-AA-00002-AA		REV A	
		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER AVA JOHNSON							
				DRAWN BY JEREMY SIMON		SCALE 1 : 1		DO NOT SCALE		SHEET 1 / 1	
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:

1. #3 TAP DRILL


1/4-28 UNF - 2B
NOTE 1

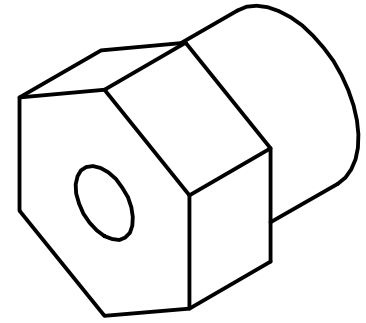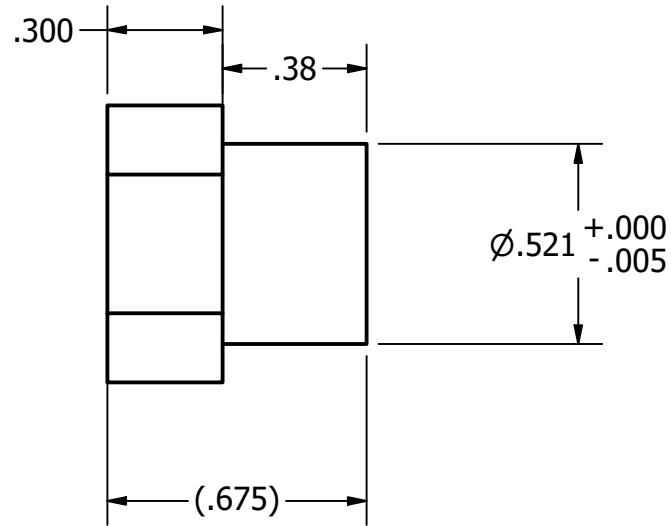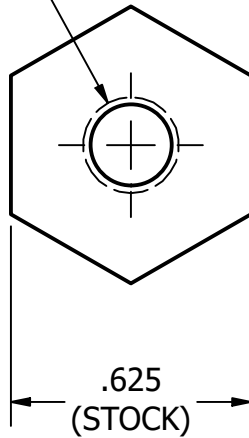



MATERIAL STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS		DATE 11/23/2025			
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE			DESIGNER AVA JOHNSON		DESCRIPTION FPL RH INSERT			
	INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	RESPONSIBLE ENGINEER AVA JOHNSON		SIZE A	P/N SU-A5003-AA-00003-AA				
		DRAWN BY SUJAN MUNVER		SCALE 2 : 1		DO NOT SCALE			SHEET 1 / 1
		APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:

1. #3 TAP DRILL

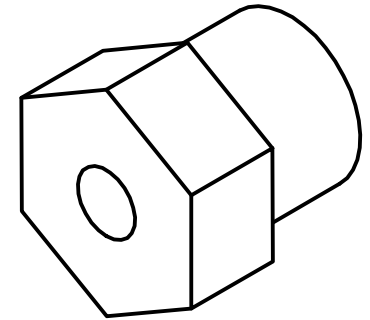


1/4-28 UNF - 2B LH
NOTE 1

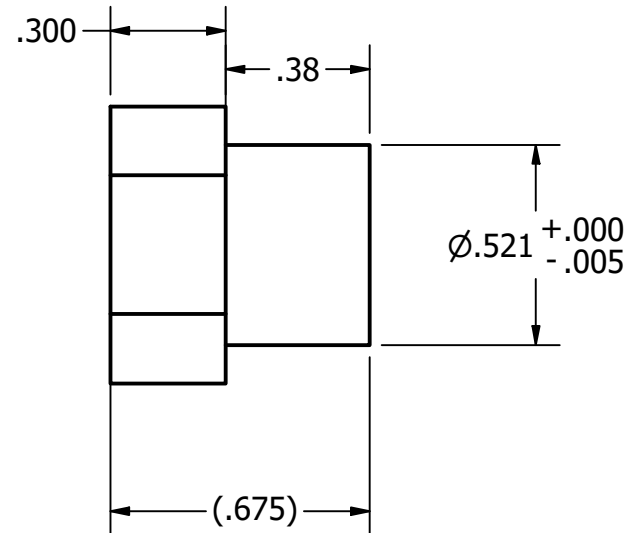
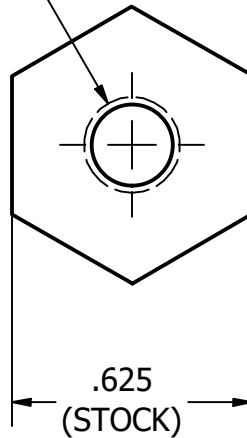



MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: LINKS		DATE 11/23/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES		FINISH		DESIGNER		DESCRIPTION FPL LH INSERT							
		BARE		AVA JOHNSON									
		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER AVA JOHNSON		SIZE A		P/N SU-A5003-AA-00004-AA				REV A	
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DRAWN BY SUJAN MUNVER		SCALE 2 : 1		DO NOT SCALE				SHEET 1 / 1	
				APPROVAL									

NOTES, UNLESS OTHERWISE SPECIFIED:
1. #3 TAP DRILL

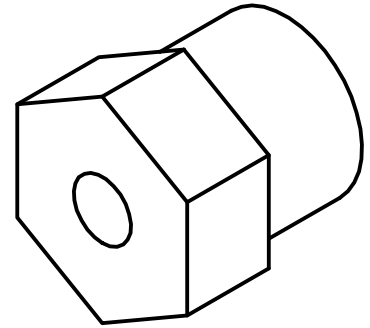




1/4-28 UNF - 2B
NOTE 1

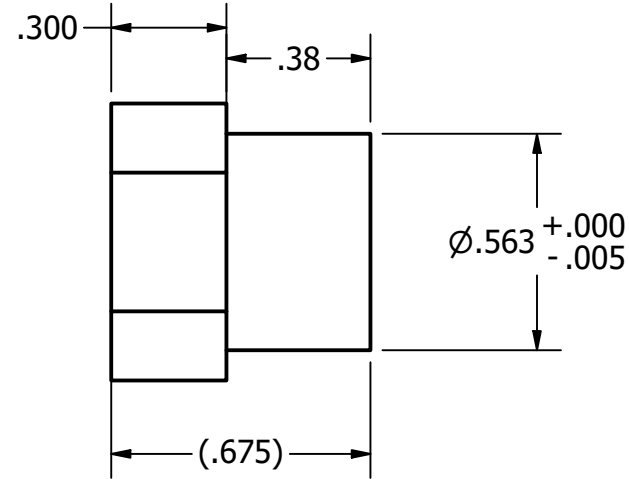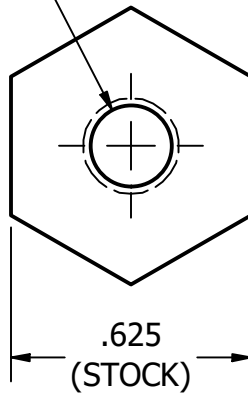



MATERIAL STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS	DATE 11/23/2025	 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 Ø 0.005 Ø +0.006 -0.001		FINISH BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER AVA JOHNSON RESPONSIBLE ENGINEER AVA JOHNSON DRAWN BY SUJAN MUNVER APPROVAL				DESCRIPTION RPL INSERT RH	
ALL DIMENSIONS IN INCHES				SIZE A	P/N SU-A5003-AA-00005-AA	REV A			
				SCALE 2:1	DO NOT SCALE		SHEET 1 / 1		

NOTES, UNLESS OTHERWISE SPECIFIED:
1. #3 TAP DRILL

1/4-28 UNF - 2B LH
NOTE 1

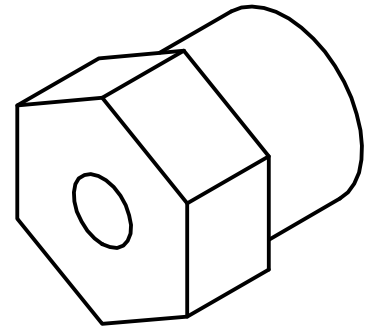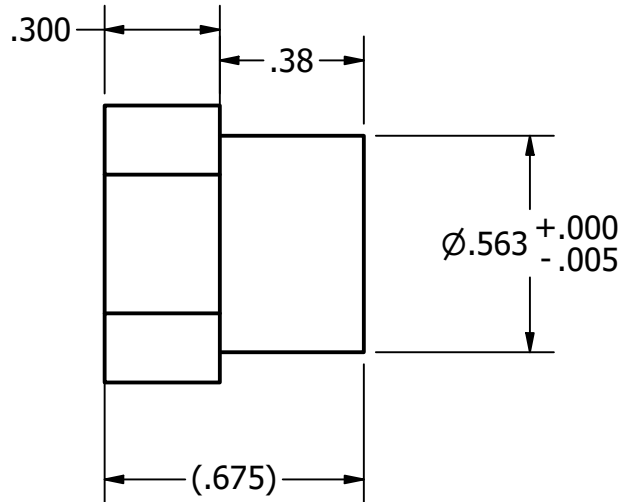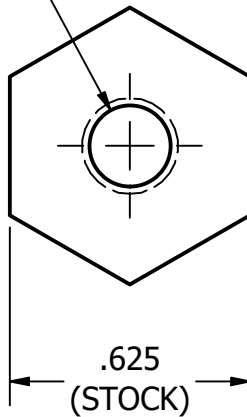


MATERIAL STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: LINKS		DATE 11/23/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE			DESIGNER AVA JOHNSON		DESCRIPTION RPL INSERT LH			
	INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	RESPONSIBLE ENGINEER AVA JOHNSON		SIZE A	P/N SU-A5003-AA-00006-AA				
		DRAWN BY SUJAN MUNVER		SCALE 2:1		DO NOT SCALE			SHEET 1 / 1
		APPROVAL							

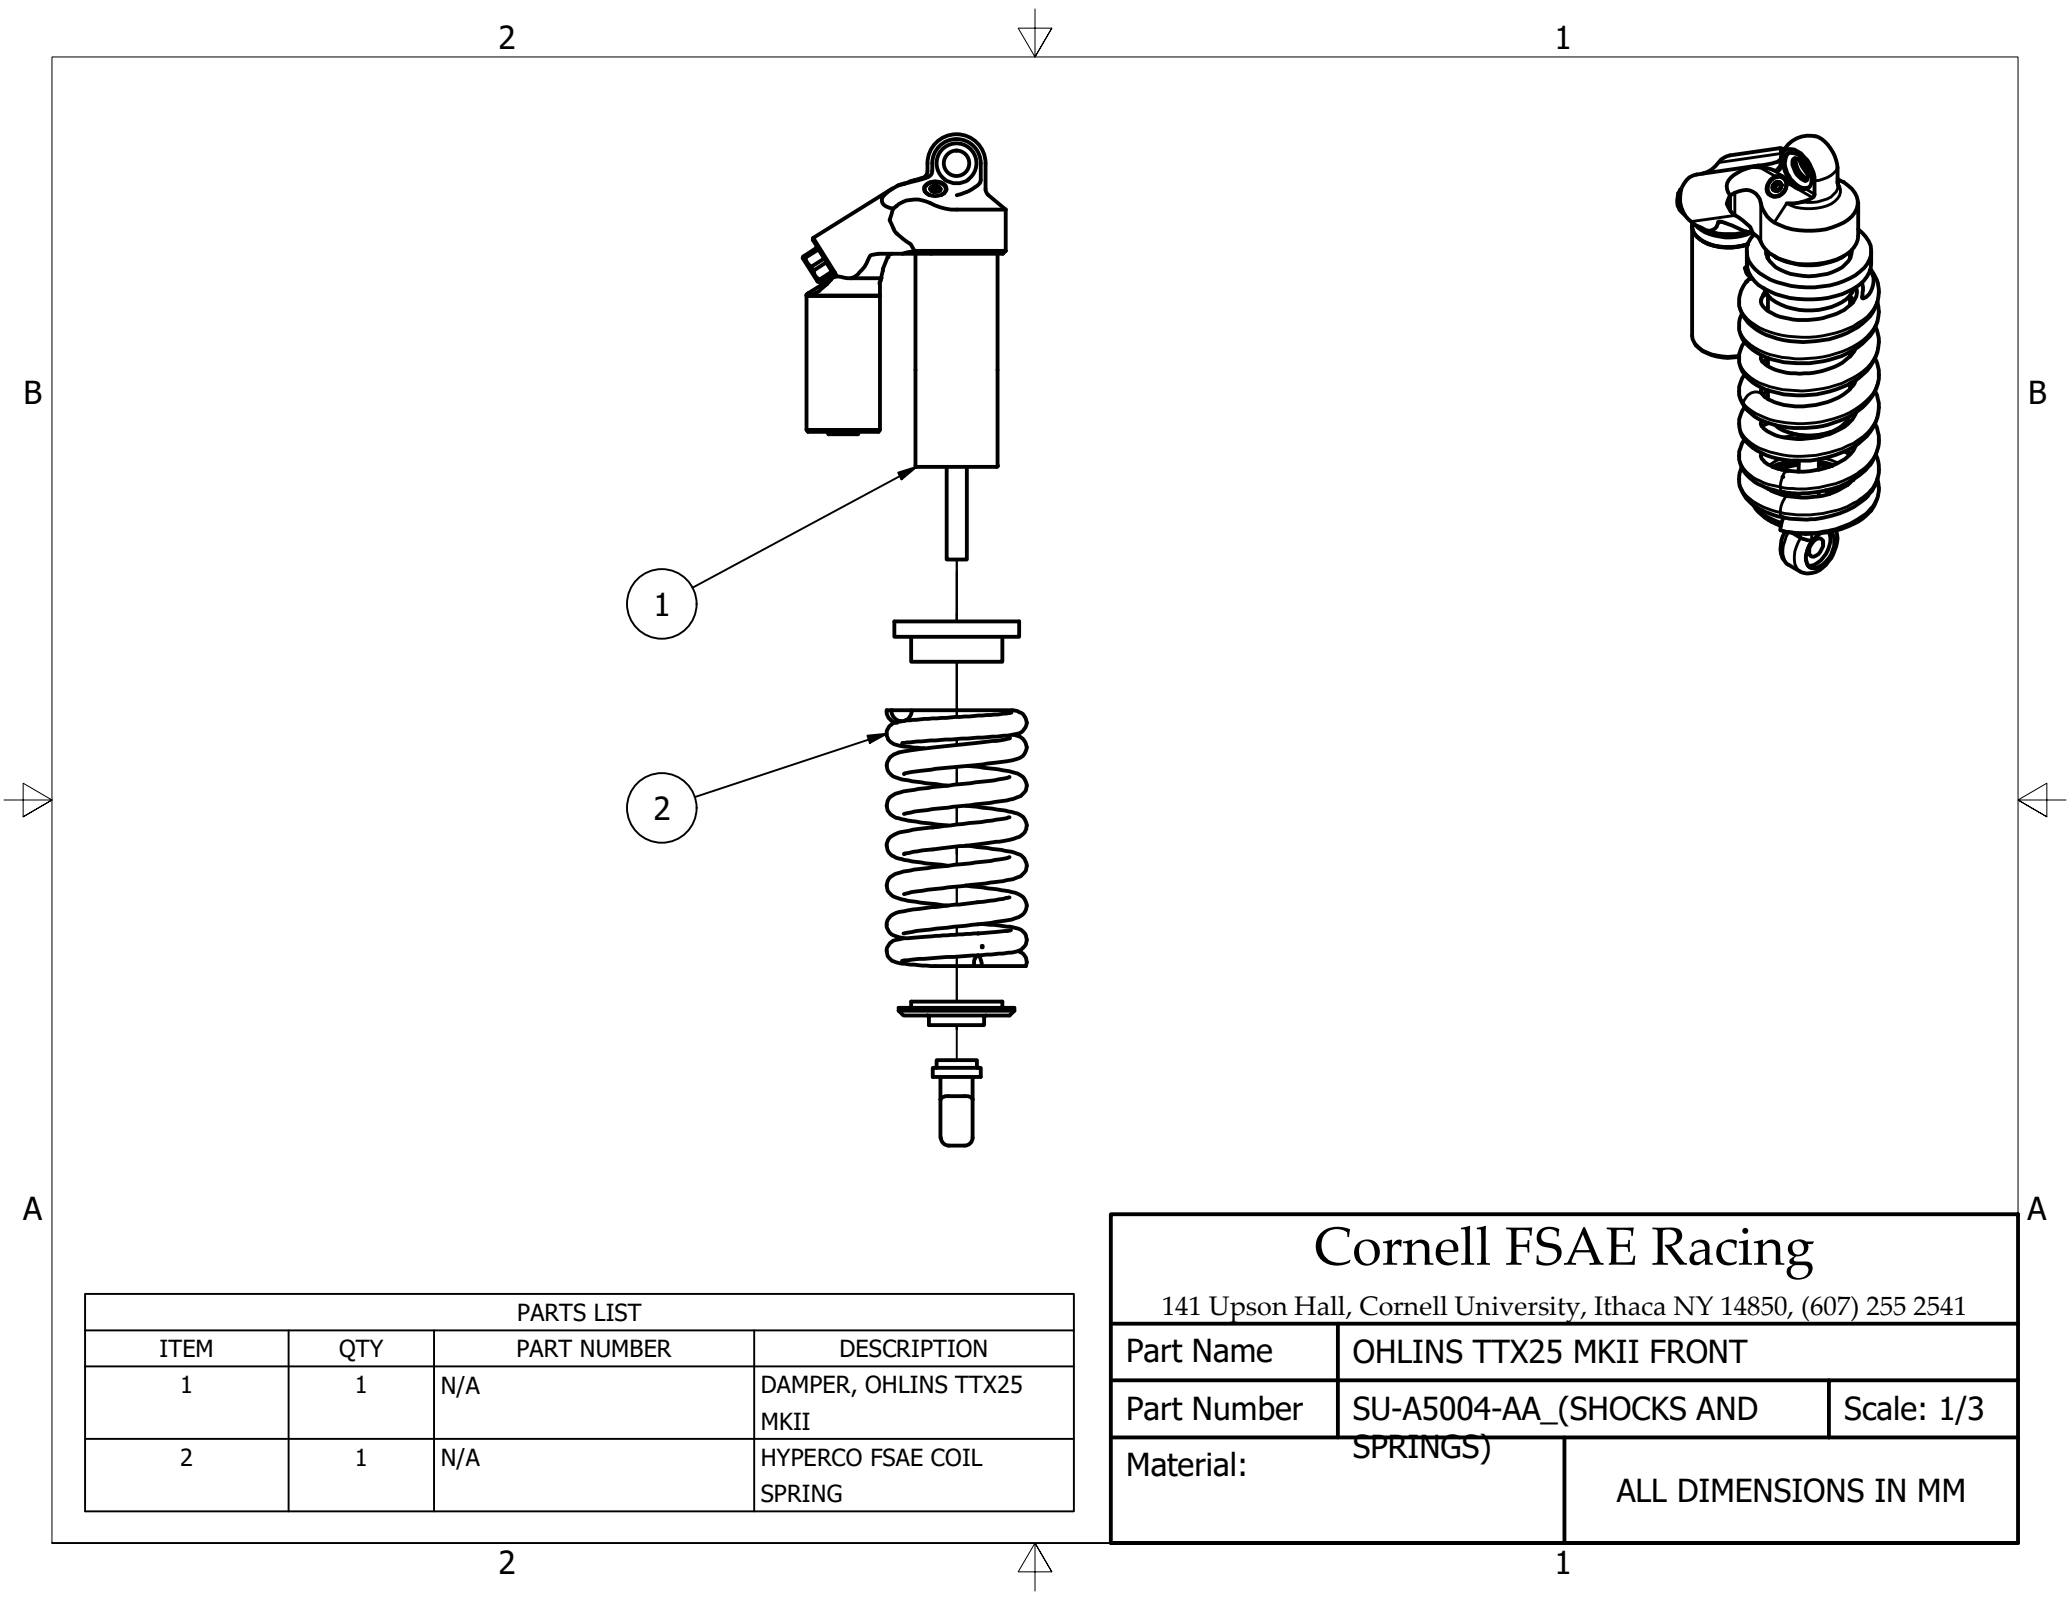

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	N/A	DAMPER, OHLINS TTX25 MKII
2	1	N/A	HYPERCO FSAE COIL SPRING

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	OHLINS TTX25 MKII FRONT	
Part Number	SU-A5004-AA_(SHOCKS AND SPRINGS)	Scale: 1/3
Material:	ALL DIMENSIONS IN MM	

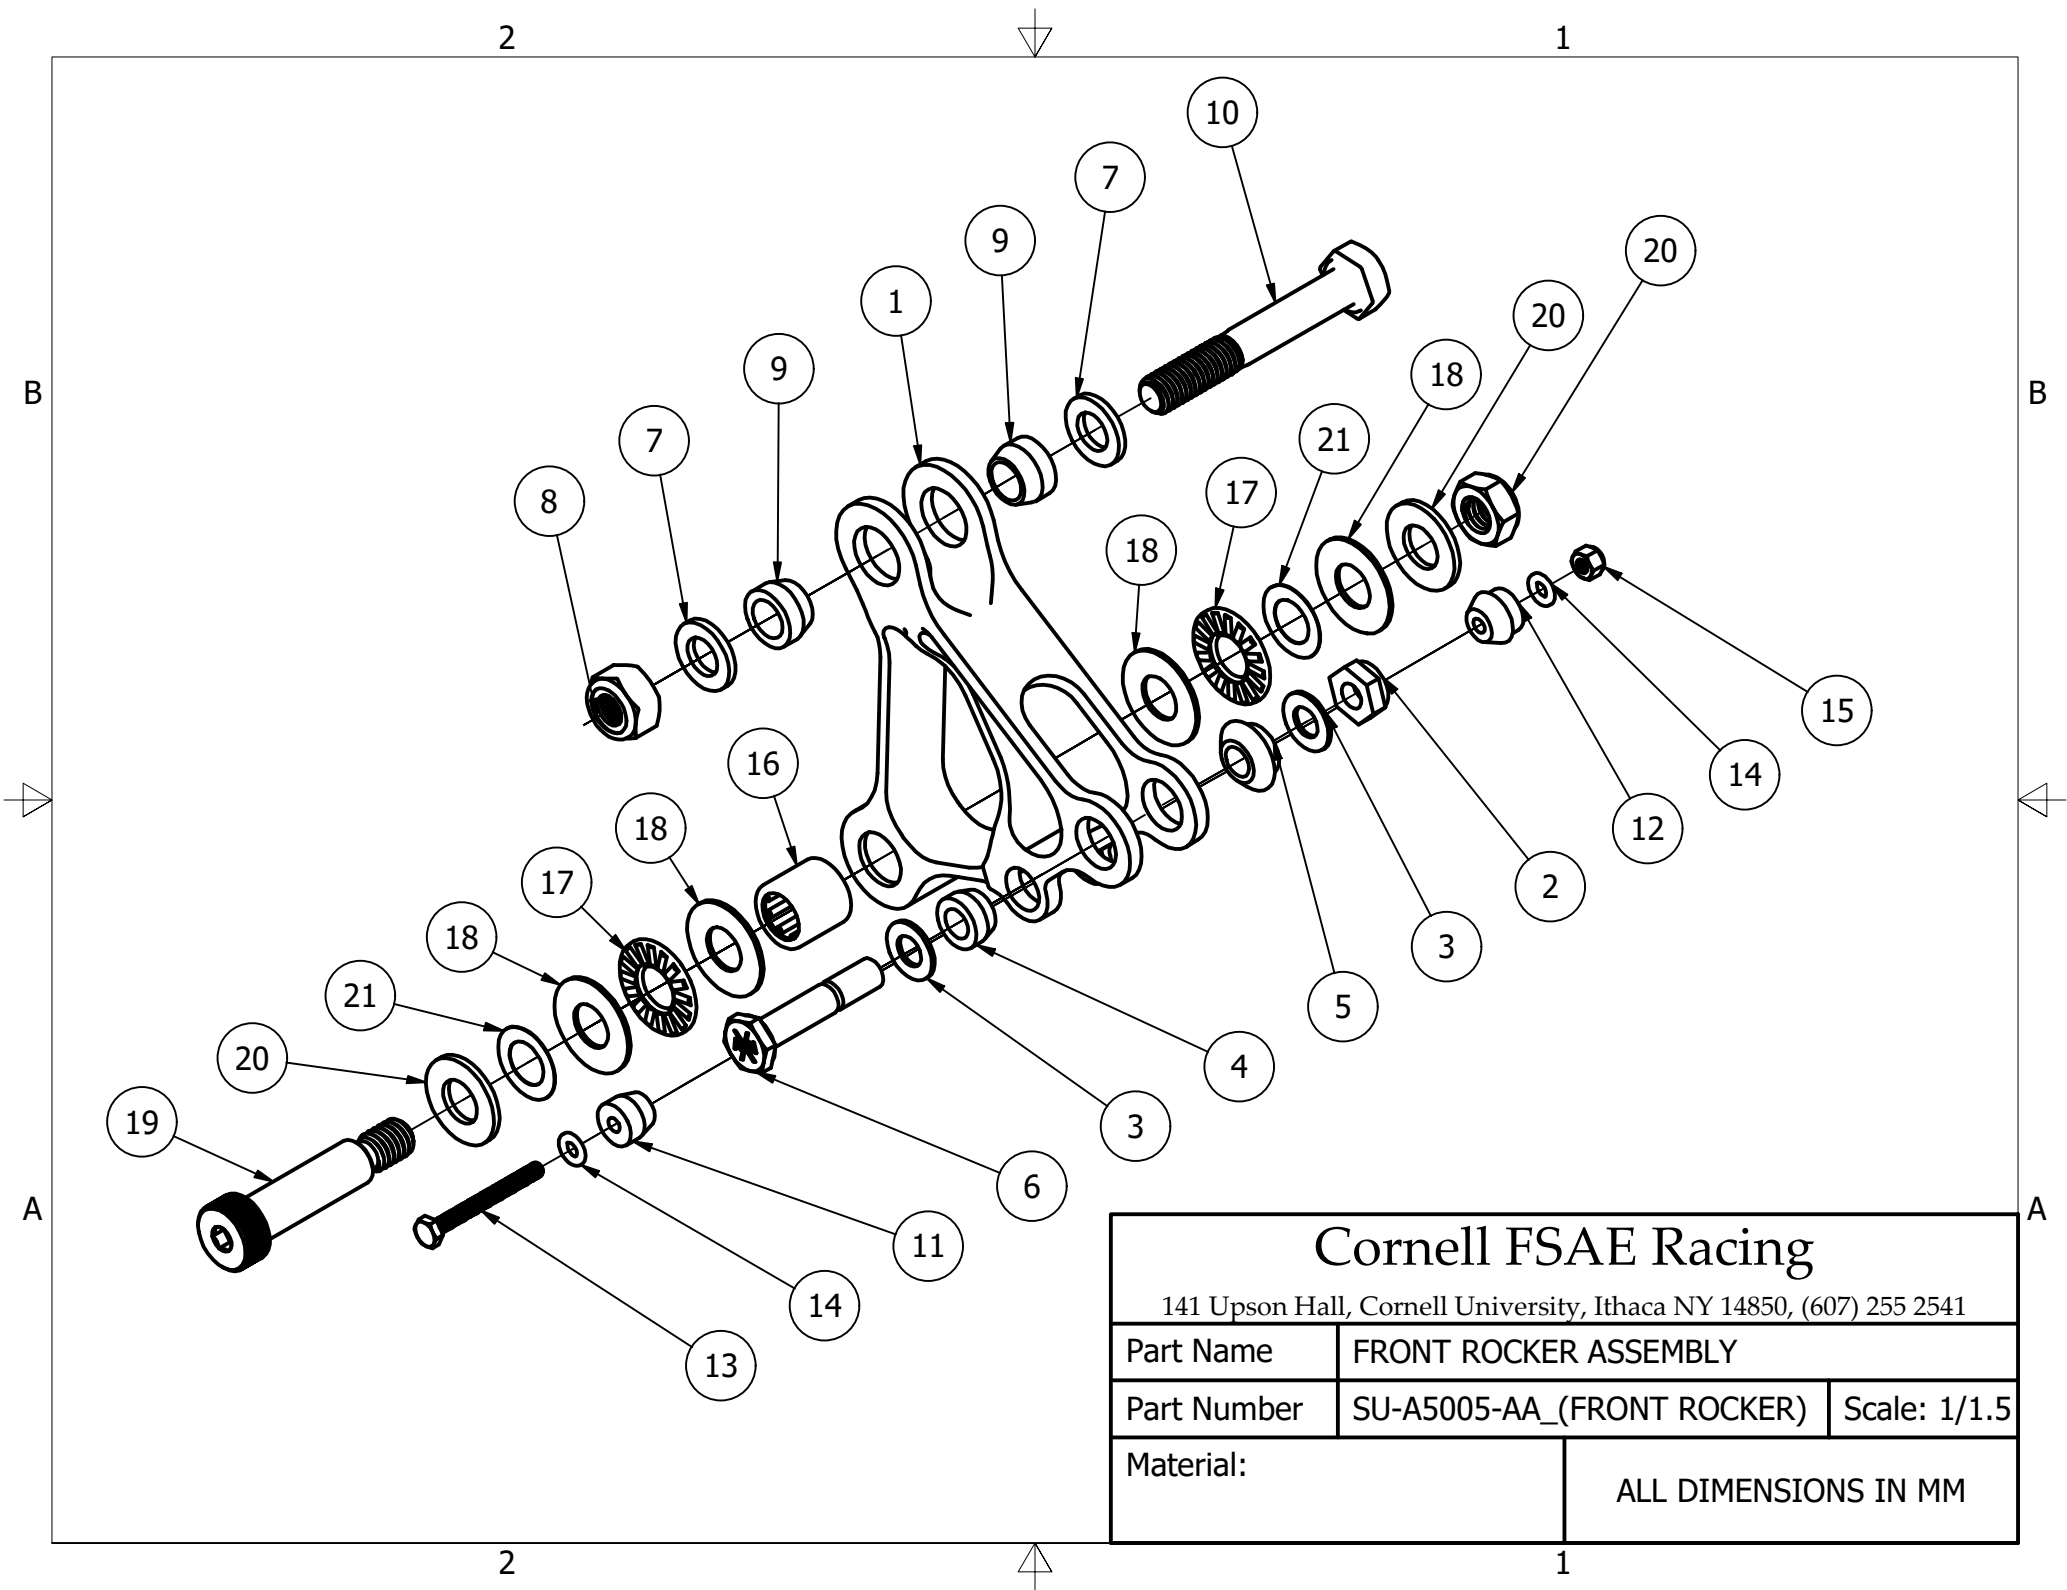


Cornell FSAE Racing

141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	FRONT ROCKER ASSEMBLY	
Part Number	SU-A5005-AA_(FRONT ROCKER)	Scale: 1/1.5
Material:		ALL DIMENSIONS IN MM

2



1



B

B

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	SU-A5005-AA-00001-AA	FRONT ROCKER
2	2	N/A	AN4 LOCKNUT LOPRO
3	4	N/A	AN4 WASHER LOPRO
4	2	SU-A5005-AA-00006-AA	ROCKER PUSHLINK THRU CONE
5	2	SU-A5005-AA-00007-AA	RKF_PLK HAT CONE
6	2	N/A	AN4-12 BOLT
7	4	N/A	M8 WASHER
8	2	N/A	M8-1.25MM NYLON INSERT LOCKNUT
9	4	SU-A5005-AA-00005-AA	ROCKER SHOCK THRU CONE
10	2	N/A	M8-1.25MM HEX HEAD SCREW
11	2	SU-A5005-AA-00003-AA	ARB DROP LINK THRU CONE
12	2	SU-A5005-AA-00004-AA	ARB DROP LINK HAT CONE
13	2	N/A	5-40 HEX HEAD SCREW
14	4	N/A	#5 WASHER
15	2	N/A	5-40 NYLON INSERT LOCKNUT
16	2	N/A	STEEL NEEDLE ROLLER BEARING
17	4	N/A	STEEL NEEDLE ROLLER THRUST BEARING
18	8	N/A	THRUST WASHER
19	2	N/A	3/8-16 SHOULDER SCREW
20	2	N/A	3/8-16 NYLON INSERT LOCKNUT
21	4	N/A	.005IN SHIM




A

A

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	FRONT ROCKER ASSEMBLY	
Part Number	SU-A5005-AA_(FRONT ROCKER)	Scale: 1/3
Material:	ALL DIMENSIONS IN MM	

2

1

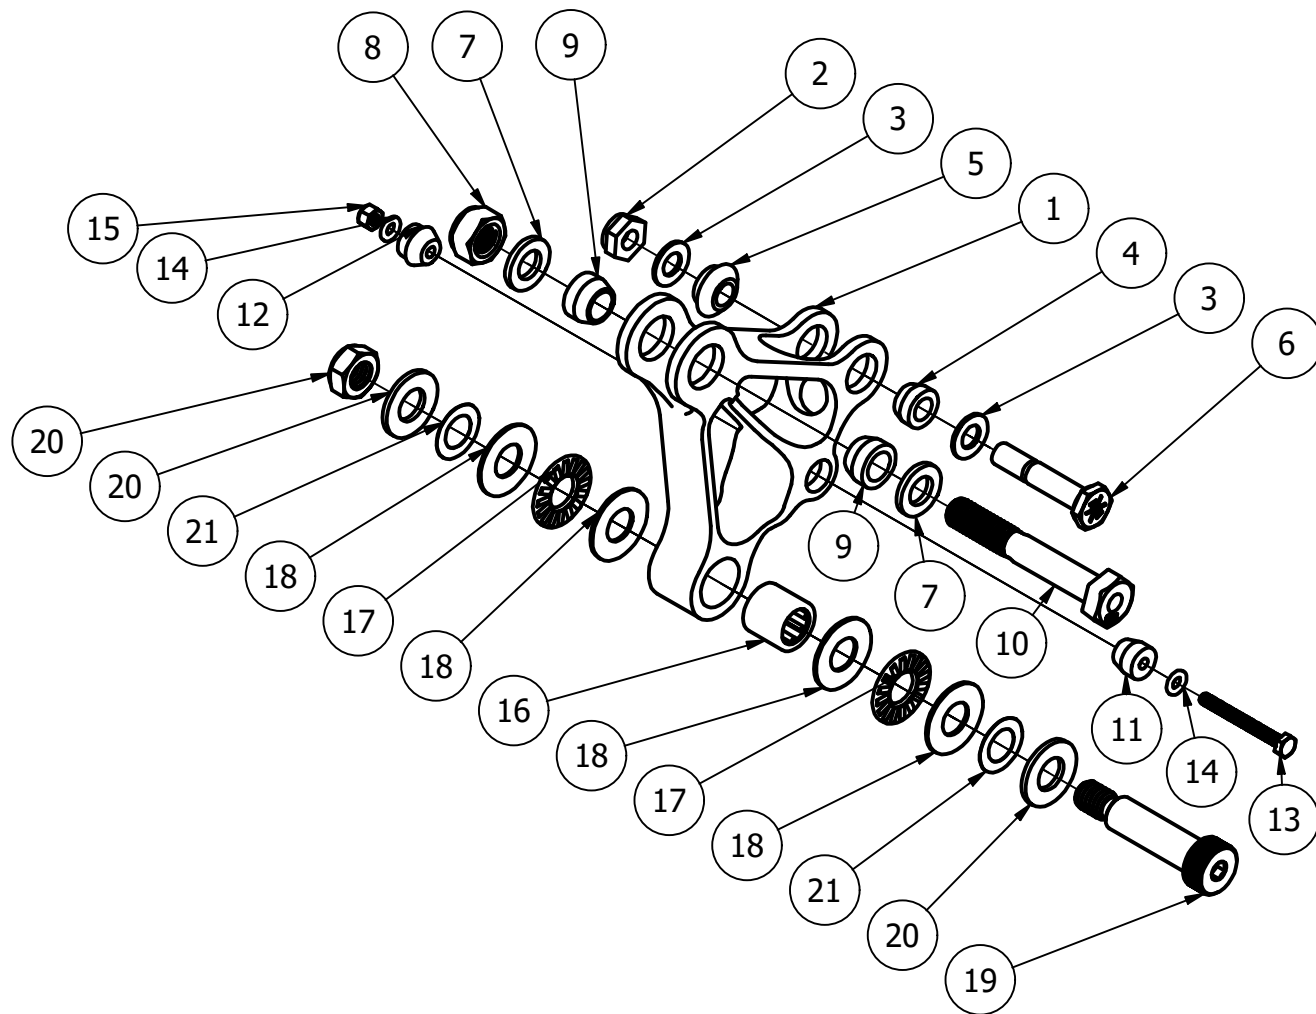

Cornell FSAE Racing

141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	REAR ROCKER ASSEMBLY	
Part Number	SU-A5004-AA_(REAR ROCKER)	Scale: 1/2
Material:	ALL DIMENSIONS IN MM	

2

1

B

B






A

A

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	SU-A5005-AA-00002-AA	REAR ROCKER
2	2	N/A	AN4 LOCKNUT LOPRO
3	4	N/A	AN4 WASHER LOPRO
4	2	SU-A5005-AA-00006-AA	ROCKER PUSHLINK THRU CONE
5	2	SU-A5005-AA-00007-AA	RKF_PLK HAT CONE
6	2	N/A	AN4-12 BOLT
7	4	N/A	M8 WASHER
8	2	N/A	M8-1.25MM NYLON INSERT LOCKNUT
9	4	SU-A5005-AA-00005-AA	ROCKER SHOCK THRU CONE
10	2	N/A	M8-1.25MM HEX HEAD BOLT
11	2	SU-A5005-AA-00003-AA	ARB DROP LINK THRU CONE
12	2	SU-A5005-AA-00004-AA	ARB DROP LINK HAT CONE
13	2	N/A	5-40 HEX HEAD SCREW
14	4	N/A	#5 WASHER
15	2	N/A	5-40 NYLON INSERT LOCKNUT
16	2	N/A	STEEL NEEDLE ROLLER BEARING
17	4	N/A	NEEDLE ROLLER THRUST BEARING
18	8	N/A	THRUST WASHER
19	2	N/A	3/8-16 SHOULDER SCREW
20	2	N/A	3/8-16 NYLON INSERT LOCKNUT
21	4	N/A	.005IN SHIM


2

1


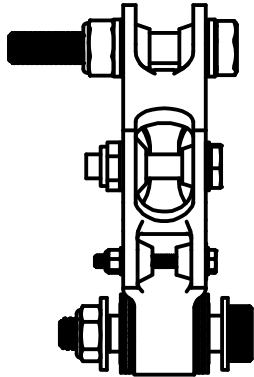
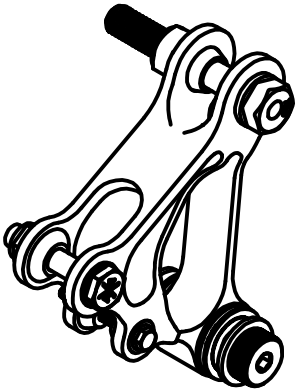
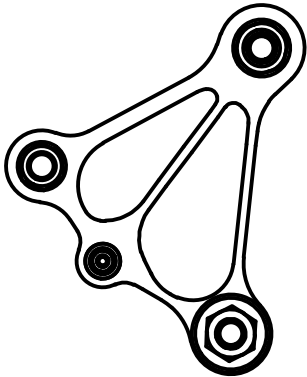


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	REAR ROCKER ASSEMBLY	
Part Number	SU-A5004-AA_(REAR ROCKER)	Scale: 1/2
Material:	ALL DIMENSIONS IN MM	


NOTES, UNLESS OTHERWISE SPECIFIED: THIS IS A MINIMUM DIMENSION DRAWING. CAD IS MASTER.

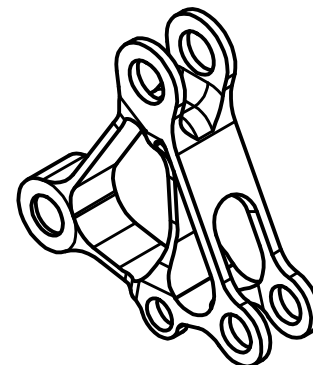


**SECTION B-B
SCALE 1 / 2**

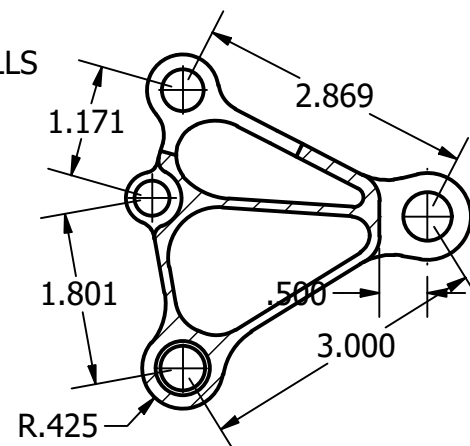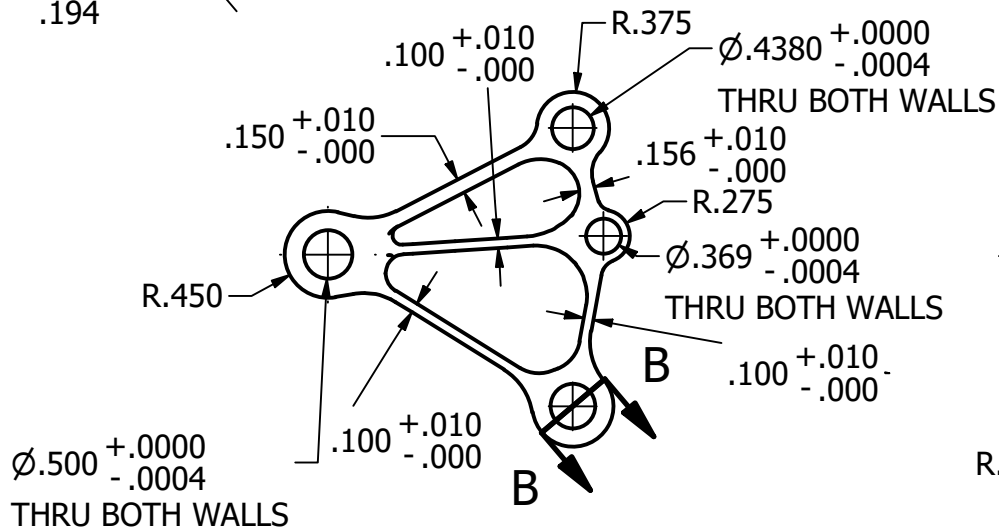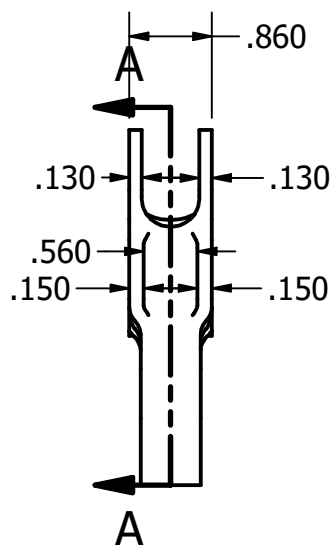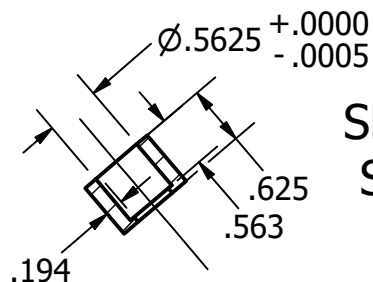

**SECTION A-A
SCALE 1 / 2**

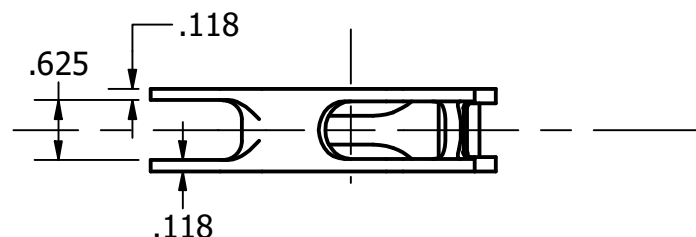




MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: ROCKERS		DATE 11/20/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH BARE		DESCRIPTION FRONT ROCKER							
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018		DESIGNER YASSINE COULIBALY		SIZE A		P/N SU-A5005-AA-00001-AA		REV A	
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER YASSINE COULIBALY		SCALE 1 / 2		DO NOT SCALE		SHEET 1 / 1	
				DRAWN BY Y.COULIBALY							
				APPROVAL							


A

A




A


NOTES, UNLESS OTHERWISE SPECIFIED:

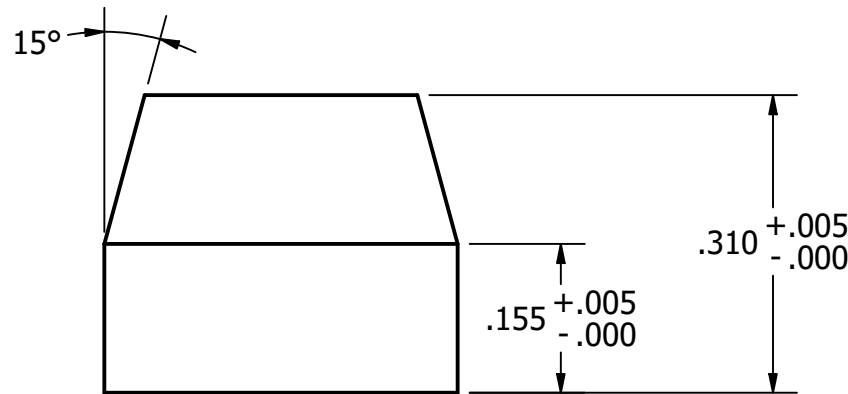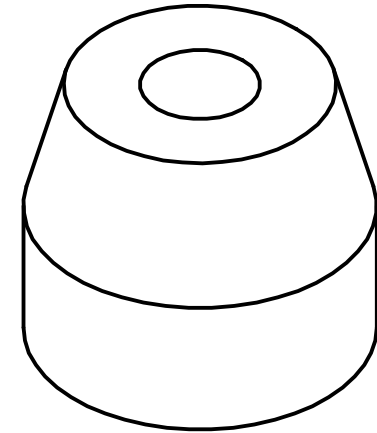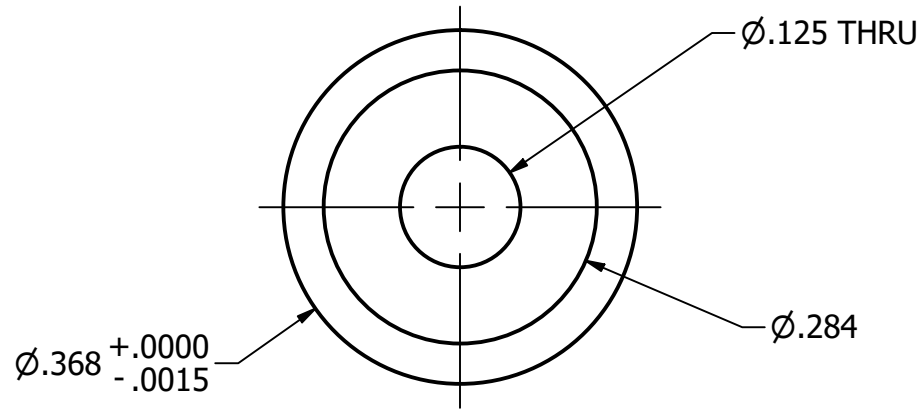




MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: ROCKERS	DATE 2/24/2026	 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 HOLE: Ø 0.005 Ø +0.006 -0.001		FINISH BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER YASSINE COLIBALY RESPONSIBLE ENGINEER YASSINE COLIBALY DRAWN BY YASSINE COLIBALY APPROVAL				DESCRIPTION ARB DROP LINK THRU CONE	
ALL DIMENSIONS IN INCHES				SIZE A	P/N SU-A5005-AA-00003-AA	REV A			
				SCALE 5 : 1	DO NOT SCALE		SHEET 1 / 1		


NOTES, UNLESS OTHERWISE SPECIFIED:

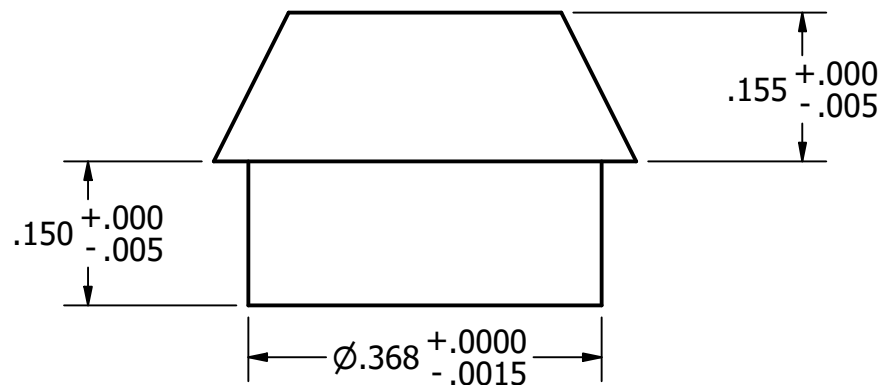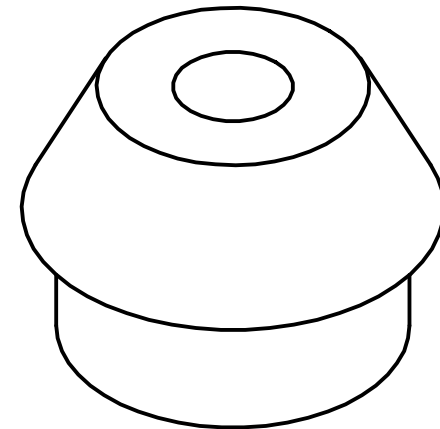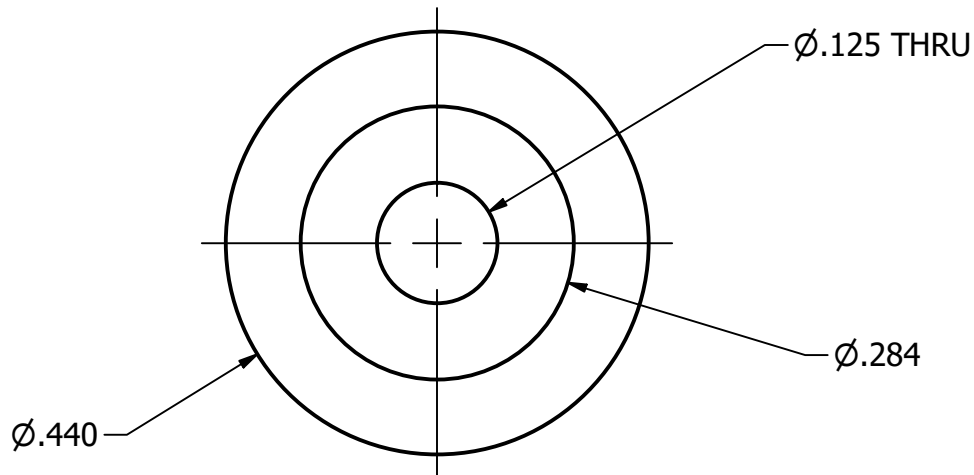




MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: ROCKERS	DATE 3/12/2026				
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 HOLE: Ø 0.005 Ø +0.006 -0.001		FINISH BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER YASSINE COULIBALY RESPONSIBLE ENGINEER YASSINE COULIBALY DRAWN BY YASSINE COULIBALY APPROVAL				DESCRIPTION ARB DROP LINK HAT CONE	
ALL DIMENSIONS IN INCHES				SIZE A	P/N SU-A5005-AA-00004-AA	REV A			
				SCALE 5 : 1	DO NOT SCALE		SHEET 1 / 1		


NOTES, UNLESS OTHERWISE SPECIFIED:

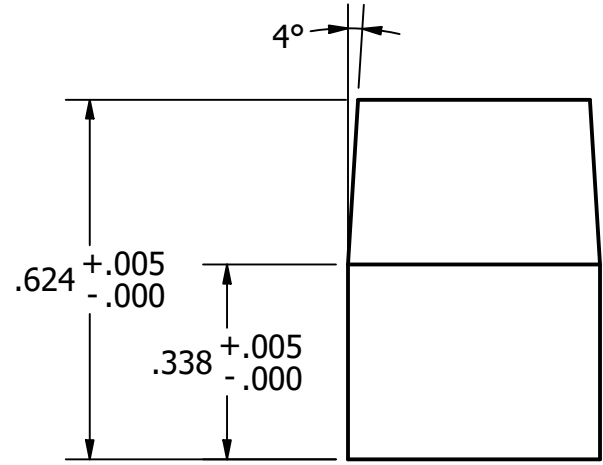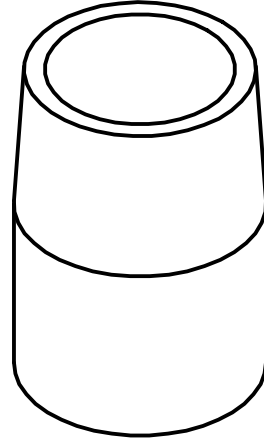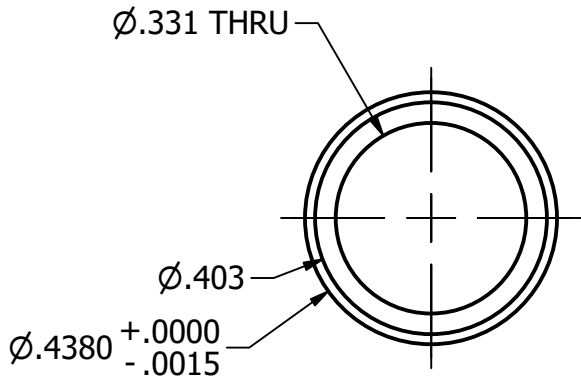




MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: CLEVISES		DATE 12/11/2025		 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED LINEAR: $\varnothing$ 0.005 X.X $\pm$ 0.1 $\varnothing$ +0.006 X.XX $\pm$ 0.02 X.XXX $\pm$ 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE			DESCRIPTION SHOCK THRU CONE						
	INTERPRET PER ASME Y14.5-2018		DESIGNER KEIRA HE		SIZE A		P/N SU-A5005-AA-00005-AA		REV A	
	ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER KEIRA HE		SCALE 3 : 1		DO NOT SCALE		SHEET 1 / 1	
			DRAWN BY KEIRA HE							
		APPROVAL								


NOTES, UNLESS OTHERWISE SPECIFIED:

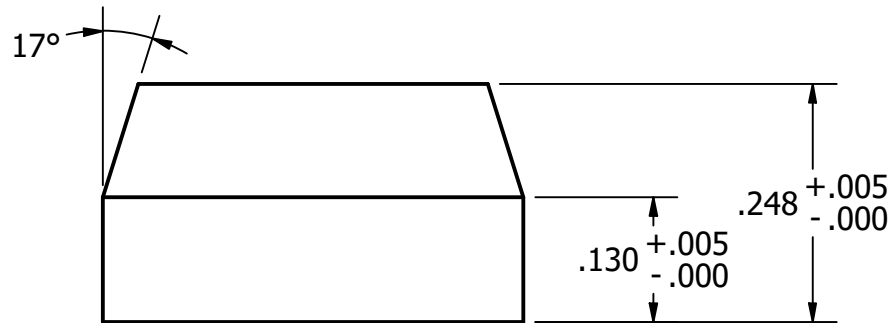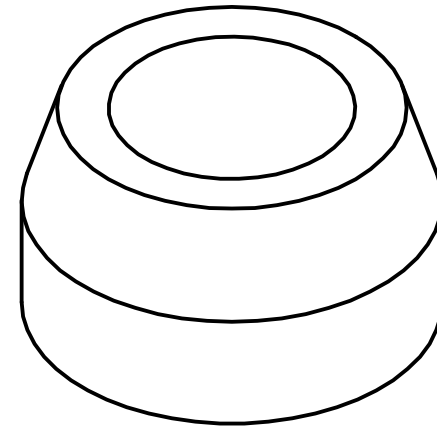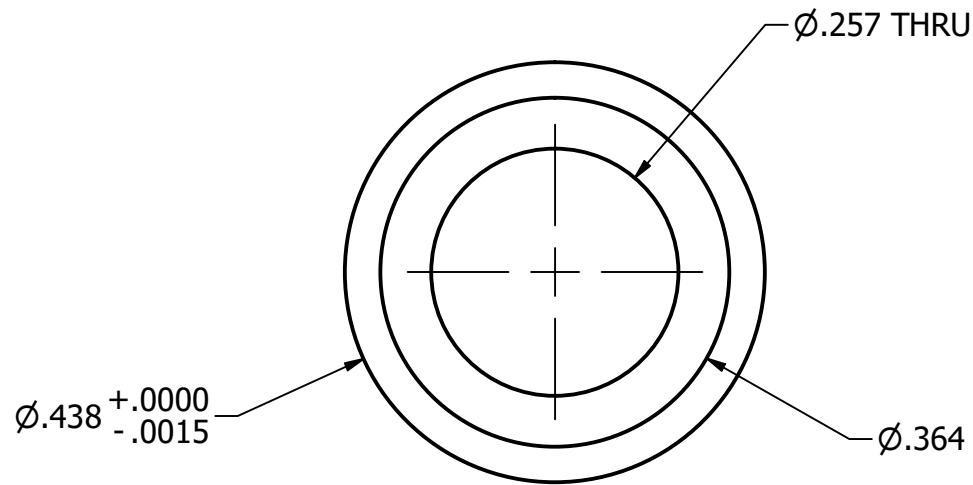


MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: ROCKERS		DATE 11/12/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE			DESIGNER YASSINE COULIBALY	DESCRIPTION ROCKER PUSHLINK THRU CONE				
	INTERPRET PER ASME Y14.5-2018	RESPONSIBLE ENGINEER YASSINE COULIBALY							
	ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	DRAWN BY Y.COULIBALY	SIZE A	P/N SU-A5005-AA-00006-AA			REV A		
		APPROVAL	SCALE 5 : 1	DO NOT SCALE			SHEET 1 / 1		

NOTES, UNLESS OTHERWISE SPECIFIED:

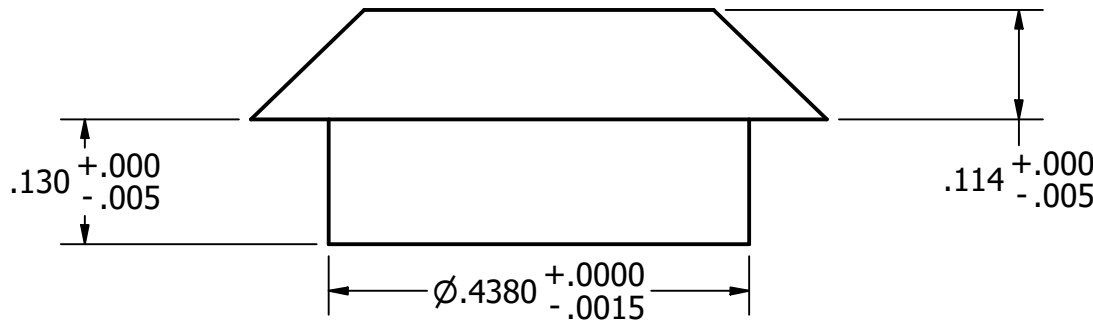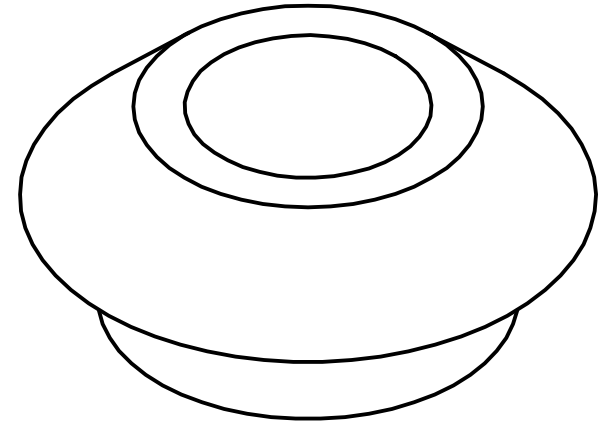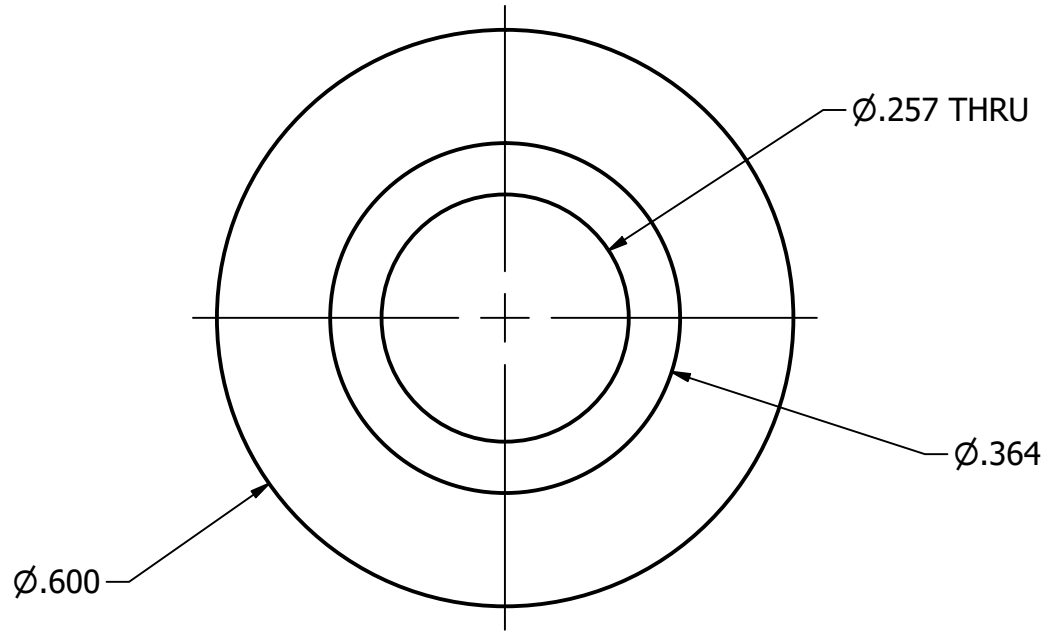


MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: ROCKERS		DATE 10/8/2025		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED				DESCRIPTION RKF_PLK HAT CONE					
FINISH BARE		DESIGNER YASSINE COULIBALY		SIZE A		P/N SU-A5005-AA-00007-AA		REV A	
LINEAR: $\varnothing \pm 0.005$ X.X ± 0.1 $\varnothing \pm 0.006$ X.XX ± 0.02 $\varnothing -0.001$ X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER YASSINE COULIBALY		SCALE 5 : 1		DO NOT SCALE	
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DRAWN BY YASSINE COULIBALY		SHEET 1 / 1			
		APPROVAL							

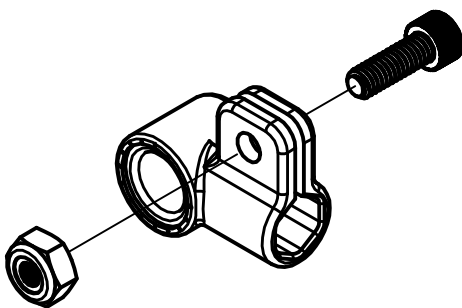

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	N/A	92196A194_18-8 Stainless Steel Socket Head Screw
2	1	N/A	90633A009_Low-Strength Steel Thin Nylon-Insert Locknut
3	1	SU-A5006-AA-00004-AA	FARB ADAPTER


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	FARB ADAPTER ASSEMBLY	
Part Number	SU-A5006-AA_(FARB ADAPTER)	Scale: 1 : 1
Material:		ALL DIMENSIONS IN MM

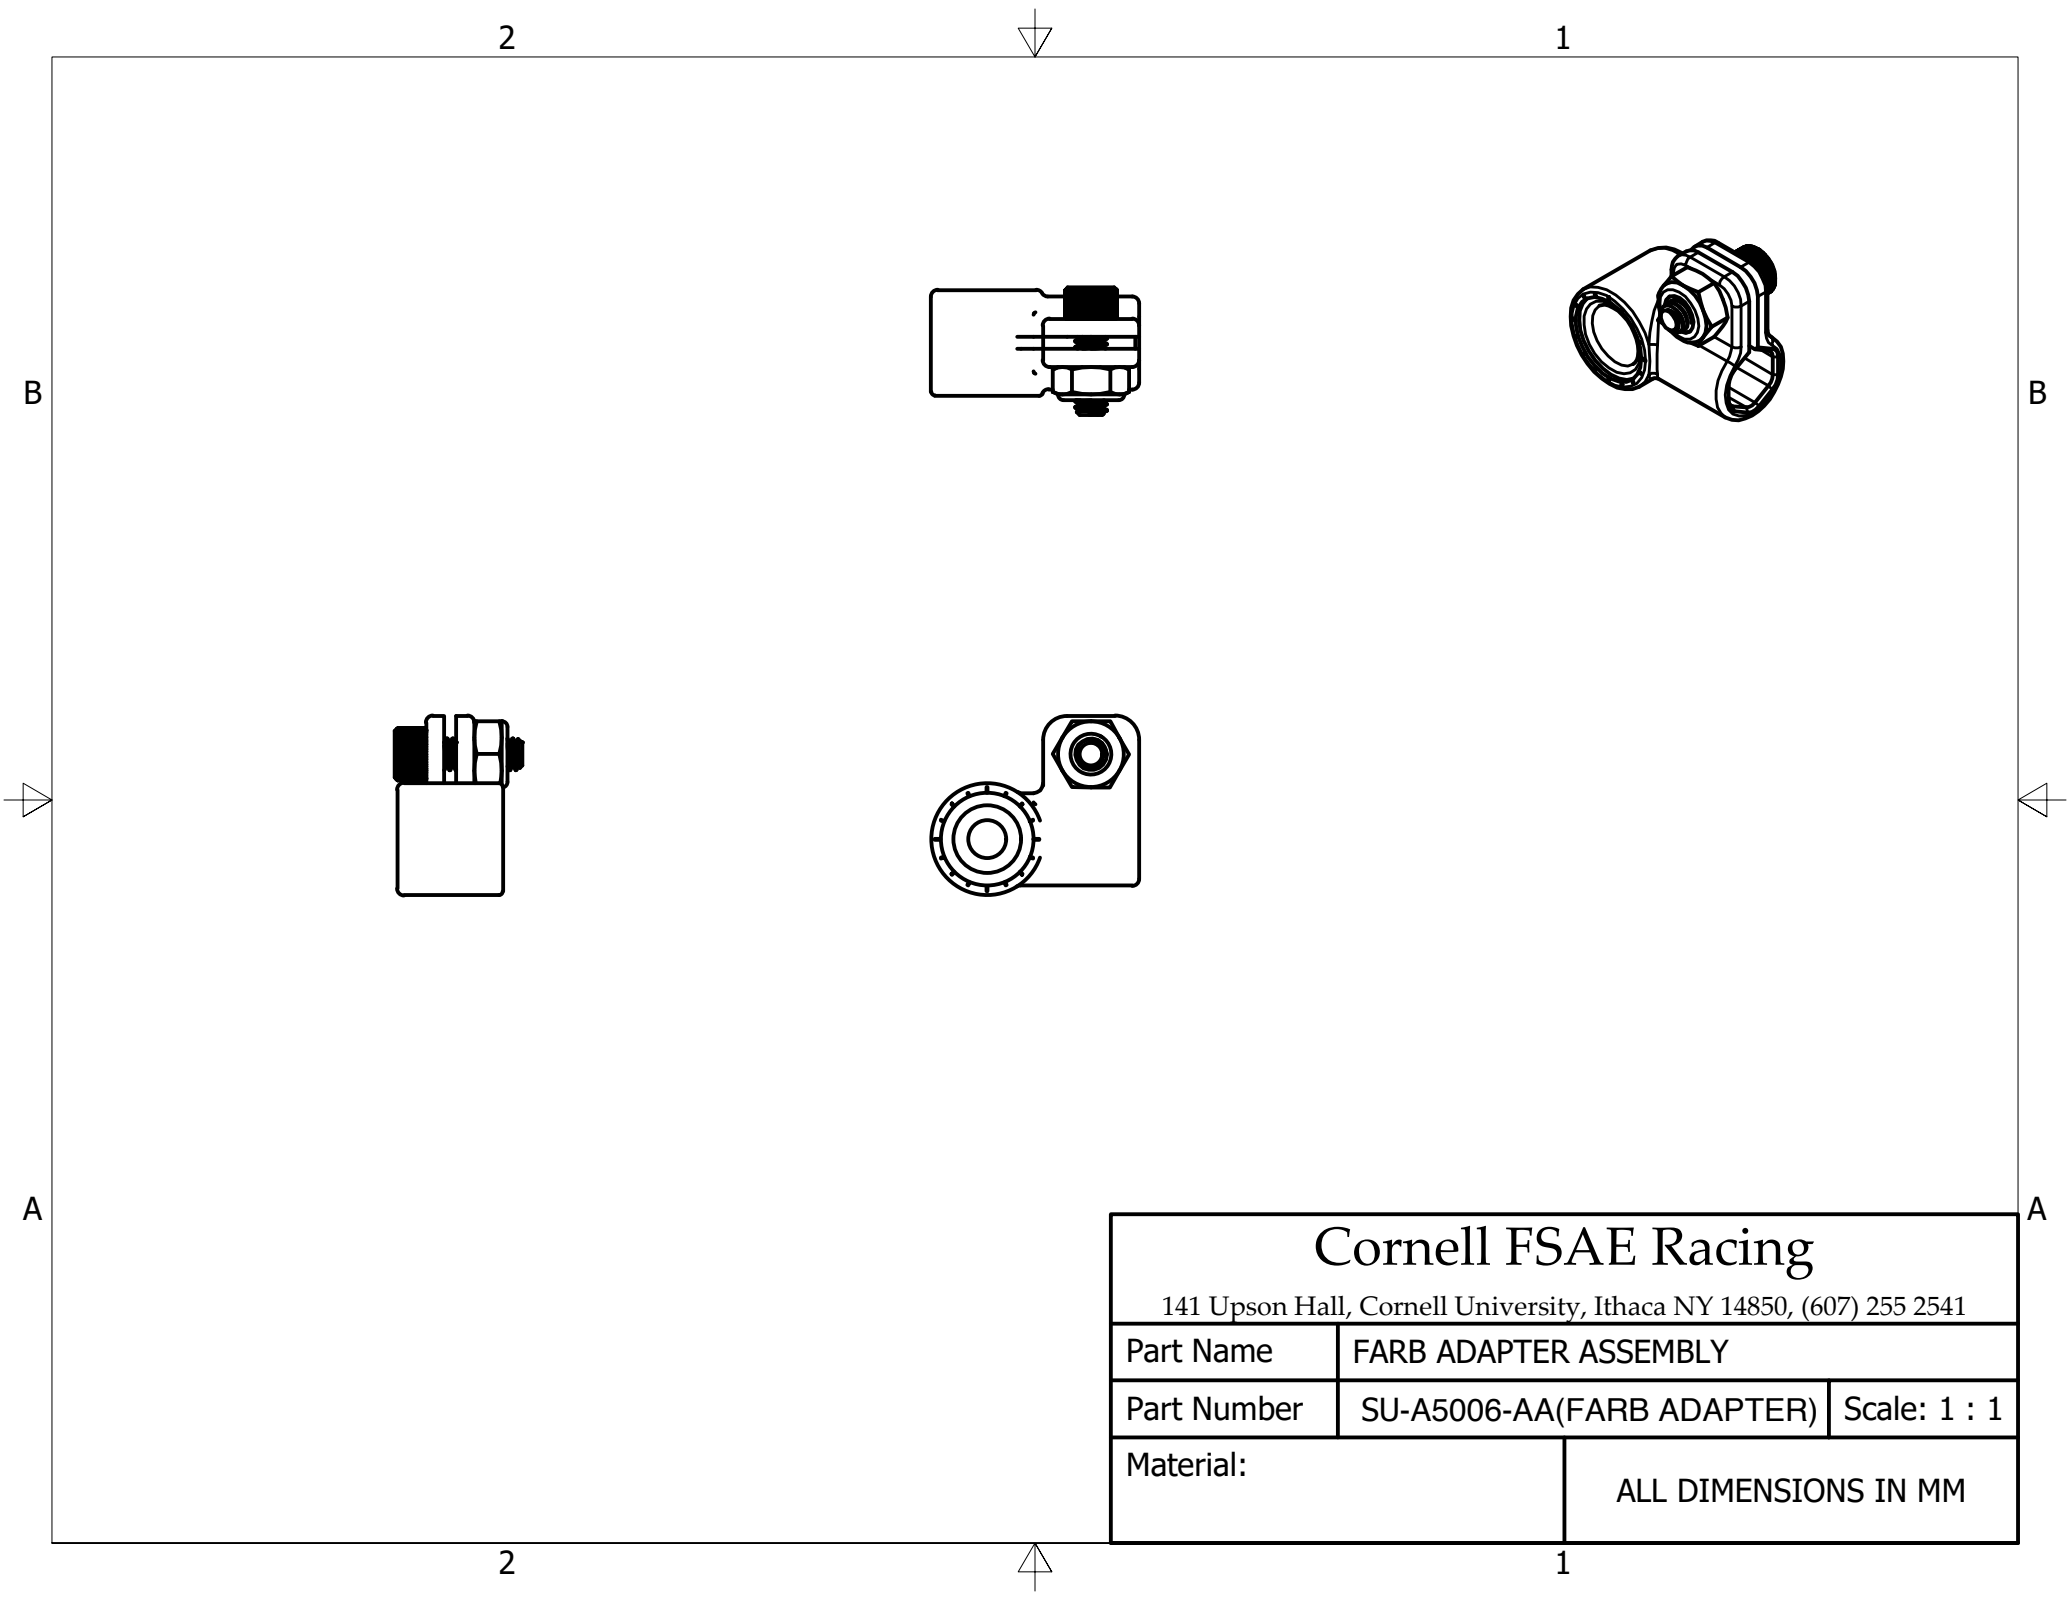

Cornell FSAE Racing


141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	FARB ADAPTER ASSEMBLY		
Part Number	SU-A5006-AA(FARB ADAPTER)	Scale:	1 : 1
Material:		ALL DIMENSIONS IN MM	

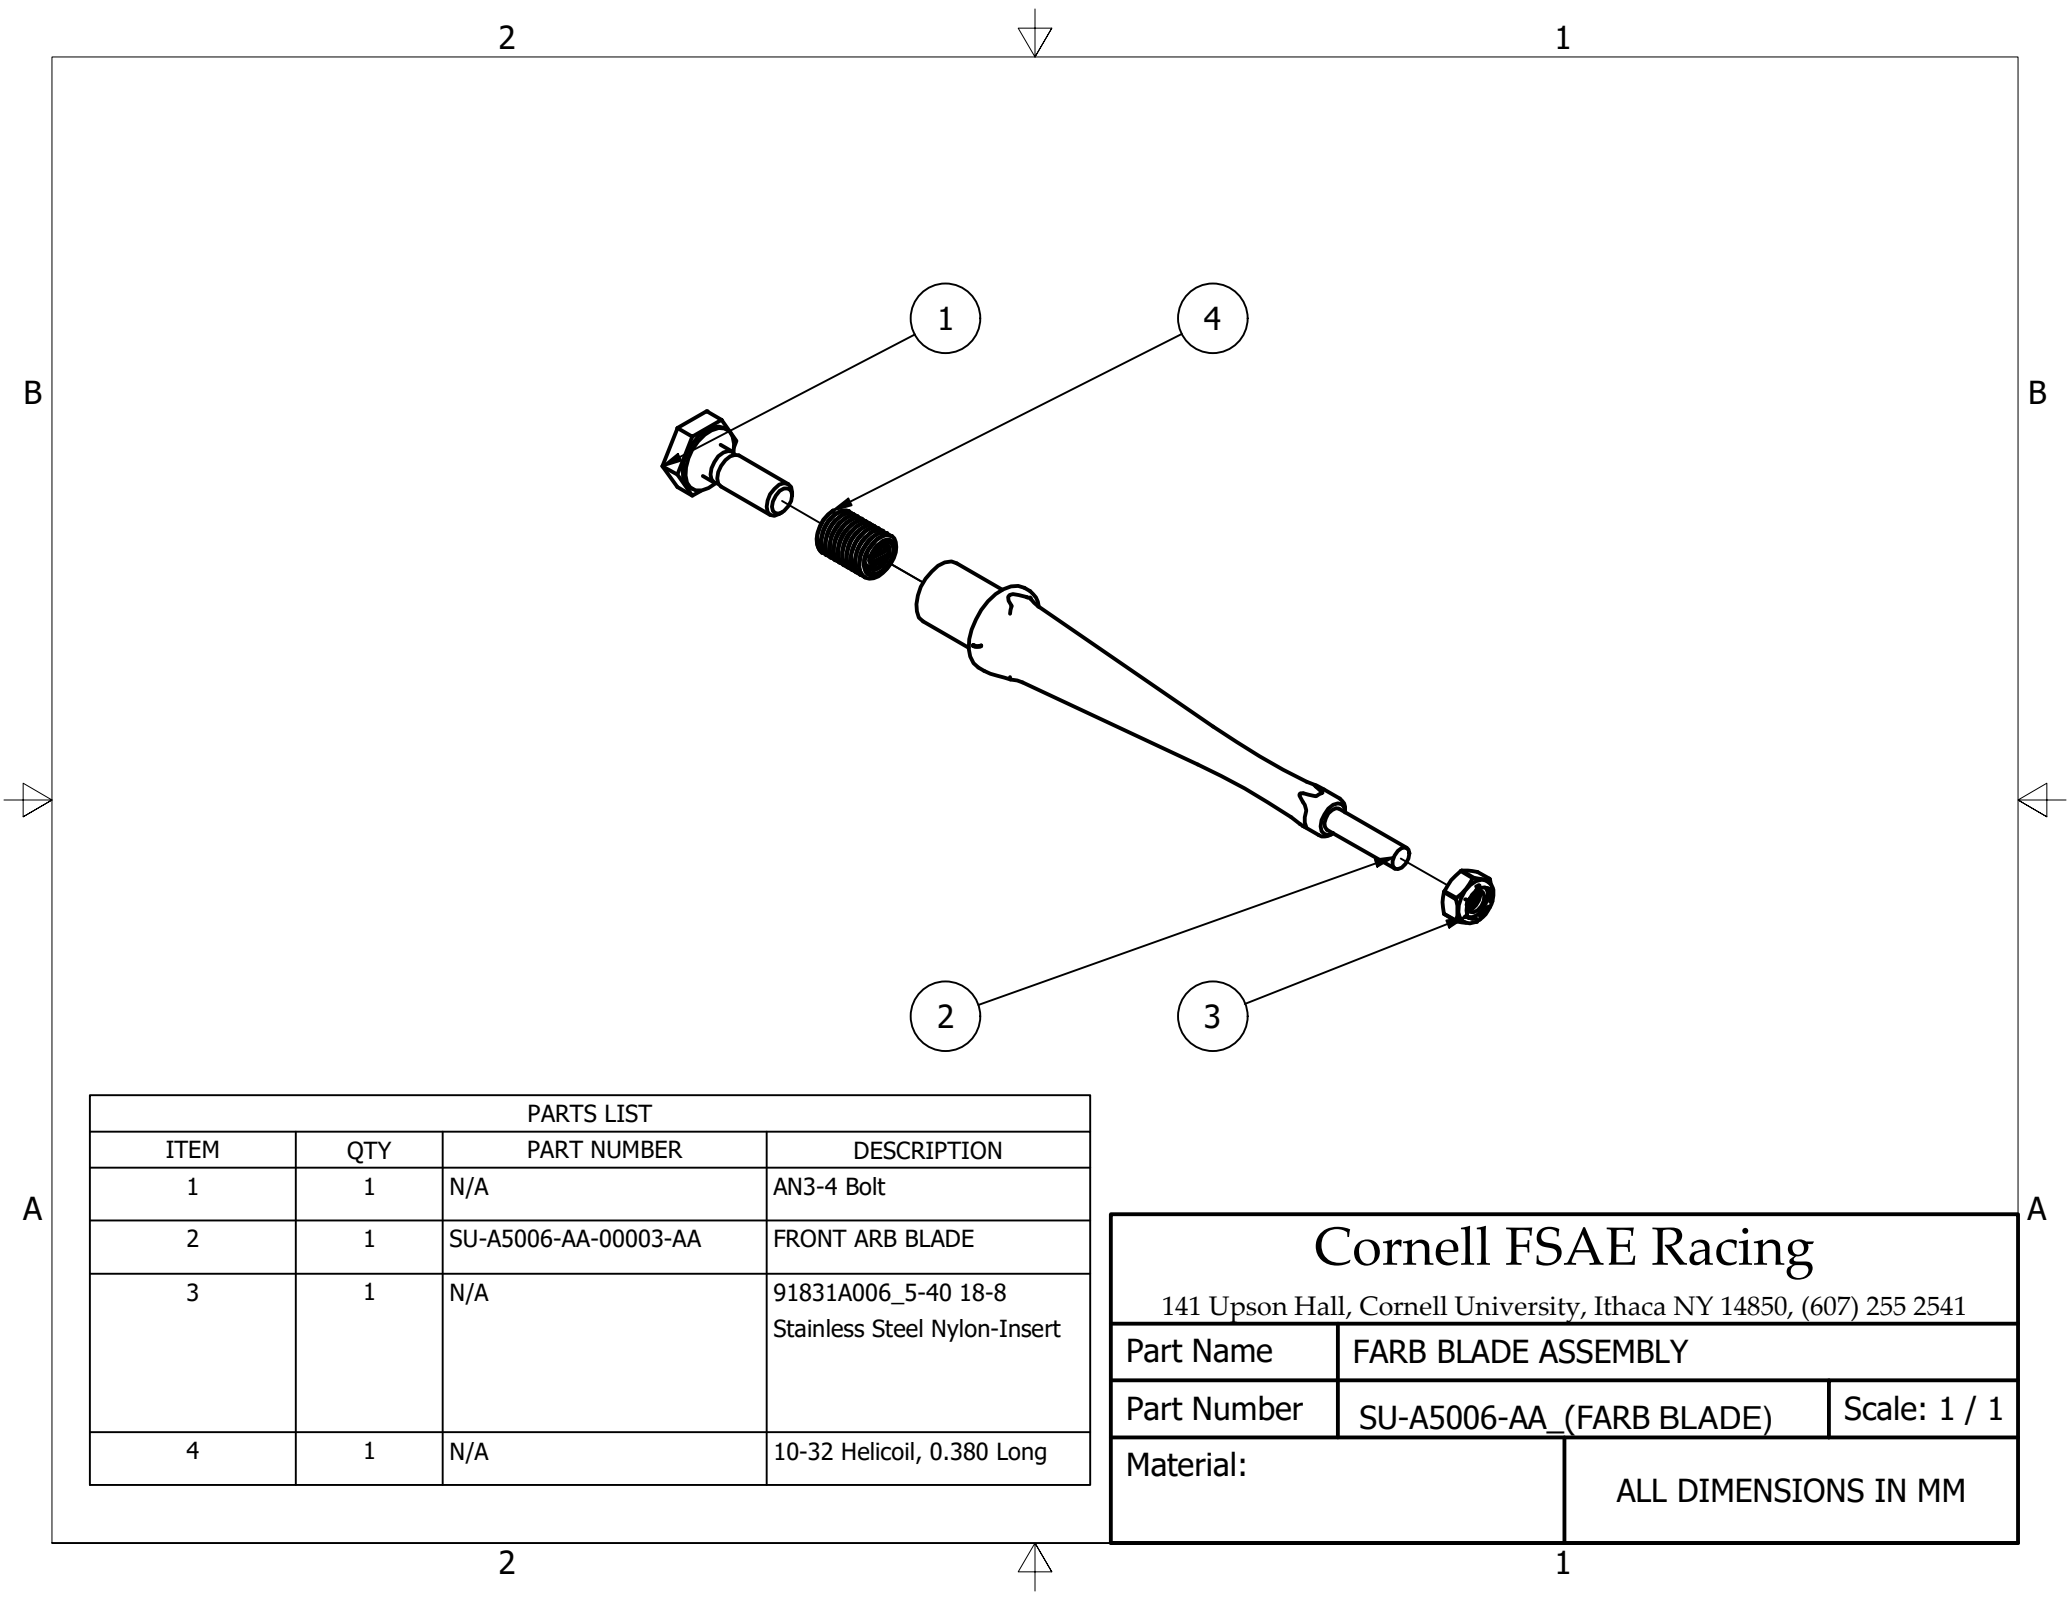

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	N/A	AN3-4 Bolt
2	1	SU-A5006-AA-00003-AA	FRONT ARB BLADE
3	1	N/A	91831A006_5-40 18-8 Stainless Steel Nylon-Insert
4	1	N/A	10-32 Helicoil, 0.380 Long


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	FARB BLADE ASSEMBLY	
Part Number	SU-A5006-AA (FARB BLADE)	Scale: 1 / 1
Material:		ALL DIMENSIONS IN MM

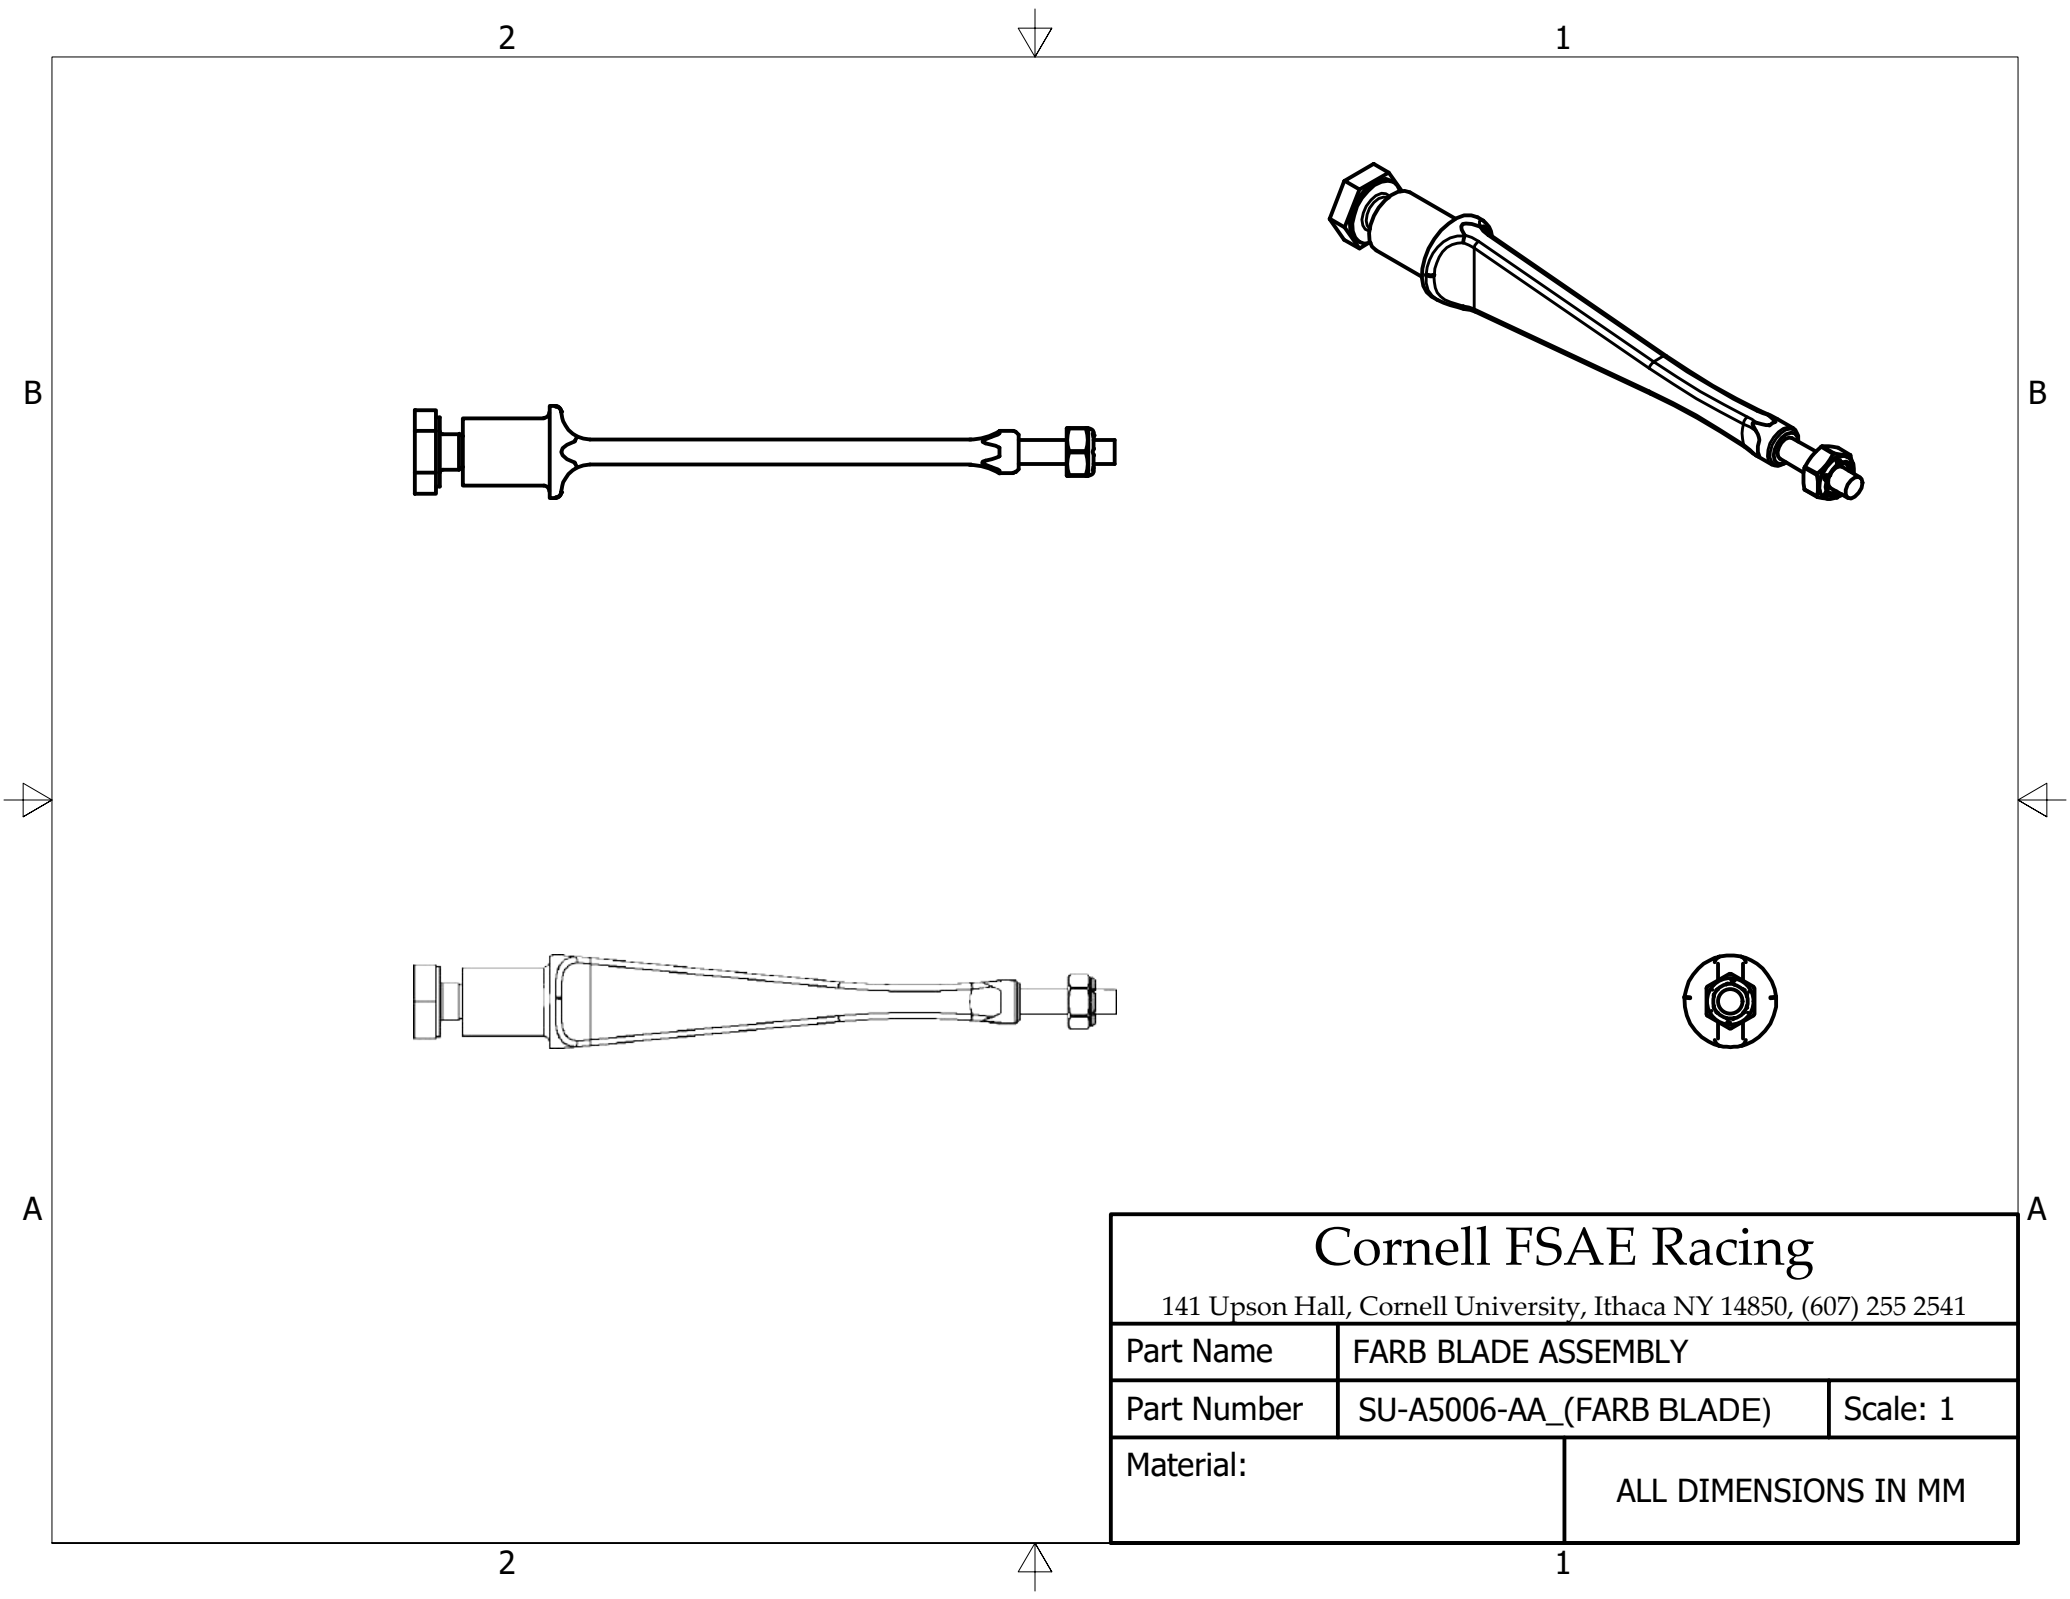

Cornell FSAE Racing


141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	FARB BLADE ASSEMBLY	
Part Number	SU-A5006-AA_(FARB BLADE)	Scale: 1
Material:	ALL DIMENSIONS IN MM	

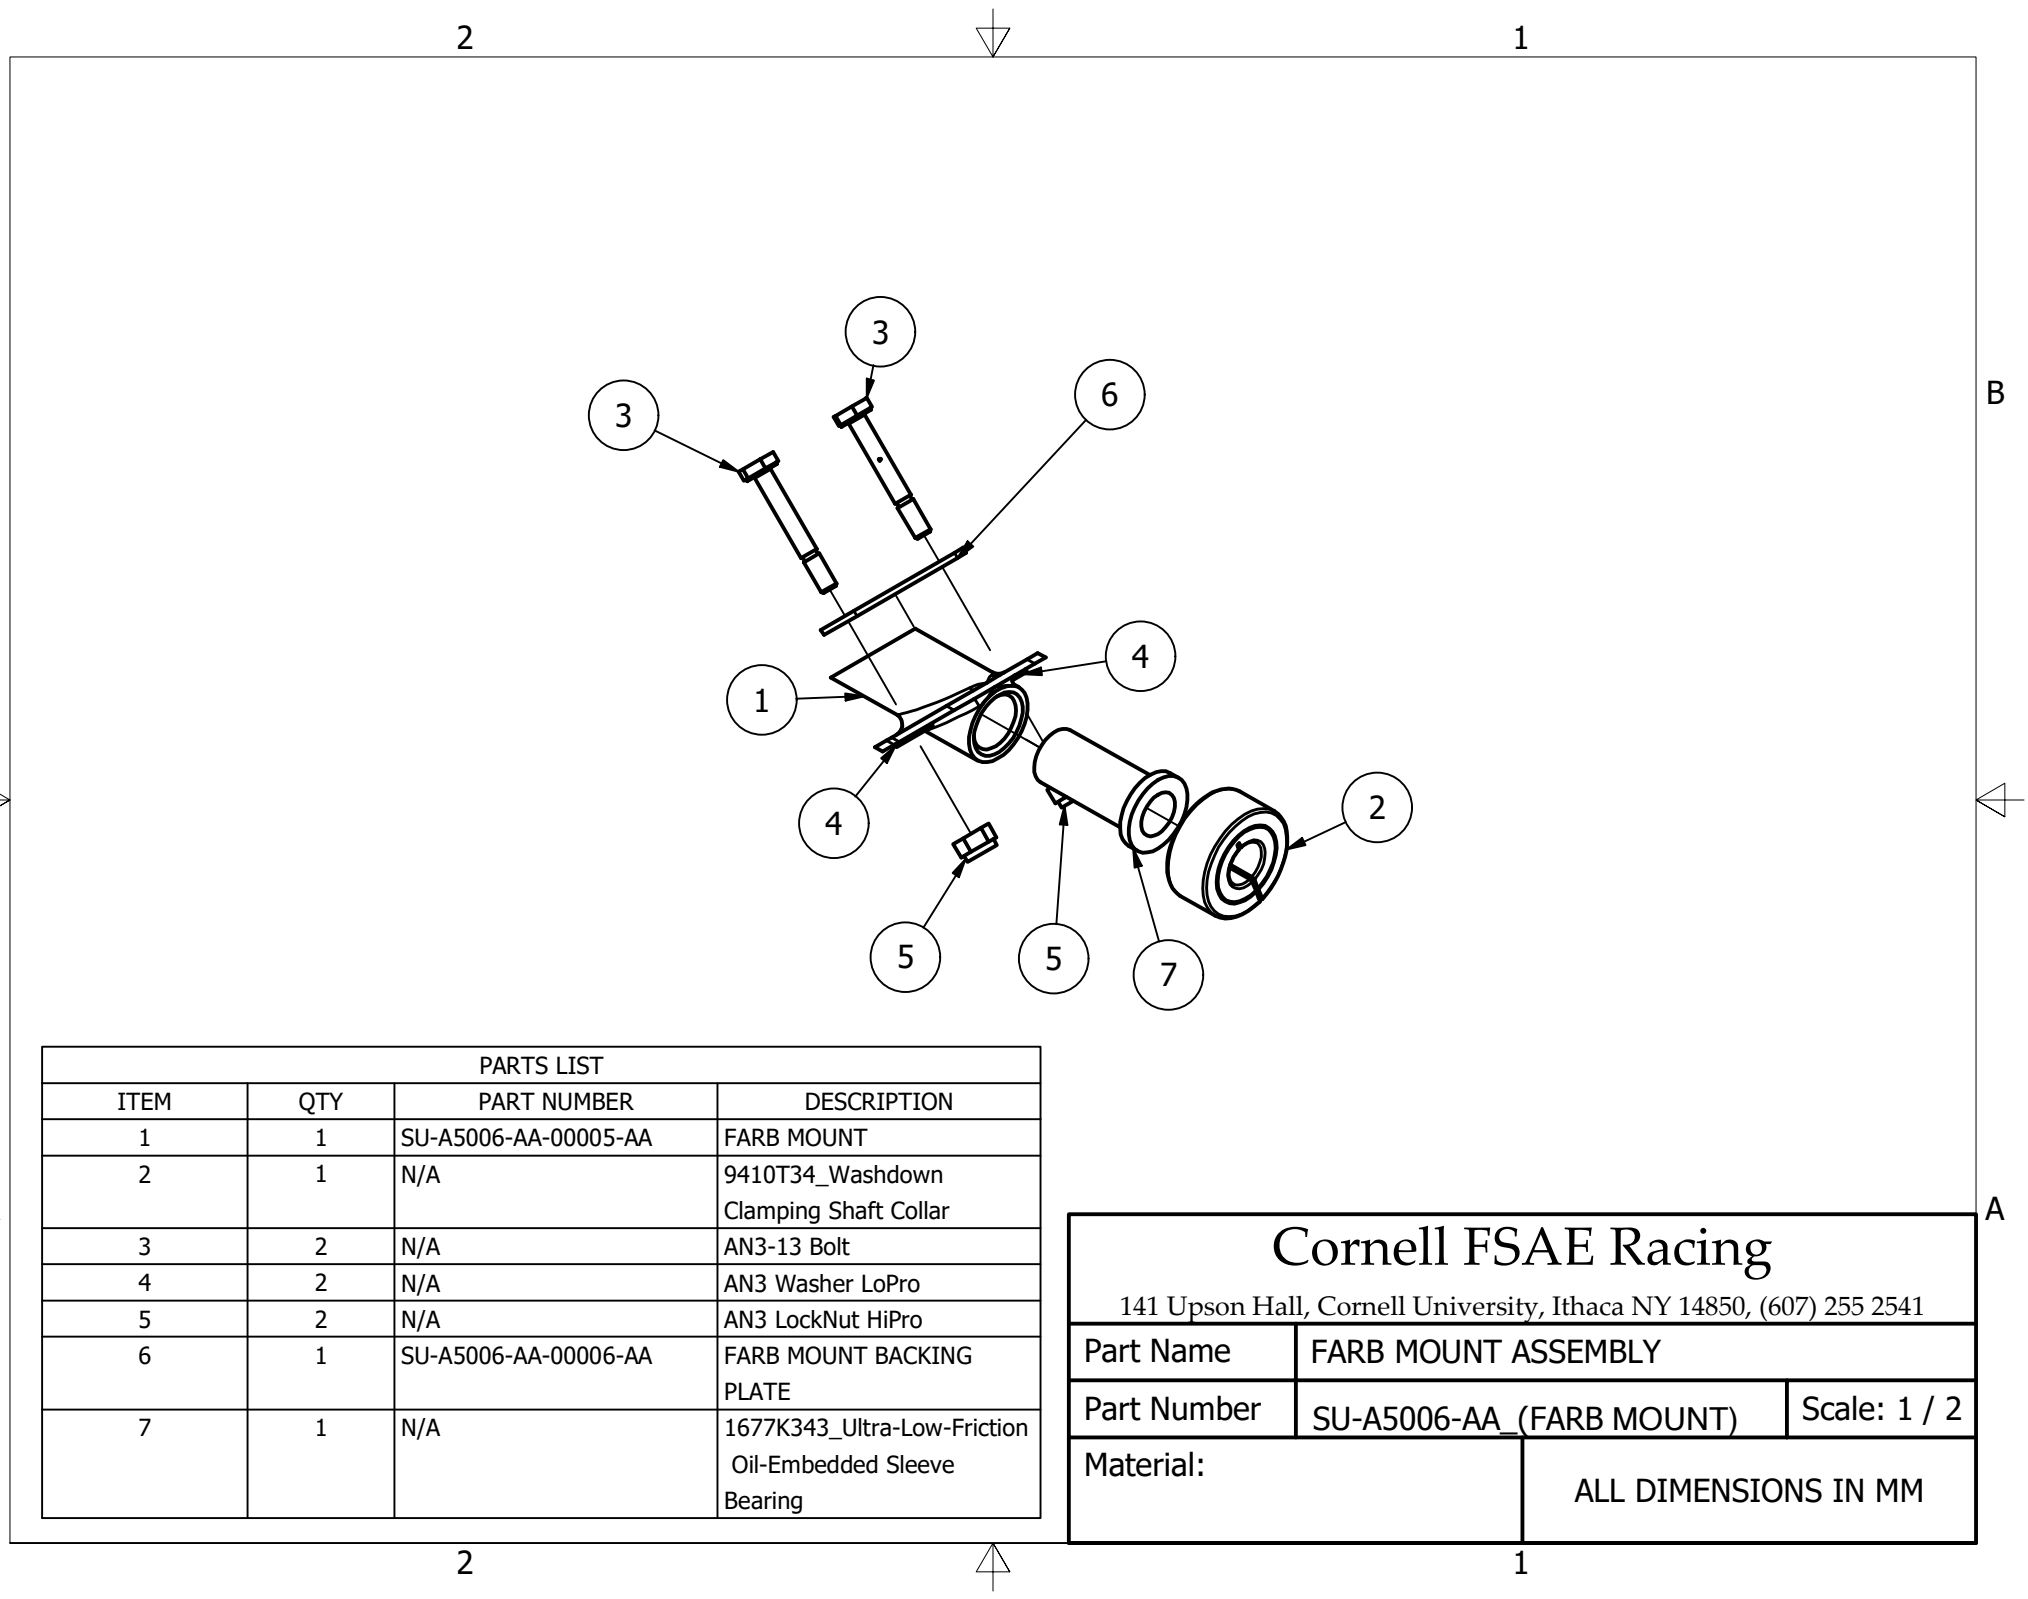

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5006-AA-00005-AA	FARB MOUNT
2	1	N/A	9410T34_Washdown Clamping Shaft Collar
3	2	N/A	AN3-13 Bolt
4	2	N/A	AN3 Washer LoPro
5	2	N/A	AN3 LockNut HiPro
6	1	SU-A5006-AA-00006-AA	FARB MOUNT BACKING PLATE
7	1	N/A	1677K343_Ultra-Low-Friction Oil-Embedded Sleeve Bearing


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	FARB MOUNT ASSEMBLY	
Part Number	SU-A5006-AA (FARB MOUNT)	Scale: 1 / 2
Material:		ALL DIMENSIONS IN MM

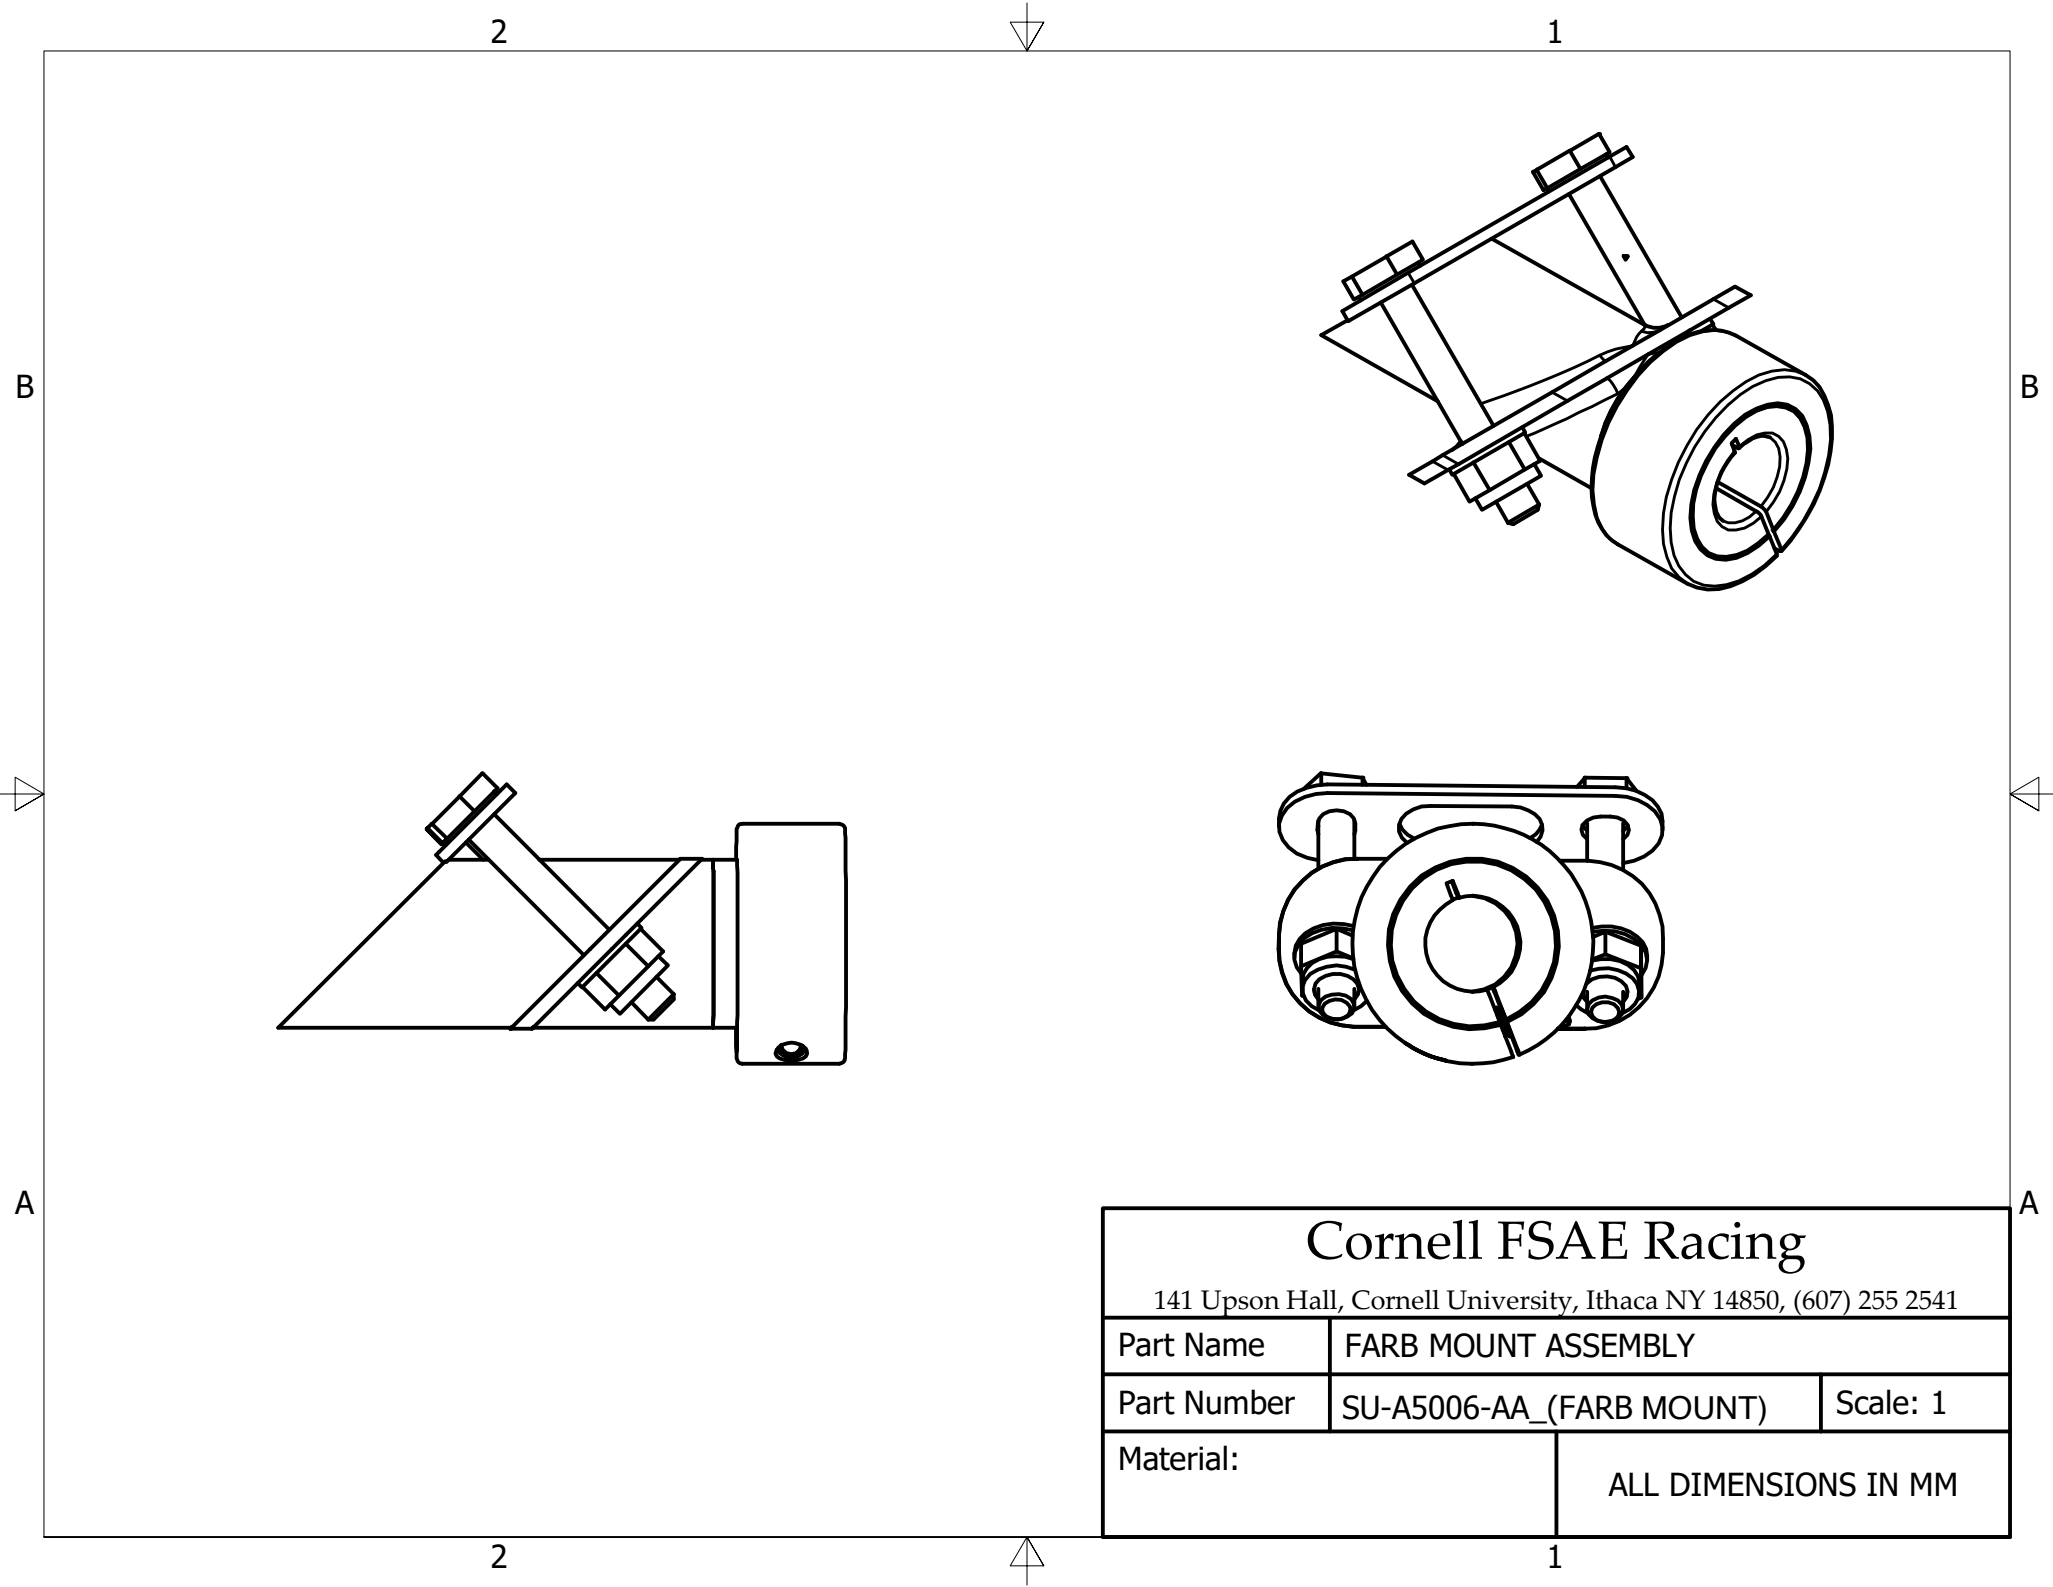

Cornell FSAE Racing


141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	FARB MOUNT ASSEMBLY	
Part Number	SU-A5006-AA_(FARB MOUNT)	Scale: 1
Material:	ALL DIMENSIONS IN MM	

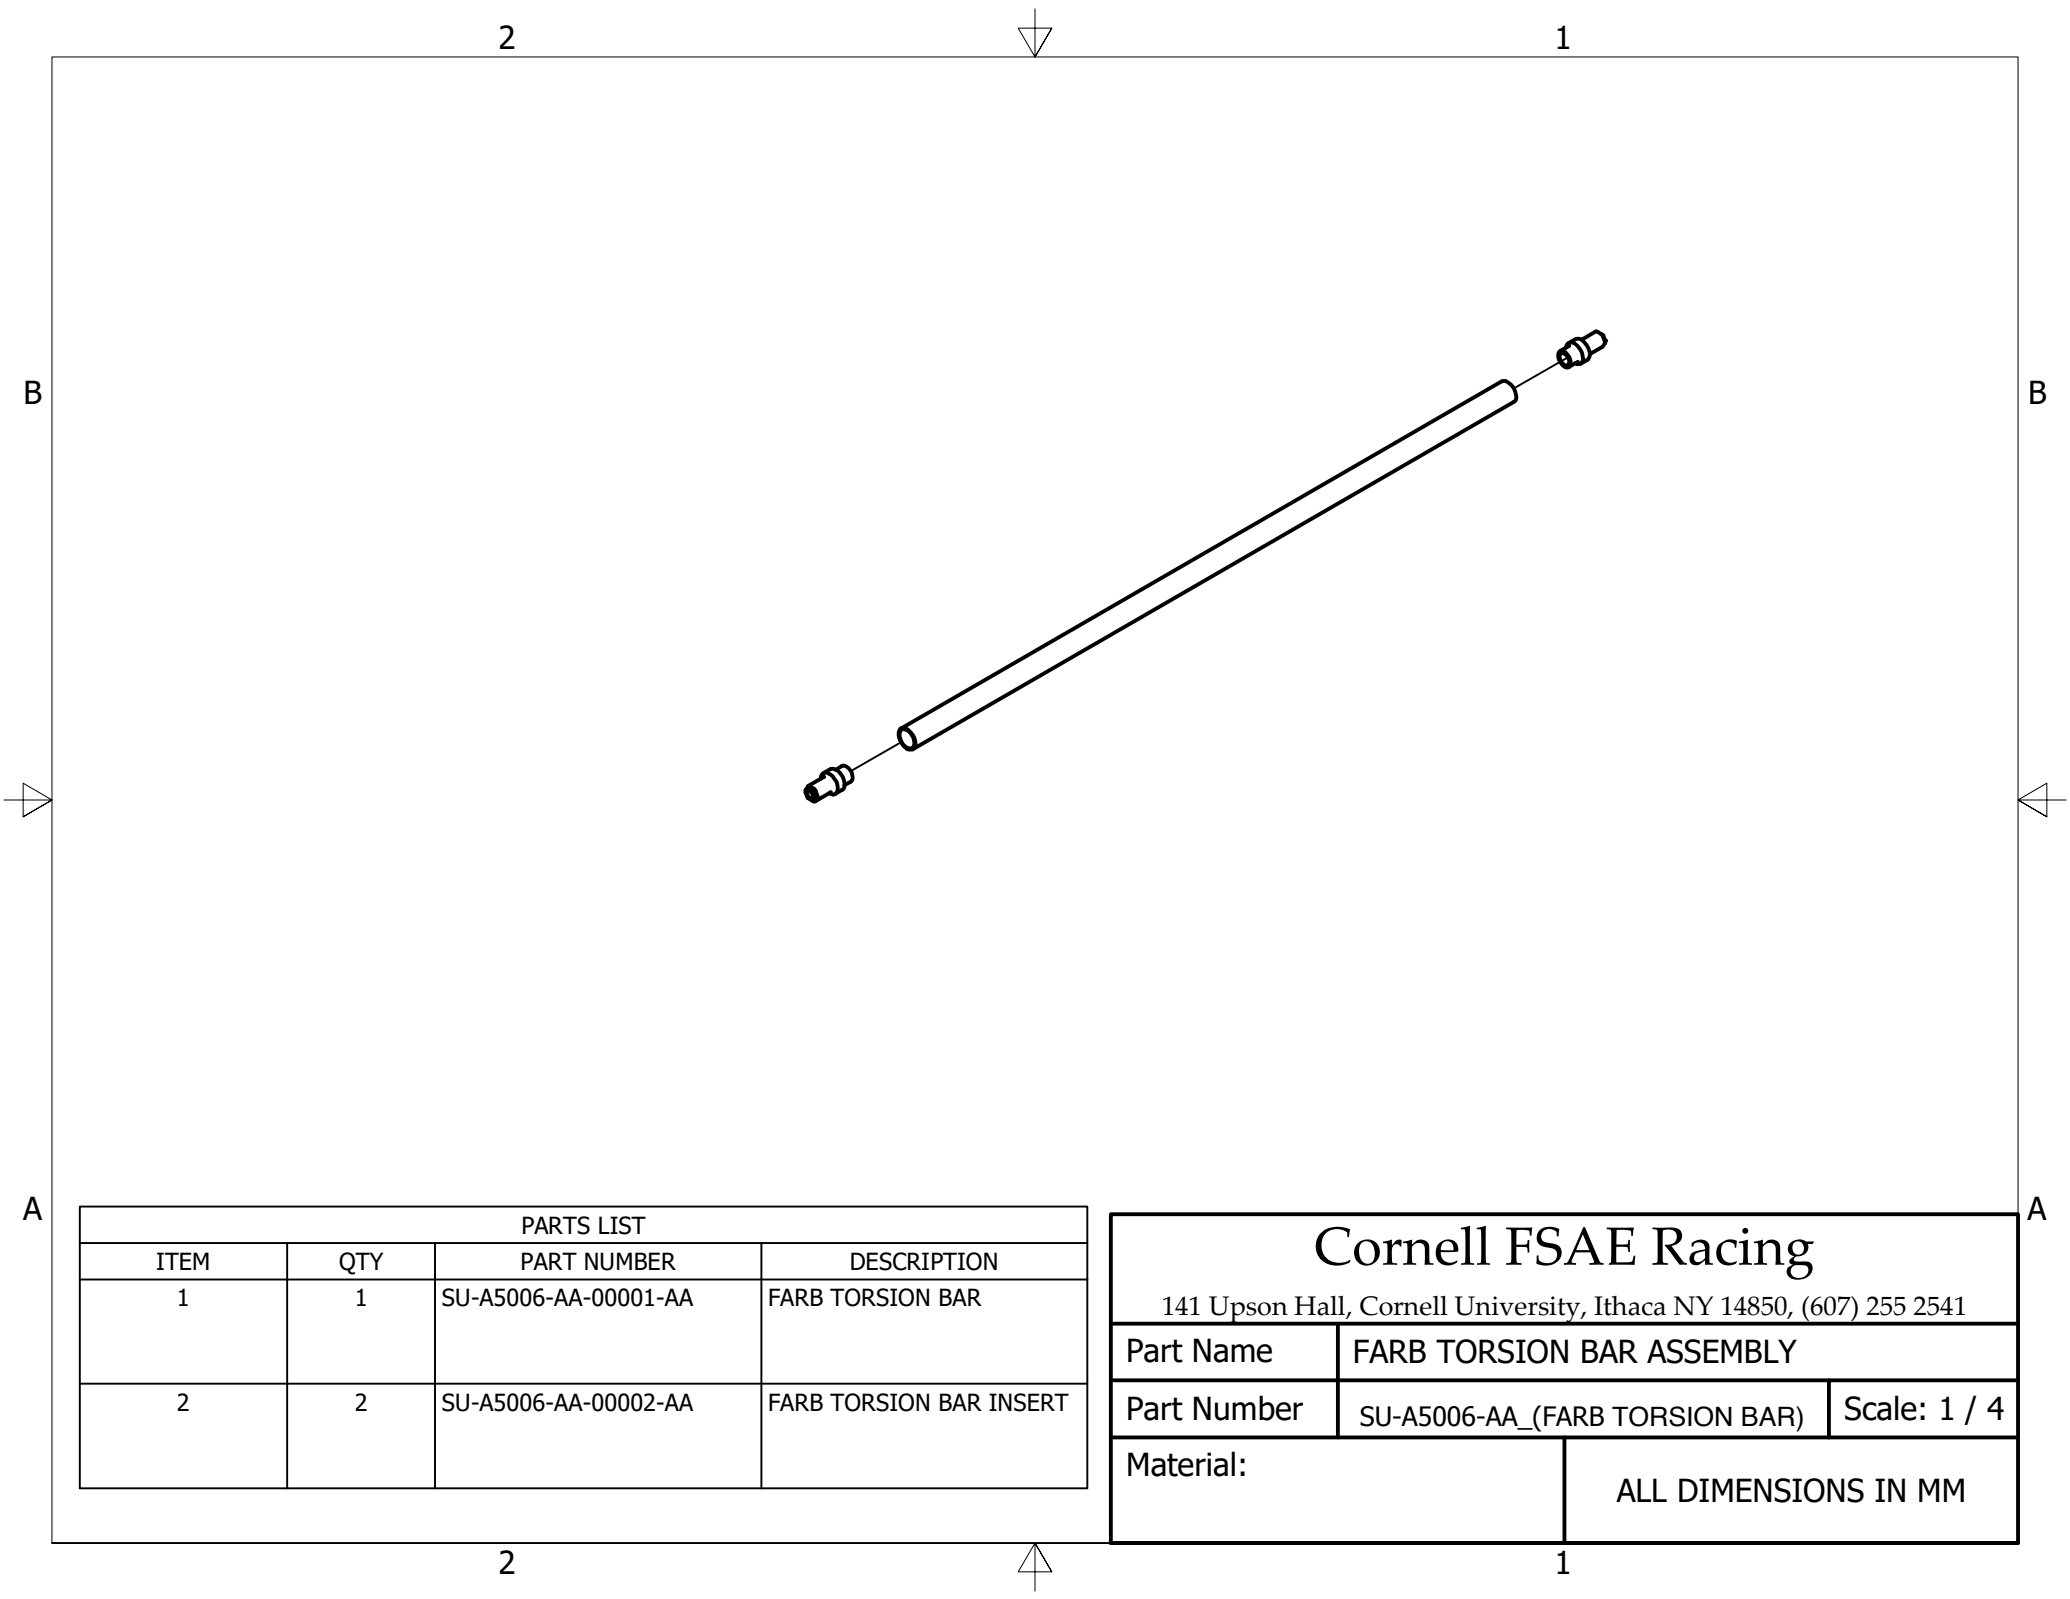

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5006-AA-00001-AA	FARB TORSION BAR
2	2	SU-A5006-AA-00002-AA	FARB TORSION BAR INSERT


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	FARB TORSION BAR ASSEMBLY	
Part Number	SU-A5006-AA_(FARB TORSION BAR)	Scale: 1 / 4
Material:		ALL DIMENSIONS IN MM

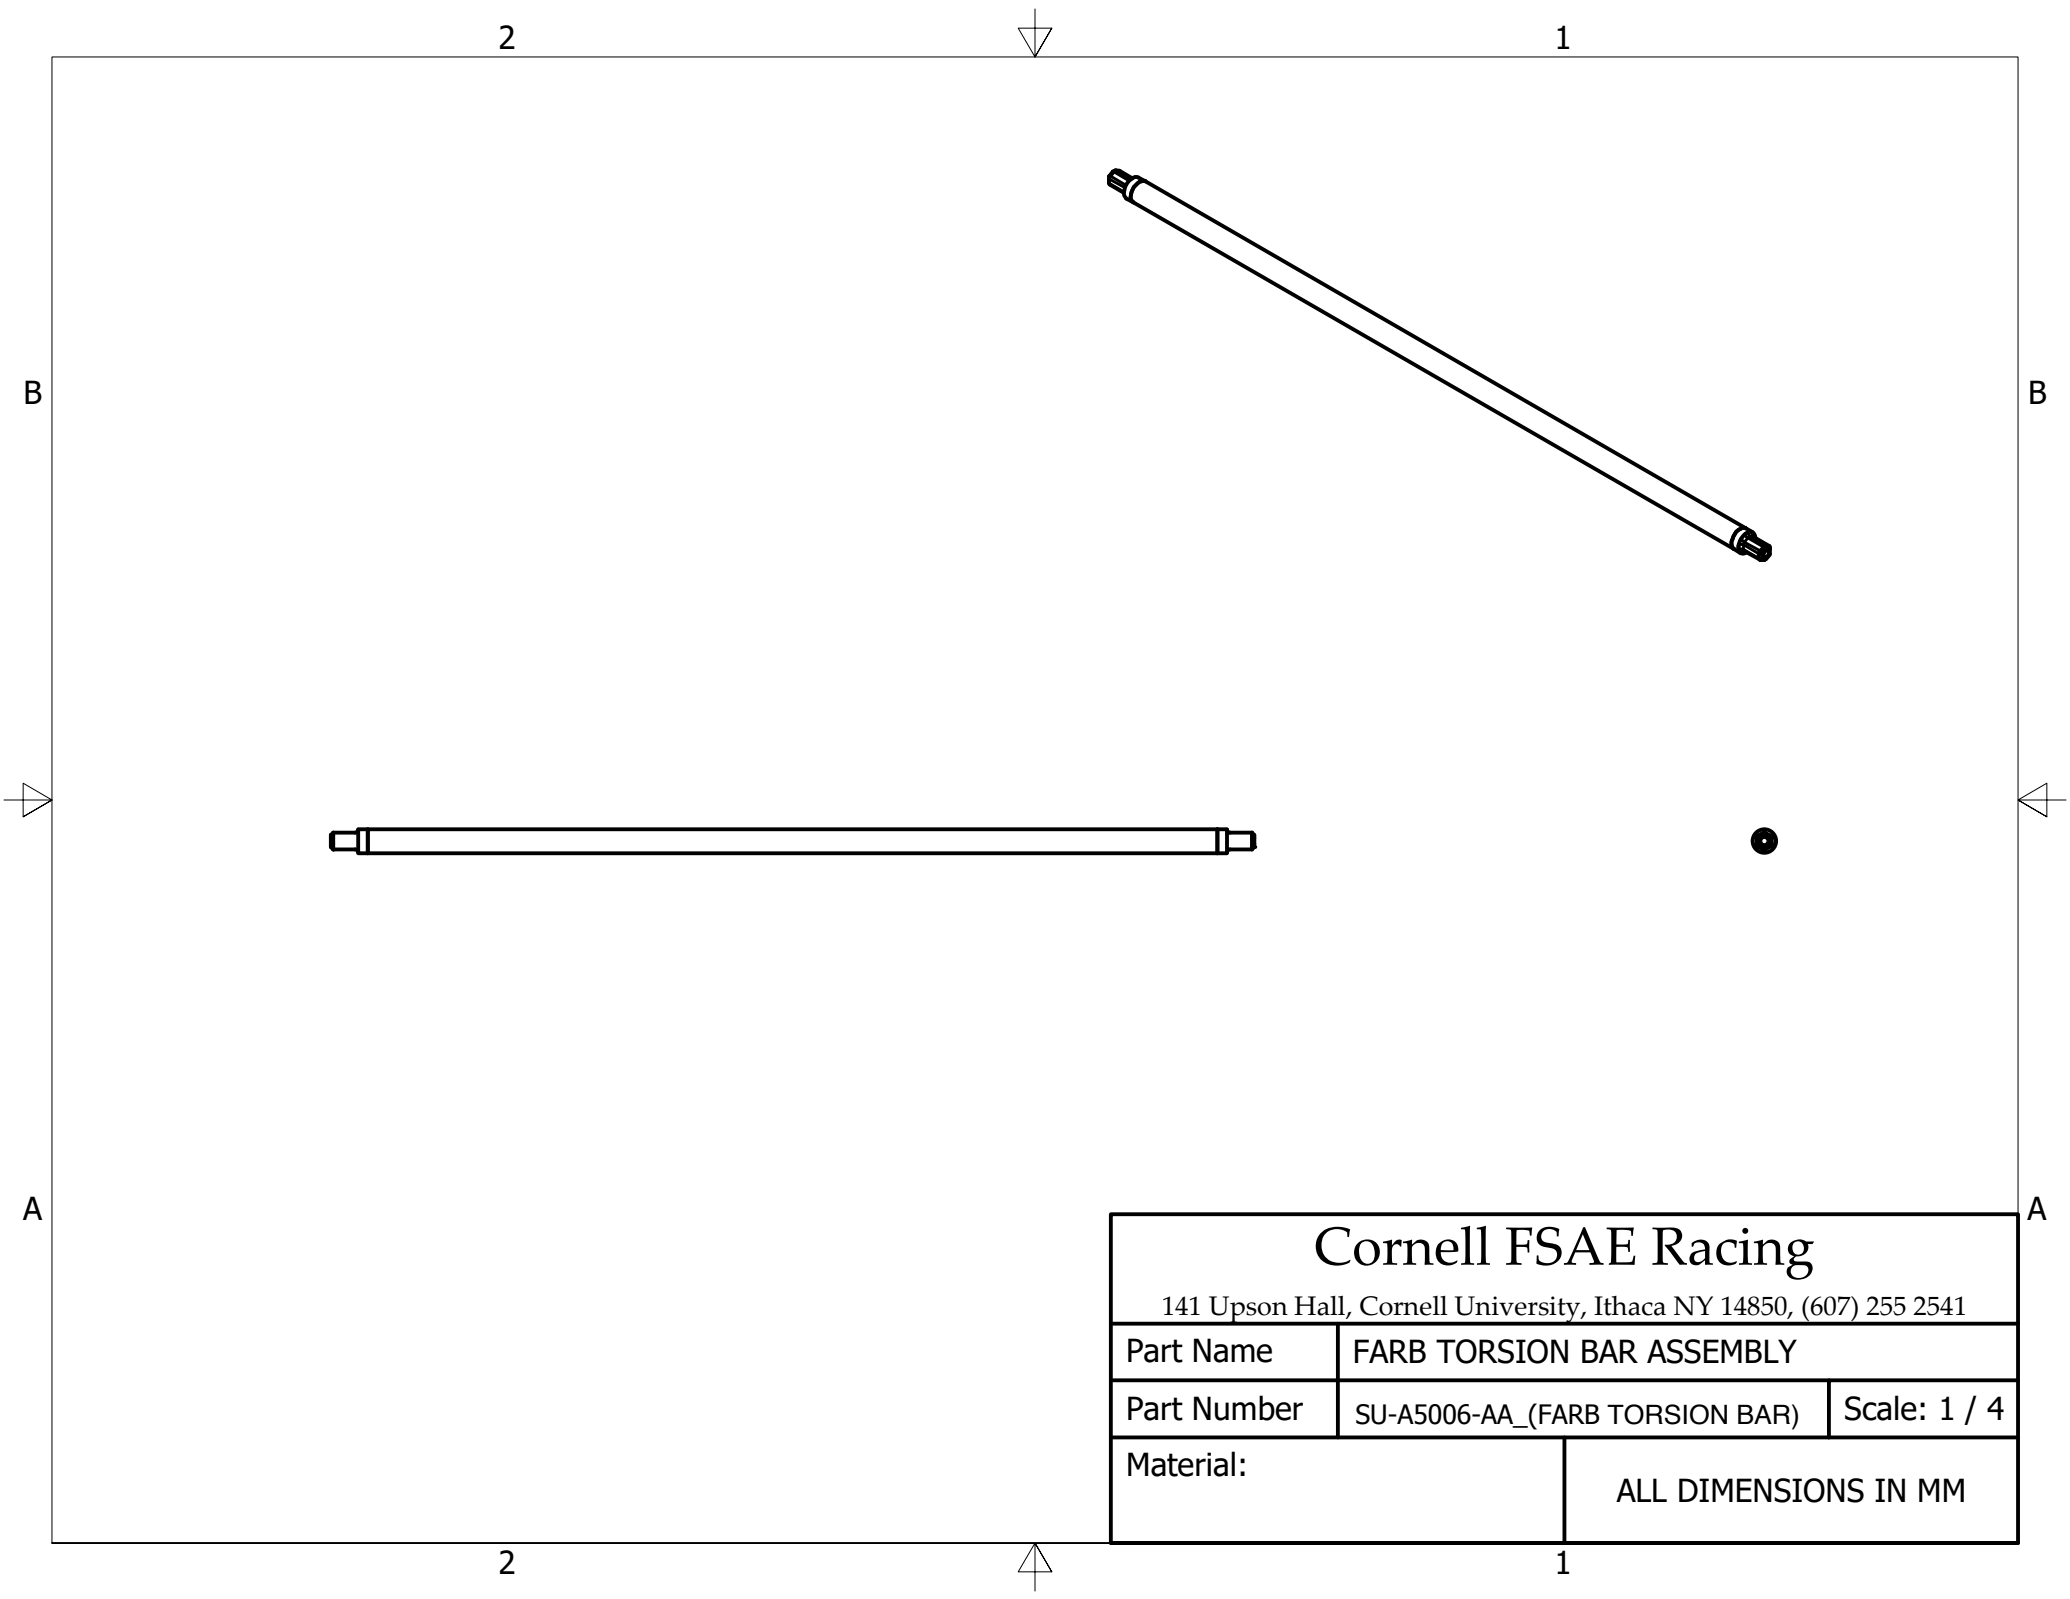


Cornell FSAE Racing

141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	FARB TORSION BAR ASSEMBLY	
Part Number	SU-A5006-AA_(FARB TORSION BAR)	Scale: 1 / 4
Material:		ALL DIMENSIONS IN MM

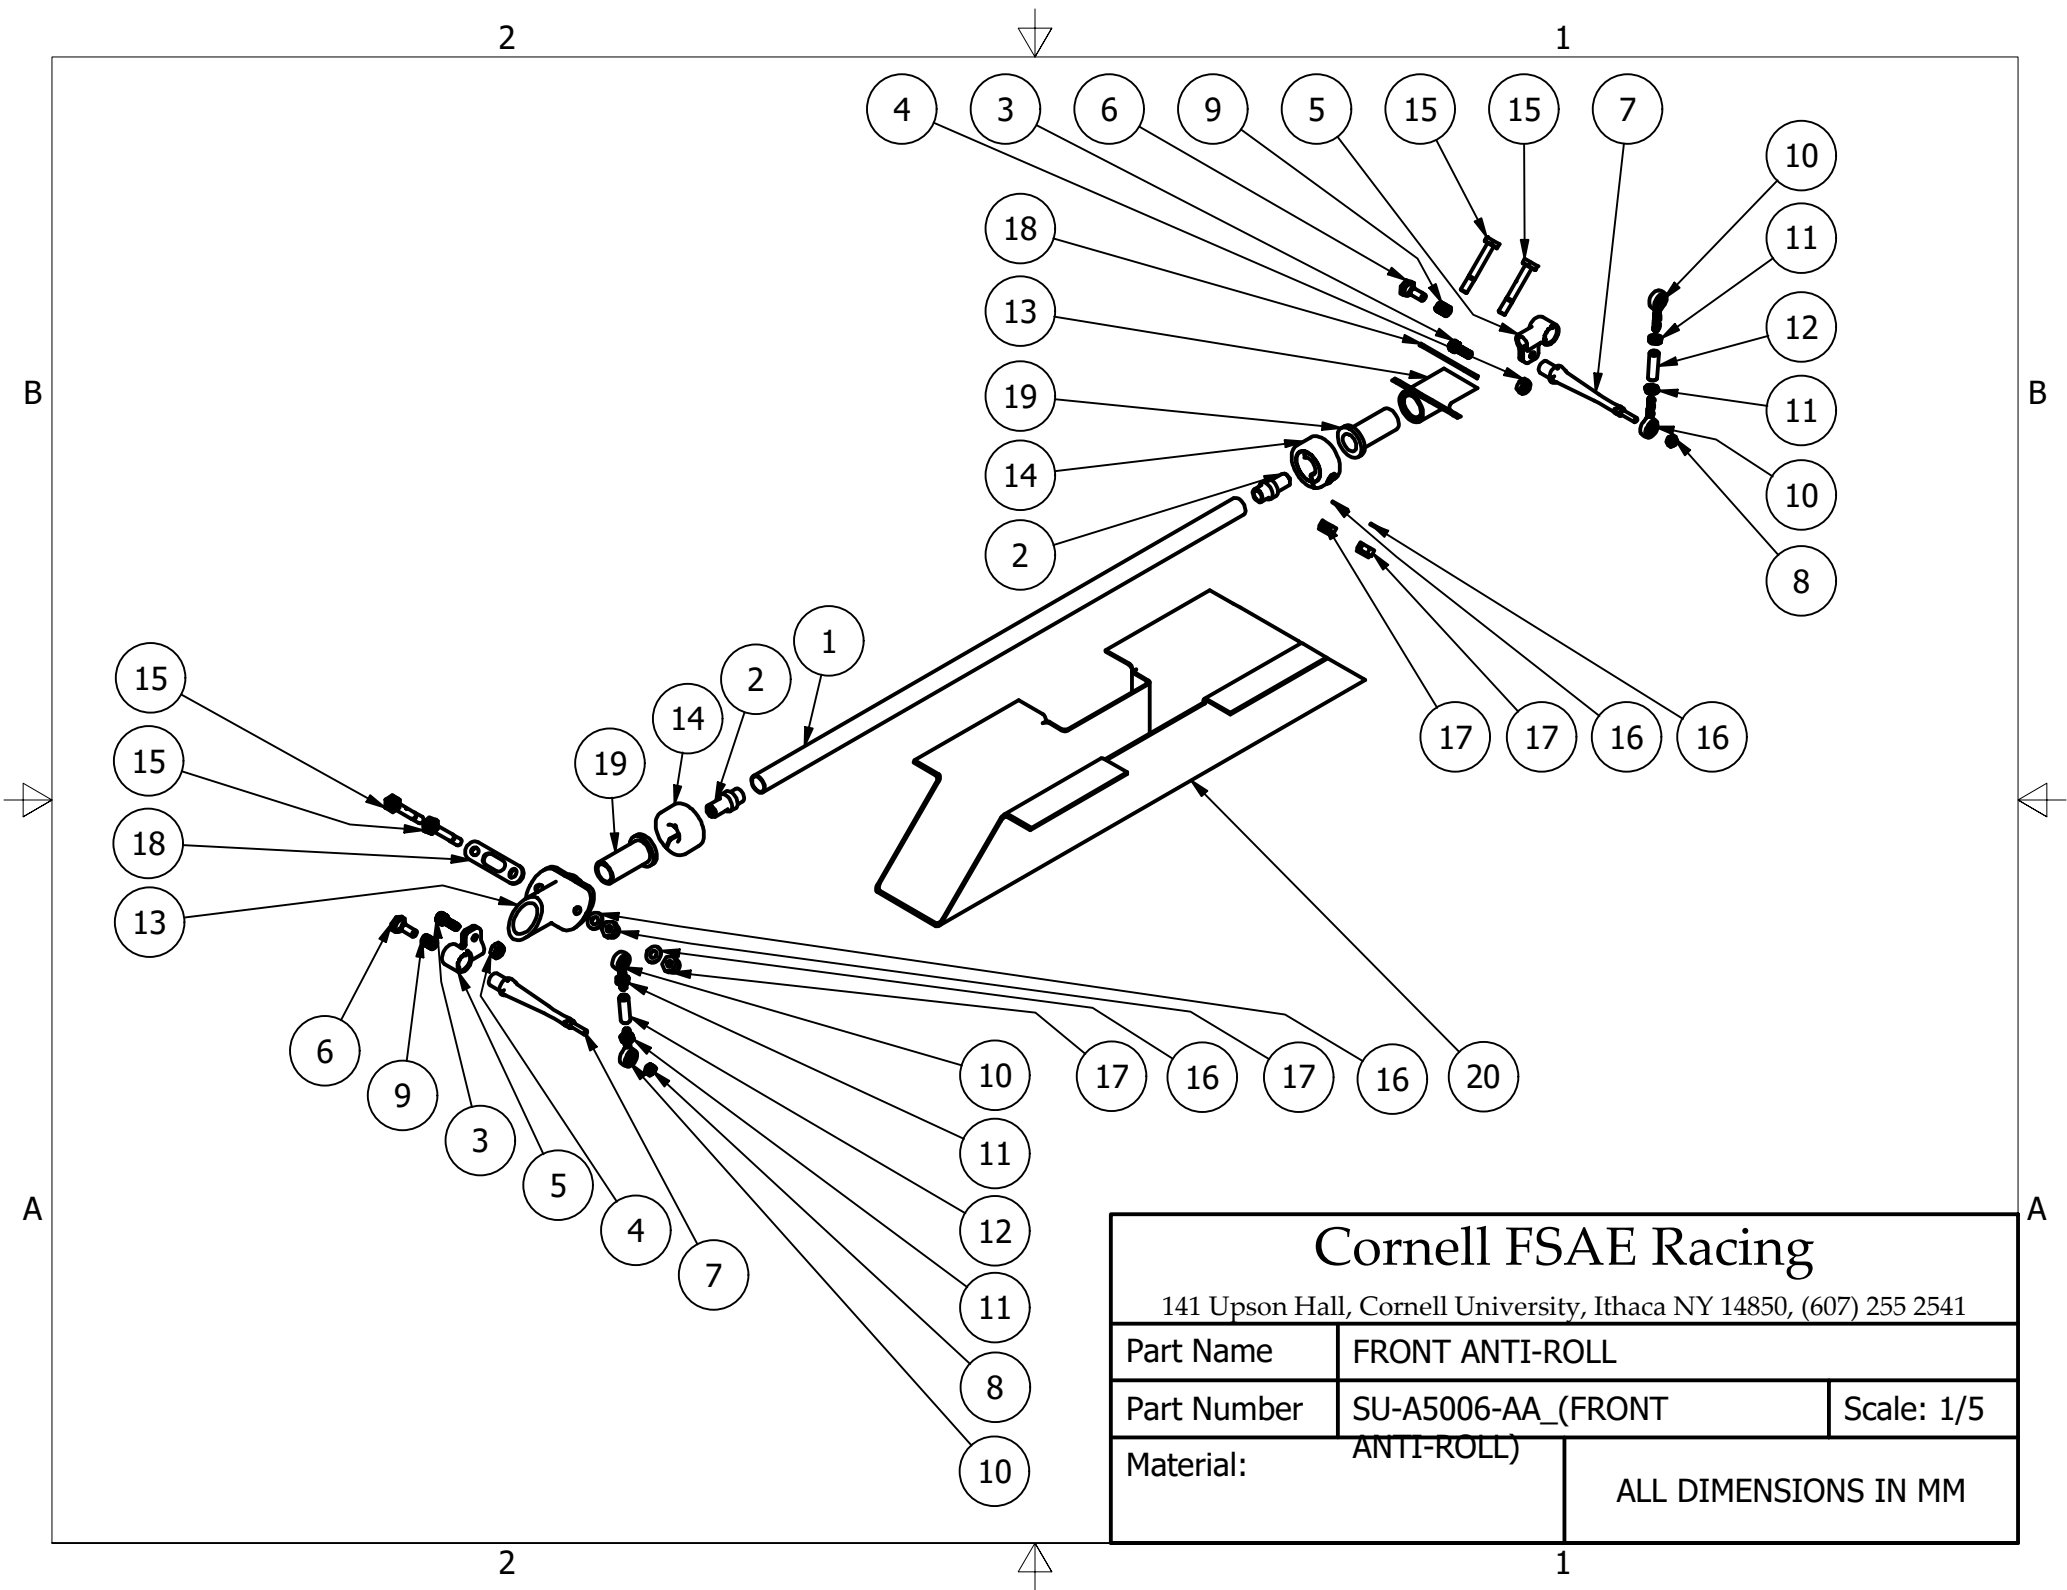

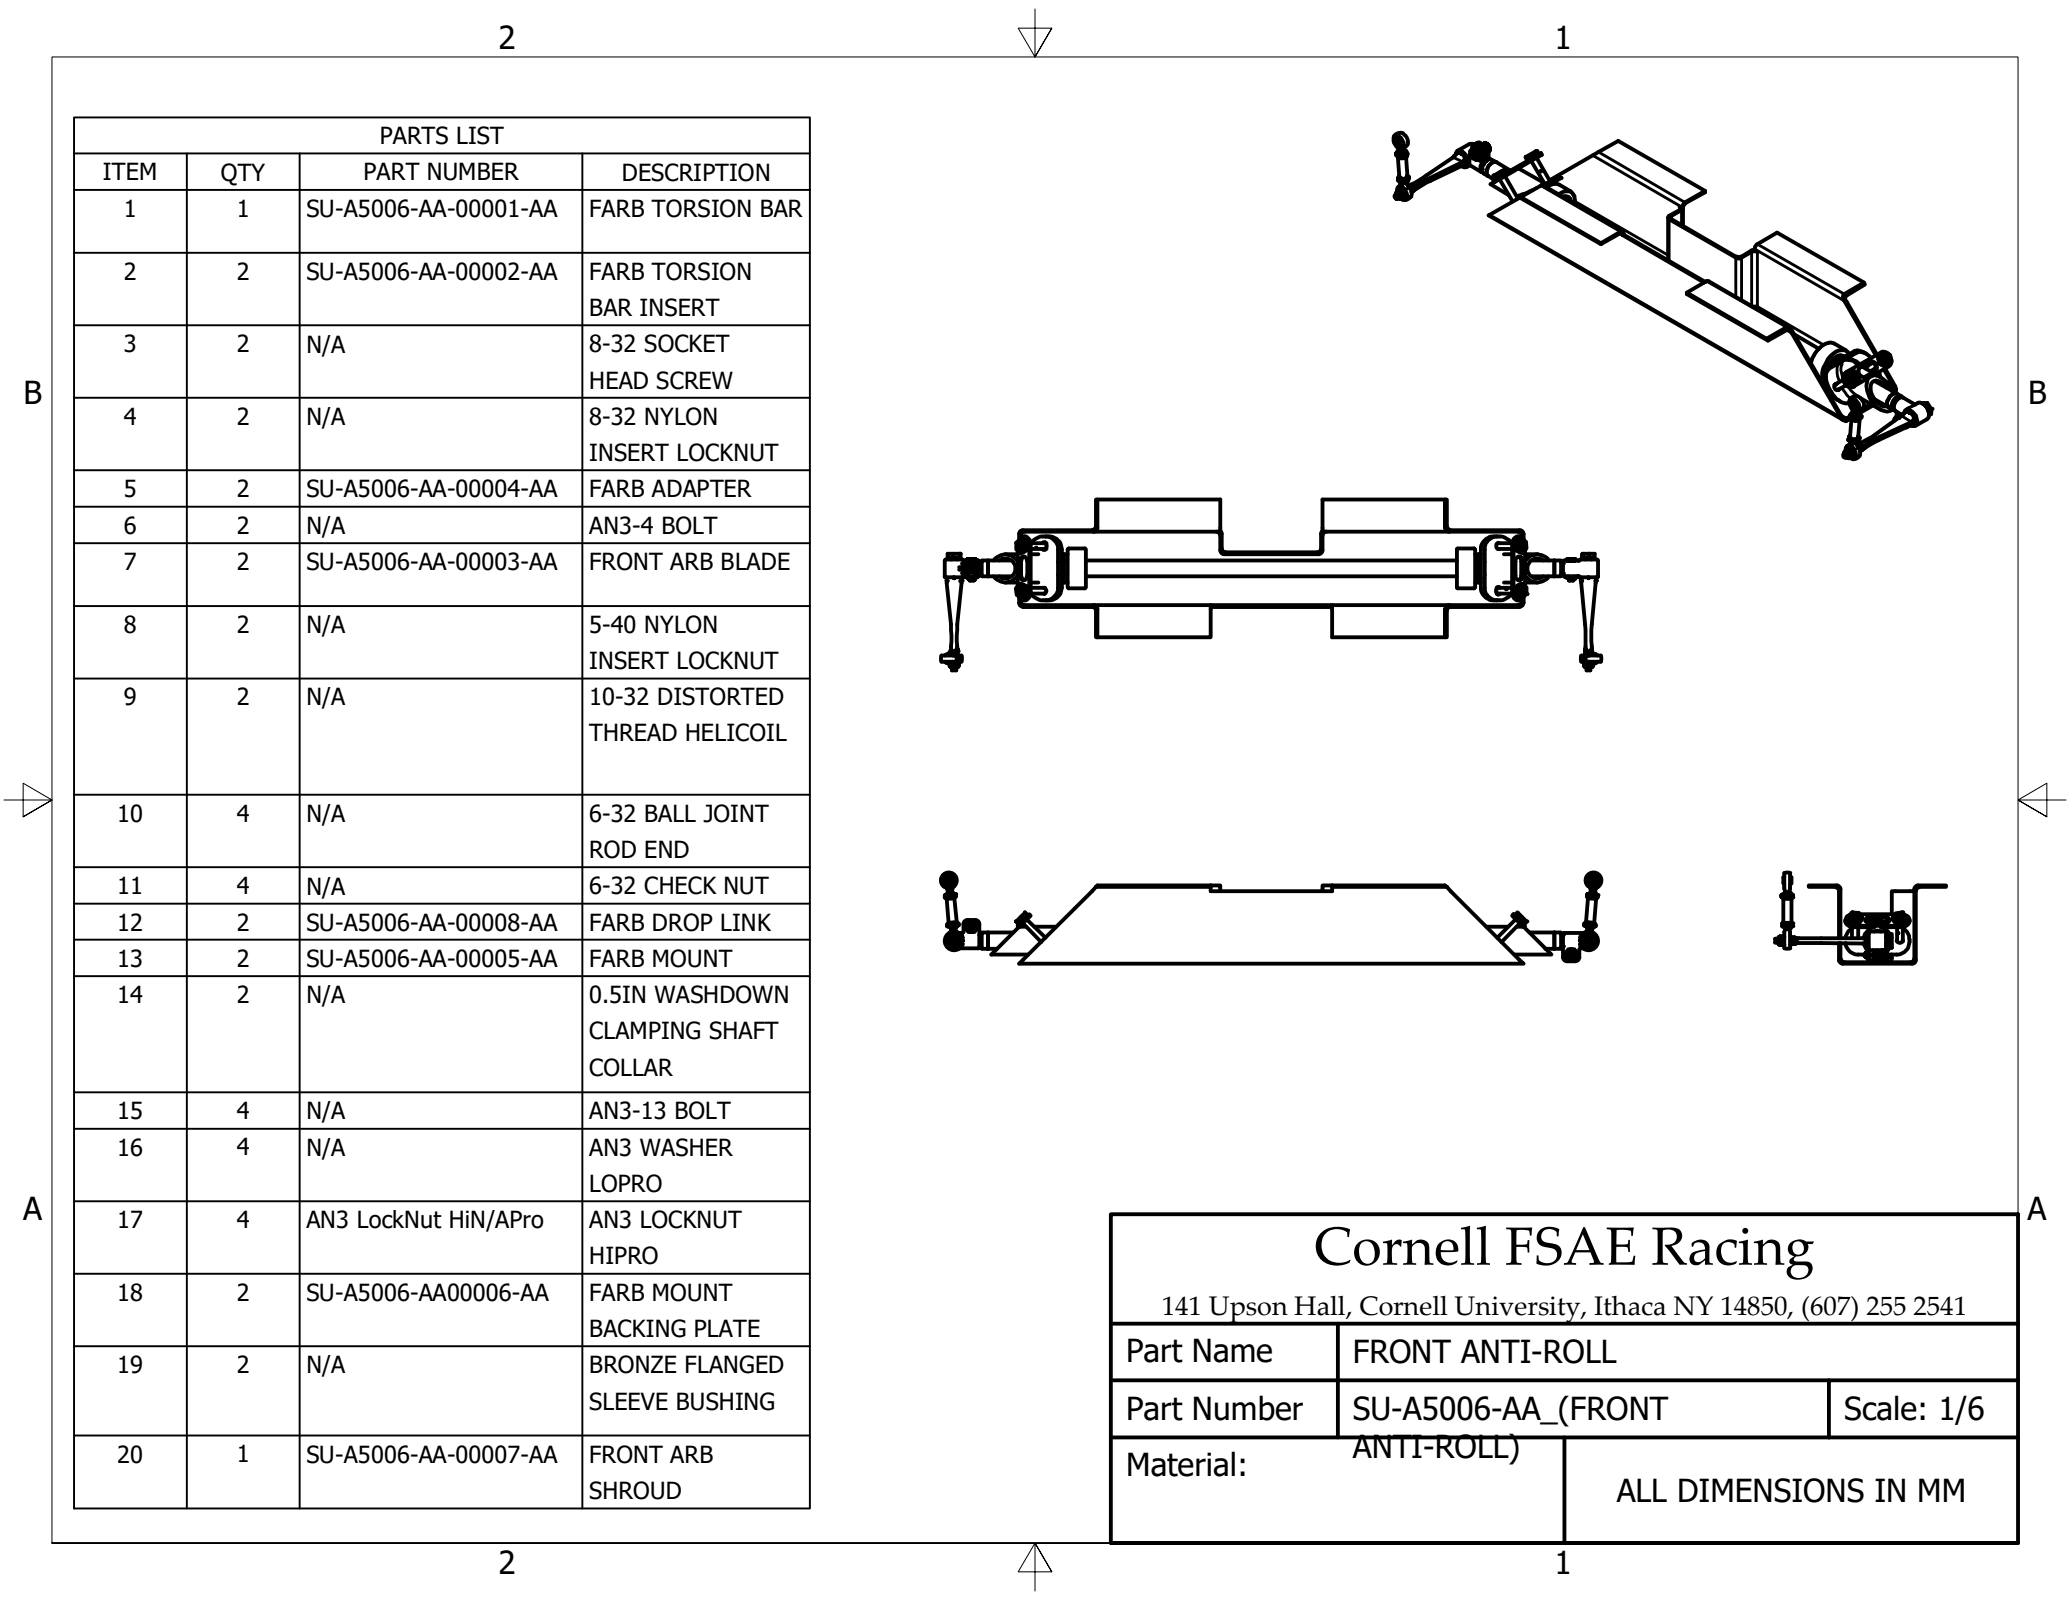


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5006-AA-00001-AA	FARB TORSION BAR
2	2	SU-A5006-AA-00002-AA	FARB TORSION BAR INSERT
3	2	N/A	8-32 SOCKET HEAD SCREW
4	2	N/A	8-32 NYLON INSERT LOCKNUT
5	2	SU-A5006-AA-00004-AA	FARB ADAPTER
6	2	N/A	AN3-4 BOLT
7	2	SU-A5006-AA-00003-AA	FRONT ARB BLADE
8	2	N/A	5-40 NYLON INSERT LOCKNUT
9	2	N/A	10-32 DISTORTED THREAD HELICOIL
10	4	N/A	6-32 BALL JOINT ROD END
11	4	N/A	6-32 CHECK NUT
12	2	SU-A5006-AA-00008-AA	FARB DROP LINK
13	2	SU-A5006-AA-00005-AA	FARB MOUNT
14	2	N/A	0.5IN WASHDOWN CLAMPING SHAFT COLLAR
15	4	N/A	AN3-13 BOLT
16	4	N/A	AN3 WASHER LOPRO
17	4	AN3 LockNut HiN/APro	AN3 LOCKNUT HIPRO
18	2	SU-A5006-AA00006-AA	FARB MOUNT BACKING PLATE
19	2	N/A	BRONZE FLANGED SLEEVE BUSHING
20	1	SU-A5006-AA-00007-AA	FRONT ARB SHROUD

Cornell FSAE Racing


141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	FRONT ANTI-ROLL	
Part Number	SU-A5006-AA_(FRONT ANTI-ROLL)	Scale: 1/6
Material:	ALL DIMENSIONS IN MM	

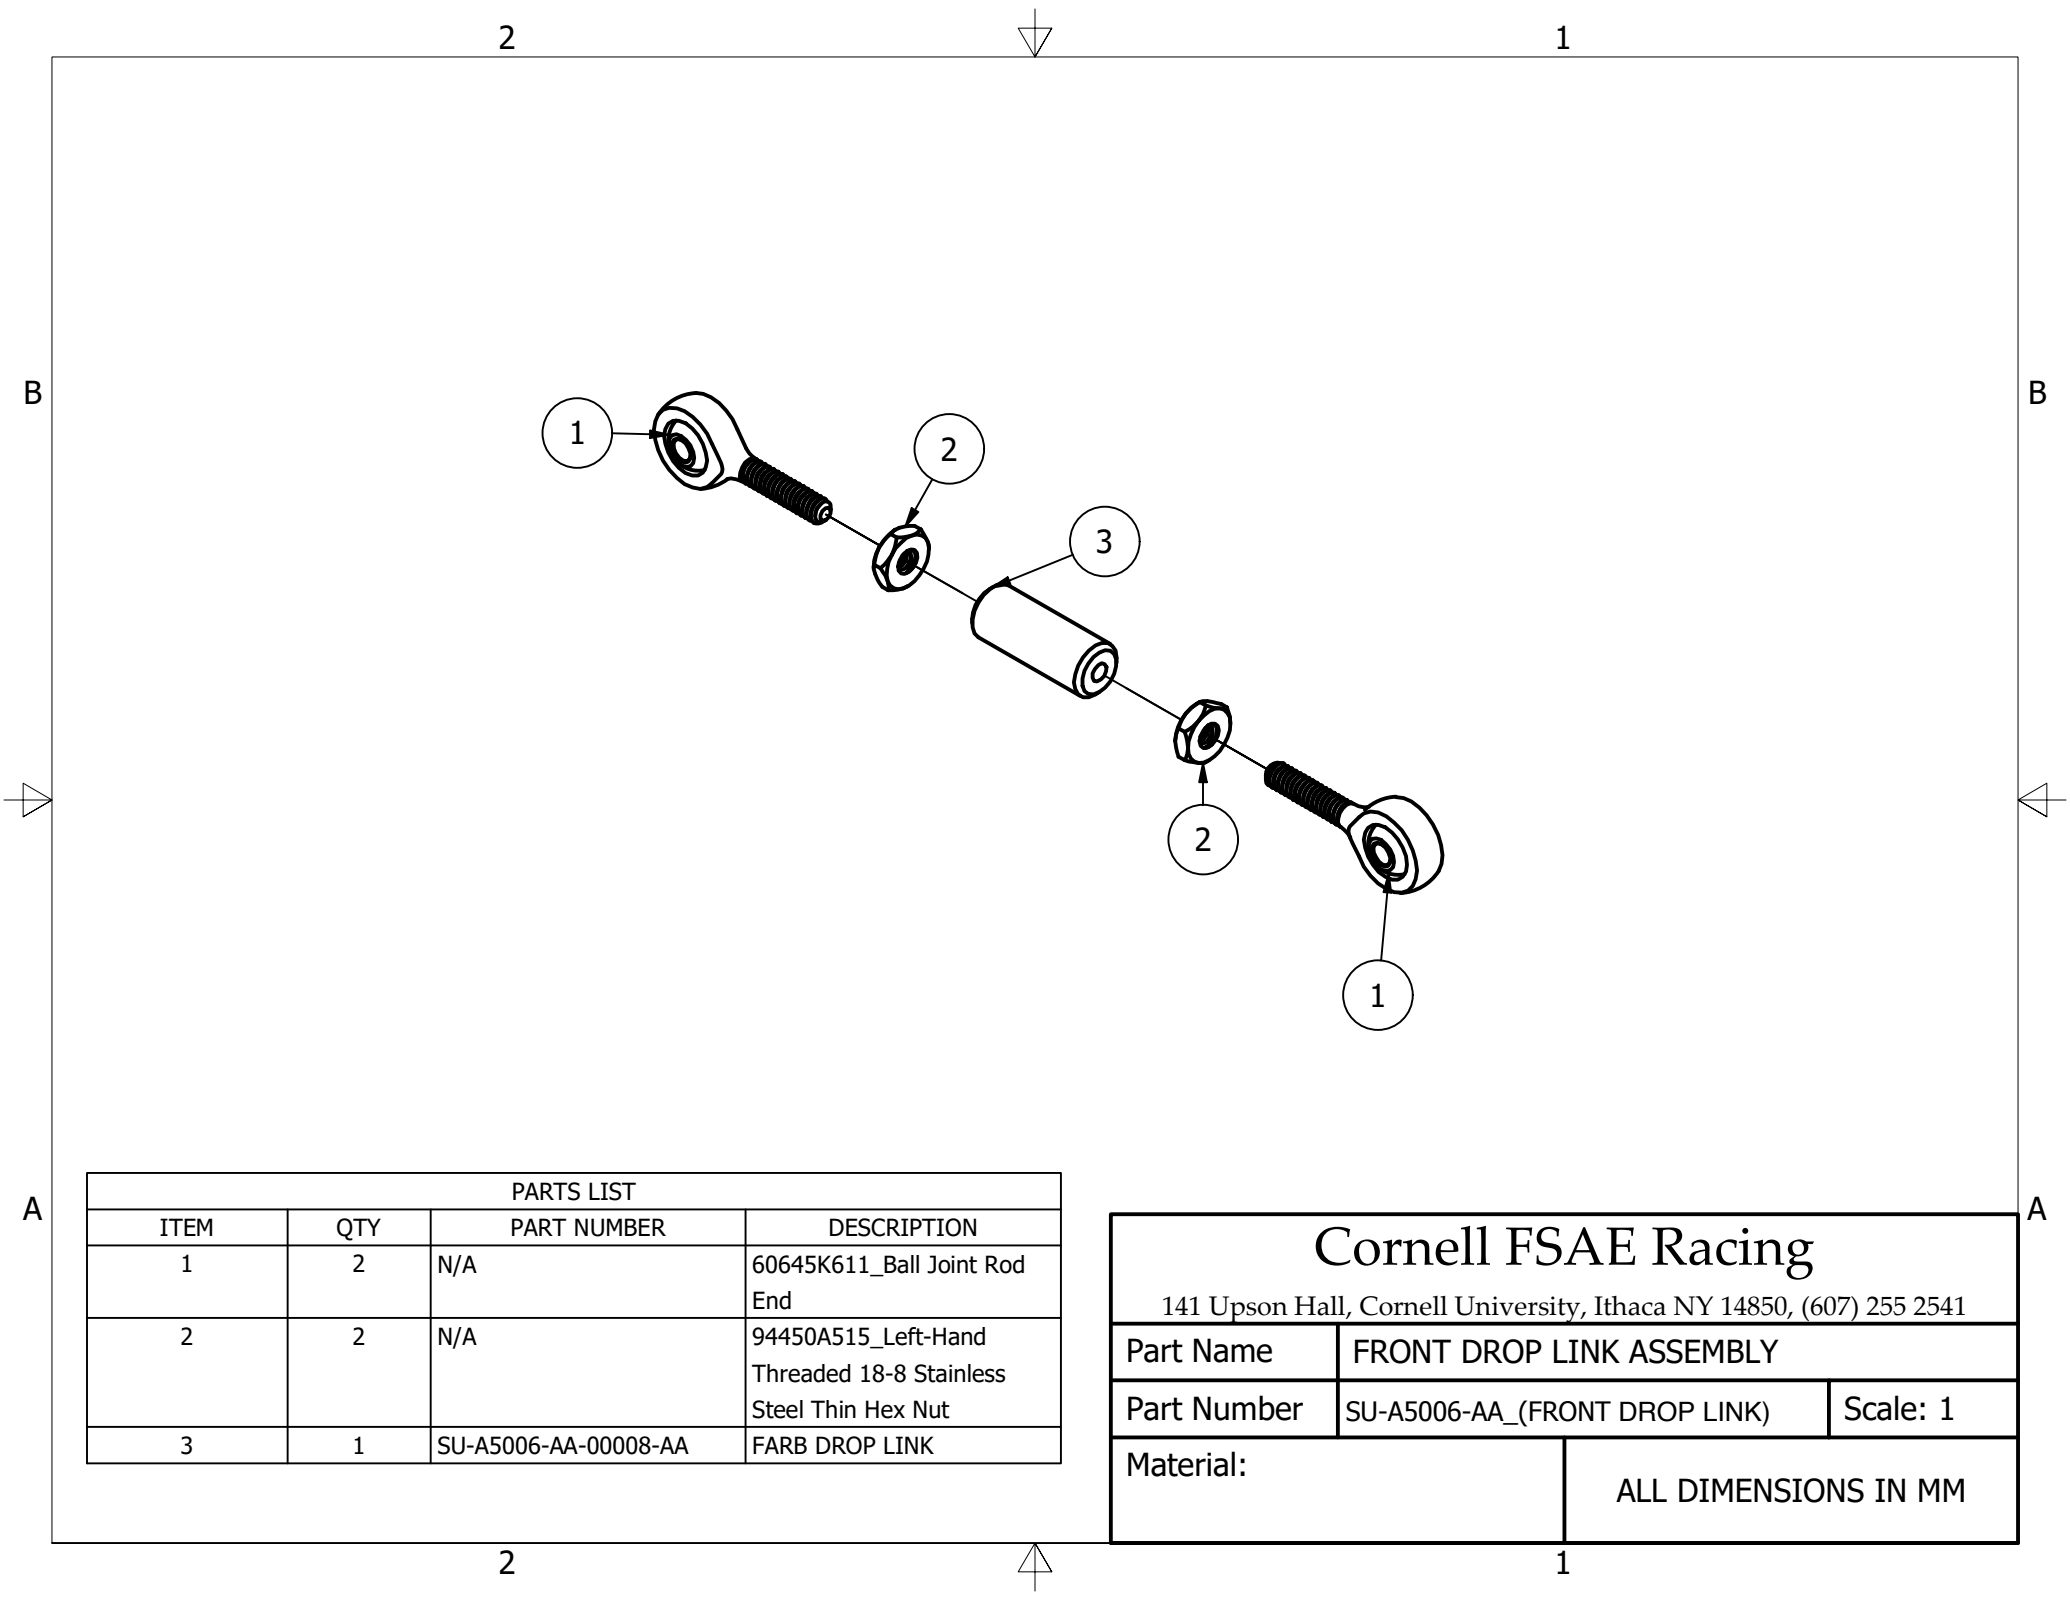


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	N/A	60645K611_Ball Joint Rod End
2	2	N/A	94450A515_Left-Hand Threaded 18-8 Stainless Steel Thin Hex Nut
3	1	SU-A5006-AA-00008-AA	FARB DROP LINK

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	FRONT DROP LINK ASSEMBLY	
Part Number	SU-A5006-AA_(FRONT DROP LINK)	Scale: 1
Material:		ALL DIMENSIONS IN MM

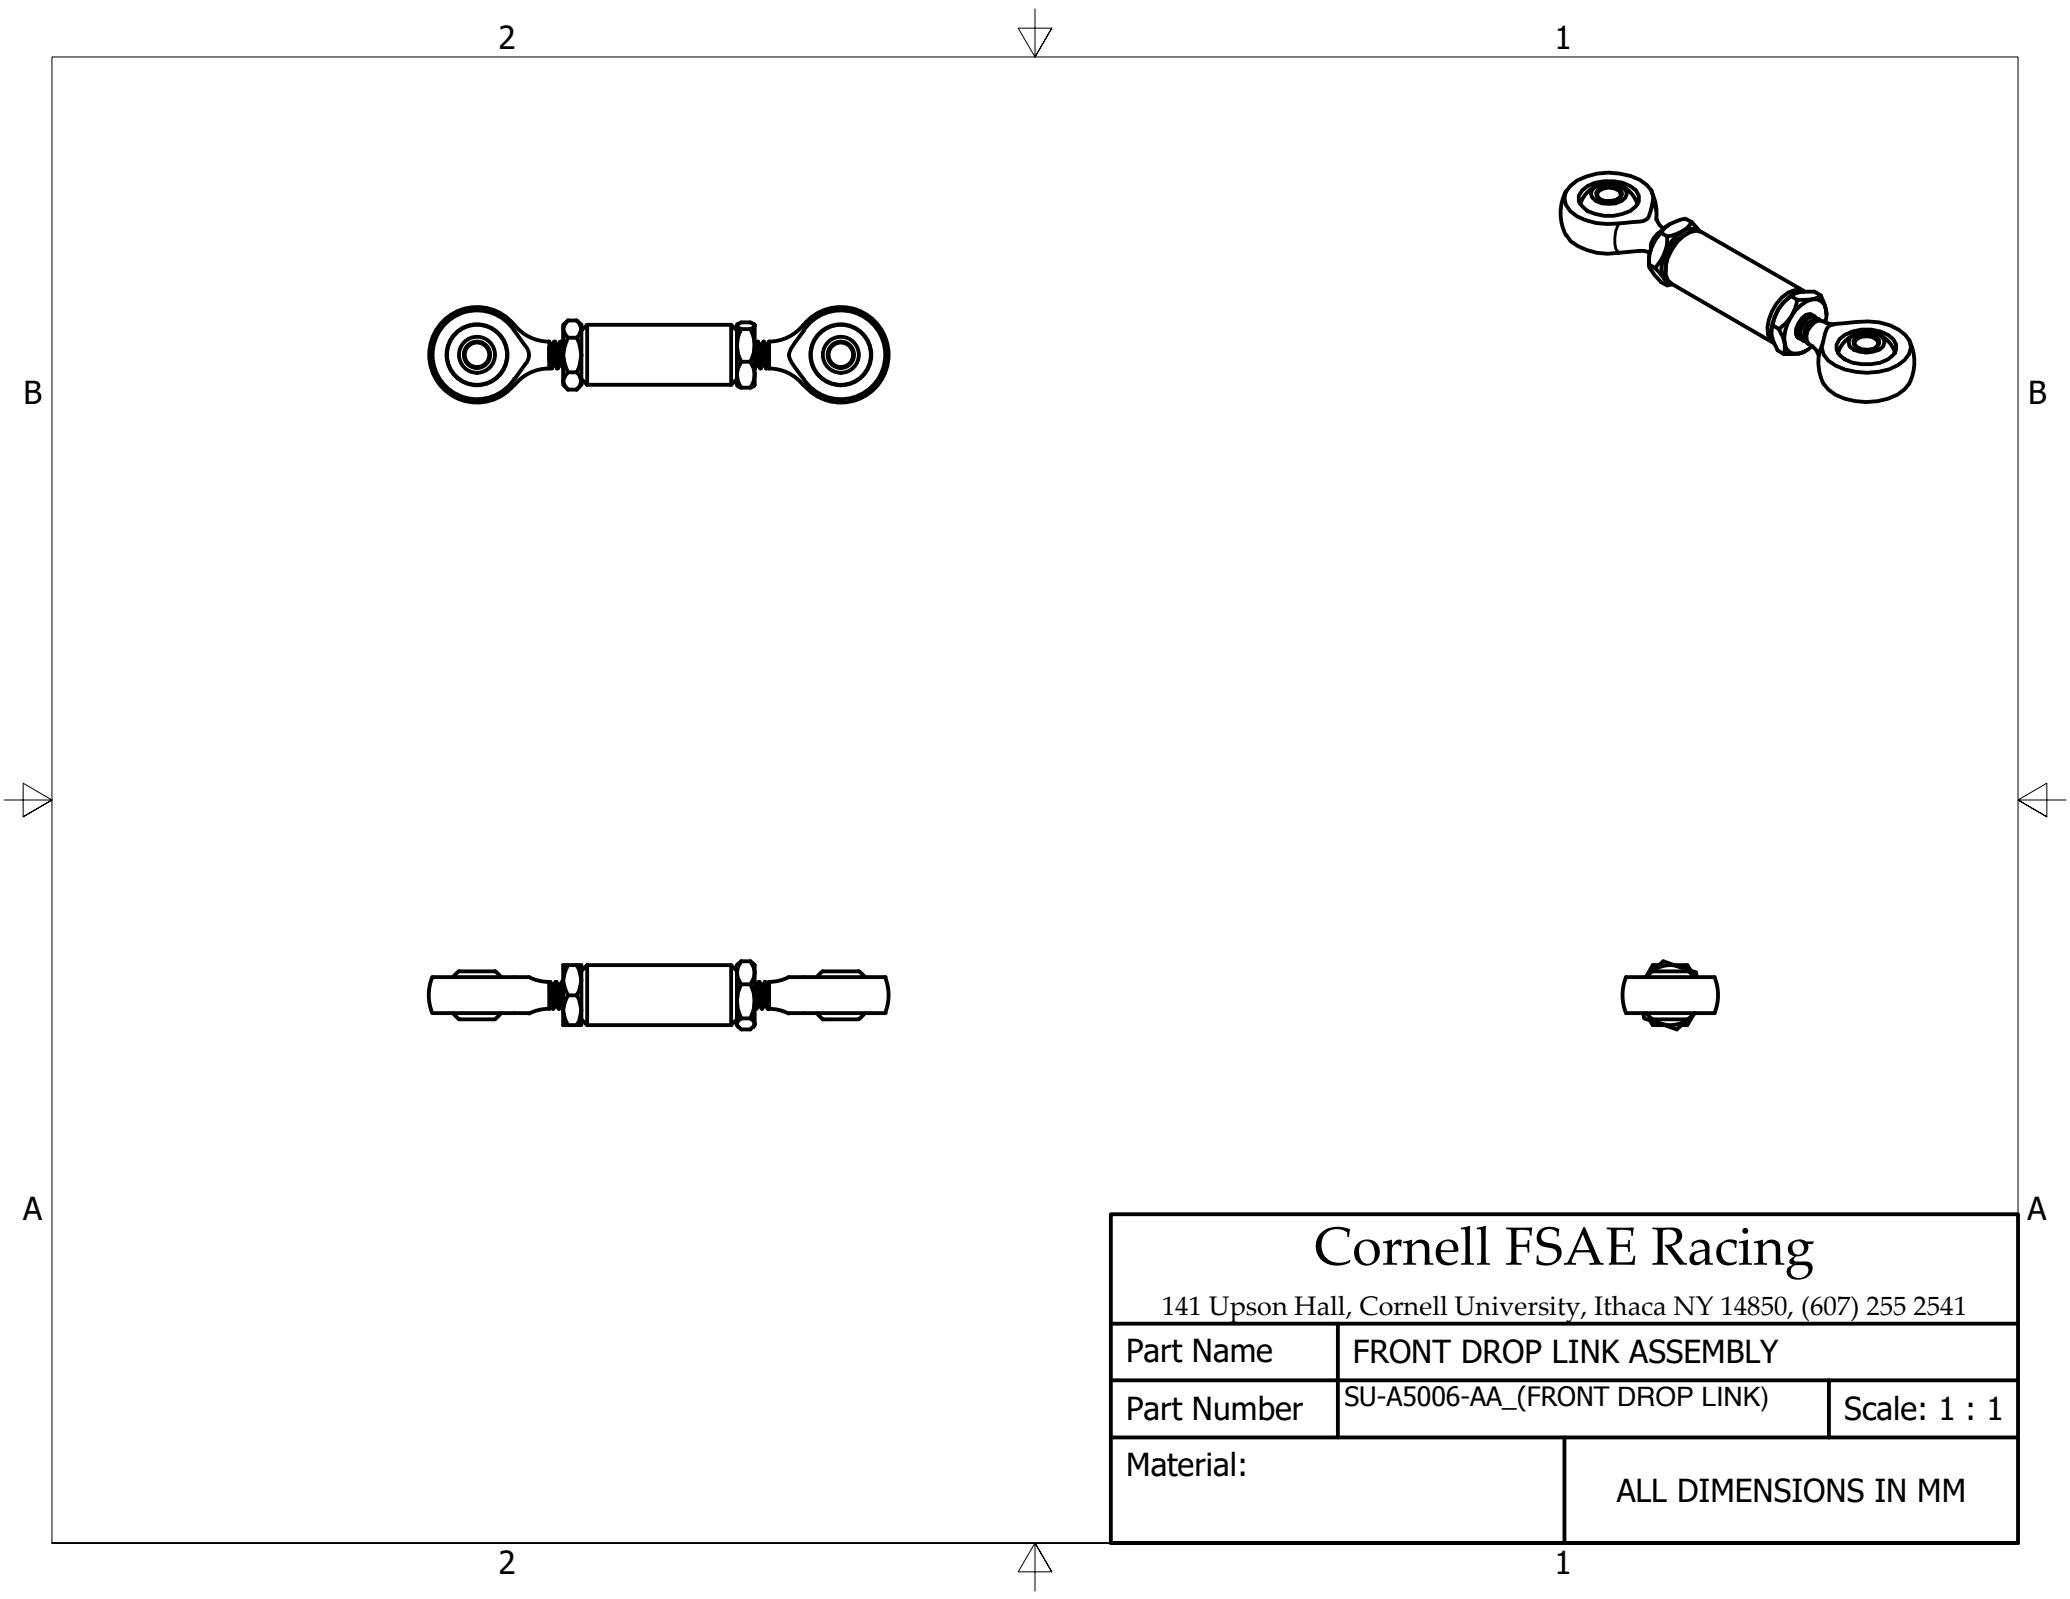


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	FRONT DROP LINK ASSEMBLY	
Part Number	SU-A5006-AA_(FRONT DROP LINK)	Scale: 1 : 1
Material:		ALL DIMENSIONS IN MM

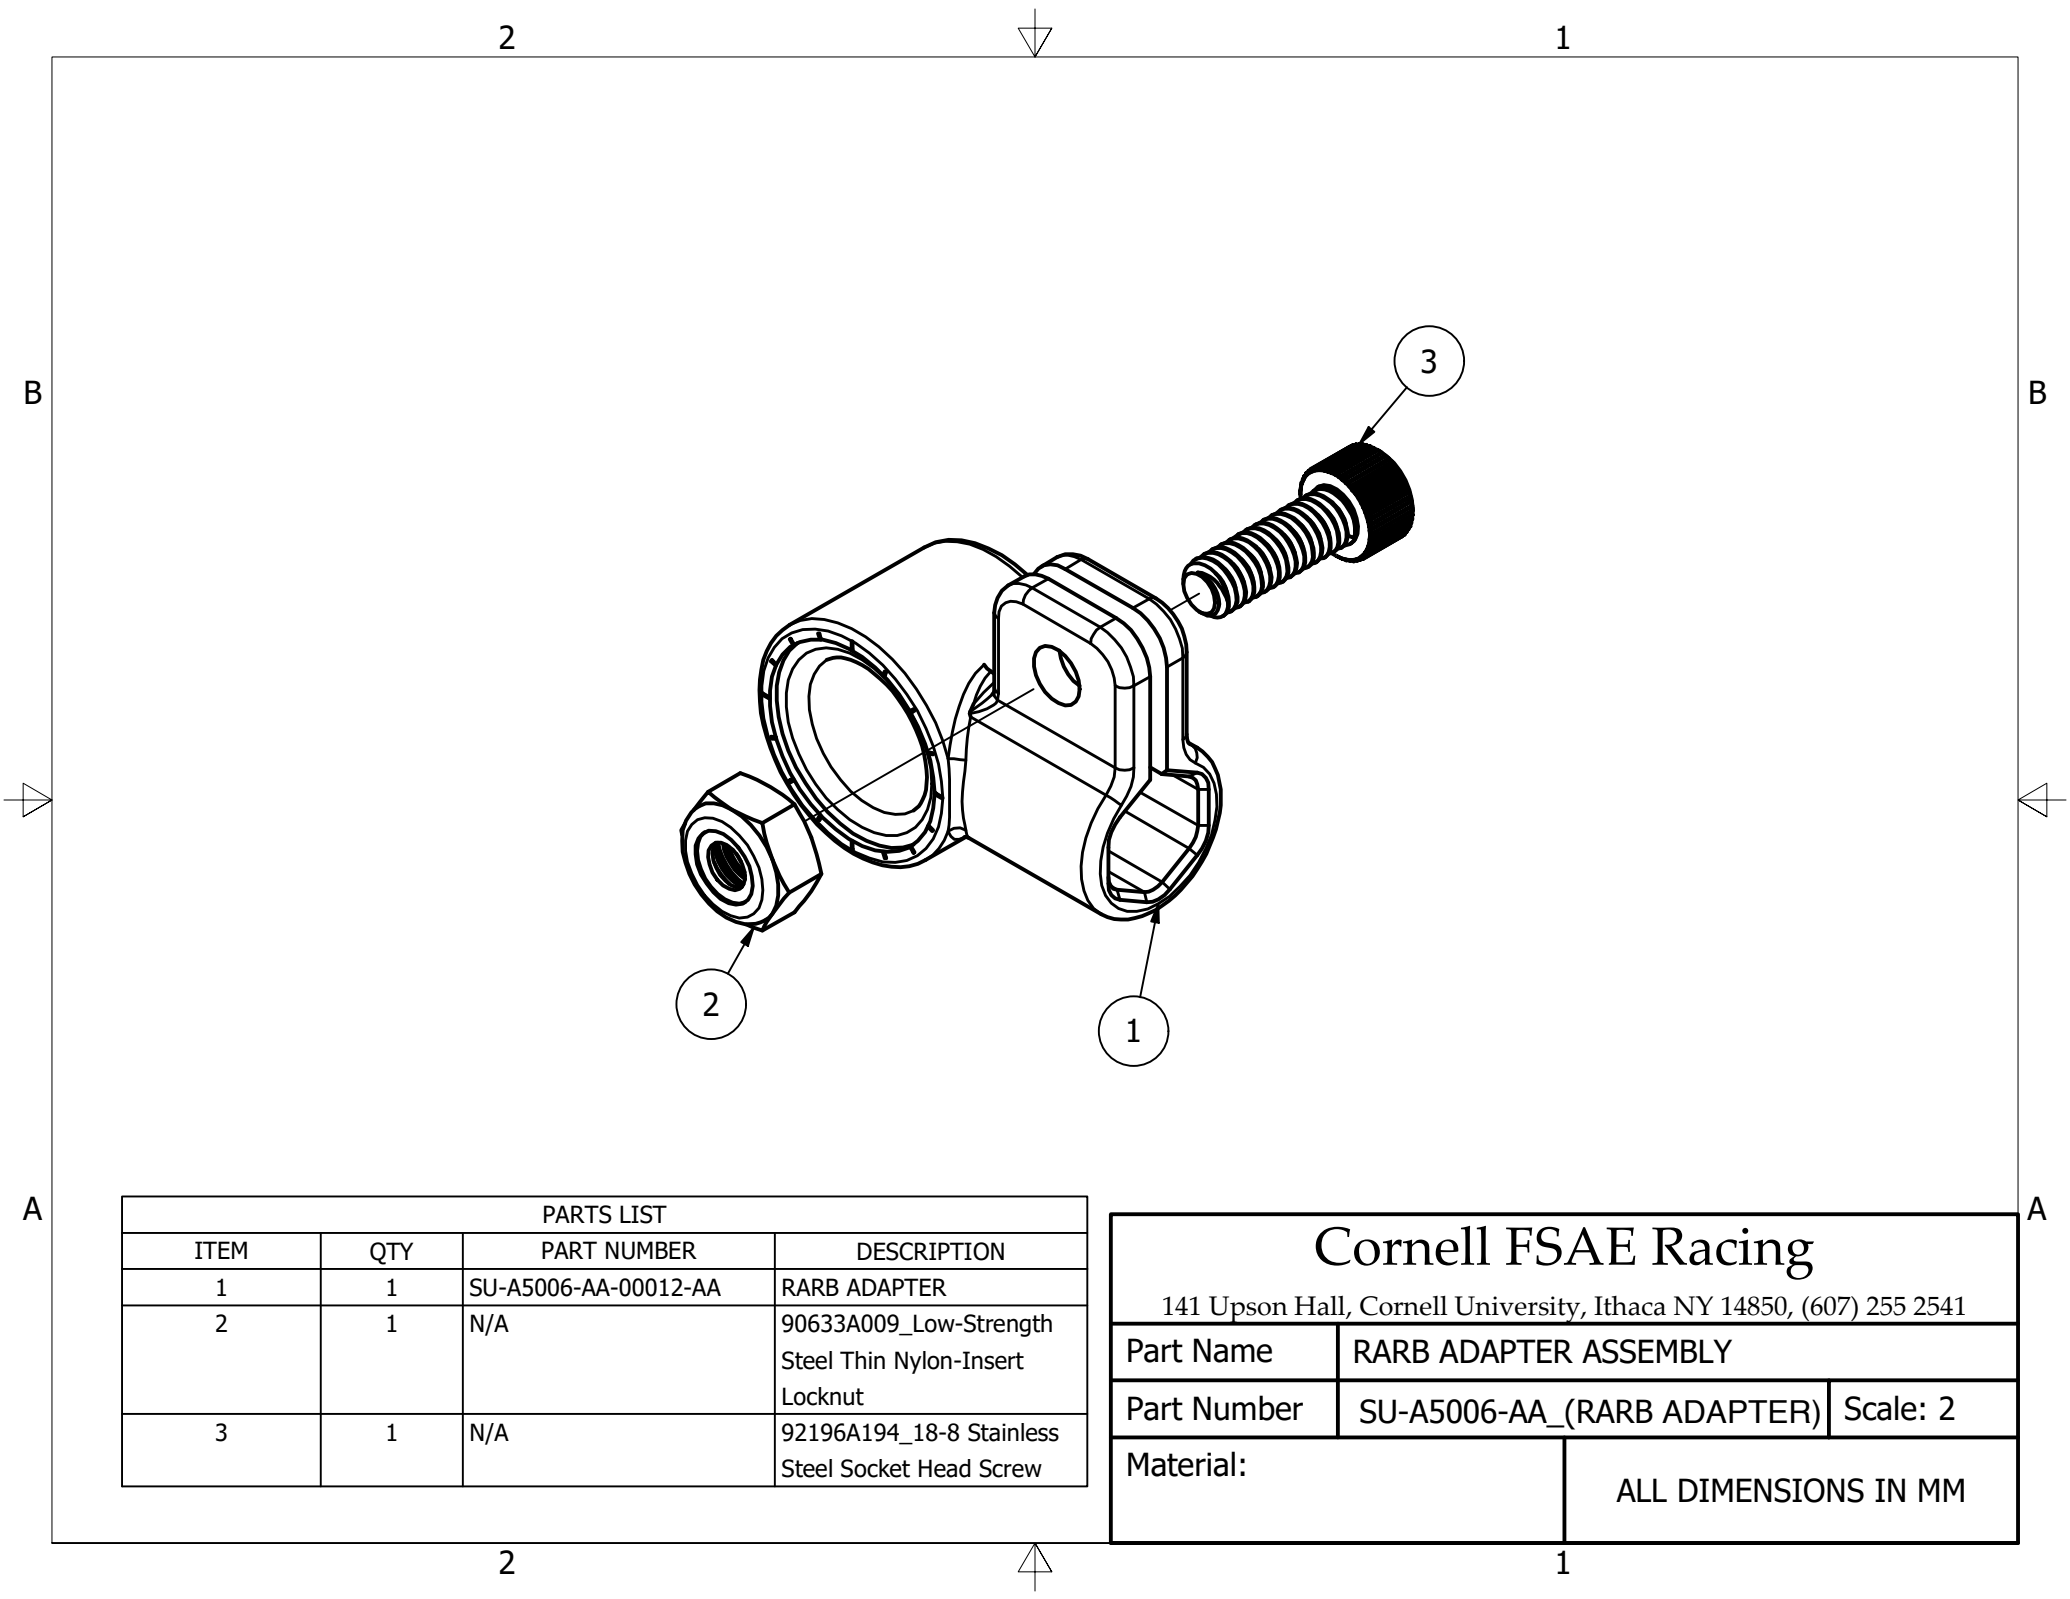


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5006-AA-00012-AA	RARB ADAPTER
2	1	N/A	90633A009_Low-Strength Steel Thin Nylon-Insert Locknut
3	1	N/A	92196A194_18-8 Stainless Steel Socket Head Screw

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RARB ADAPTER ASSEMBLY	
Part Number	SU-A5006-AA_(RARB ADAPTER)	Scale: 2
Material:		ALL DIMENSIONS IN MM




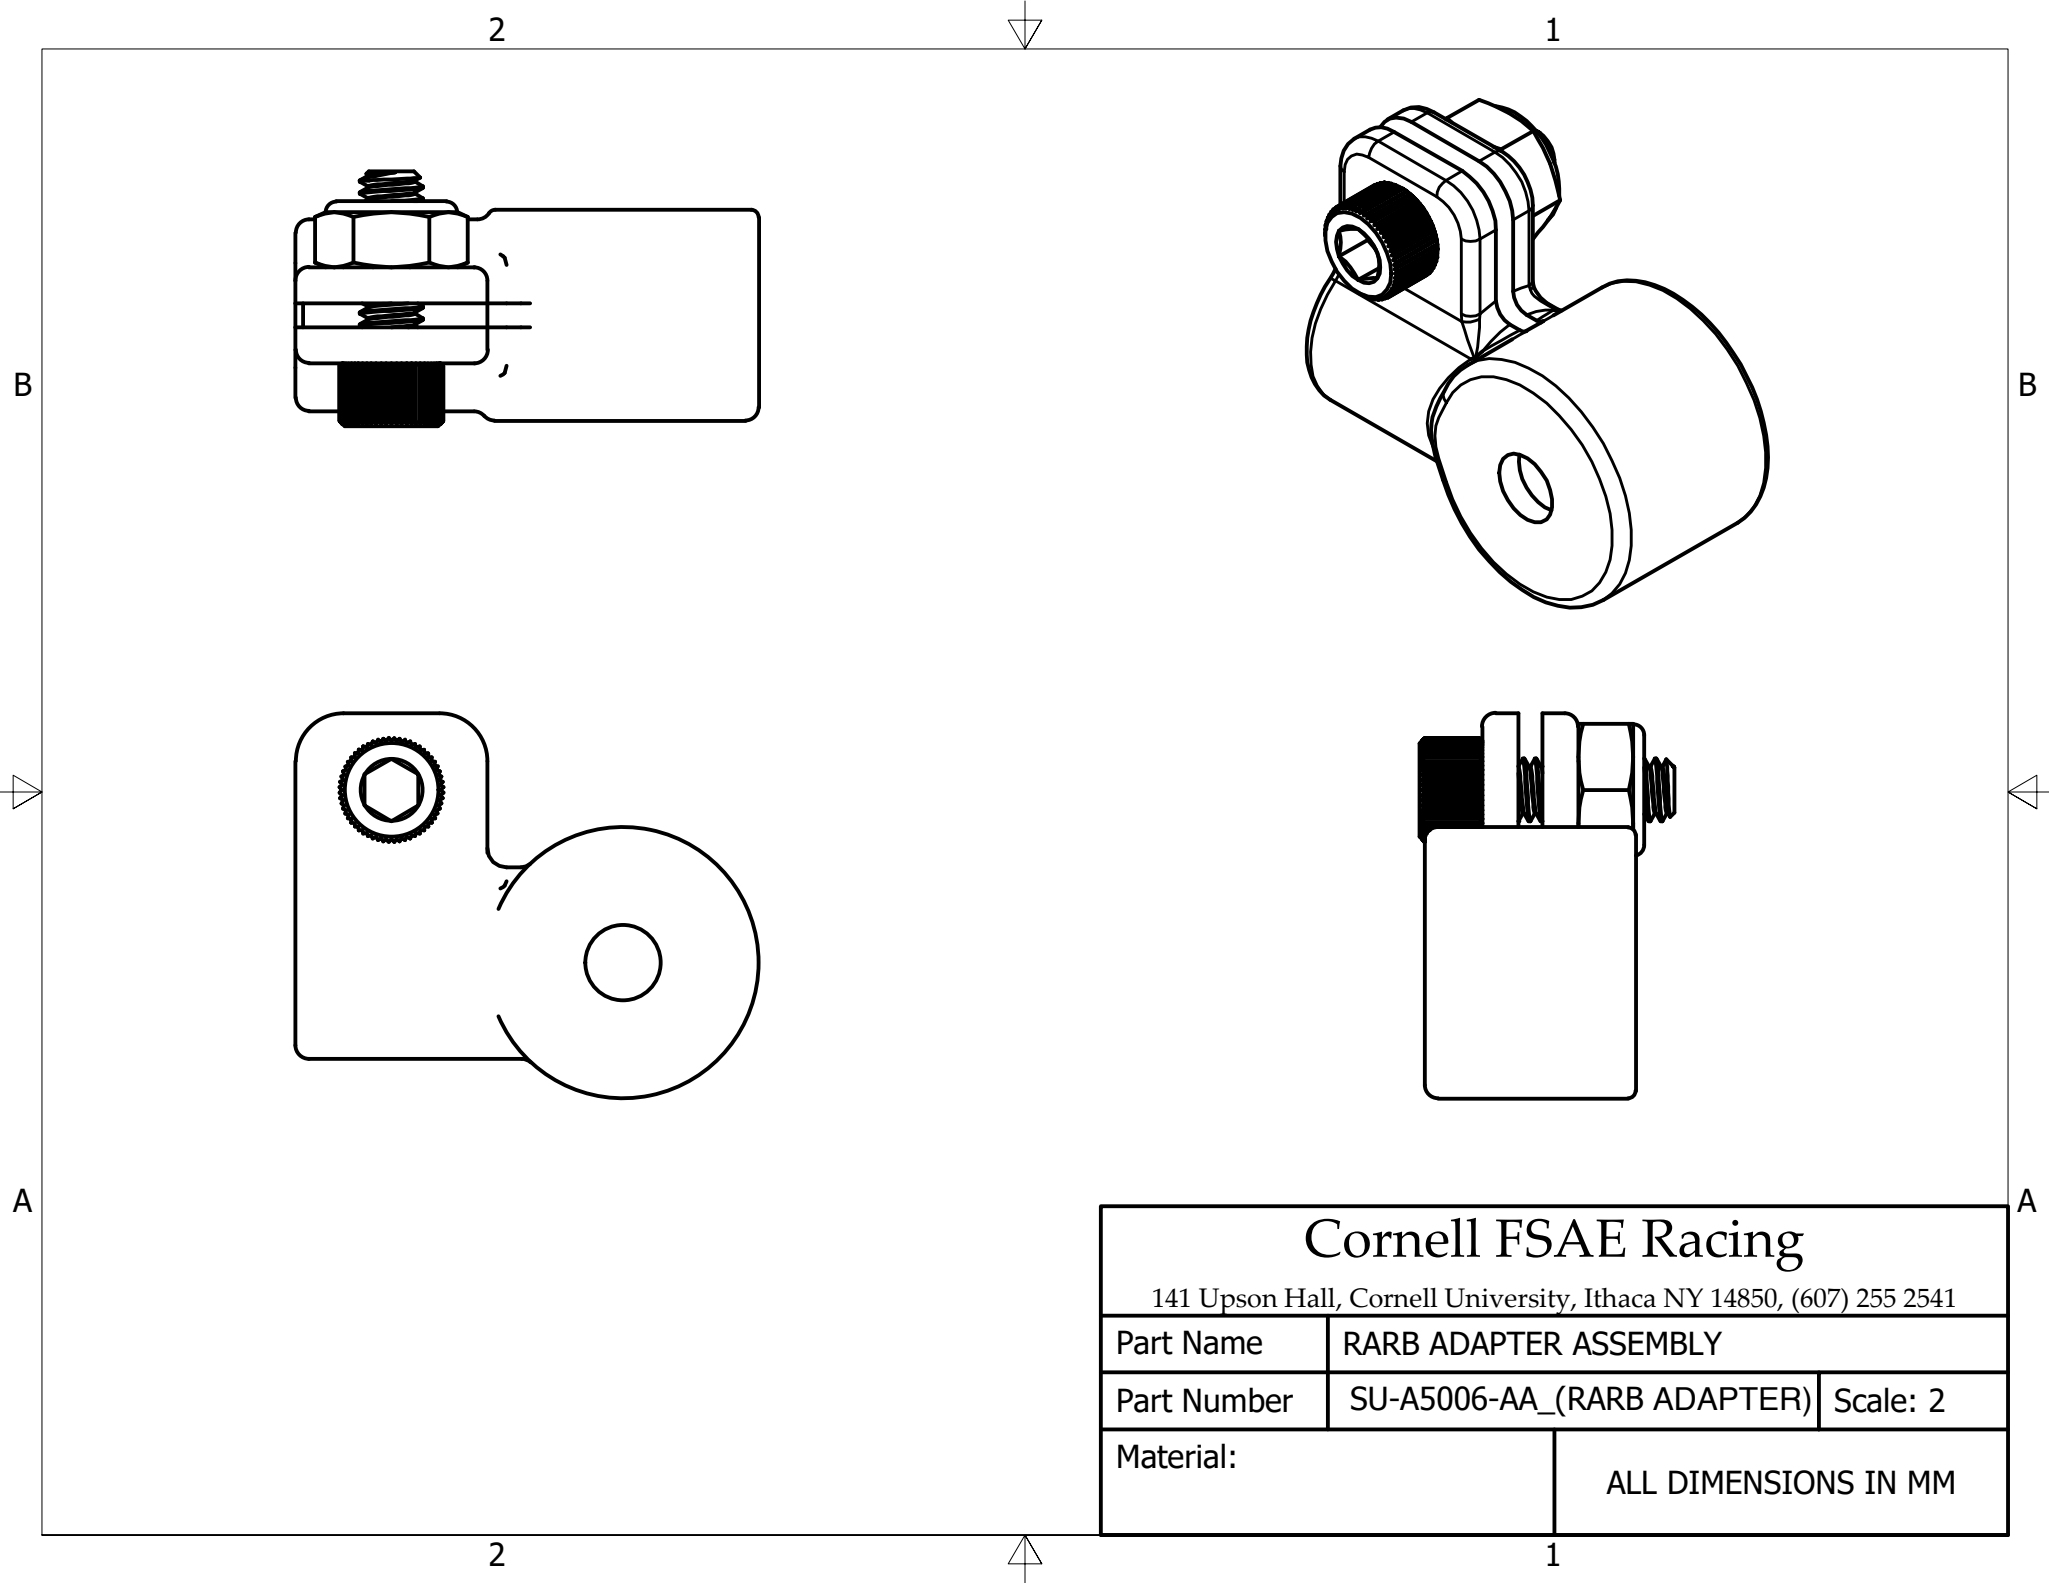


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RARB ADAPTER ASSEMBLY	
Part Number	SU-A5006-AA_(RARB ADAPTER)	Scale: 2
Material:	ALL DIMENSIONS IN MM	

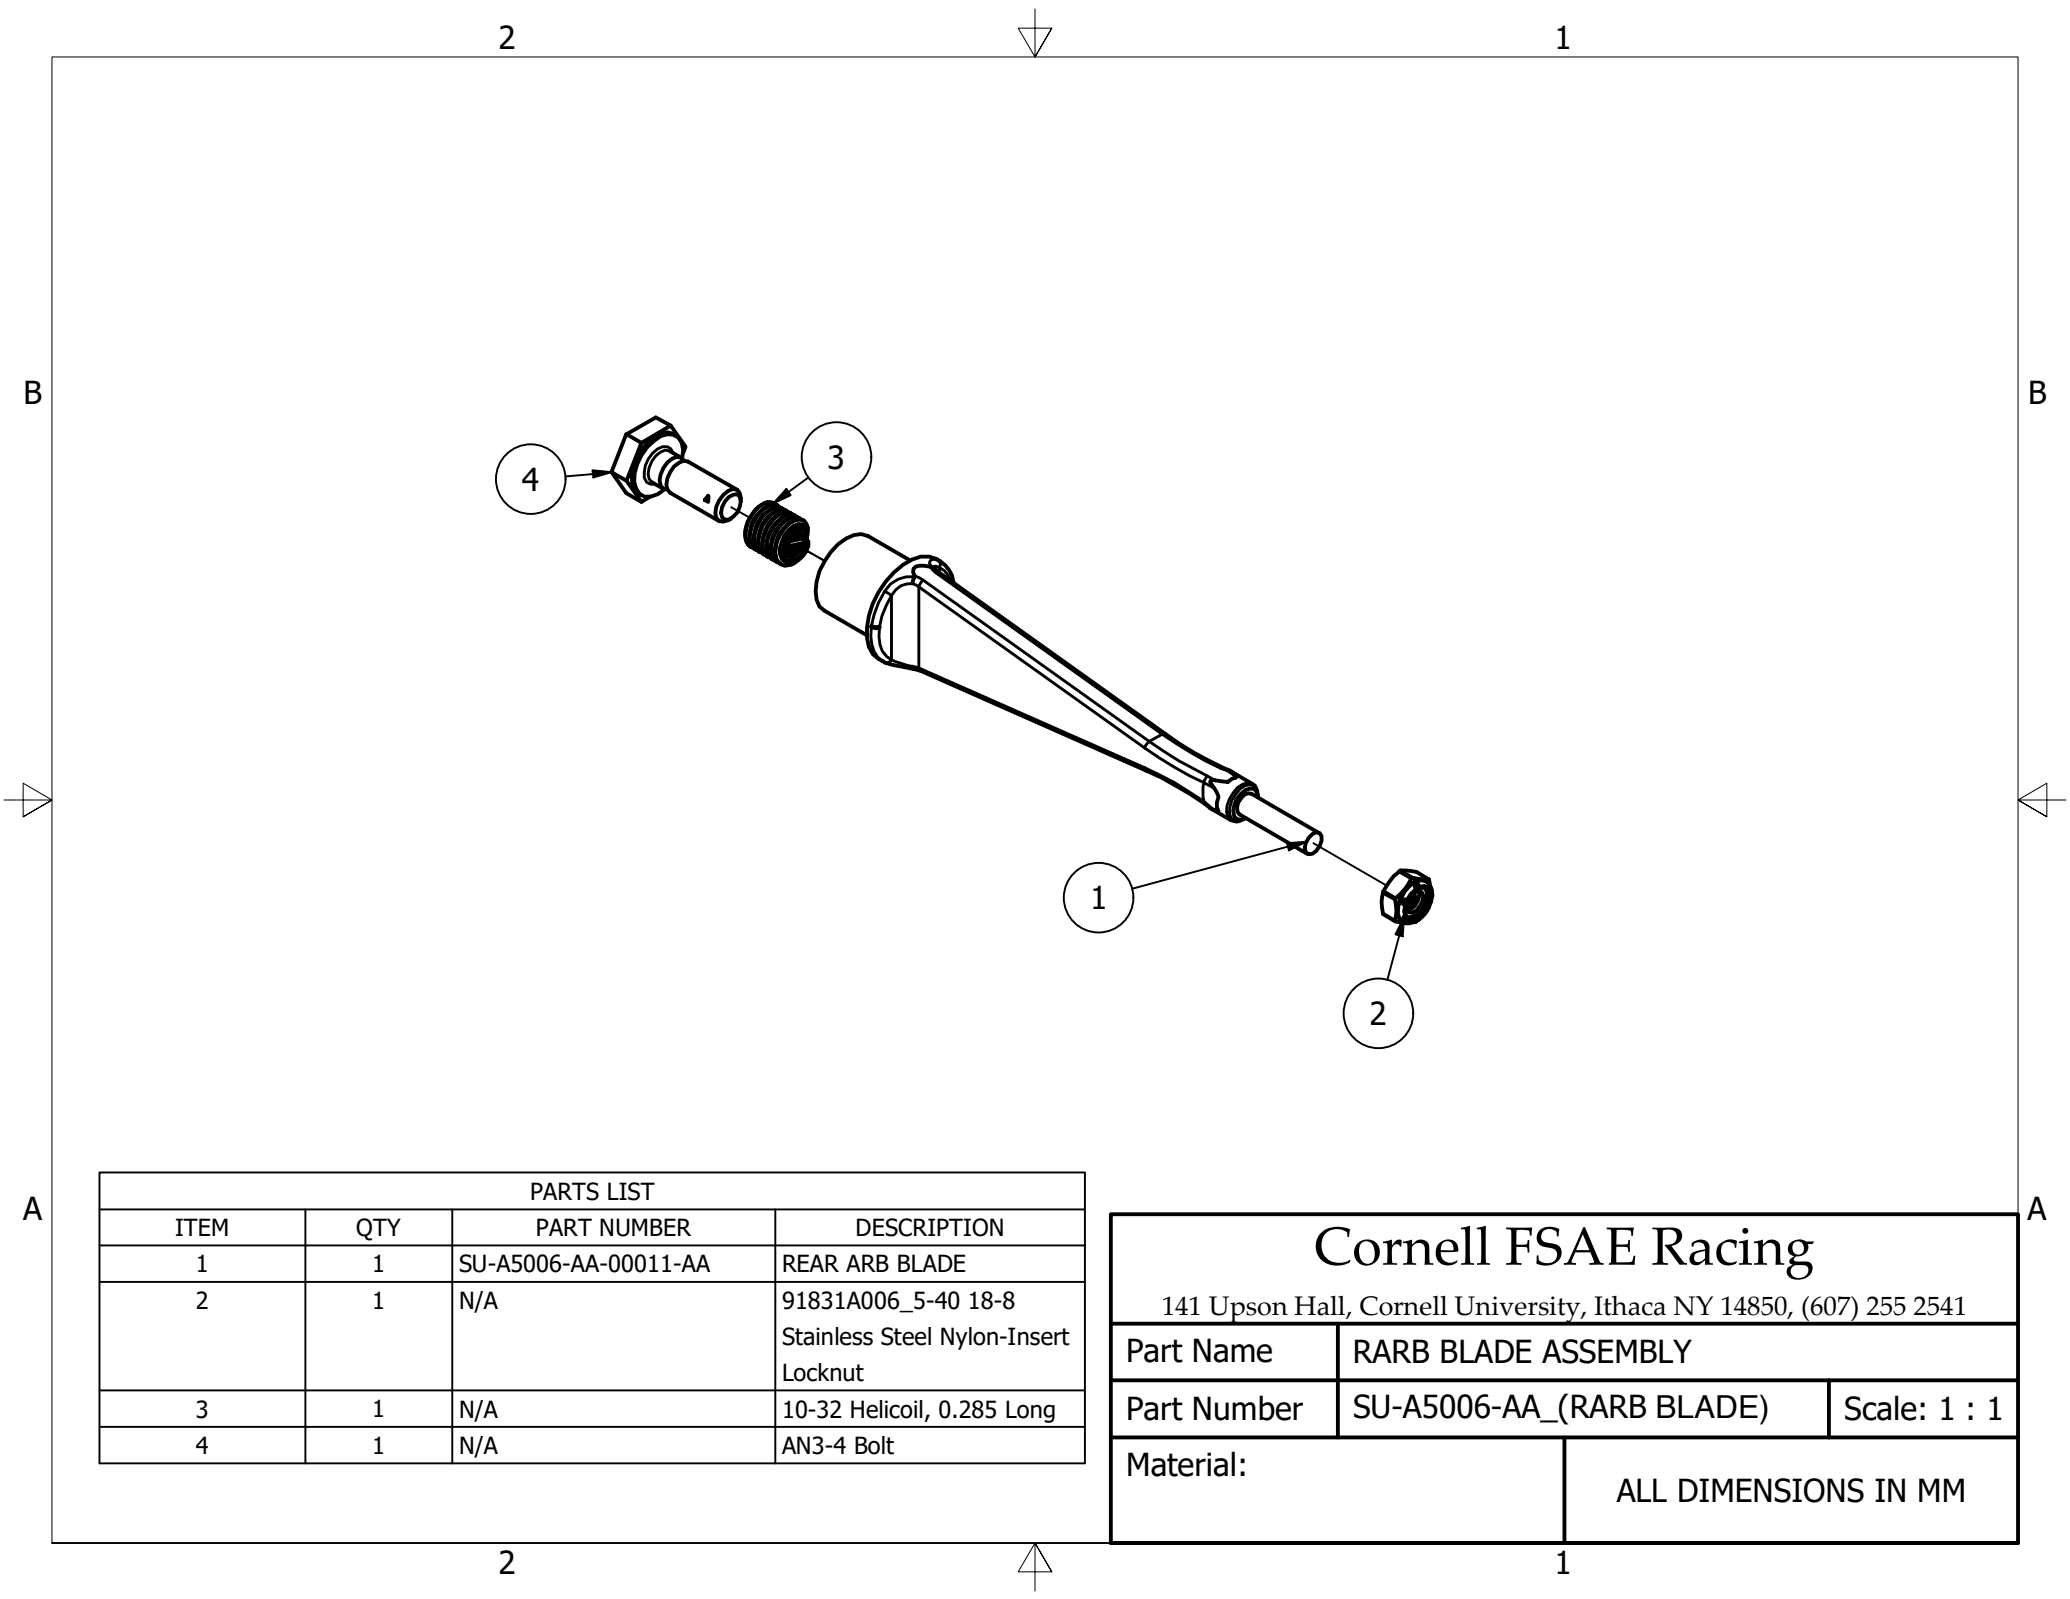


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5006-AA-00011-AA	REAR ARB BLADE
2	1	N/A	91831A006_5-40 18-8 Stainless Steel Nylon-Insert Locknut
3	1	N/A	10-32 Helicoil, 0.285 Long
4	1	N/A	AN3-4 Bolt

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RARB BLADE ASSEMBLY	
Part Number	SU-A5006-AA_(RARB BLADE)	Scale: 1 : 1
Material:		ALL DIMENSIONS IN MM

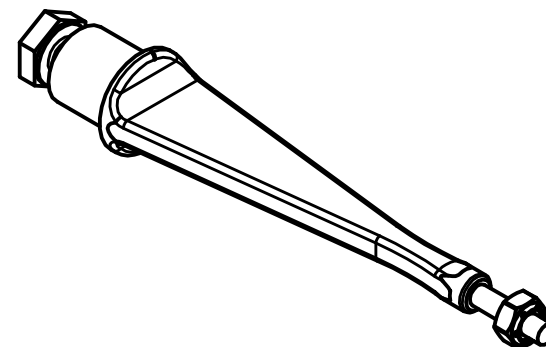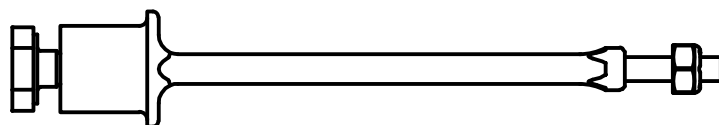

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RARB BLADE ASSEMBLY	
Part Number	SU-A5006-AA_(RARB BLADE)	Scale: 1 : 1
Material:		ALL DIMENSIONS IN MM

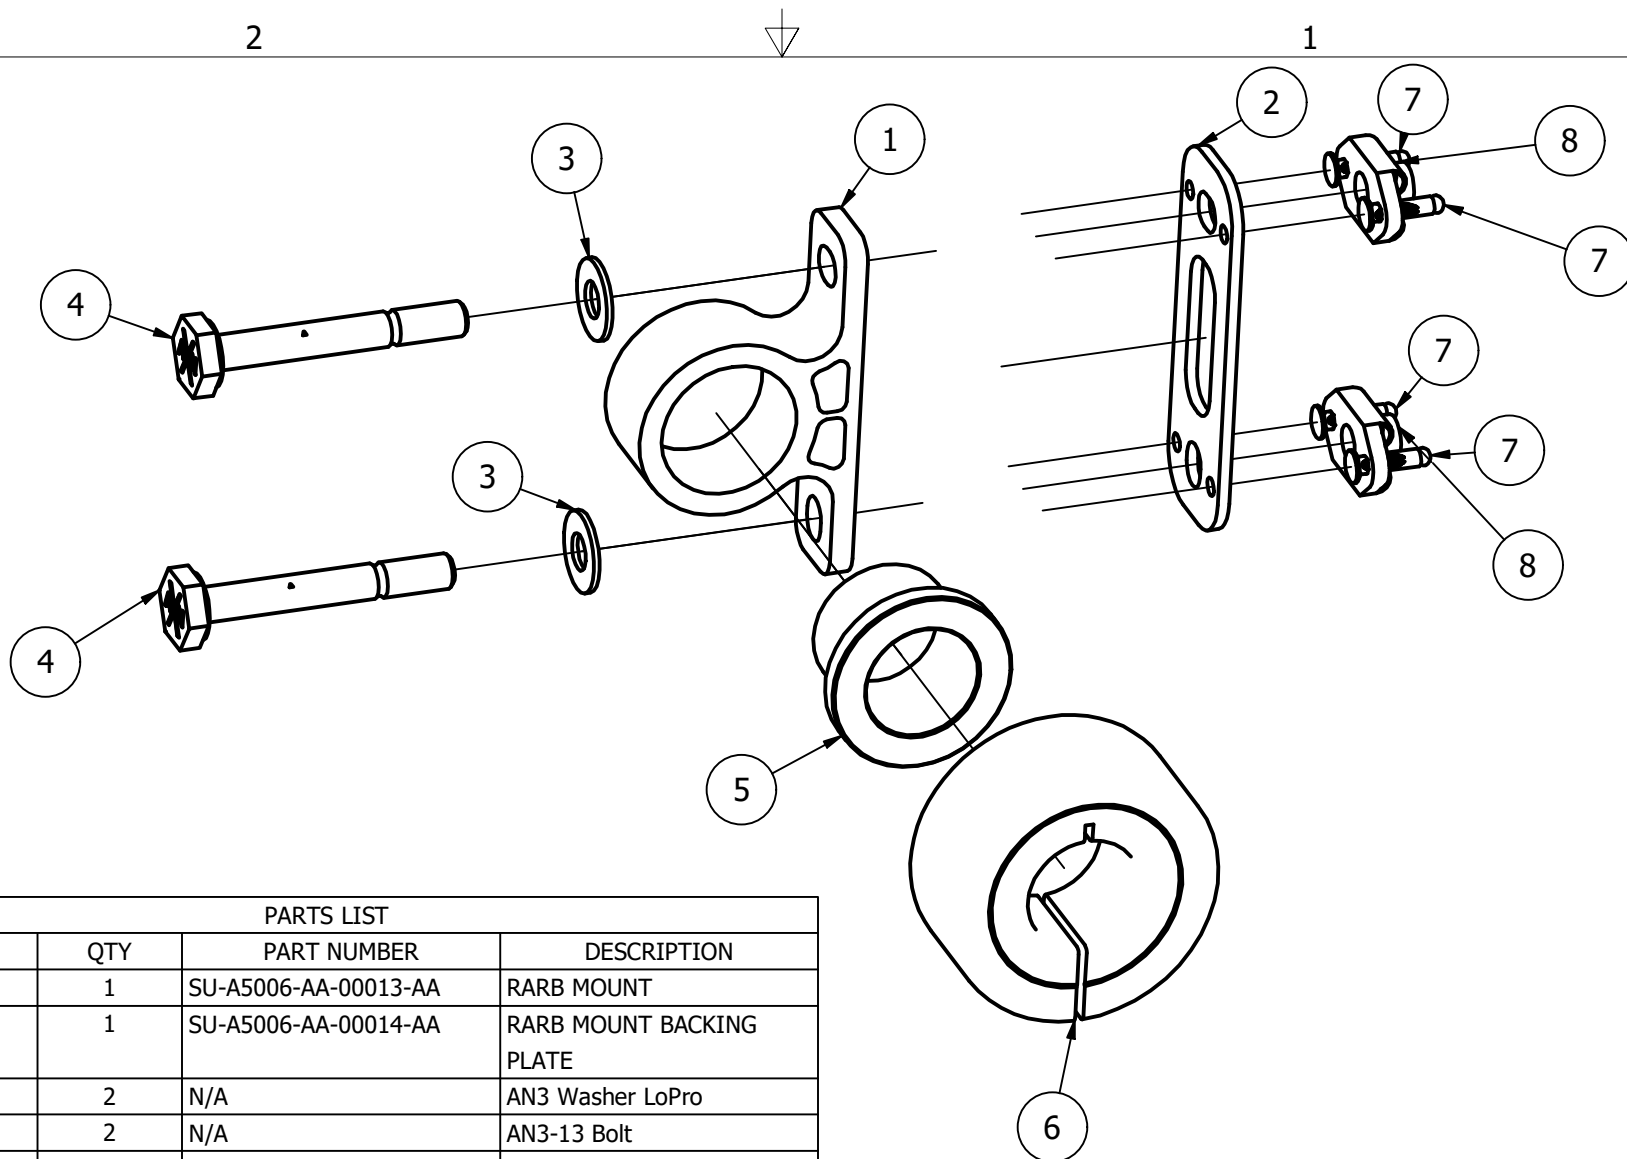


PARTS LIST

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5006-AA-00013-AA	RARB MOUNT
2	1	SU-A5006-AA-00014-AA	RARB MOUNT BACKING PLATE
3	2	N/A	AN3 Washer LoPro
4	2	N/A	AN3-13 Bolt
5	1	N/A	6338K425_Oil-Embedded 841 Bronze Flanged Sleeve Bearing
6	1	N/A	9410T35_Washdown Clamping Shaft Collar
7	4	N/A	97517A196_Aluminum Blind Rivets with Steel Mandrel
8	2	N/A	90857A129_Military Specification Rivet-Mount Nut


Cornell FSAE Racing

141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	RARB MOUNT ASSEMBLY	
Part Number	SU-A5006-AA_(RARB MOUNT)	Scale: 1
Material:	ALL DIMENSIONS IN MM	

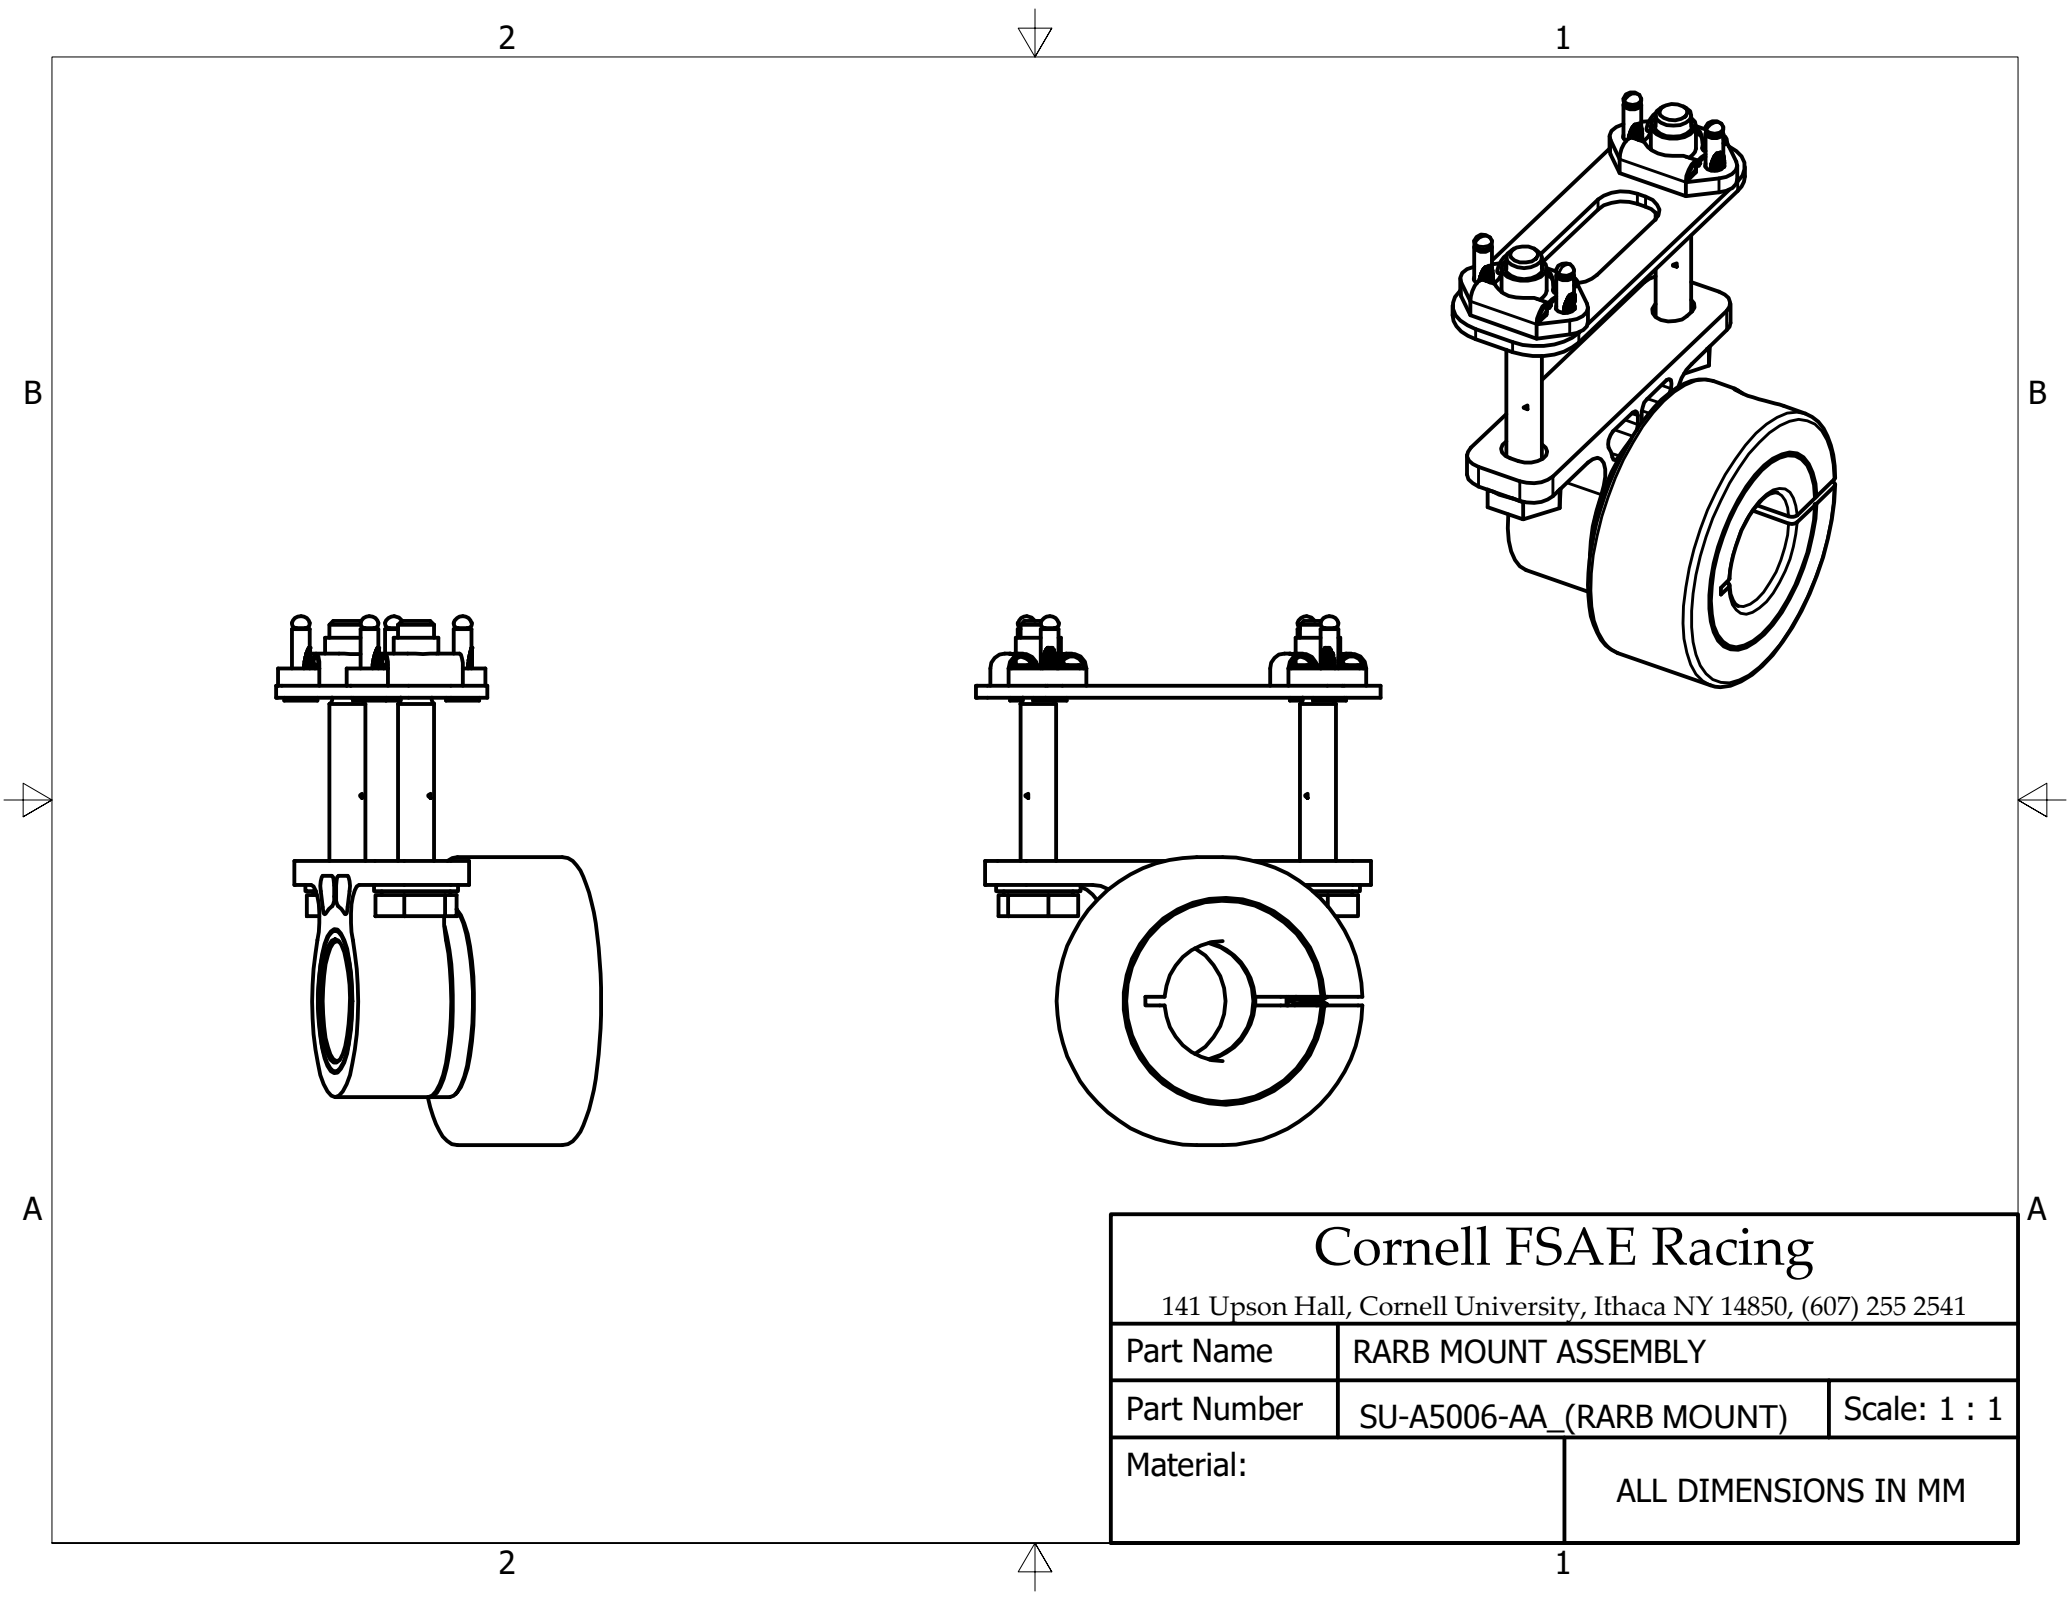


Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RARB MOUNT ASSEMBLY	
Part Number	SU-A5006-AA_ (RARB MOUNT)	Scale: 1 : 1
Material:		ALL DIMENSIONS IN MM

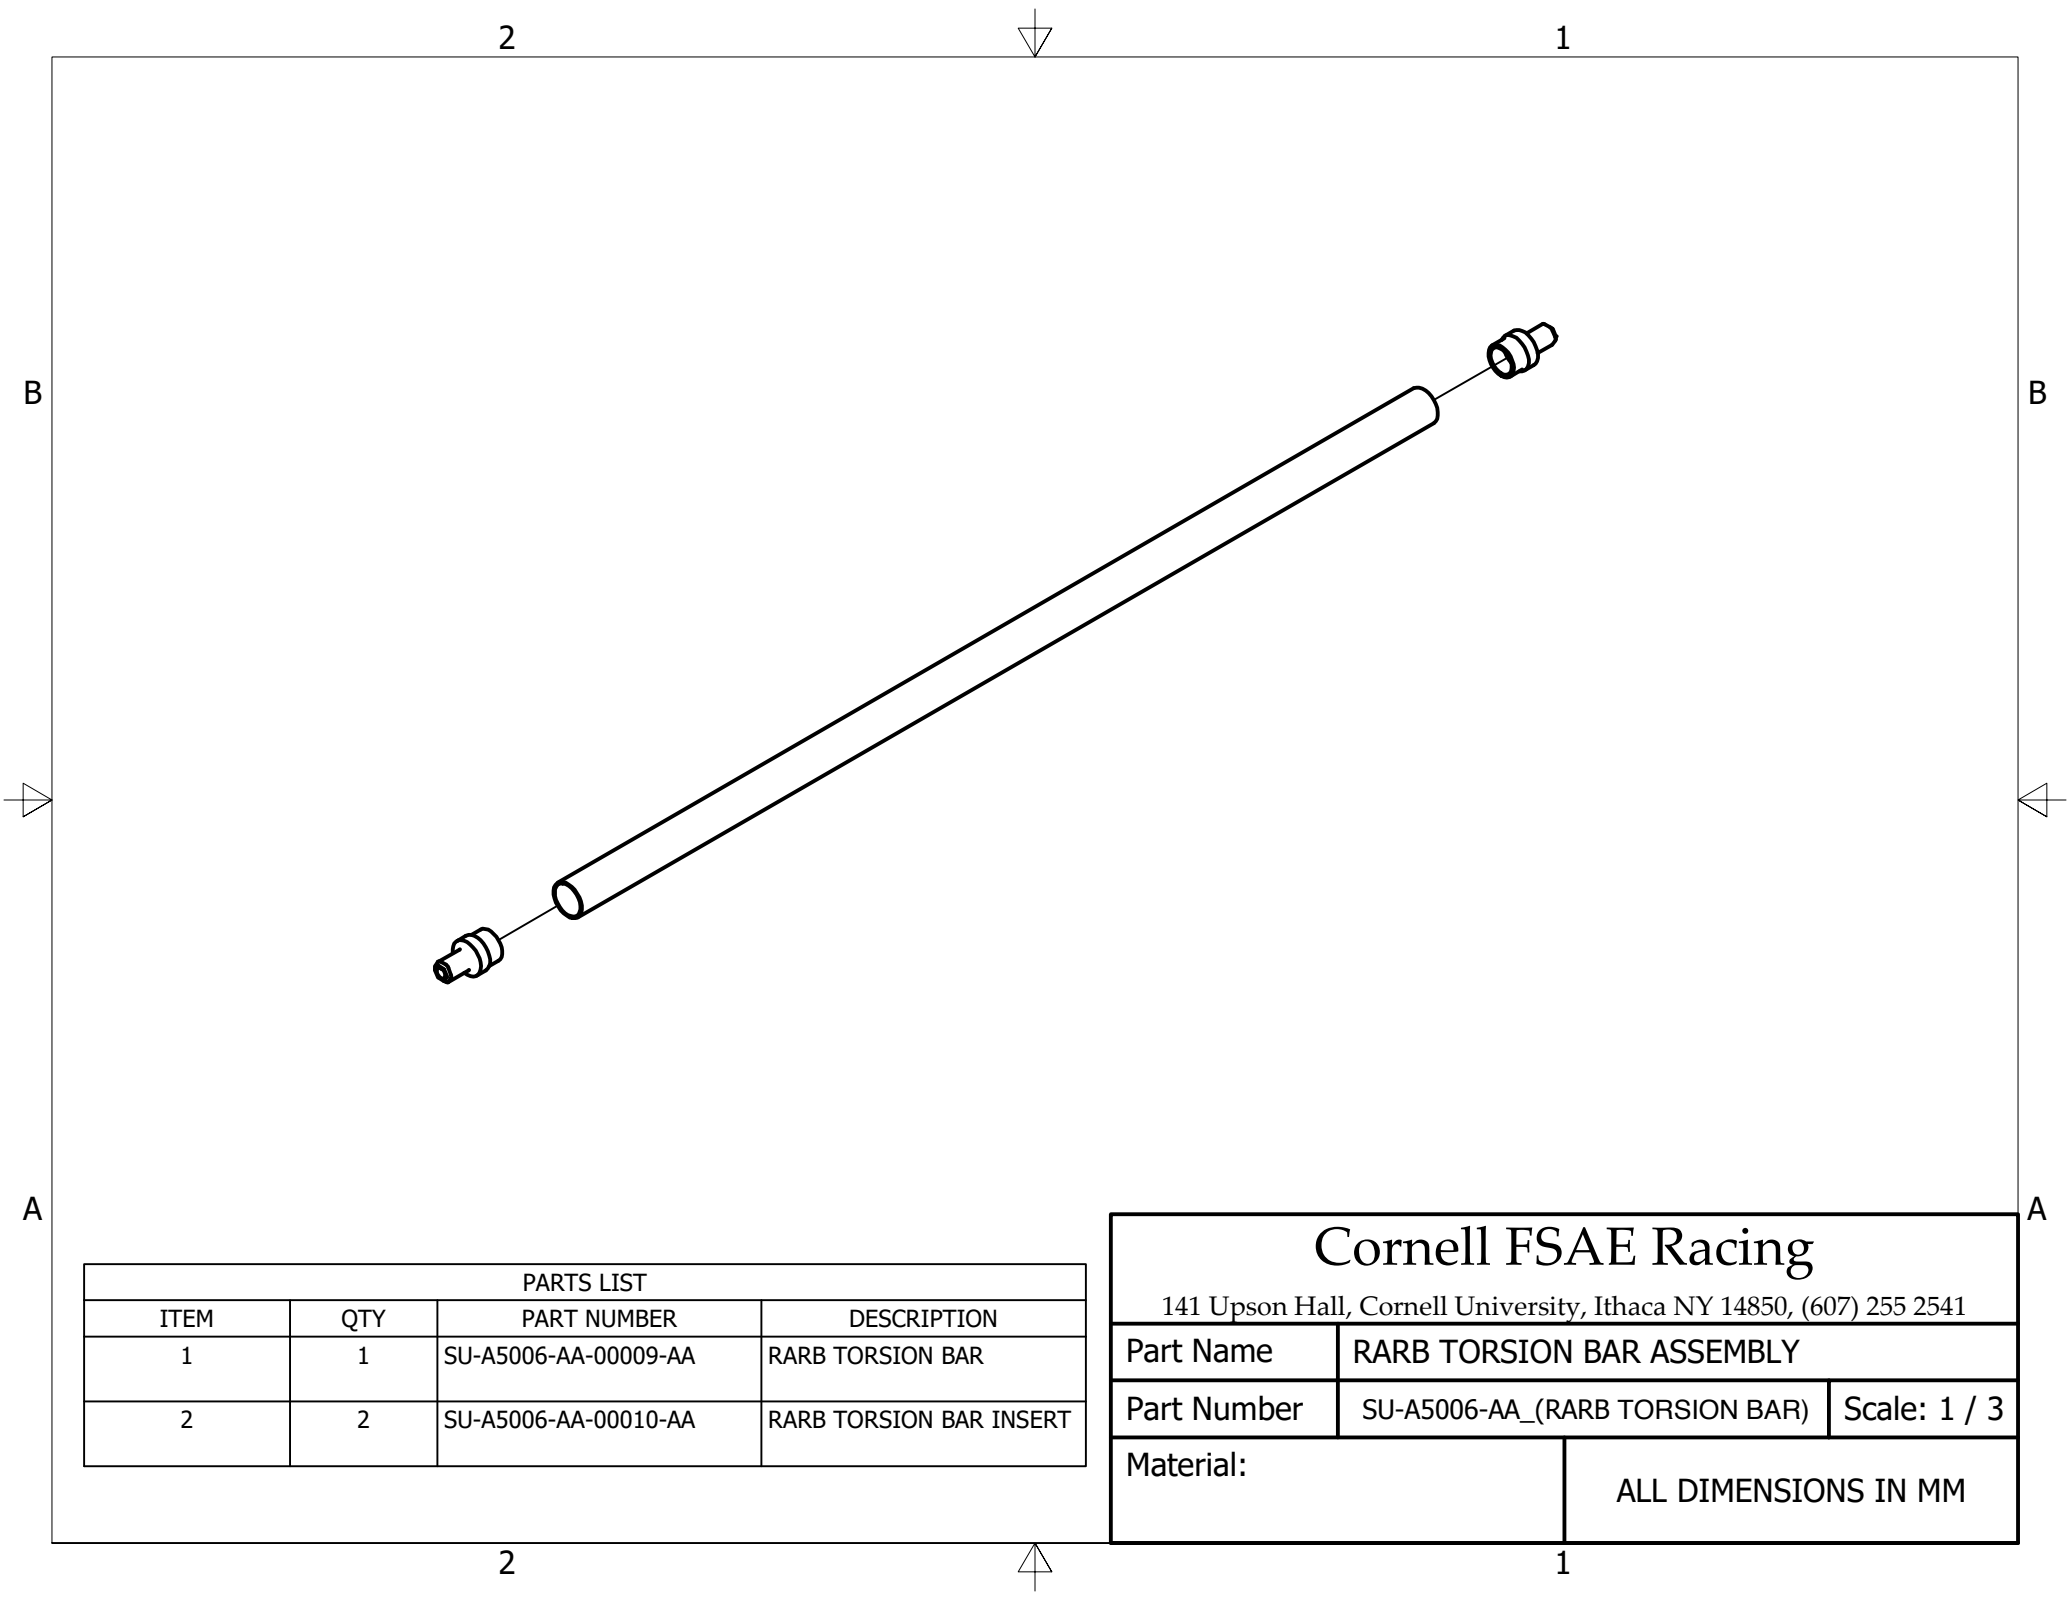


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5006-AA-00009-AA	RARB TORSION BAR
2	2	SU-A5006-AA-00010-AA	RARB TORSION BAR INSERT

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RARB TORSION BAR ASSEMBLY	
Part Number	SU-A5006-AA_(RARB TORSION BAR)	Scale: 1 / 3
Material:		ALL DIMENSIONS IN MM

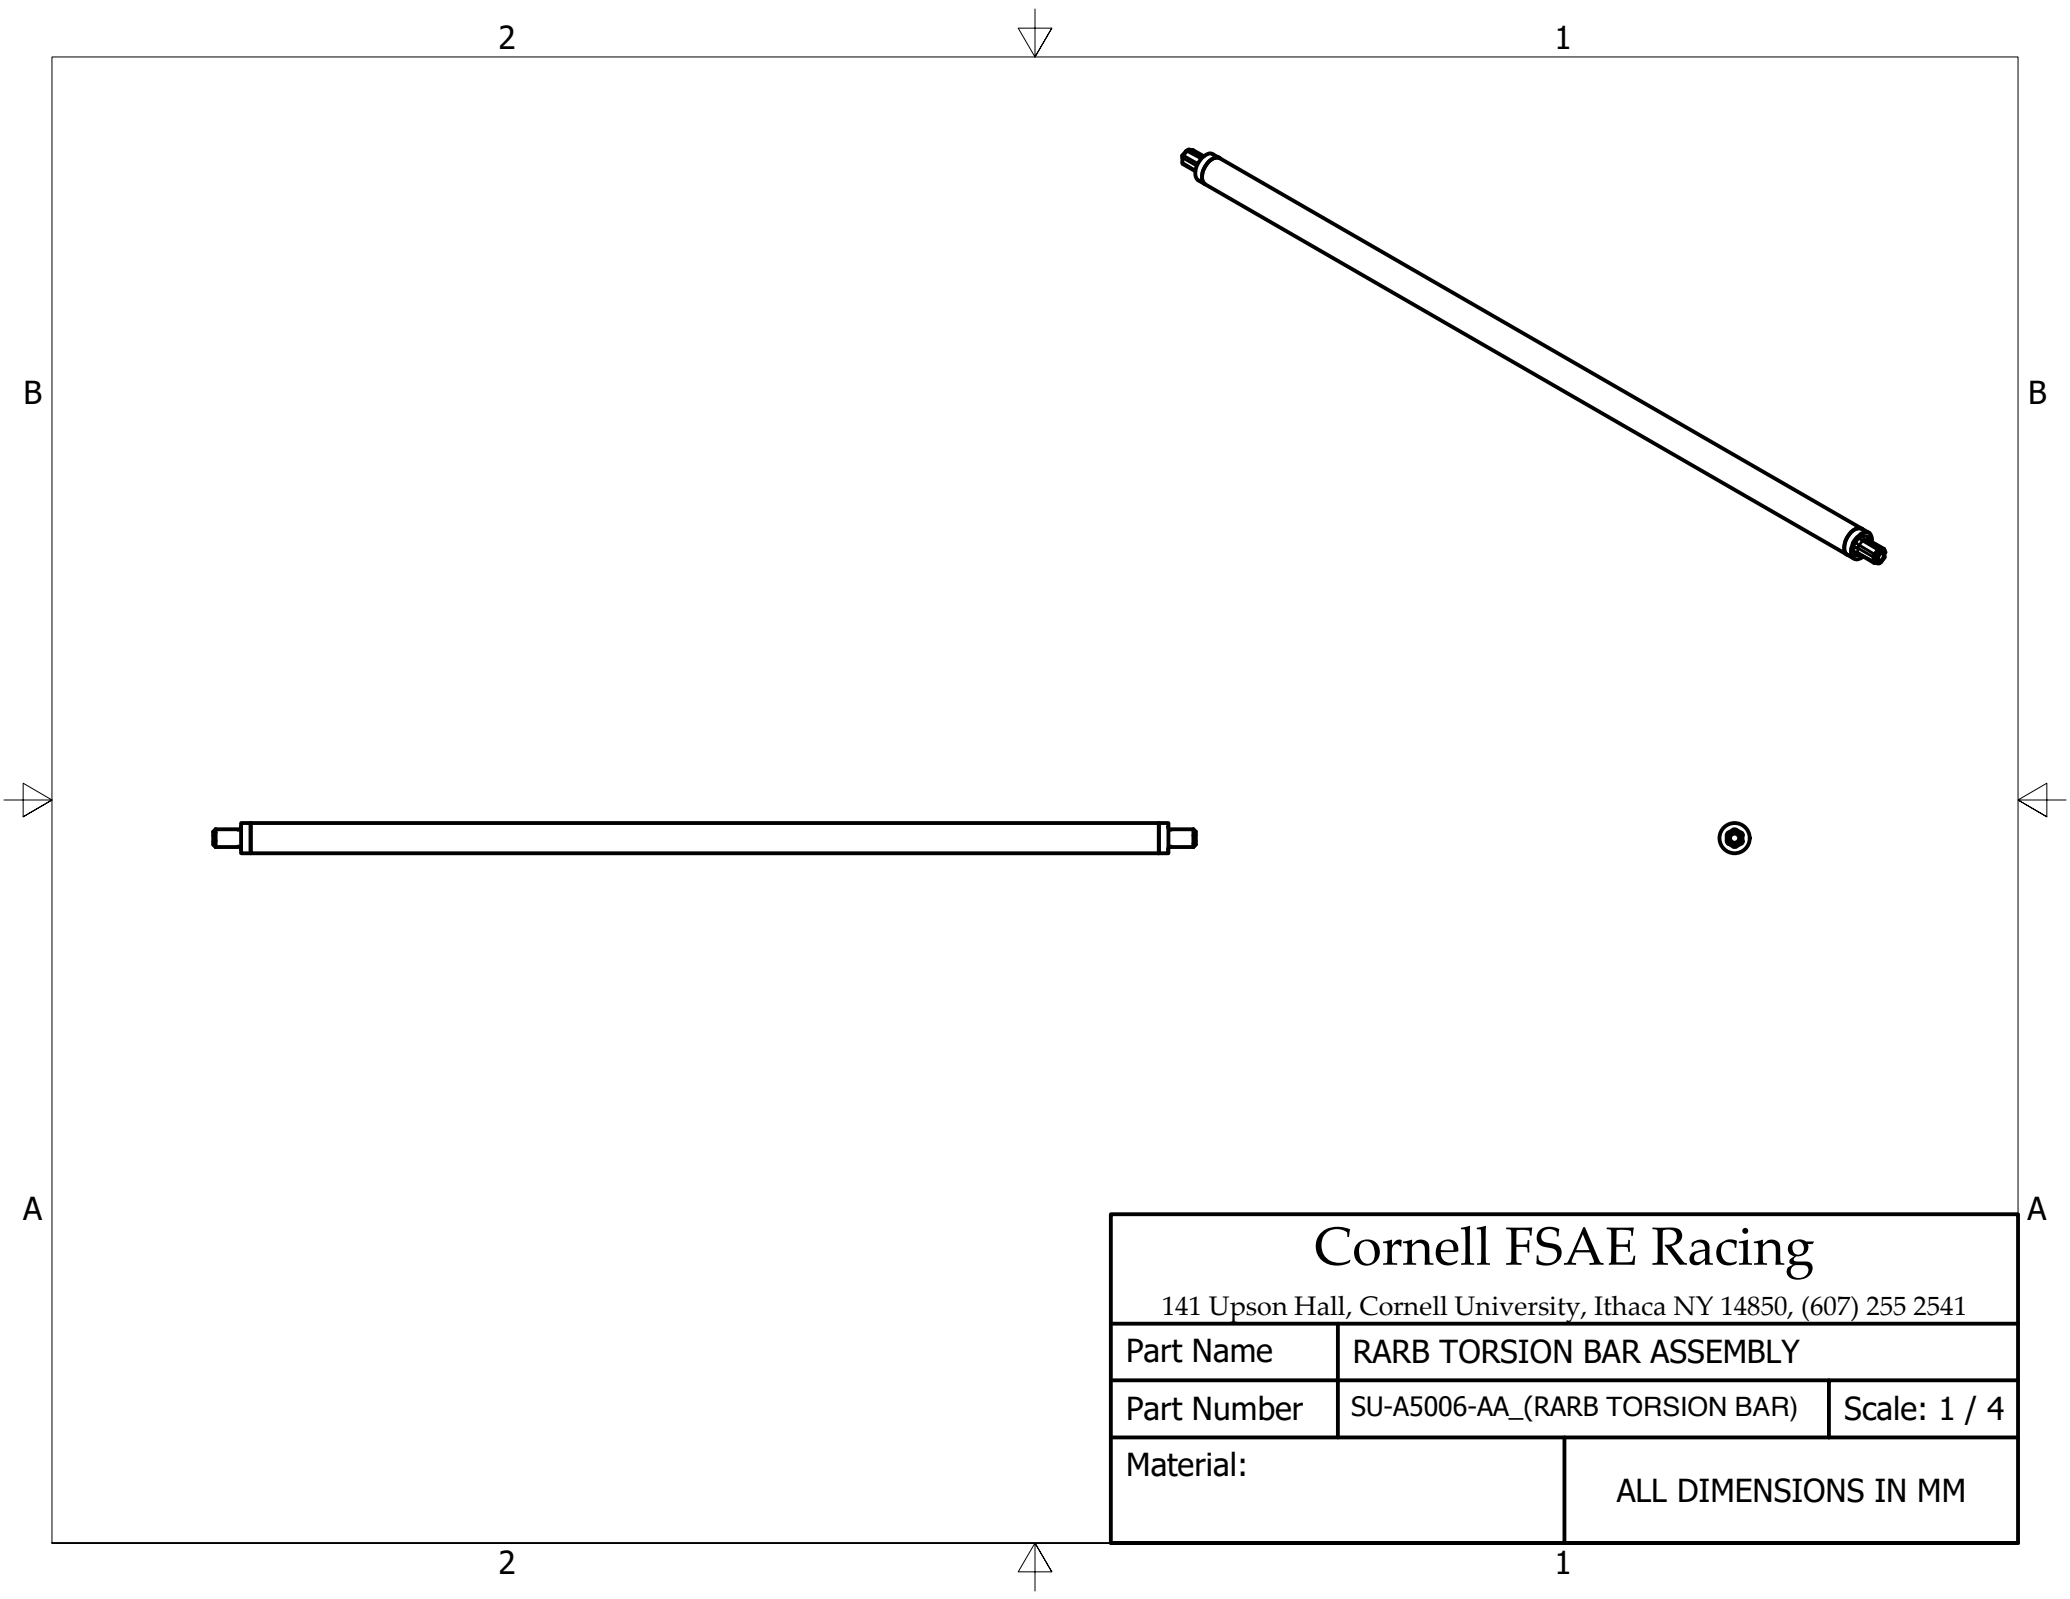

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	RARB TORSION BAR ASSEMBLY	
Part Number	SU-A5006-AA_(RARB TORSION BAR)	Scale: 1 / 4
Material:		ALL DIMENSIONS IN MM

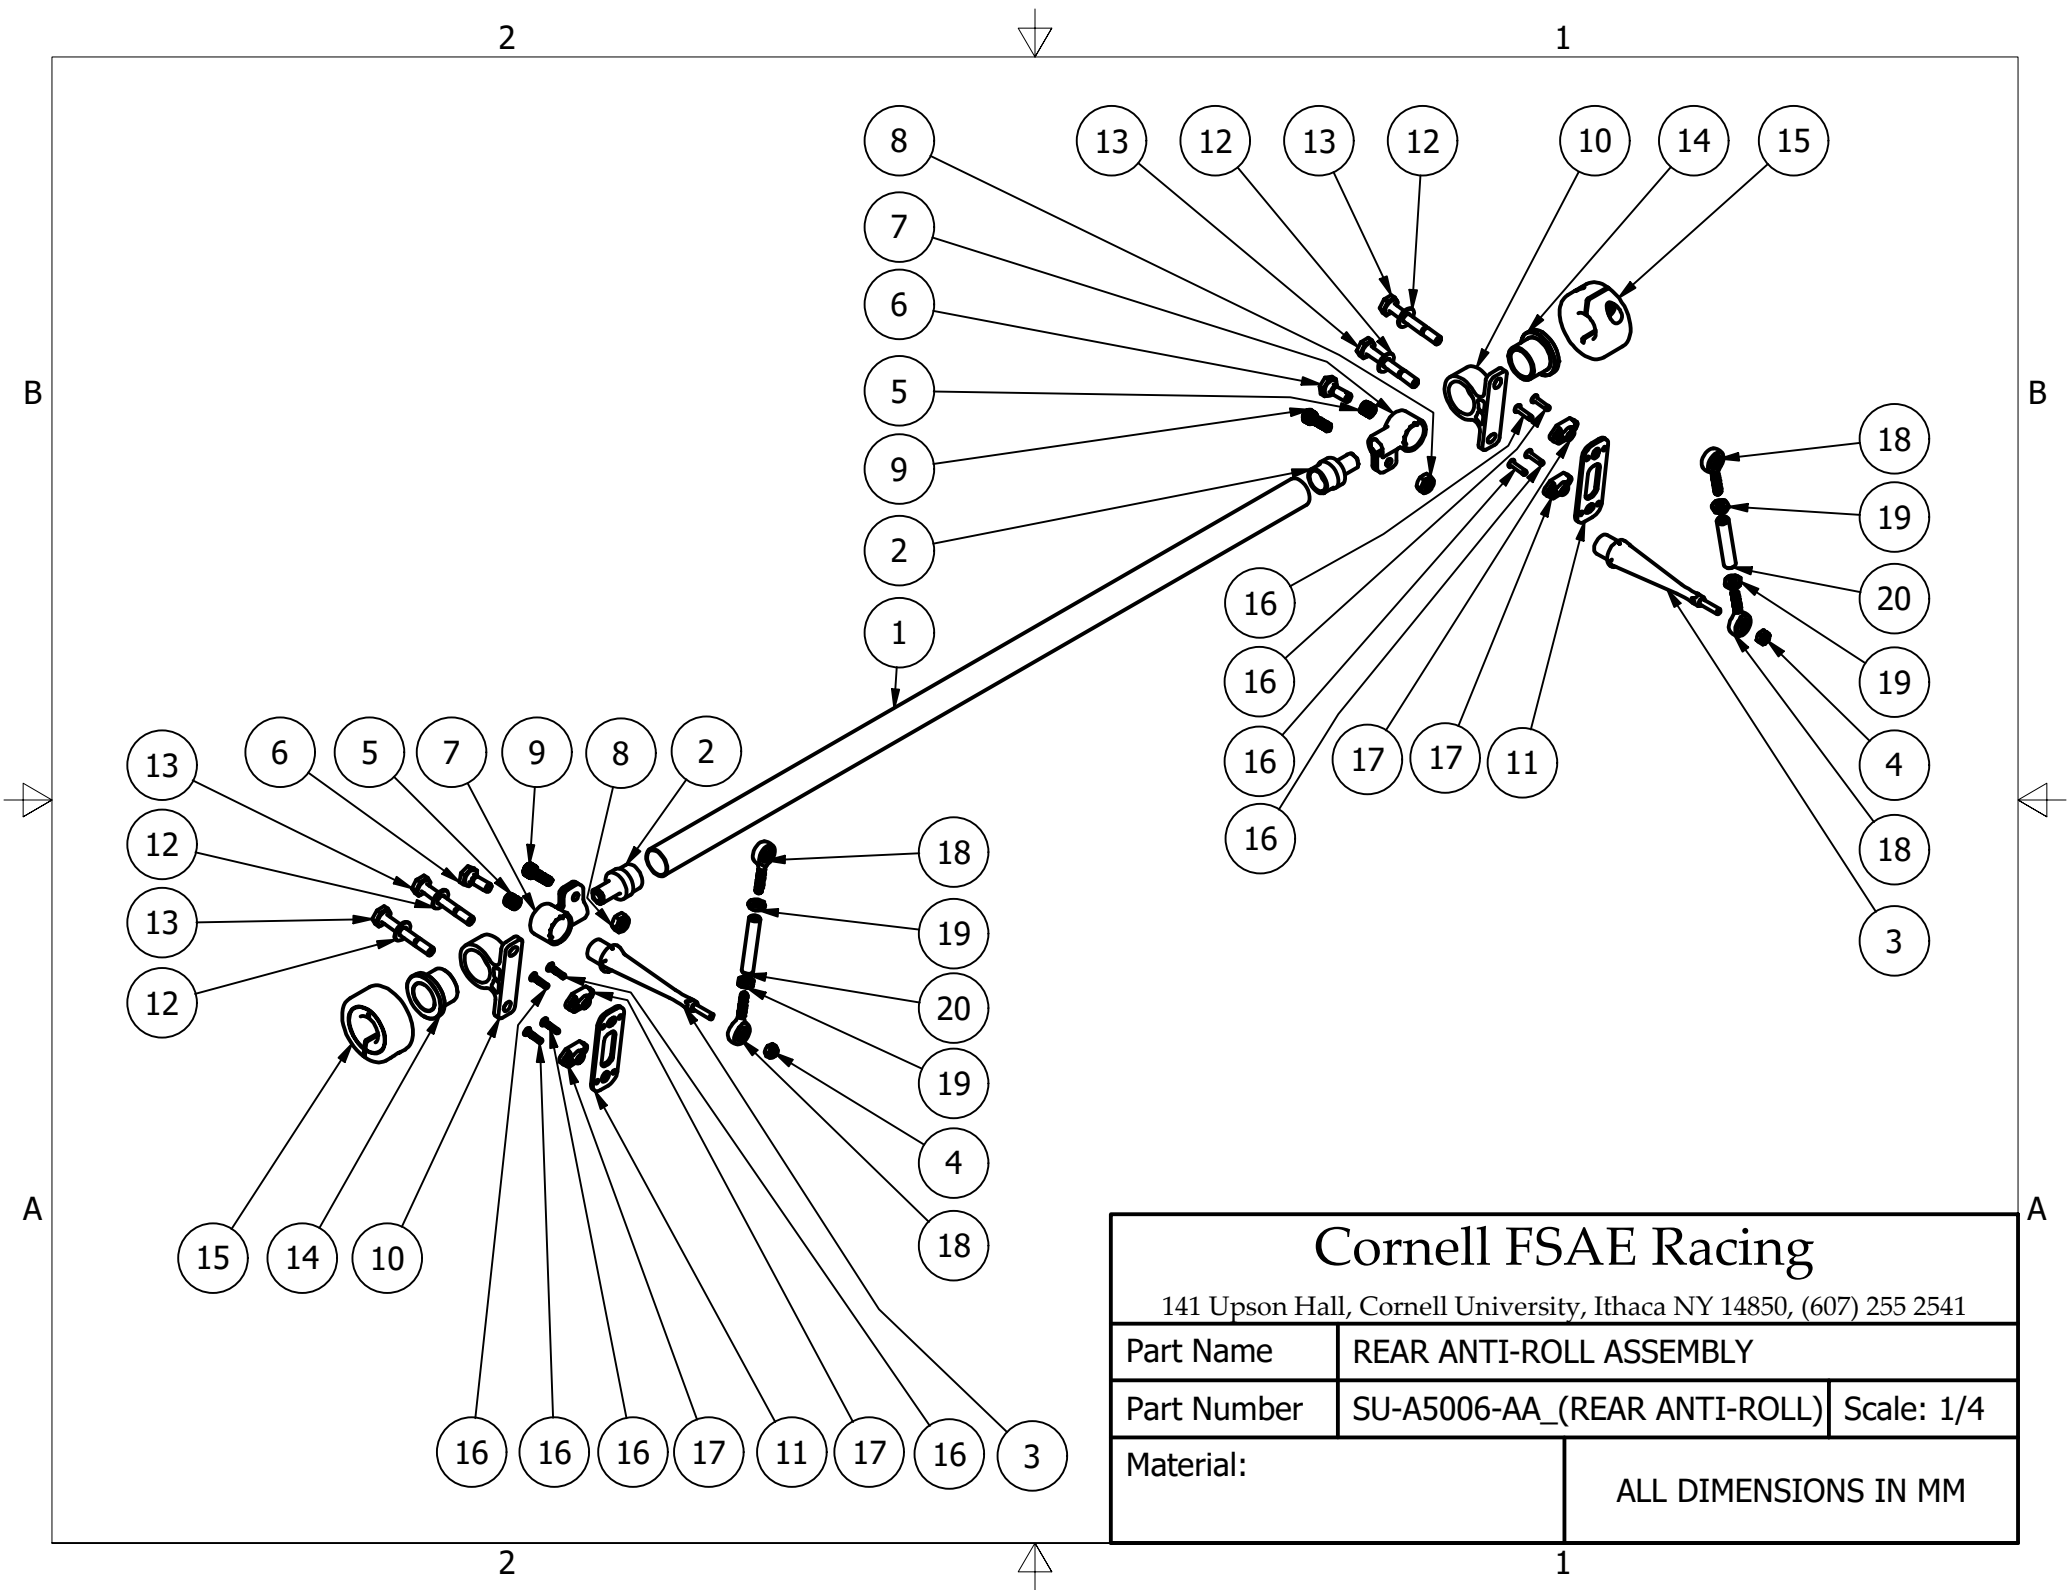

2

1

B

B



PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5006-AA-00009-AA	RARB TORSION BAR
2	2	SU-A5006-AA-00010-AA	RARB TORSION BAR INSERT
3	2	SU-A5006-AA-00011-AA	REAR ARB BLADE
4	2	N/A	5-40 NYLON INSERT LOCKNUT
5	2	N/A	10-32 DISTORTED THREAD HELICOIL
6	2	N/A	AN3-4 BOLT
7	2	SU-A5006-AA-00012-AA	RARB ADAPTER
8	2	N/A	8-32 NYLON INSERT LOCKNUT
9	2	N/A	8-32 SOCKET HEAD SCREW
10	2	SU-A5006-AA-00013-AA	RARB MOUNT
11	2	SU-A5006-AA-00014-AA	RARB MOUNT BACKING PLATE
12	4	N/A	AN3 WASHER LOPRO
13	4	N/A	AN3-13 BOLT
14	2	N/A	BRONZE FLANGED SLEEVE BUSHING
15	2	N/A	.625IN CLAMPING SHAFT COLLAR
16	8	N/A	ALUMINUM BLIND RIVETS
17	4	N/A	10-32 DISTORTED THREAD NUT PLATE
18	4	N/A	6-32 BALL JOINT ROD END
19	4	N/A	6-32 CHECK NUT
20	2	SU-A5006-AA-00015-AA	RARB DROP LINK

A

A

2


1

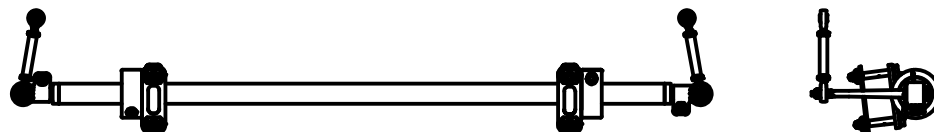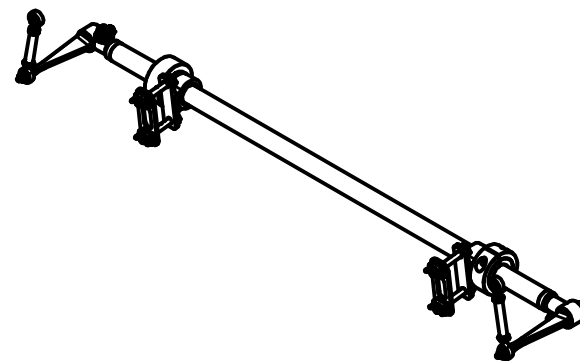

Cornell FSAE Racing


141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541

Part Name	REAR ANTI-ROLL ASSEMBLY	
Part Number	SU-A5006-AA_(REAR ANTI-ROLL)	Scale: 1 / 6
Material:	ALL DIMENSIONS IN MM	

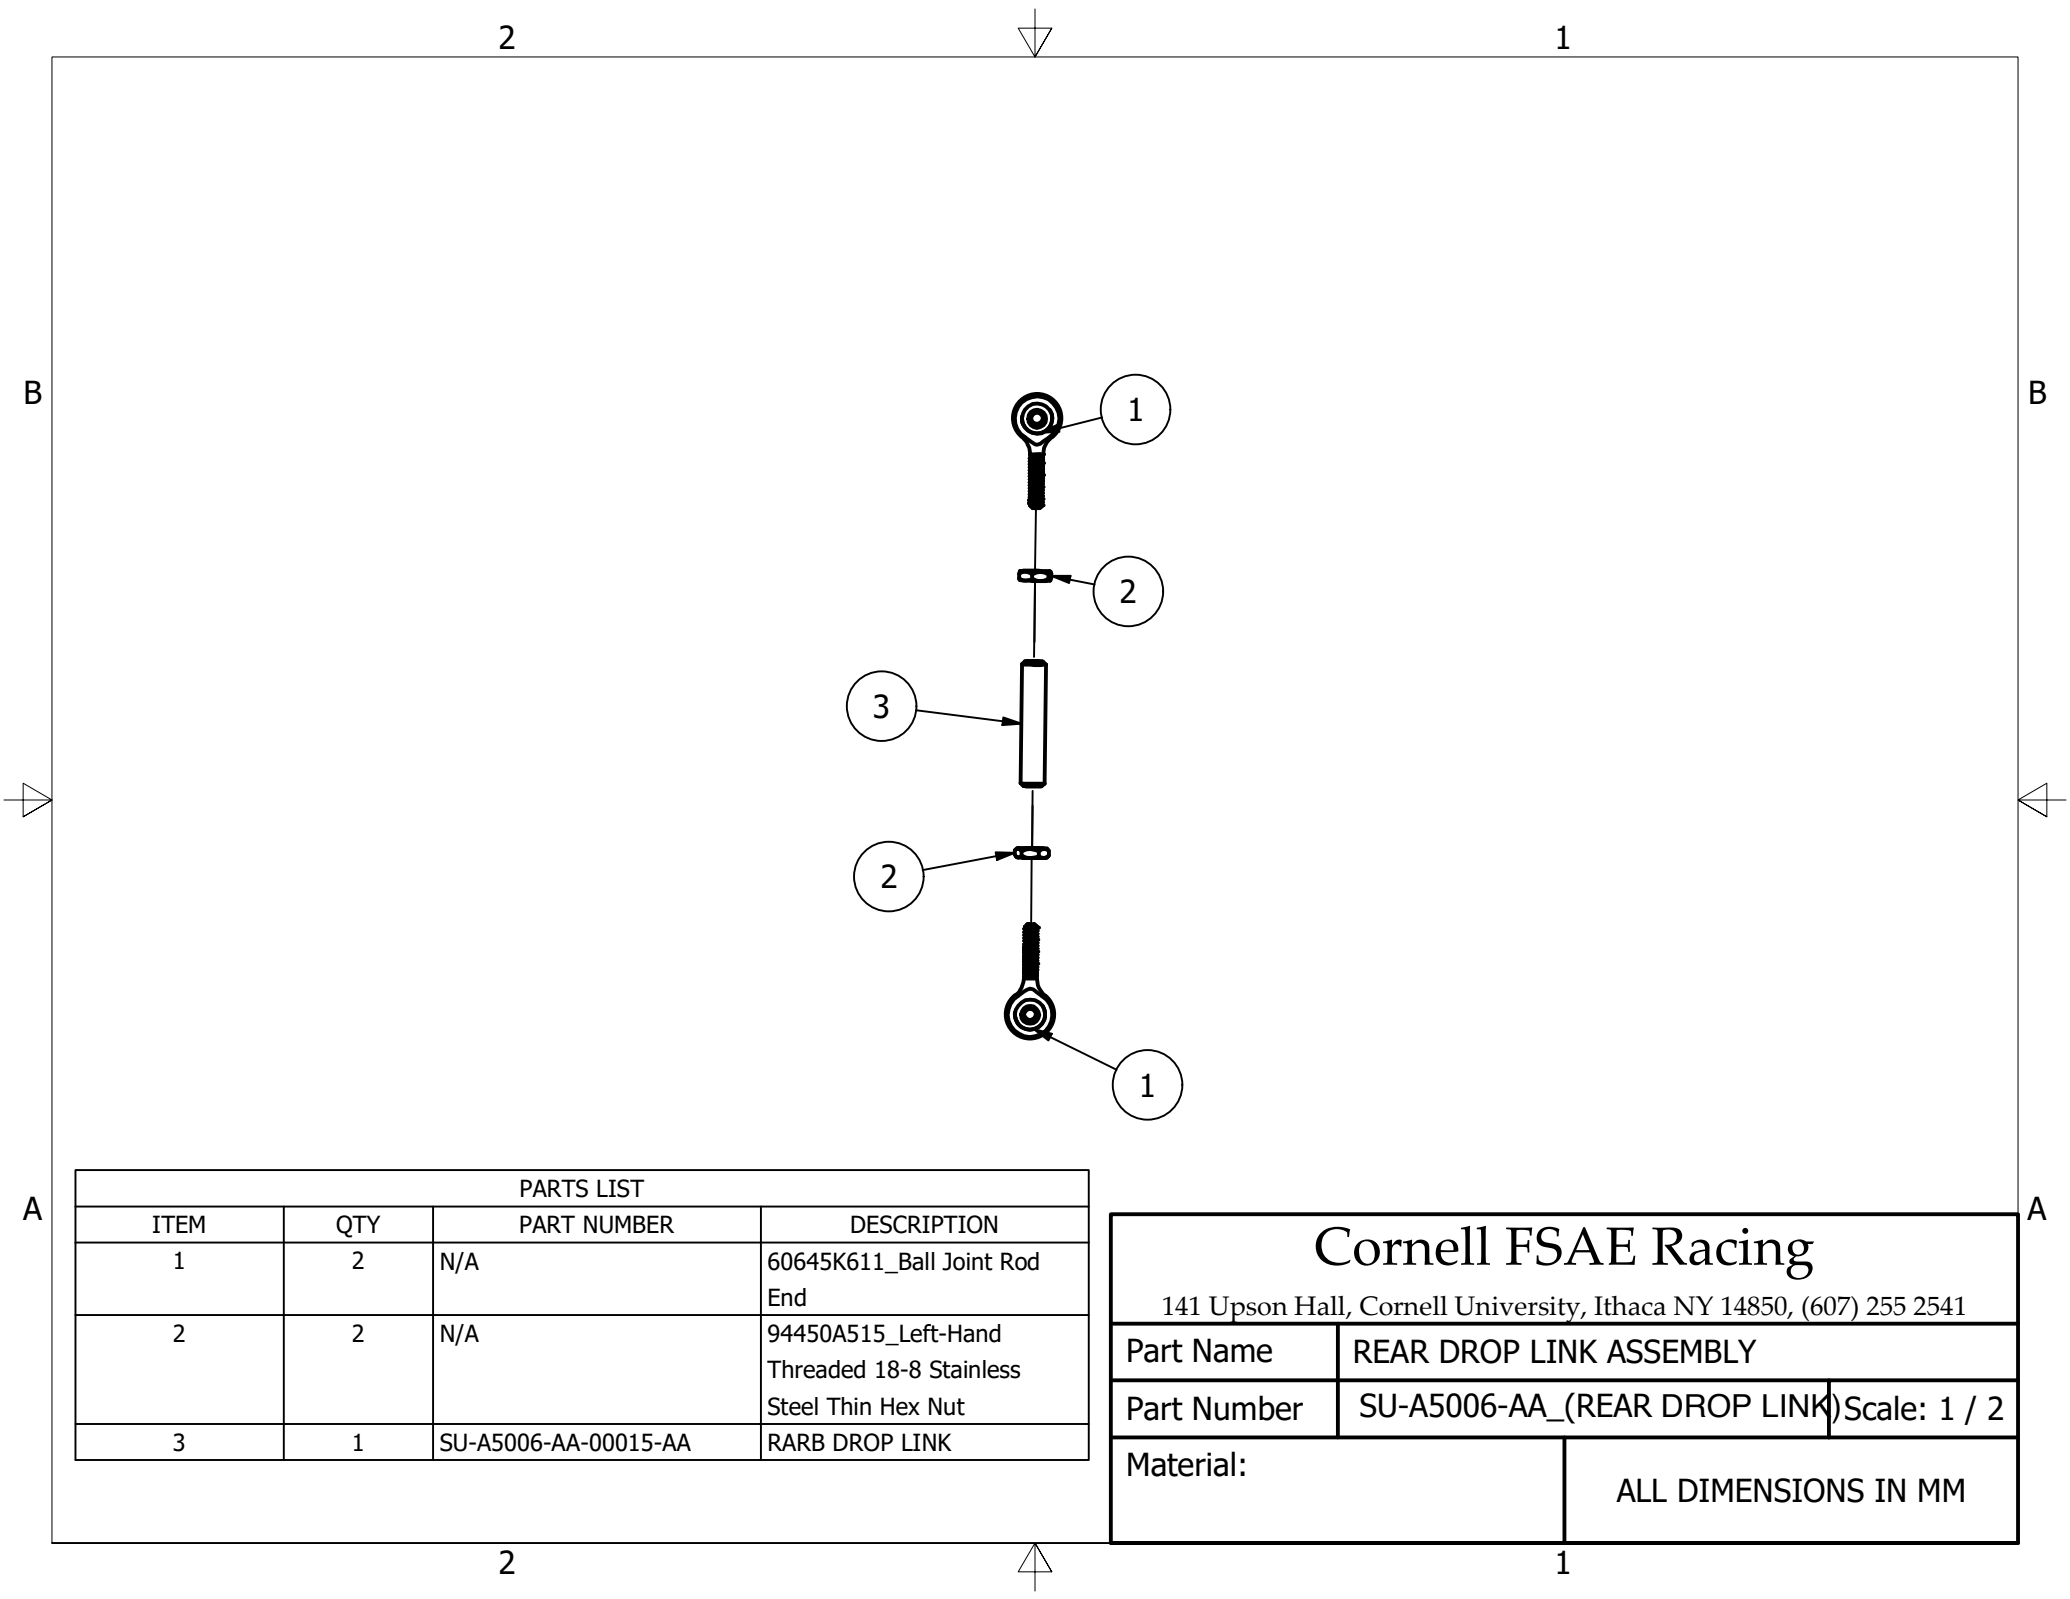


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	2	N/A	60645K611_Ball Joint Rod End
2	2	N/A	94450A515_Left-Hand Threaded 18-8 Stainless Steel Thin Hex Nut
3	1	SU-A5006-AA-00015-AA	RARB DROP LINK


Cornell FSAE Racing			
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541			
Part Name	REAR DROP LINK ASSEMBLY		
Part Number	SU-A5006-AA_(REAR DROP LINK)	Scale: 1 / 2	
Material:		ALL DIMENSIONS IN MM	

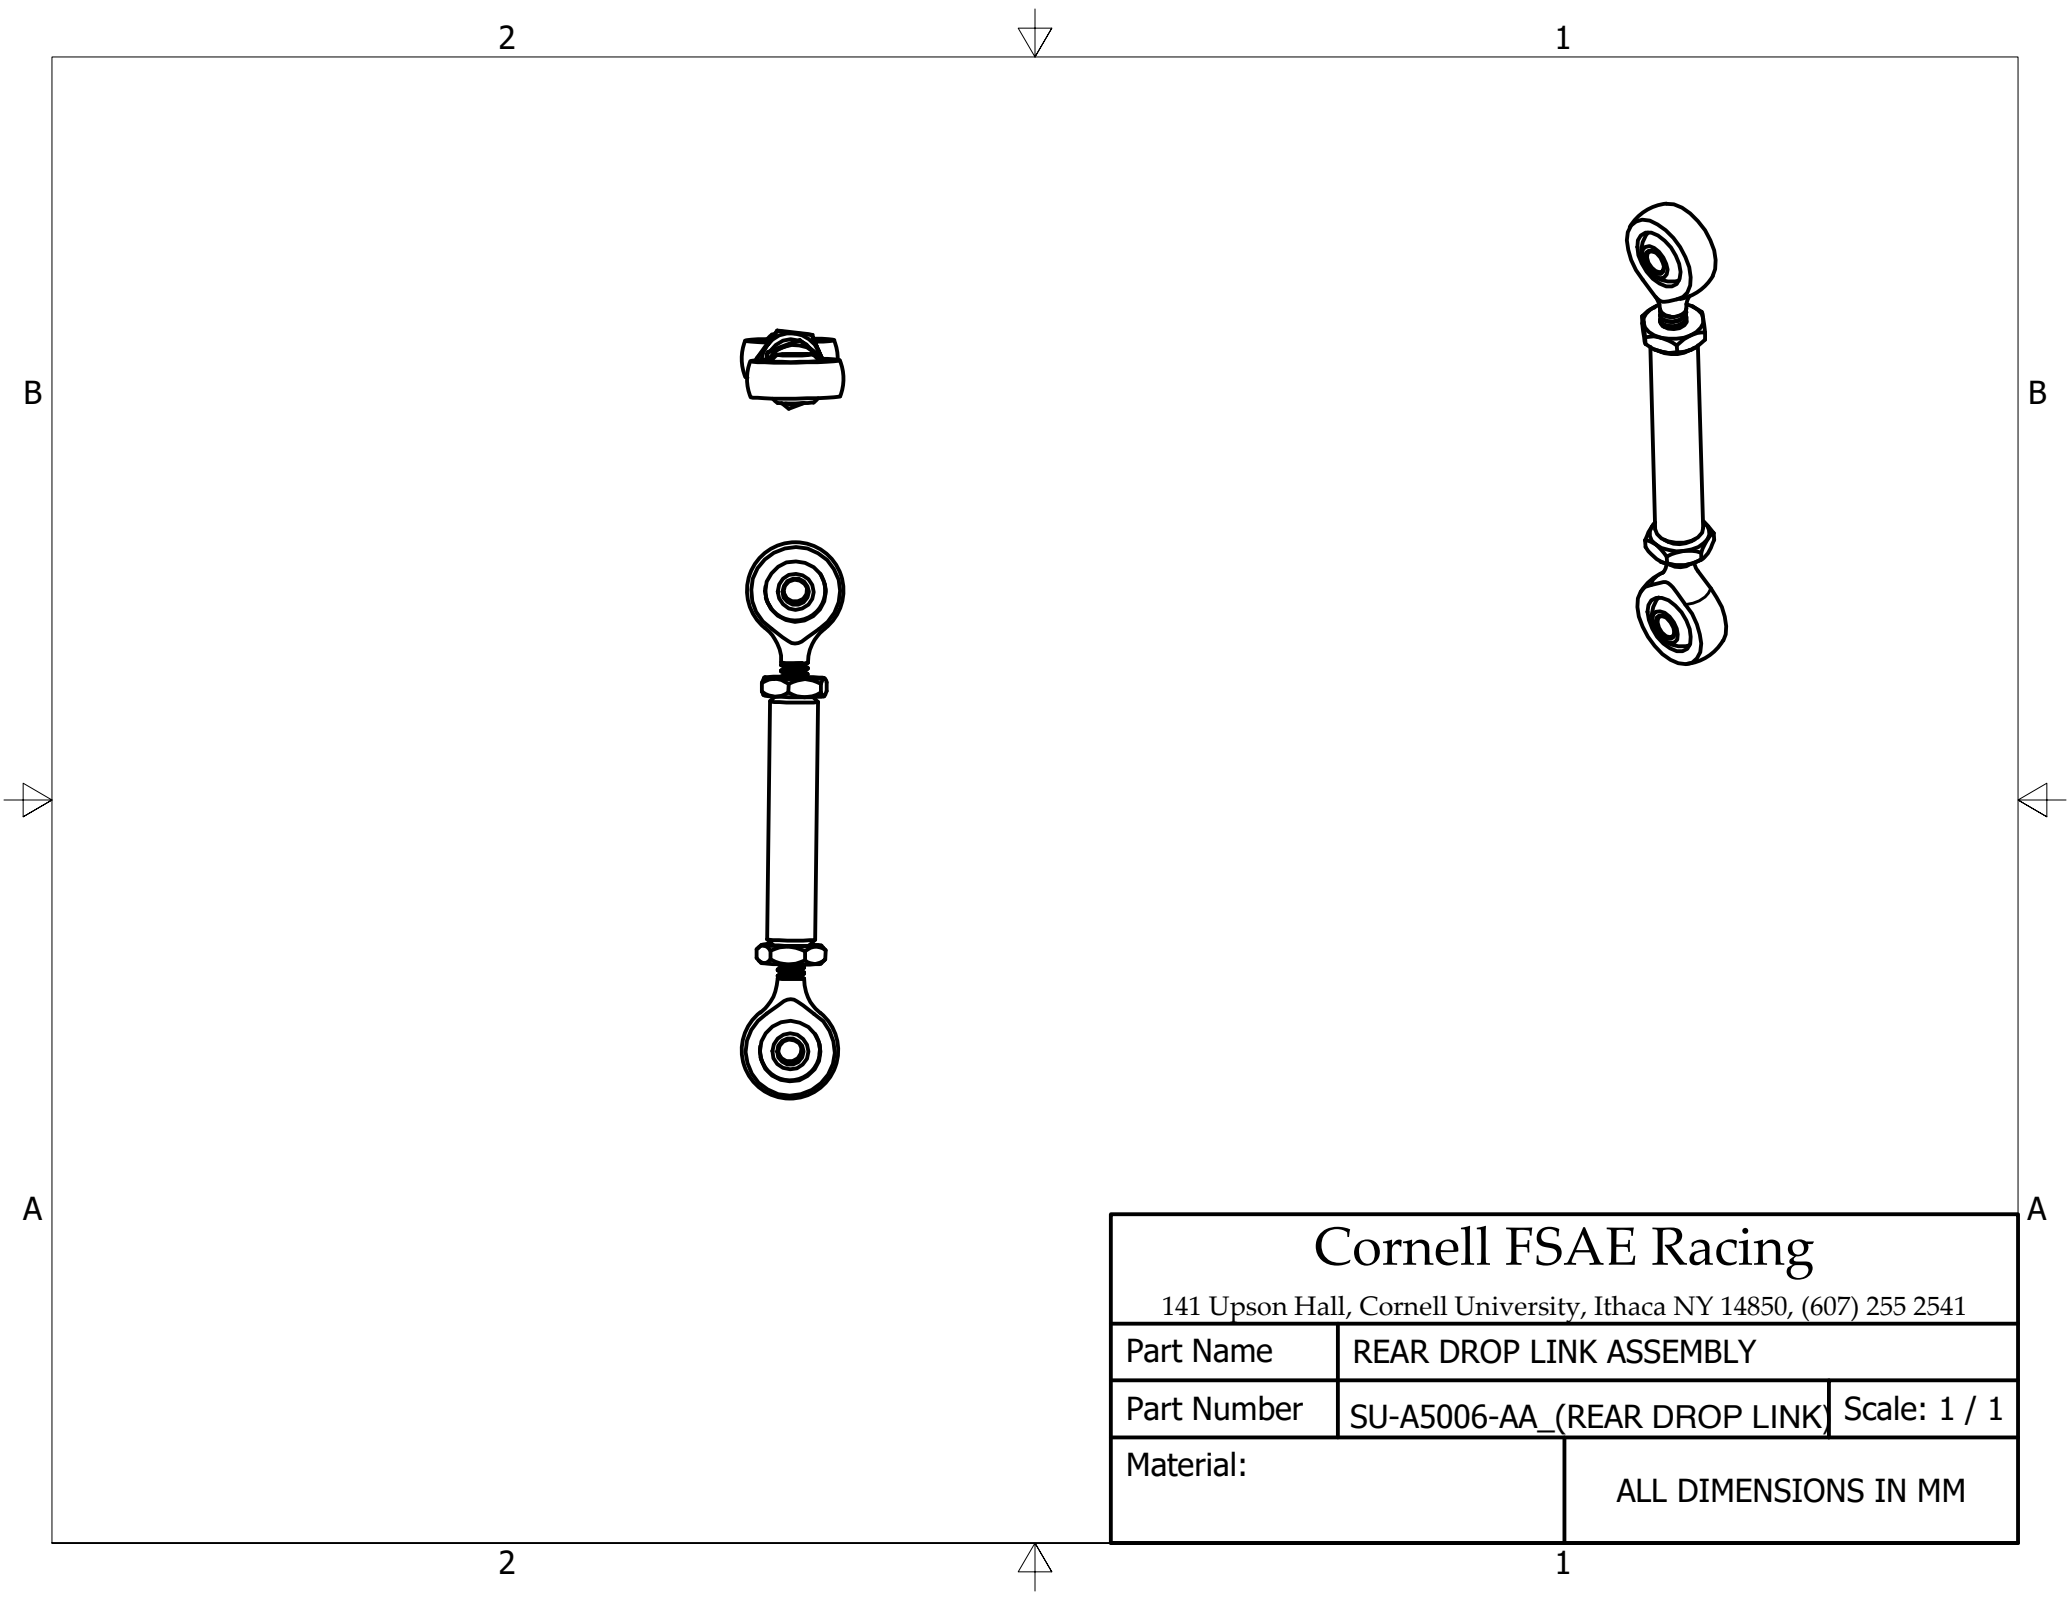

Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	REAR DROP LINK ASSEMBLY	
Part Number	SU-A5006-AA_(REAR DROP LINK)	Scale: 1 / 1
Material:	ALL DIMENSIONS IN MM	


NOTES, UNLESS OTHERWISE SPECIFIED:

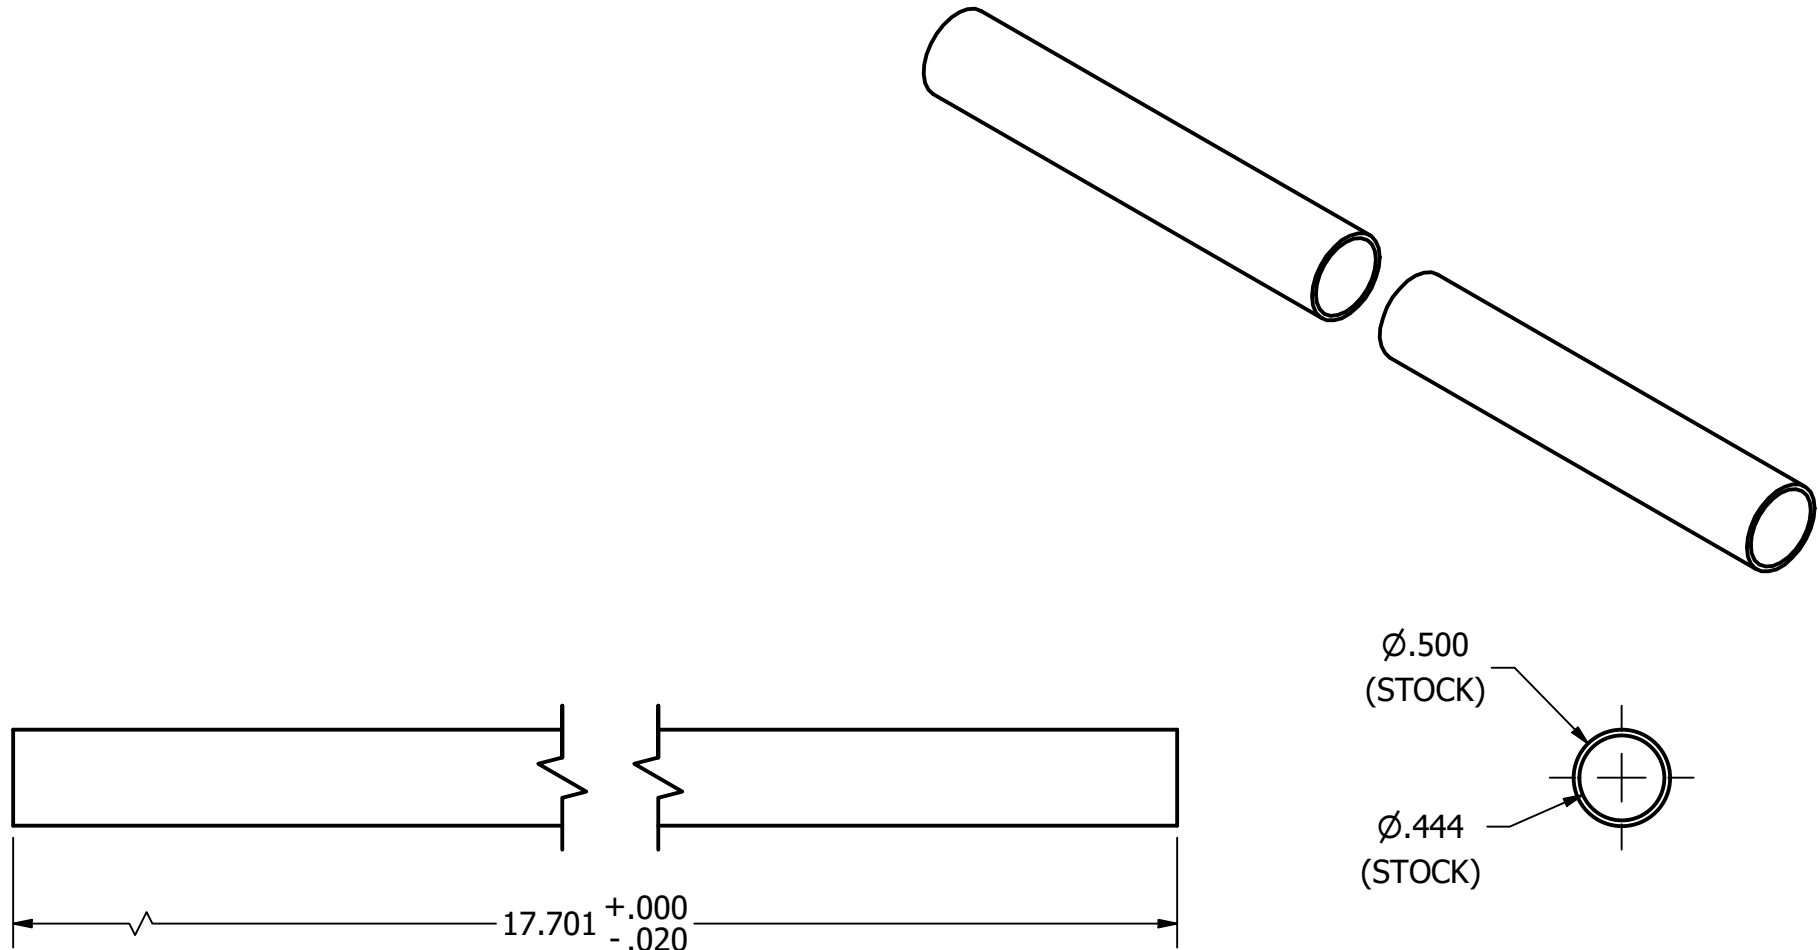





MATERIAL STEEL, AISI 4130		THIRD ANGLE PROJECTION 		SUBSYSTEM: ANTI-ROLL		DATE 3/2/2026					
TOLERANCES, UNLESS SPECIFIED				DESCRIPTION FARB TORSION BAR							
FINISH BARE		DESIGNER JUNSEOK KANG		SIZE A		P/N SU-A5006-AA-00001-AA			REV A		
INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER JUNSEOK KANG		SCALE 1		DO NOT SCALE				SHEET 1 / 1	
ALL DIMENSIONS IN INCHES		DRAWN BY SUJAN MUNVER									
ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		APPROVAL									
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		Ø 0.005 Ø +0.006 -0.001									


NOTES, UNLESS OTHERWISE SPECIFIED:

1. NON-CRITICAL RADIUS.
2. PRE-MACHINE MAJOR DIMENSIONS ON LATHE.
POST-MACHINE ON CNC.




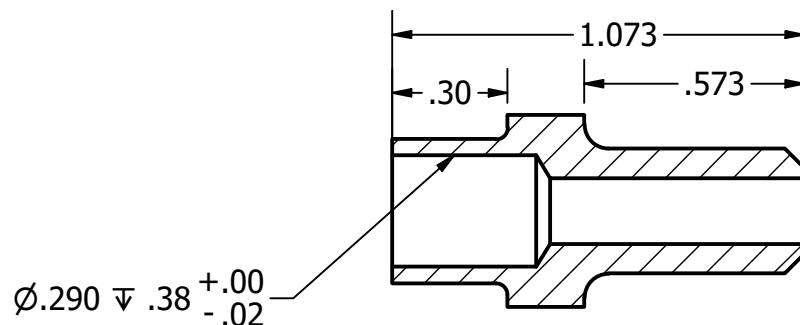


SECTION A-A
SCALE 2:1

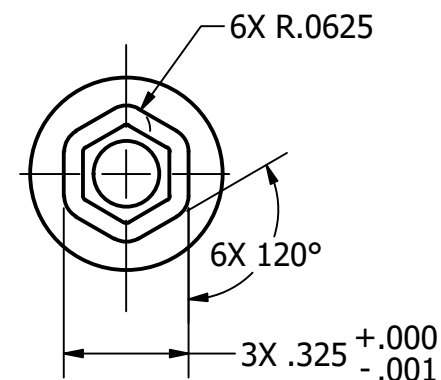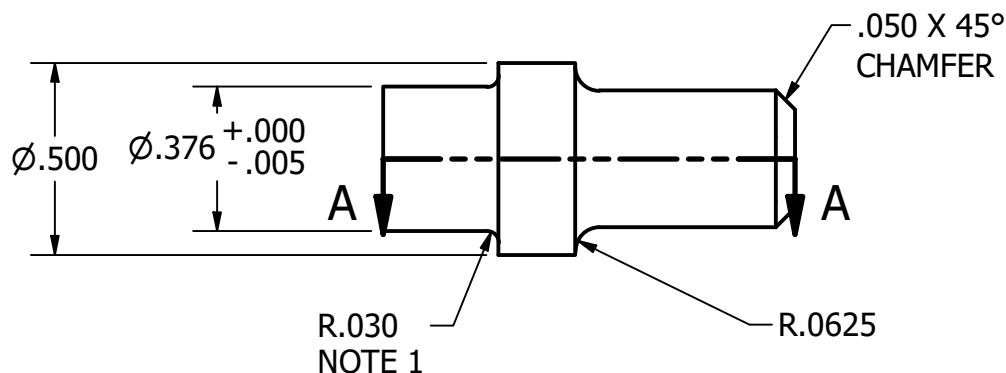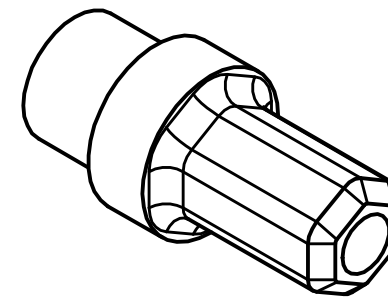


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE				
STEEL, AISI 4130				ANTI-ROLL		4/17/2026		CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION				
BARE		INTERPRET PER ASME Y14.5-2018		SUJAN MUNVER		FARB TORSION BAR INSERT				
LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 $\varnothing \pm 0.006$ -0.001		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER SUJAN MUNVER		SIZE A		P/N SU-A5006-AA-00002-AA		REV A
ALL DIMENSIONS IN INCHES				DRAWN BY SUJAN MUNVER		SCALE 2:1		DO NOT SCALE		SHEET 1 / 1
				APPROVAL						

- NOTES, UNLESS OTHERWISE SPECIFIED:
1. ALL DIMENSIONS .010|A|B|C UNLESS OTHERWISE SPECIFIED
 2. GAS-CARBURIZE AT 893C (1640F) FOR 380 MINUTES WITH A CARBON POTENTIAL OF 1.14 DURING THE SOAK. THEN QUENCH IN OIL AT 121C (250F), AND TEMPER AT 149C (300F) FOR 1 HOUR.
 3. ENGRAVE 2X TO ∇ .005
 4. CADMIUM PLATE (BLACK FINISH)

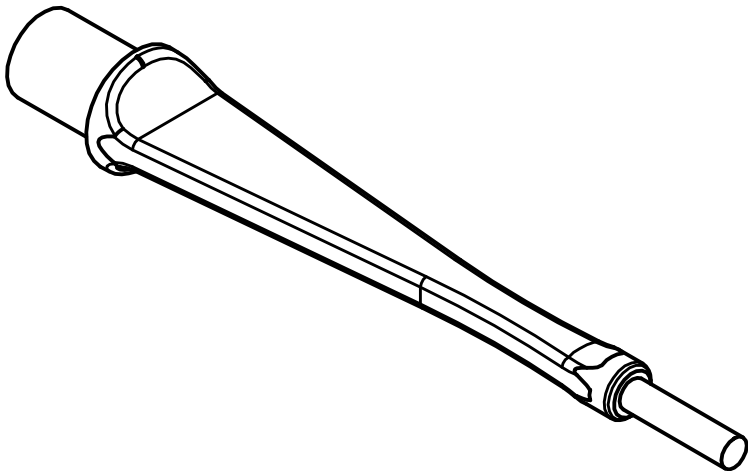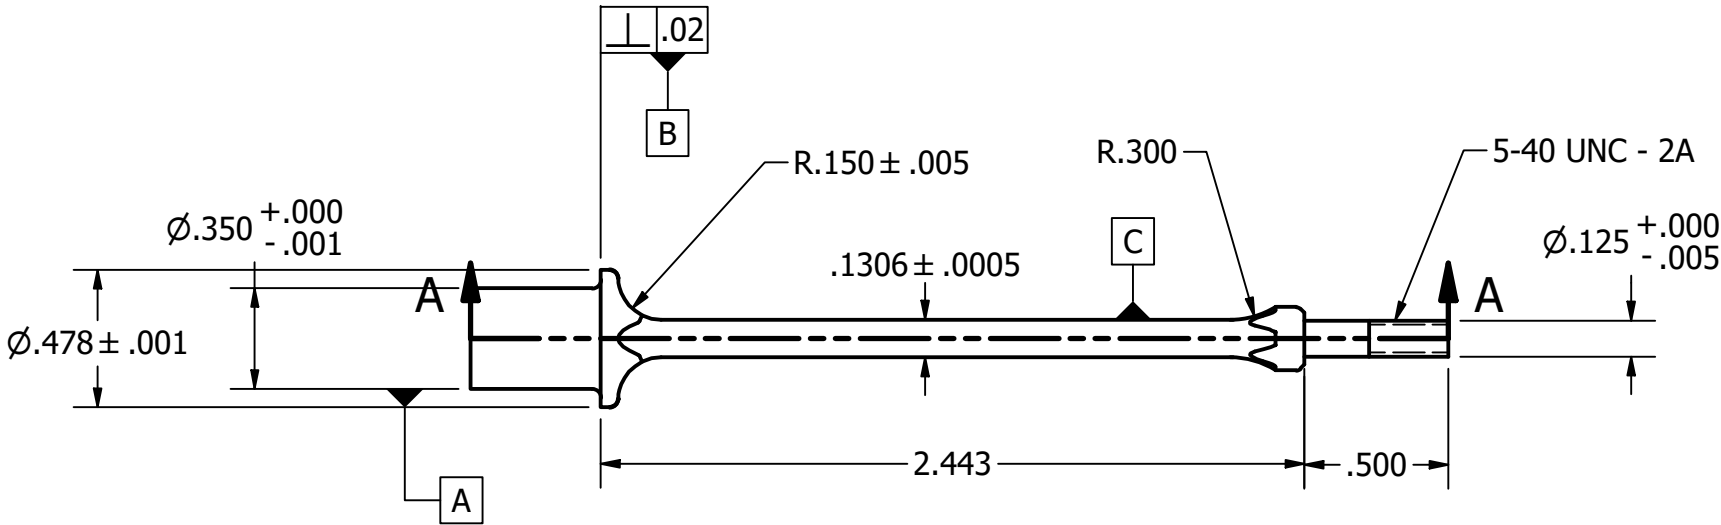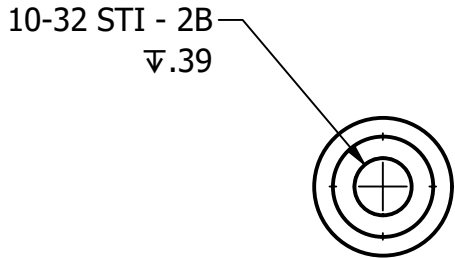

DETAIL B
SCALE 5:1
(NOTE 3)

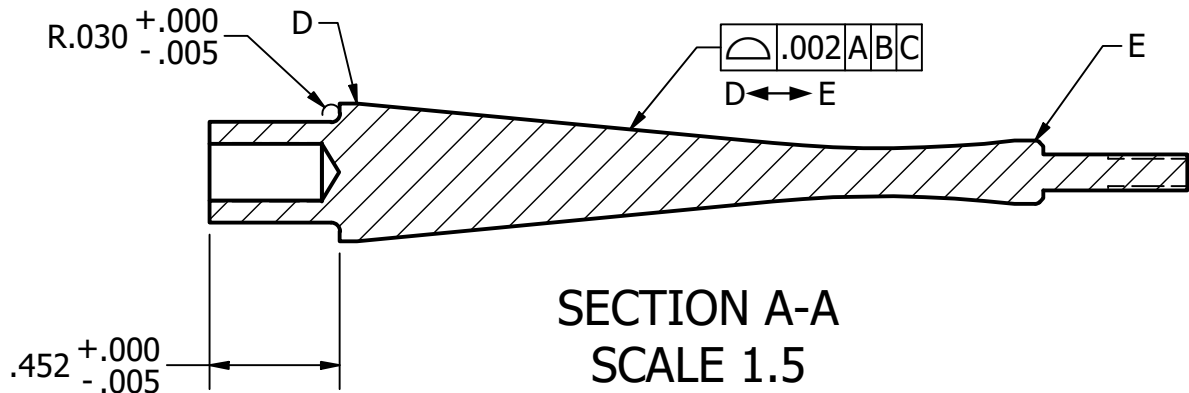


SECTION A-A
SCALE 1.5

MATERIAL		STEEL, AISI 8620		THIRD ANGLE PROJECTION		SUBSYSTEM: ANTI-ROLL		DATE 3/8/2026			
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION FRONT ARB BLADE					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		Ø 0.005 Ø +0.006 -0.001									
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018									
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING									
				DESIGNER SUJAN MUNVER		SIZE B		P/N SU-A5006-AA-00003-AA		REV A	
				RESPONSIBLE ENGINEER SUJAN MUNVER		SCALE 1.5		DO NOT SCALE		SHEET 1 / 1	
				DRAWN BY A. BACKHOLM							
				APPROVAL							



NOTES, UNLESS OTHERWISE SPECIFIED:


1. ALL DIMENSIONS $\frac{\text{.010}}{\text{A B C}}$ UNLESS OTHERWISE SPECIFIED
2. ENGRAVE 16X TO $\nabla .005$

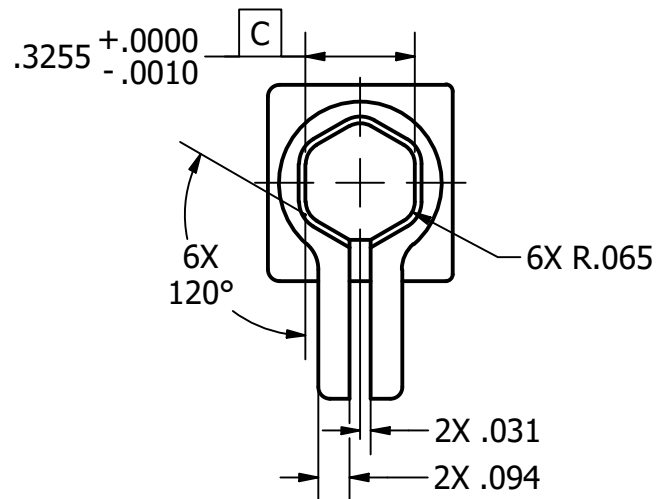

SECTION A-A
SCALE 1.75:1




DETAIL B
SCALE 5:1
(NOTE 2)

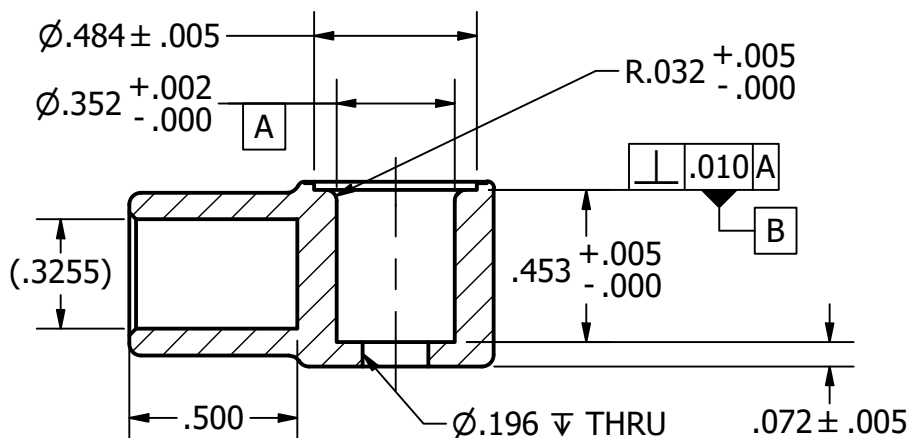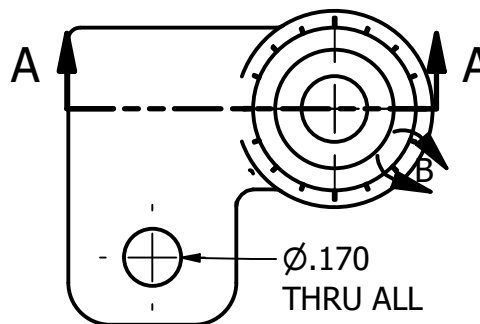


MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: ANTI-ROLL		DATE 3/8/2026		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION FARB ADAPTER							
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018										DESIGNER SUJAN MUNVER	
⌀ 0.005 ⌀ +0.006 -0.001		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING										RESPONSIBLE ENGINEER SUJAN MUNVER	
												DRAWN BY SUJAN MUNVER	
				APPROVAL									
ALL DIMENSIONS IN INCHES				SCALE 1.75:1		P/N SU-A5006-AA-00004-AA		DO NOT SCALE		REV A SHEET 1 / 1			

NOTES, UNLESS OTHERWISE SPECIFIED:

1. ALL DIMENSIONS  .010/ABC UNLESS OTHERWISE SPECIFIED.

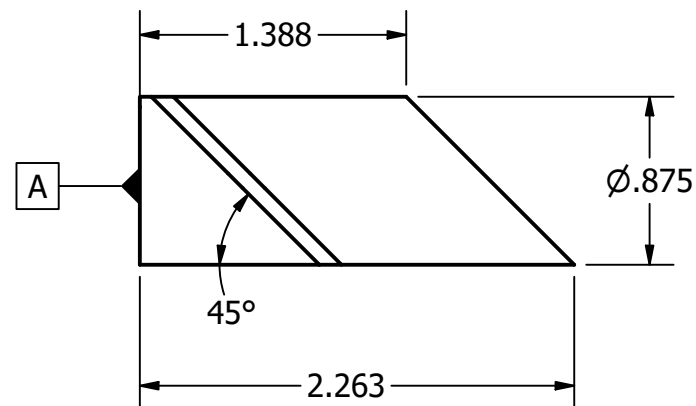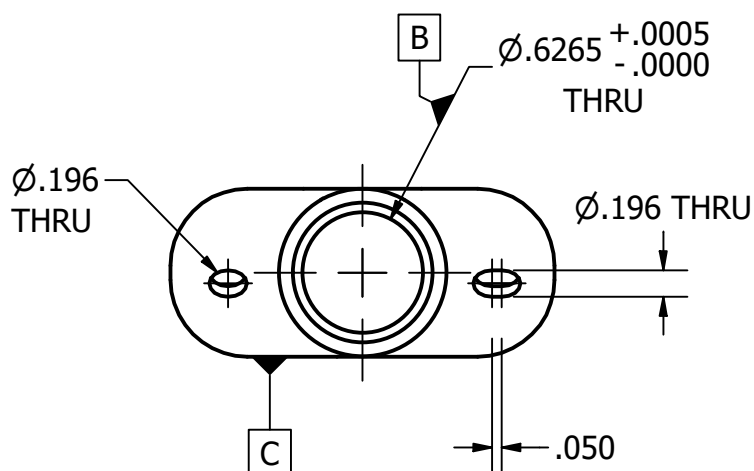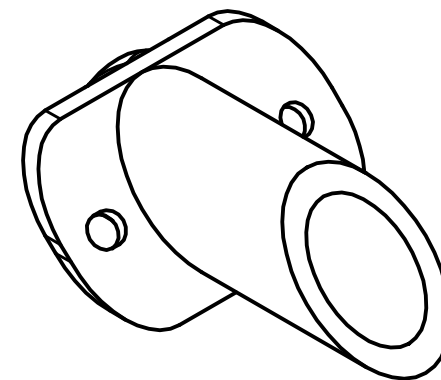


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE		CORNELL RACING	
ALUMINUM, 7075-T651				ANTI-ROLL		3/8/2026			
TOLERANCES, UNLESS SPECIFIED		FINISH		DESCRIPTION					
BARE		DESIGNER		FARB MOUNT					
INTERPRET PER ASME Y14.5-2018		SUJAN MUNVER							
ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER		SIZE		P/N			REV
		SUJAN MUNVER		A		SU-A5006-AA-00005-AA			A
		DRAWN BY		SCALE		DO NOT SCALE			SHEET
		SUJAN MUNVER		1					1 / 1
		APPROVAL							

LINEAR:
X.X ± 0.1
X.XX ± 0.02
X.XXX ± 0.010


⌀ 0.005
⌀ +0.006
-0.001


ALL DIMENSIONS
IN INCHES

NOTES, UNLESS OTHERWISE SPECIFIED:
1. LASER CUT, .063 THICKNESS

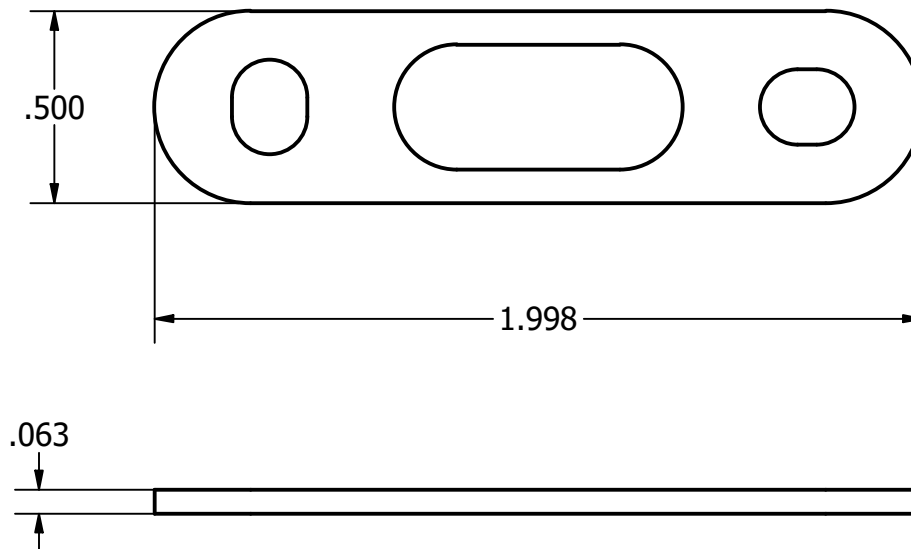


MATERIAL ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION 		SUBSYSTEM: ANTI-ROLL	DATE 3/6/2026				
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 HOLE: Ø 0.005 Ø +0.006 -0.001		FINISH BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER SUJAN MUNVER RESPONSIBLE ENGINEER SUJAN MUNVER DRAWN BY SUJAN MUNVER APPROVAL				DESCRIPTION FARB MOUNT BACKING PLATE	
ALL DIMENSIONS IN INCHES				SIZE A	P/N SU-A5006-AA-00006-AA		REV A		
				SCALE 2	DO NOT SCALE		SHEET 1 / 1		


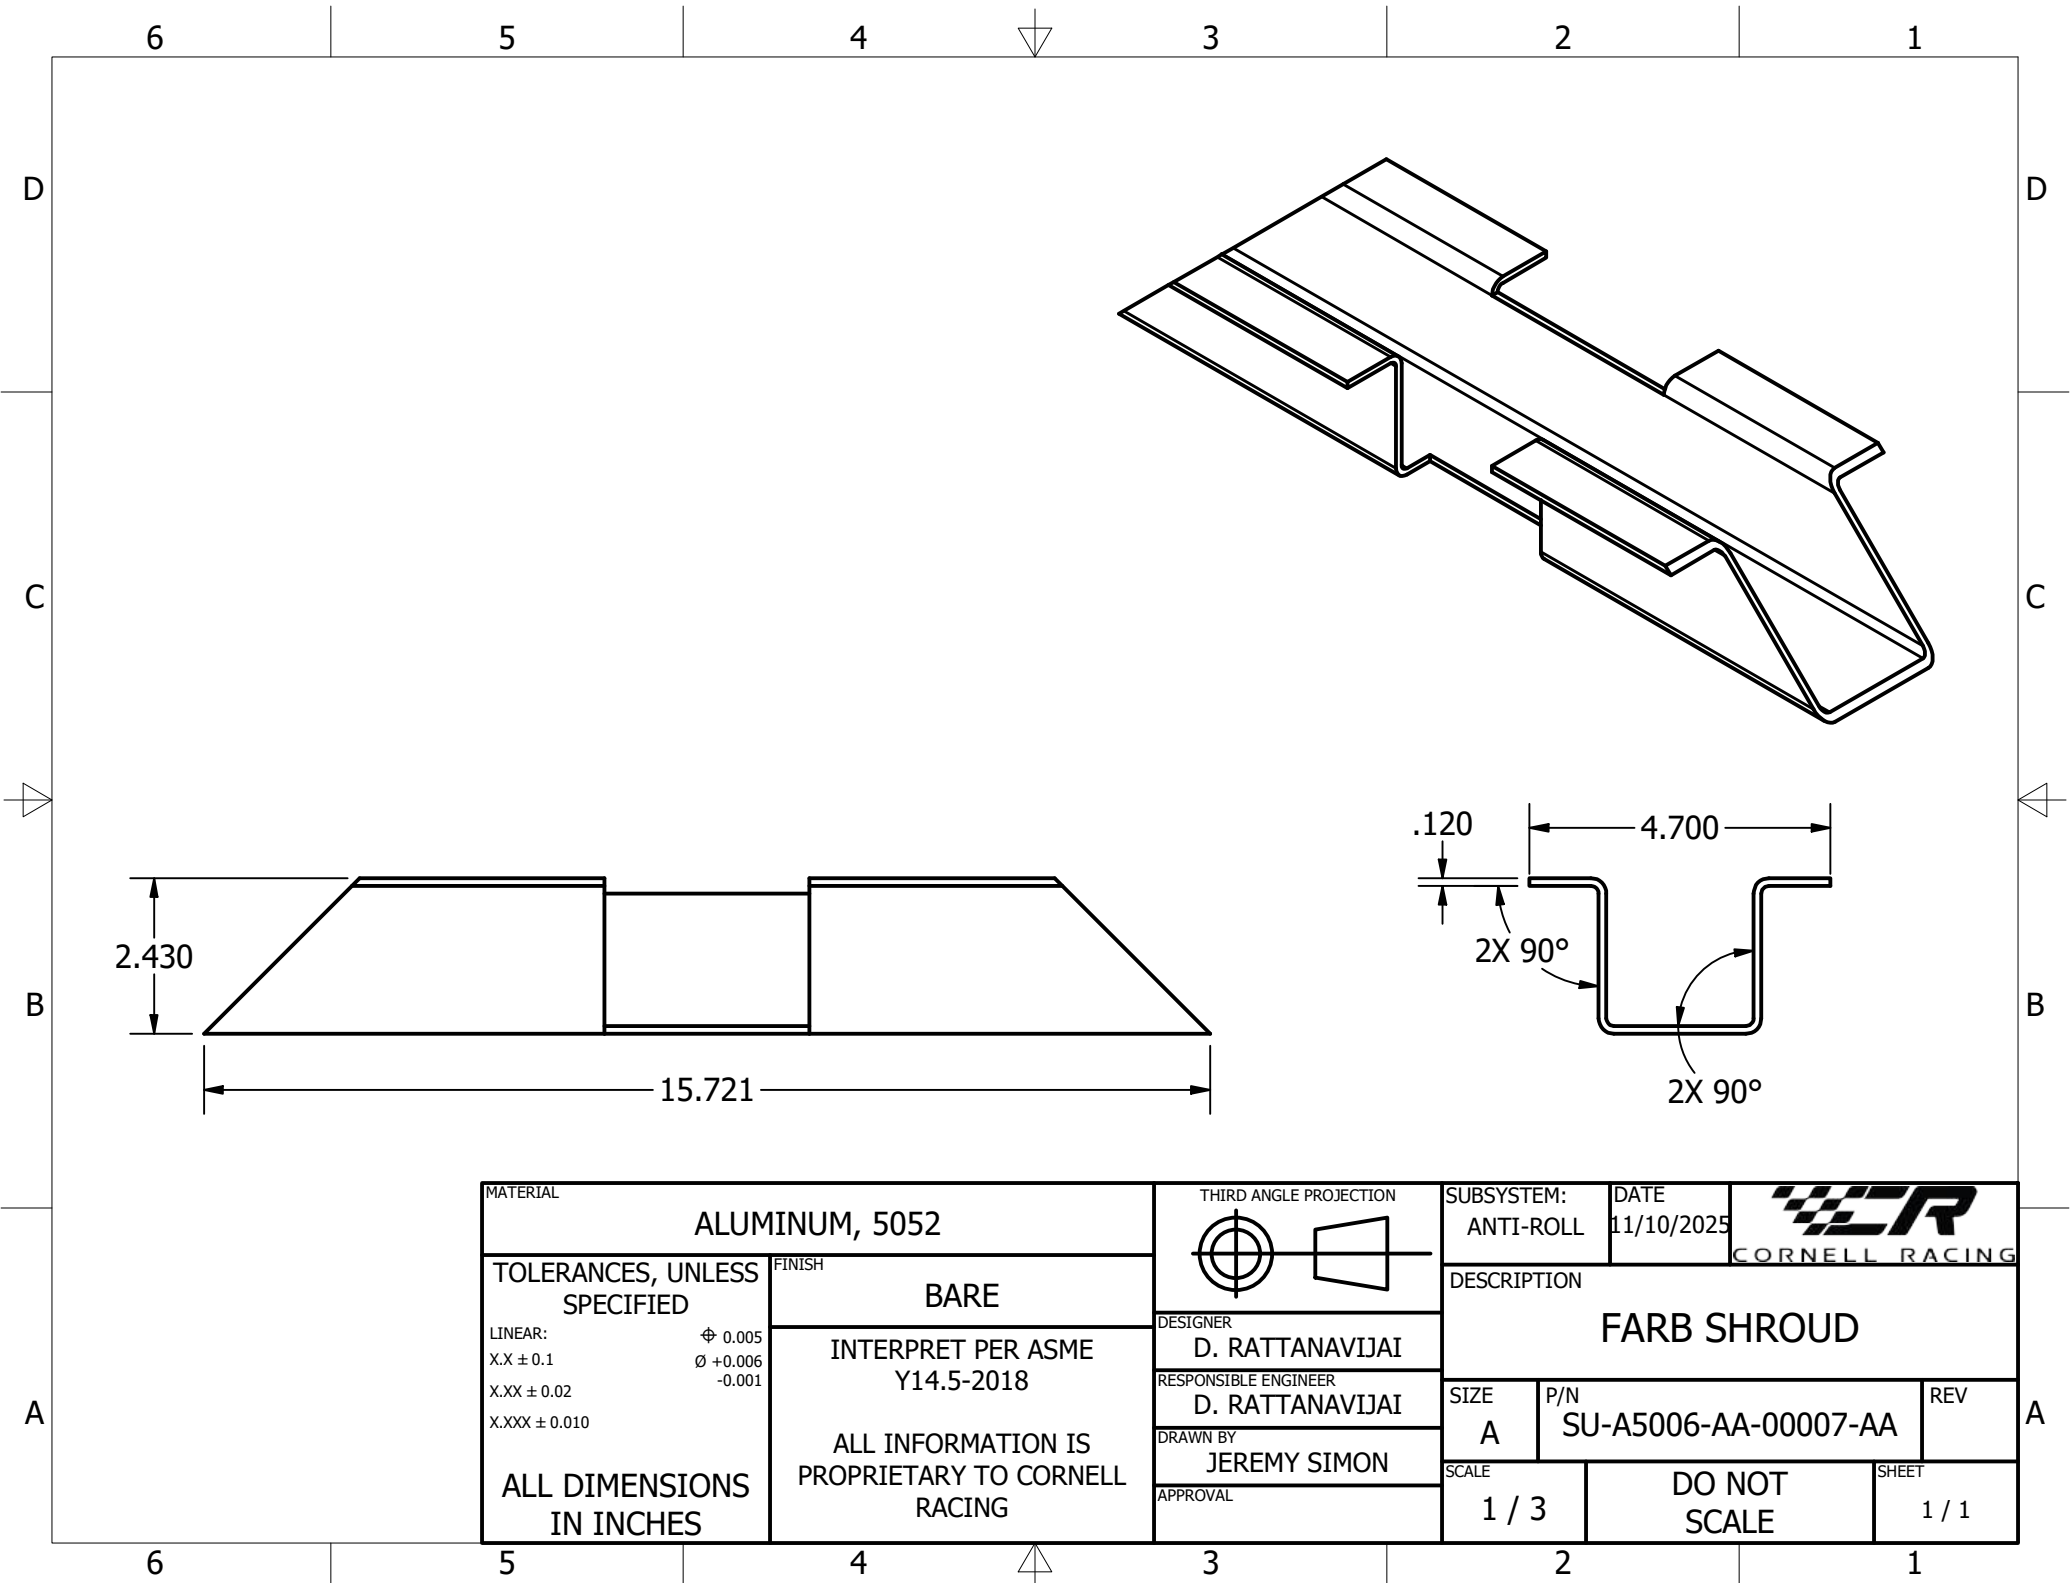


MATERIAL		ALUMINUM, 5052		THIRD ANGLE PROJECTION 		SUBSYSTEM: ANTI-ROLL	DATE 11/10/2025		
TOLERANCES, UNLESS SPECIFIED		FINISH BARE				DESCRIPTION FARB SHROUD			
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		Ø 0.005 Ø +0.006 -0.001		DESIGNER D. RATTANAVIJAI		SIZE A	P/N SU-A5006-AA-00007-AA		REV
		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER D. RATTANAVIJAI					
				DRAWN BY JEREMY SIMON		SCALE 1 / 3	DO NOT SCALE		SHEET 1 / 1
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		APPROVAL					


NOTES, UNLESS OTHERWISE SPECIFIED:






6-32 UNC - 2B
▽ .400

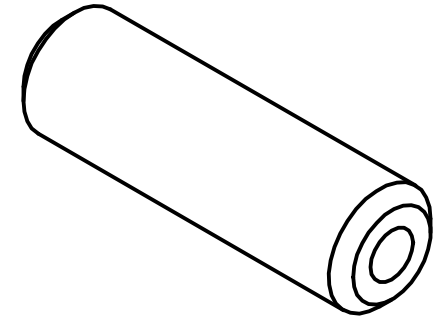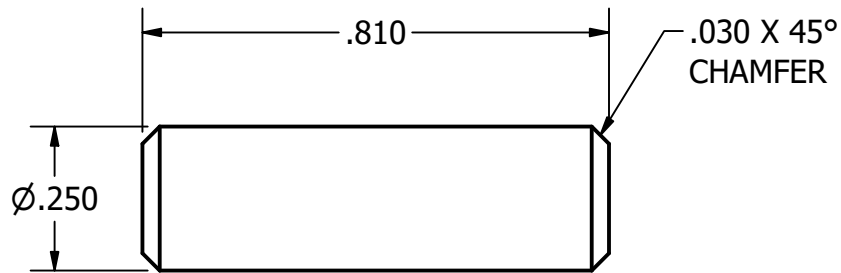

6-32 UNC - 2B LH
▽ .400

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 7075-T651				ANTI-ROLL		2/22/2026		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH	BARE			DESCRIPTION				
	LINEAR: ± 0.005	INTERPRET PER ASME Y14.5-2018			DESIGNER				
	X.X ± 0.1				SUJAN MUNVER				
	X.XX ± 0.02				RESPONSIBLE ENGINEER				
	X.XXX ± 0.010				SUJAN MUNVER				
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING			SIZE	P/N	REV		
					A	SU-A5006-AA-00008-AA	A		
					SCALE	DO NOT SCALE			SHEET
					3				1 / 1


NOTES, UNLESS OTHERWISE SPECIFIED:

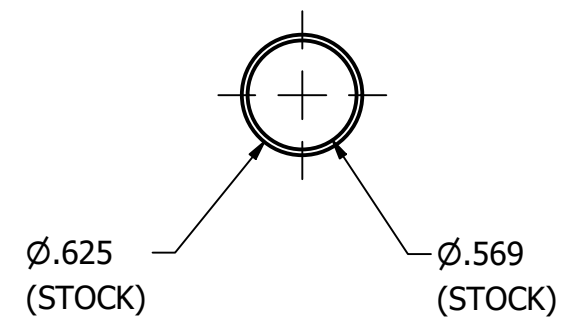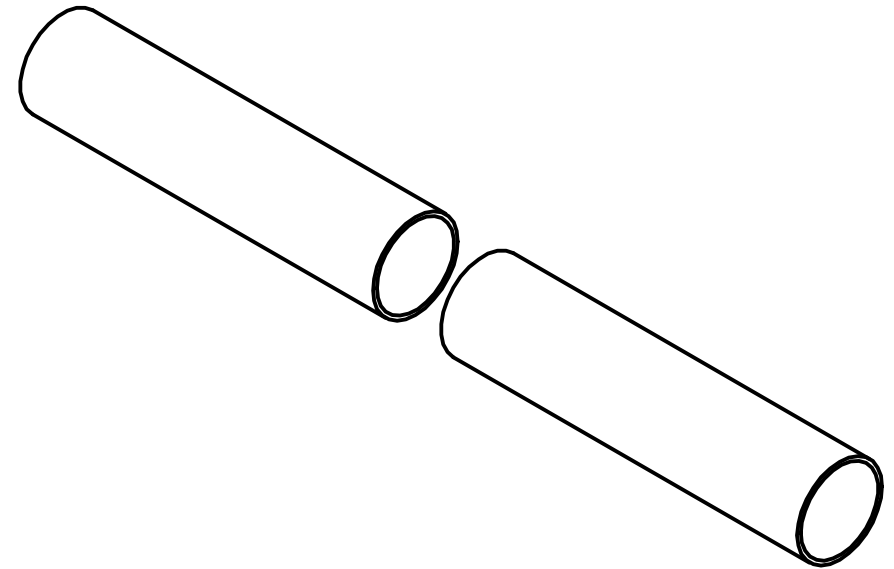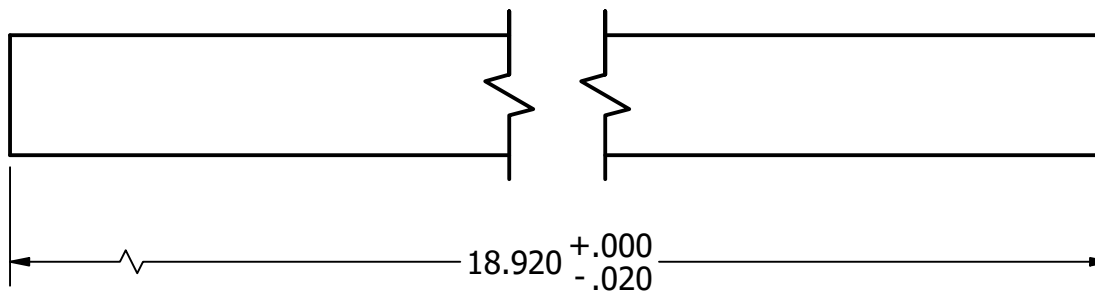


MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: ANTI-ROLL		DATE 3/2/2026		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH	BARE				DESCRIPTION					
		INTERPRET PER ASME Y14.5-2018		DESIGNER		RARB TORSION BAR					
				JUNSEOK KANG							
				RESPONSIBLE ENGINEER							
				JUNSEOK KANG							
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		Ø 0.005 Ø +0.006 -0.001		DRAWN BY		SIZE		P/N		REV	
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		SUJAN MUNVER		A		SU-A5006-AA-00009-AA		A	
				APPROVAL		SCALE		DO NOT SCALE		SHEET	
						1				1 / 1	

NOTES, UNLESS OTHERWISE SPECIFIED:




1. NON-CRITICAL RADIUS.
2. PRE-MACHINE MAJOR DIMENSIONS ON LATHE.
POST-MACHINE ON CNC.

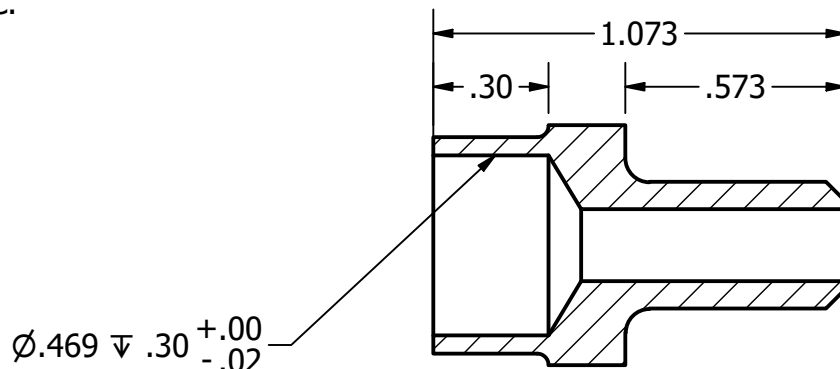

SECTION A-A
SCALE 2



Ø.1875
THRU



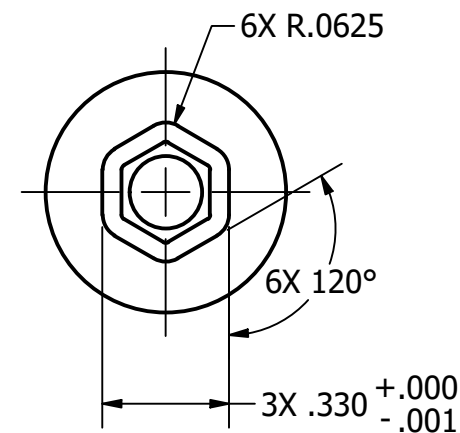
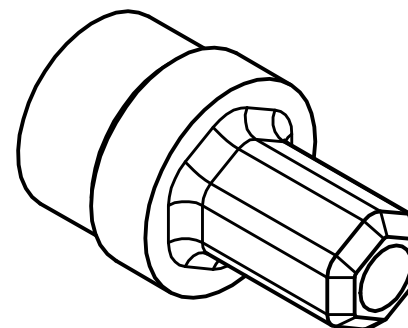
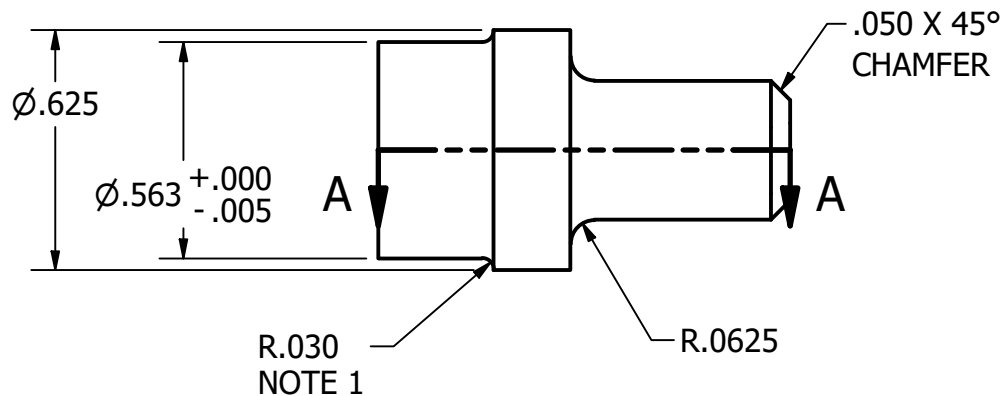


MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: ANTI-ROLL		DATE 3/2/2026			
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES		FINISH		DESIGNER		DESCRIPTION RARB TORSION BAR INSERT					
		BARE		SUJAN MUNVER							
		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		SUJAN MUNVER		A		SU-A5006-AA-00010-AA		A	
				DRAWN BY		SCALE		DO NOT SCALE		SHEET	
				SUJAN MUNVER		2				1 / 1	
				APPROVAL							


1. ALL DIMENSIONS  .010 A B C UNLESS OTHERWISE SPECIFIED
2. GAS-CARBURIZE AT 893C (1640F) FOR 380 MINUTES WITH A CARBON POTENTIAL OF 1.14 DURING THE SOAK. THEN QUENCH IN OIL AT 121C (250F), AND TEMPER AT 149C (300F) FOR 1 HOUR

3. ENGRAVE 2X TO ∇ .005

4. CADMIUM PLATE (BLACK FINISH)

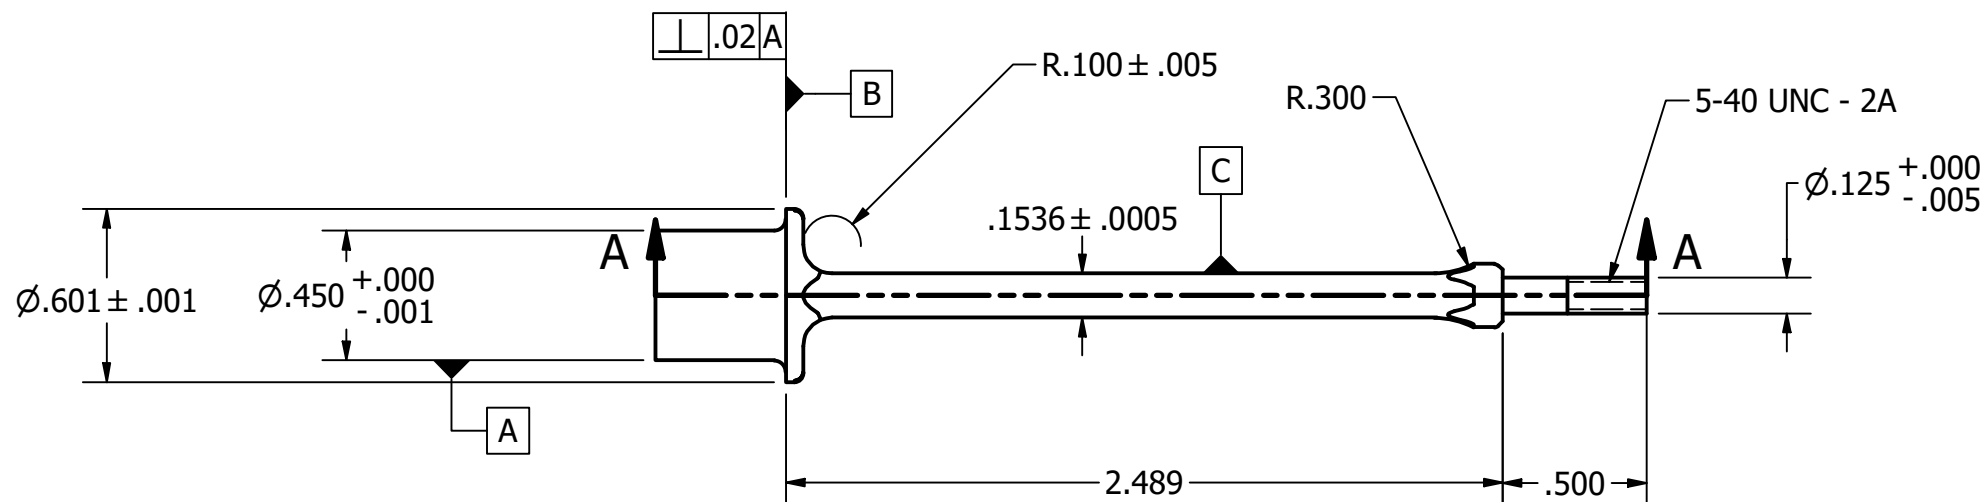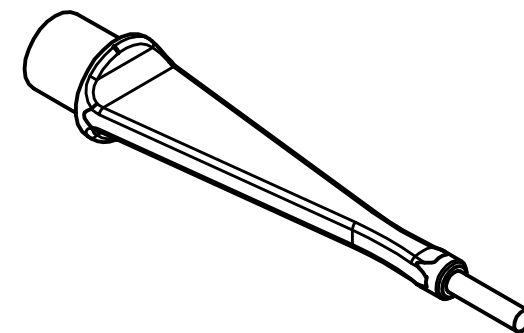

DETAIL B
SCALE 5:1
(NOTE 3)

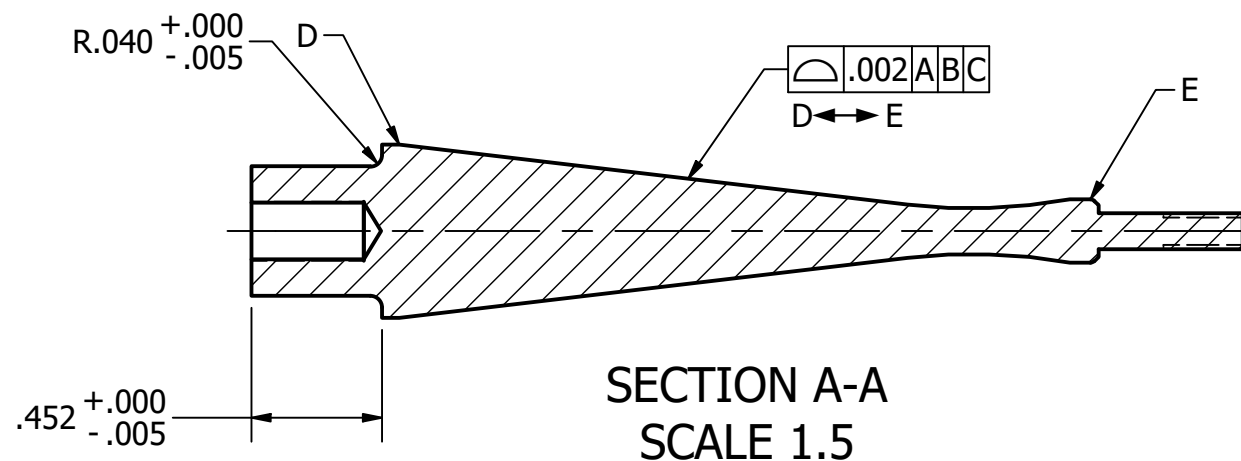





SECTION A-A
SCALE 1.5

MATERIAL		STEEL, AISI 8620		THIRD ANGLE PROJECTION		SUBSYSTEM: ANTI-ROLL		DATE 3/8/2026		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES		FINISH				DESCRIPTION REAR ARB BLADE					
		BARE									
		INTERPRET PER ASME Y14.5-2018									
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING									
				DESIGNER SUJAN MUNVER		SIZE B		P/N SU-A5006-AA-00011-AA		REV A	
				RESPONSIBLE ENGINEER SUJAN MUNVER							
				DRAWN BY A. BACKHOLM		SCALE 1.5		DO NOT SCALE		SHEET 1 / 1	
				APPROVAL							


NOTES, UNLESS OTHERWISE SPECIFIED:

1. ALL DIMENSIONS  .010 ABC UNLESS OTHERWISE SPECIFIED.
2. ENGRAVE 16X TO ∇ .005





DETAIL B
SCALE 4:1
(NOTE 2)

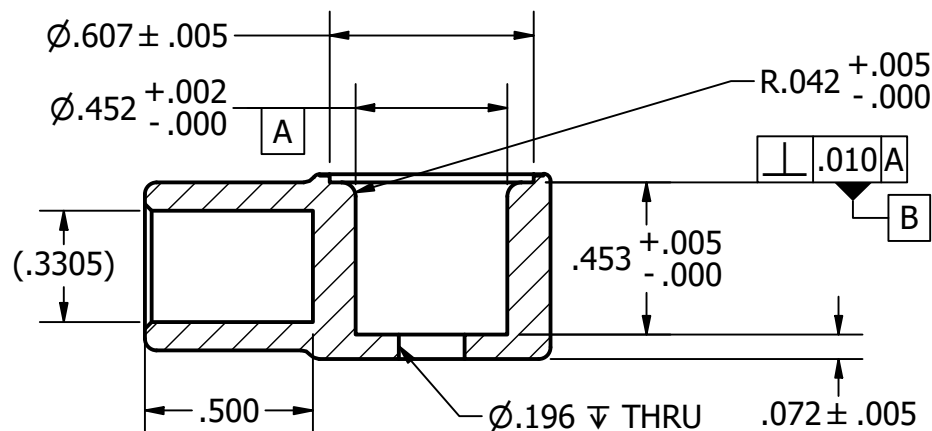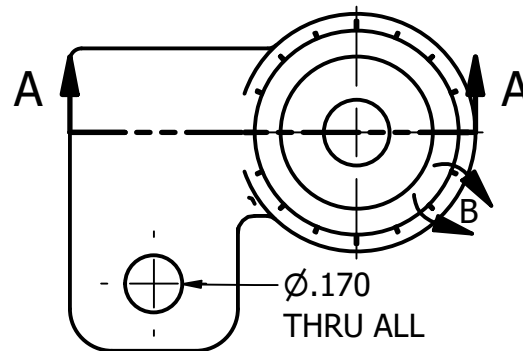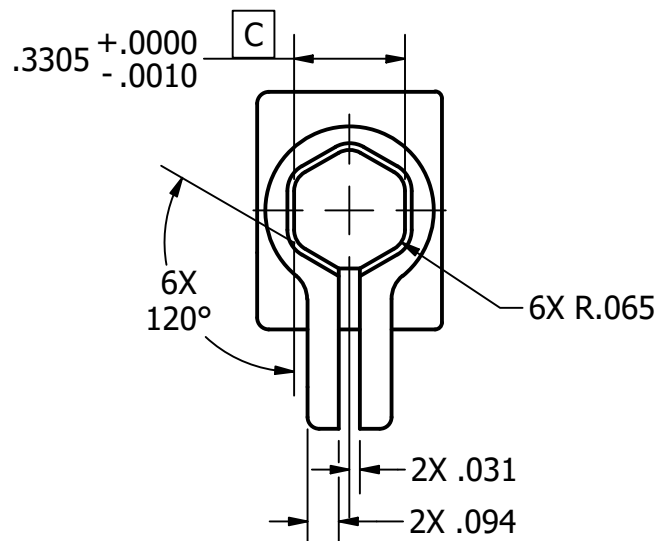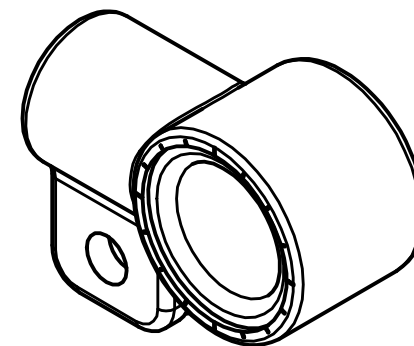



SECTION A-A
SCALE 1.75:1

MATERIAL		STEEL, AISI 4130		THIRD ANGLE PROJECTION		SUBSYSTEM: ANTI-ROLL		DATE 3/8/2026			
TOLERANCES, UNLESS SPECIFIED	FINISH		BARE				DESCRIPTION RARB ADAPTER				
	LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018		DESIGNER SUJAN MUNVER						
	ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER SUJAN MUNVER		SIZE A	P/N SU-A5006-AA-00012-AA		REV A	
					DRAWN BY SUJAN MUNVER		SCALE 1.75:1		DO NOT SCALE		SHEET 1 / 1
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:
 1. THIS IS A MINIMUM DIMENSION DRAWING.
 REFERENCE CAD FOR ALL UNLISTED DIMENSIONS.

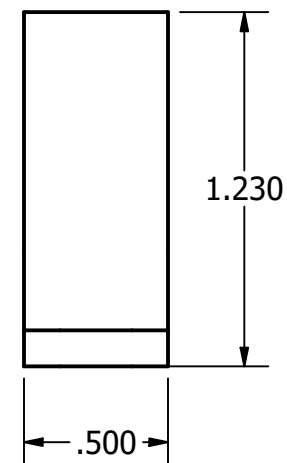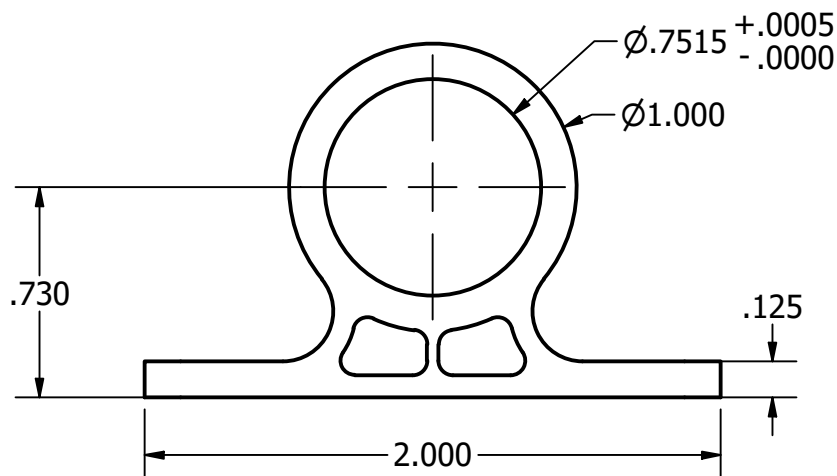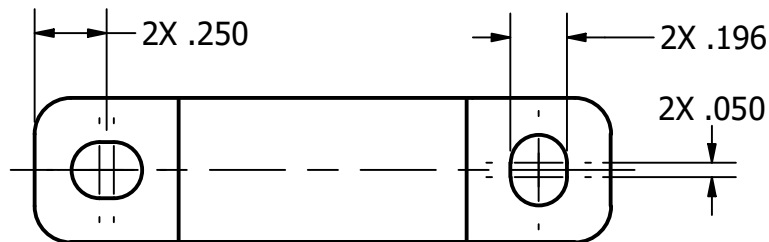



MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE					
ALUMINUM, 6061-T6				ANTI-ROLL		3/6/2026		CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION					
BARE		INTERPRET PER ASME Y14.5-2018		SUJAN MUNVER		RARB MOUNT					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
				SUJAN MUNVER		A		SU-A5006-AA-00013-AA		A	
				DRAWN BY		SCALE		DO NOT SCALE		SHEET	
				SUJAN MUNVER		1.5:1				1 / 1	
		APPROVAL									

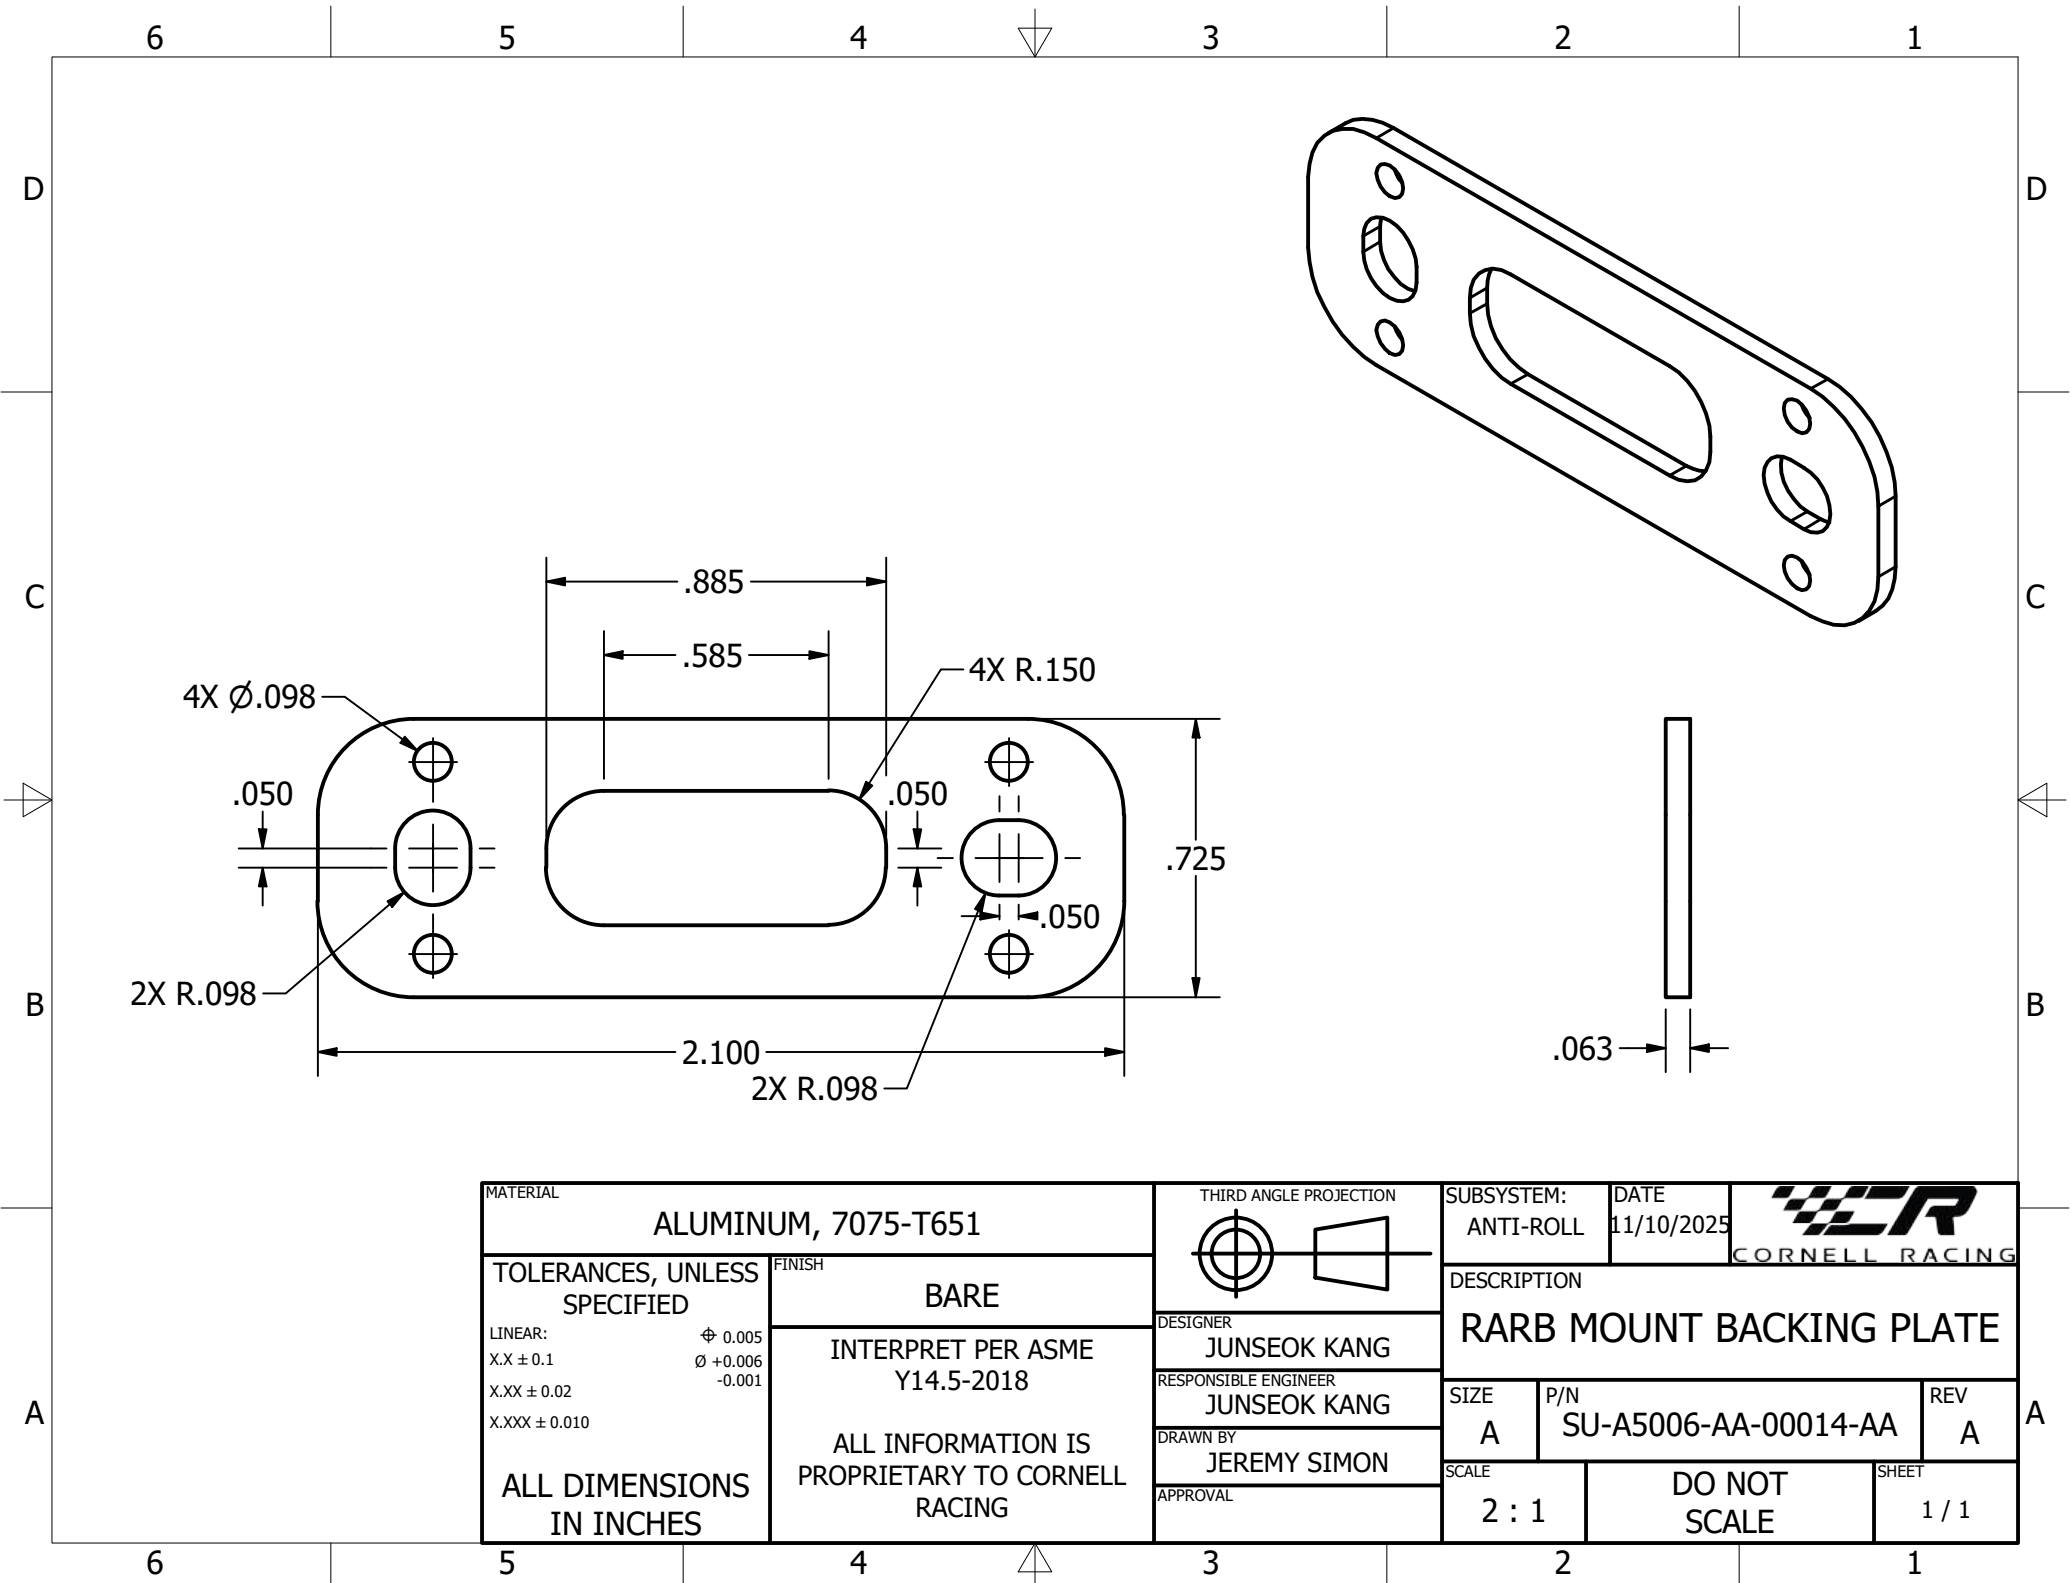








MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE					
ALUMINUM, 7075-T651				ANTI-ROLL		11/10/2025		CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION					
LINEAR: $\varnothing$ 0.005 X.X $\pm$ 0.1 X.XX $\pm$ 0.02 X.XXX $\pm$ 0.010		BARE		JUNSEOK KANG		RARB MOUNT BACKING PLATE					
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
				JUNSEOK KANG		A		SU-A5006-AA-00014-AA		A	
				DRAWN BY		SCALE		DO NOT SCALE		SHEET	
				JEREMY SIMON		2 : 1					
				APPROVAL						1 / 1	

NOTES, UNLESS OTHERWISE SPECIFIED:

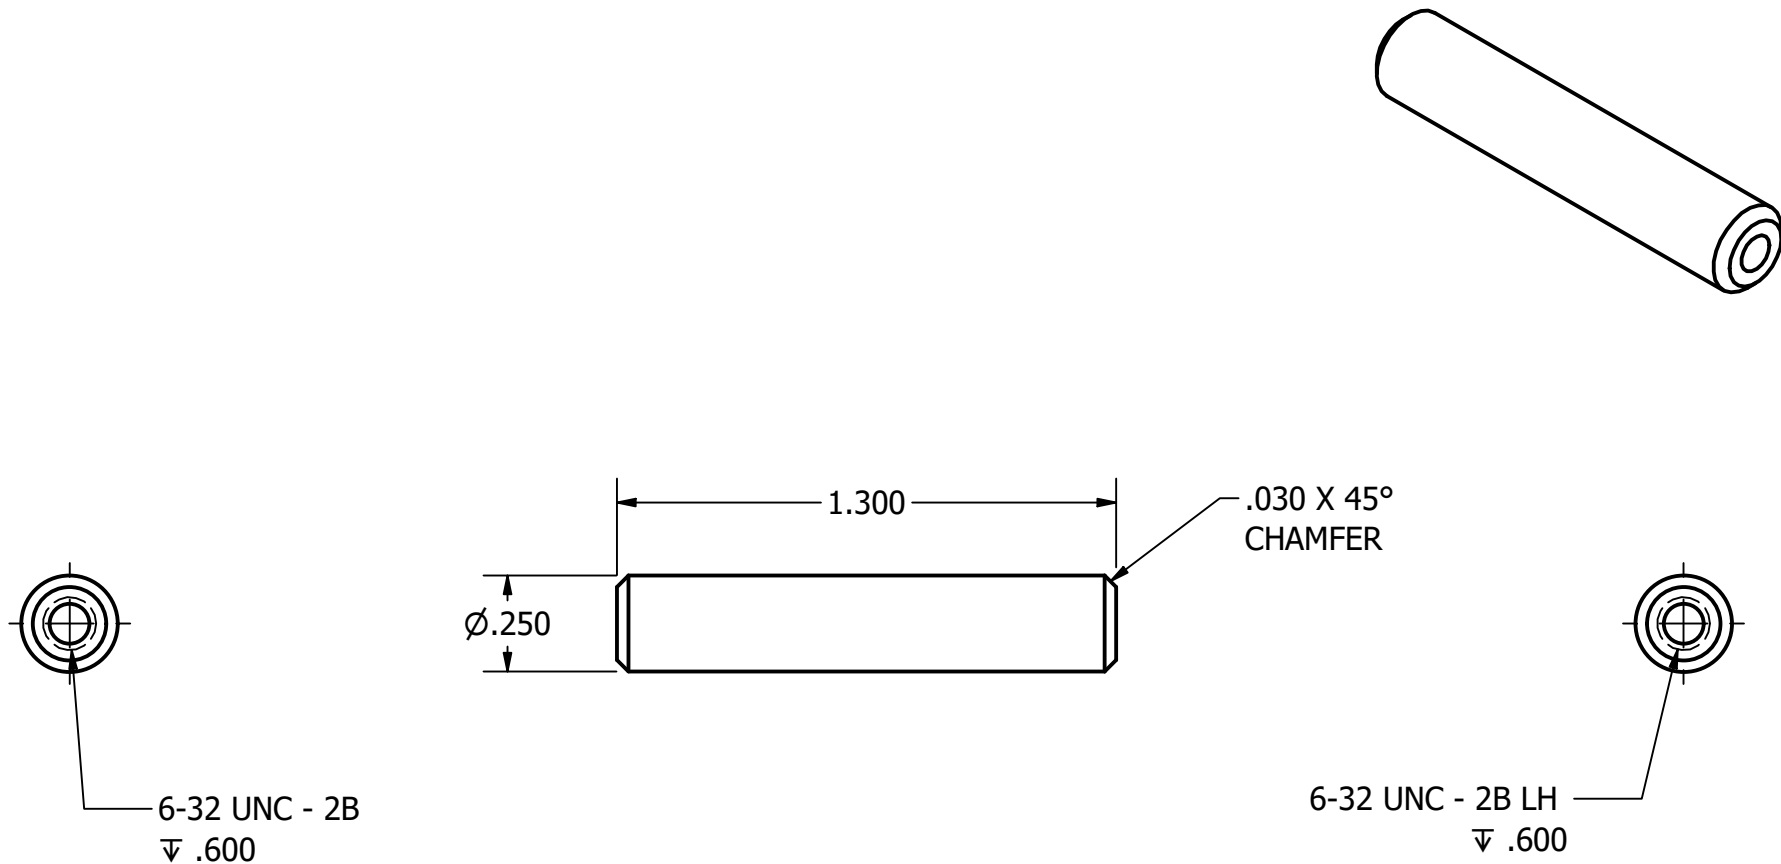

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE					
ALUMINUM, 7075-T651				ANTI-ROLL		3/1/2026		CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION					
BARE		INTERPRET PER ASME Y14.5-2018		SUJAN MUNVER		RARB DROP LINK					
LINEAR: $\varnothing \pm 0.005$ X.X ± 0.1 $\varnothing \pm 0.006$ X.XX ± 0.02 $\varnothing -0.001$ X.XXX ± 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
ALL DIMENSIONS IN INCHES				SUJAN MUNVER		A		SU-A5006-AA-00015-AA		A	
				DRAWN BY		SCALE		DO NOT SCALE		SHEET	
				SUJAN MUNVER		2				1 / 1	
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:
1. THIS IS A MINIMALIST DRAWING
REFER TO CAD FOR UNLISTED DIMENSION
2. SURFACE FINISH IN MICROMETERS

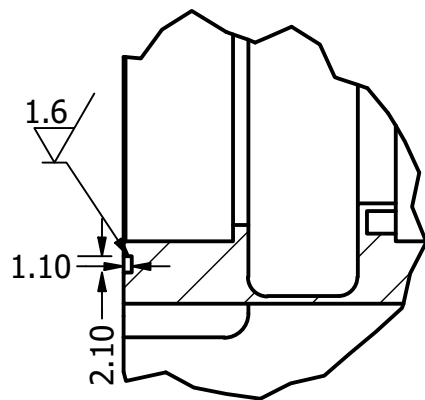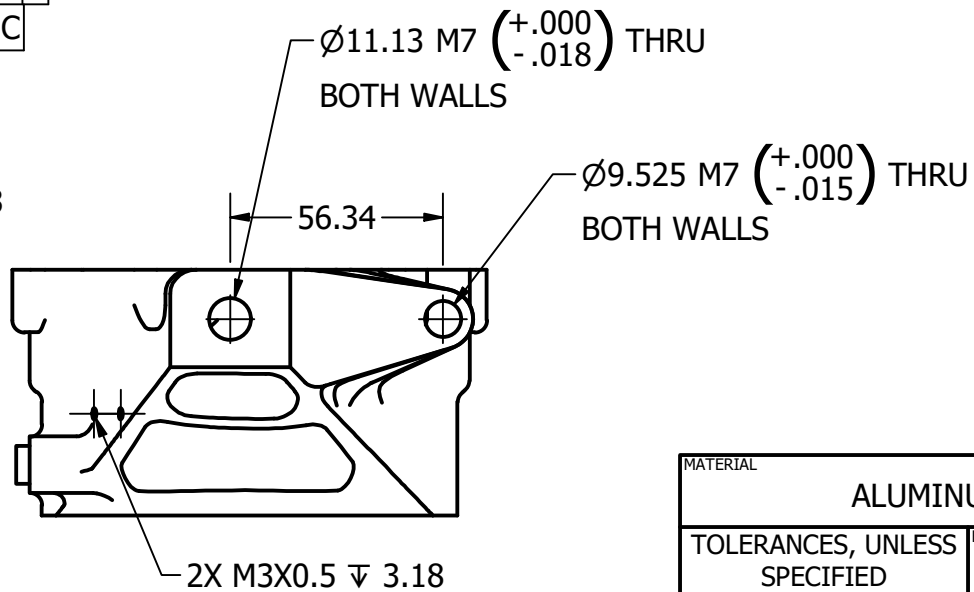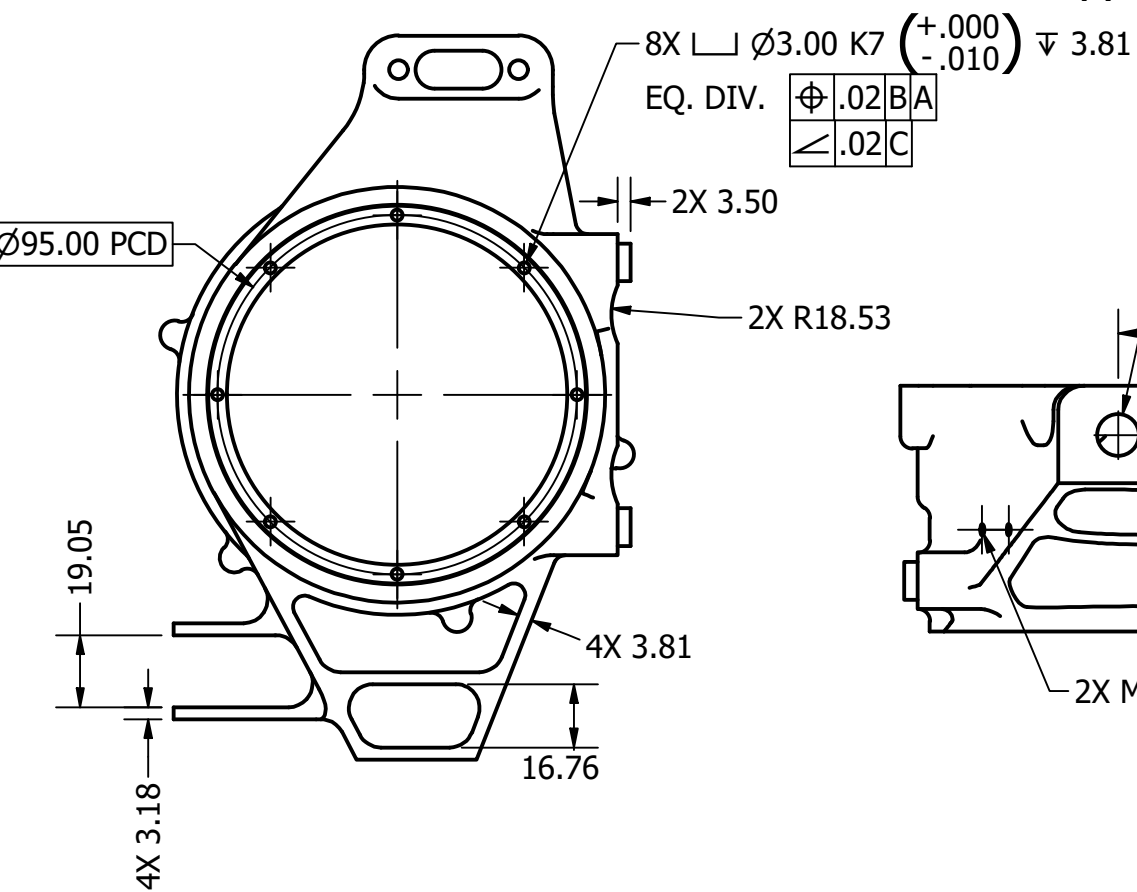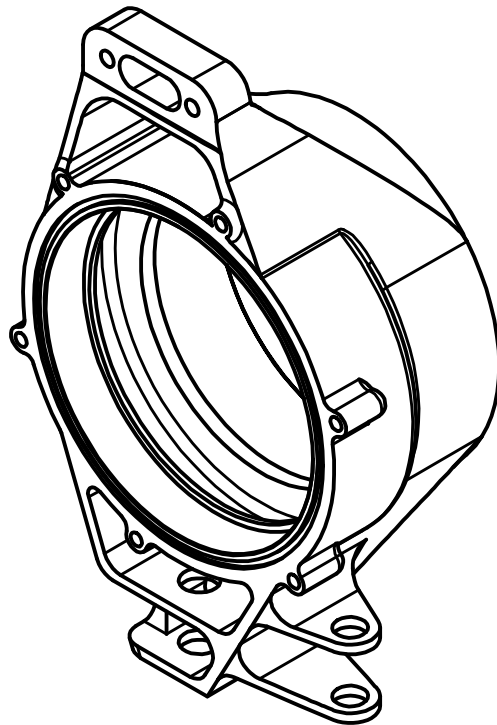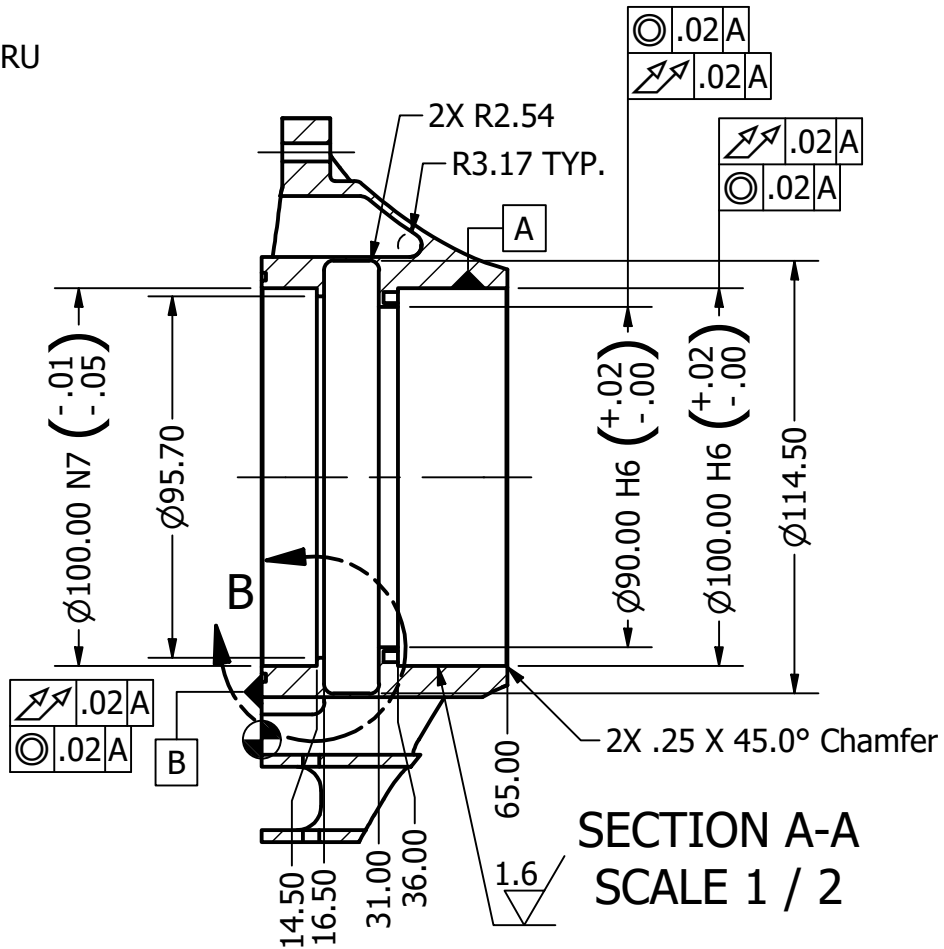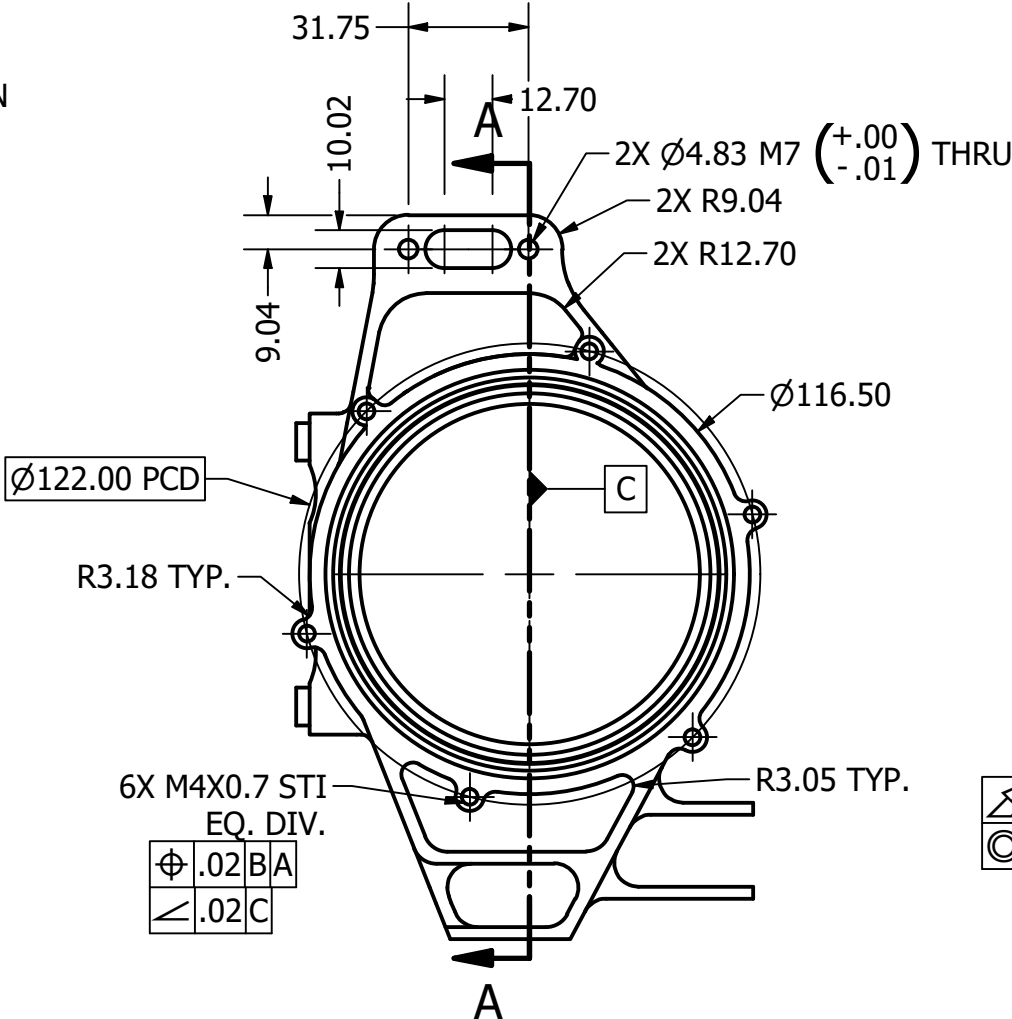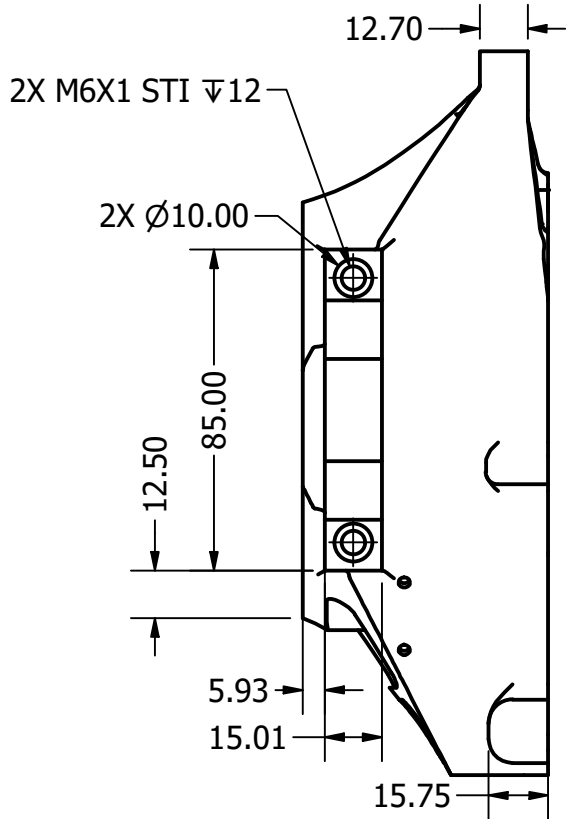


DETAIL B
SCALE 1 : 1


SECTION A-A
SCALE 1 / 2

MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: UNSPRUNG	DATE 11/22/2025		
TOLERANCES, UNLESS SPECIFIED LINEAR: $\varnothing$ 0.12 X.X $\pm$ 2.5 X.XX $\pm$ 0.25 X.XXX $\pm$ 0.1 ALL DIMENSIONS IN MM	FINISH BARE			TITLE FL UPRIGHT			
	INTERPRET PER ASME Y14.5-2009 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	DESIGN BY CAROLINE MOSKAL	SIZE B				
		RESPONSIBLE ENGINEER CAROLINE MOSKAL	SCALE	DO NOT SCALE		SHEET 1 / 1	
		DRAWN BY CAROLINE MOSKAL	1 / 2				
		MFG APP					



NOTES, UNLESS OTHERWISE SPECIFIED:
1. THIS IS A MINIMALIST DRAWING
REFER TO CAD FOR UNLISTED DIMENSION
2. SURFACE FINISH IN MICROMETERS

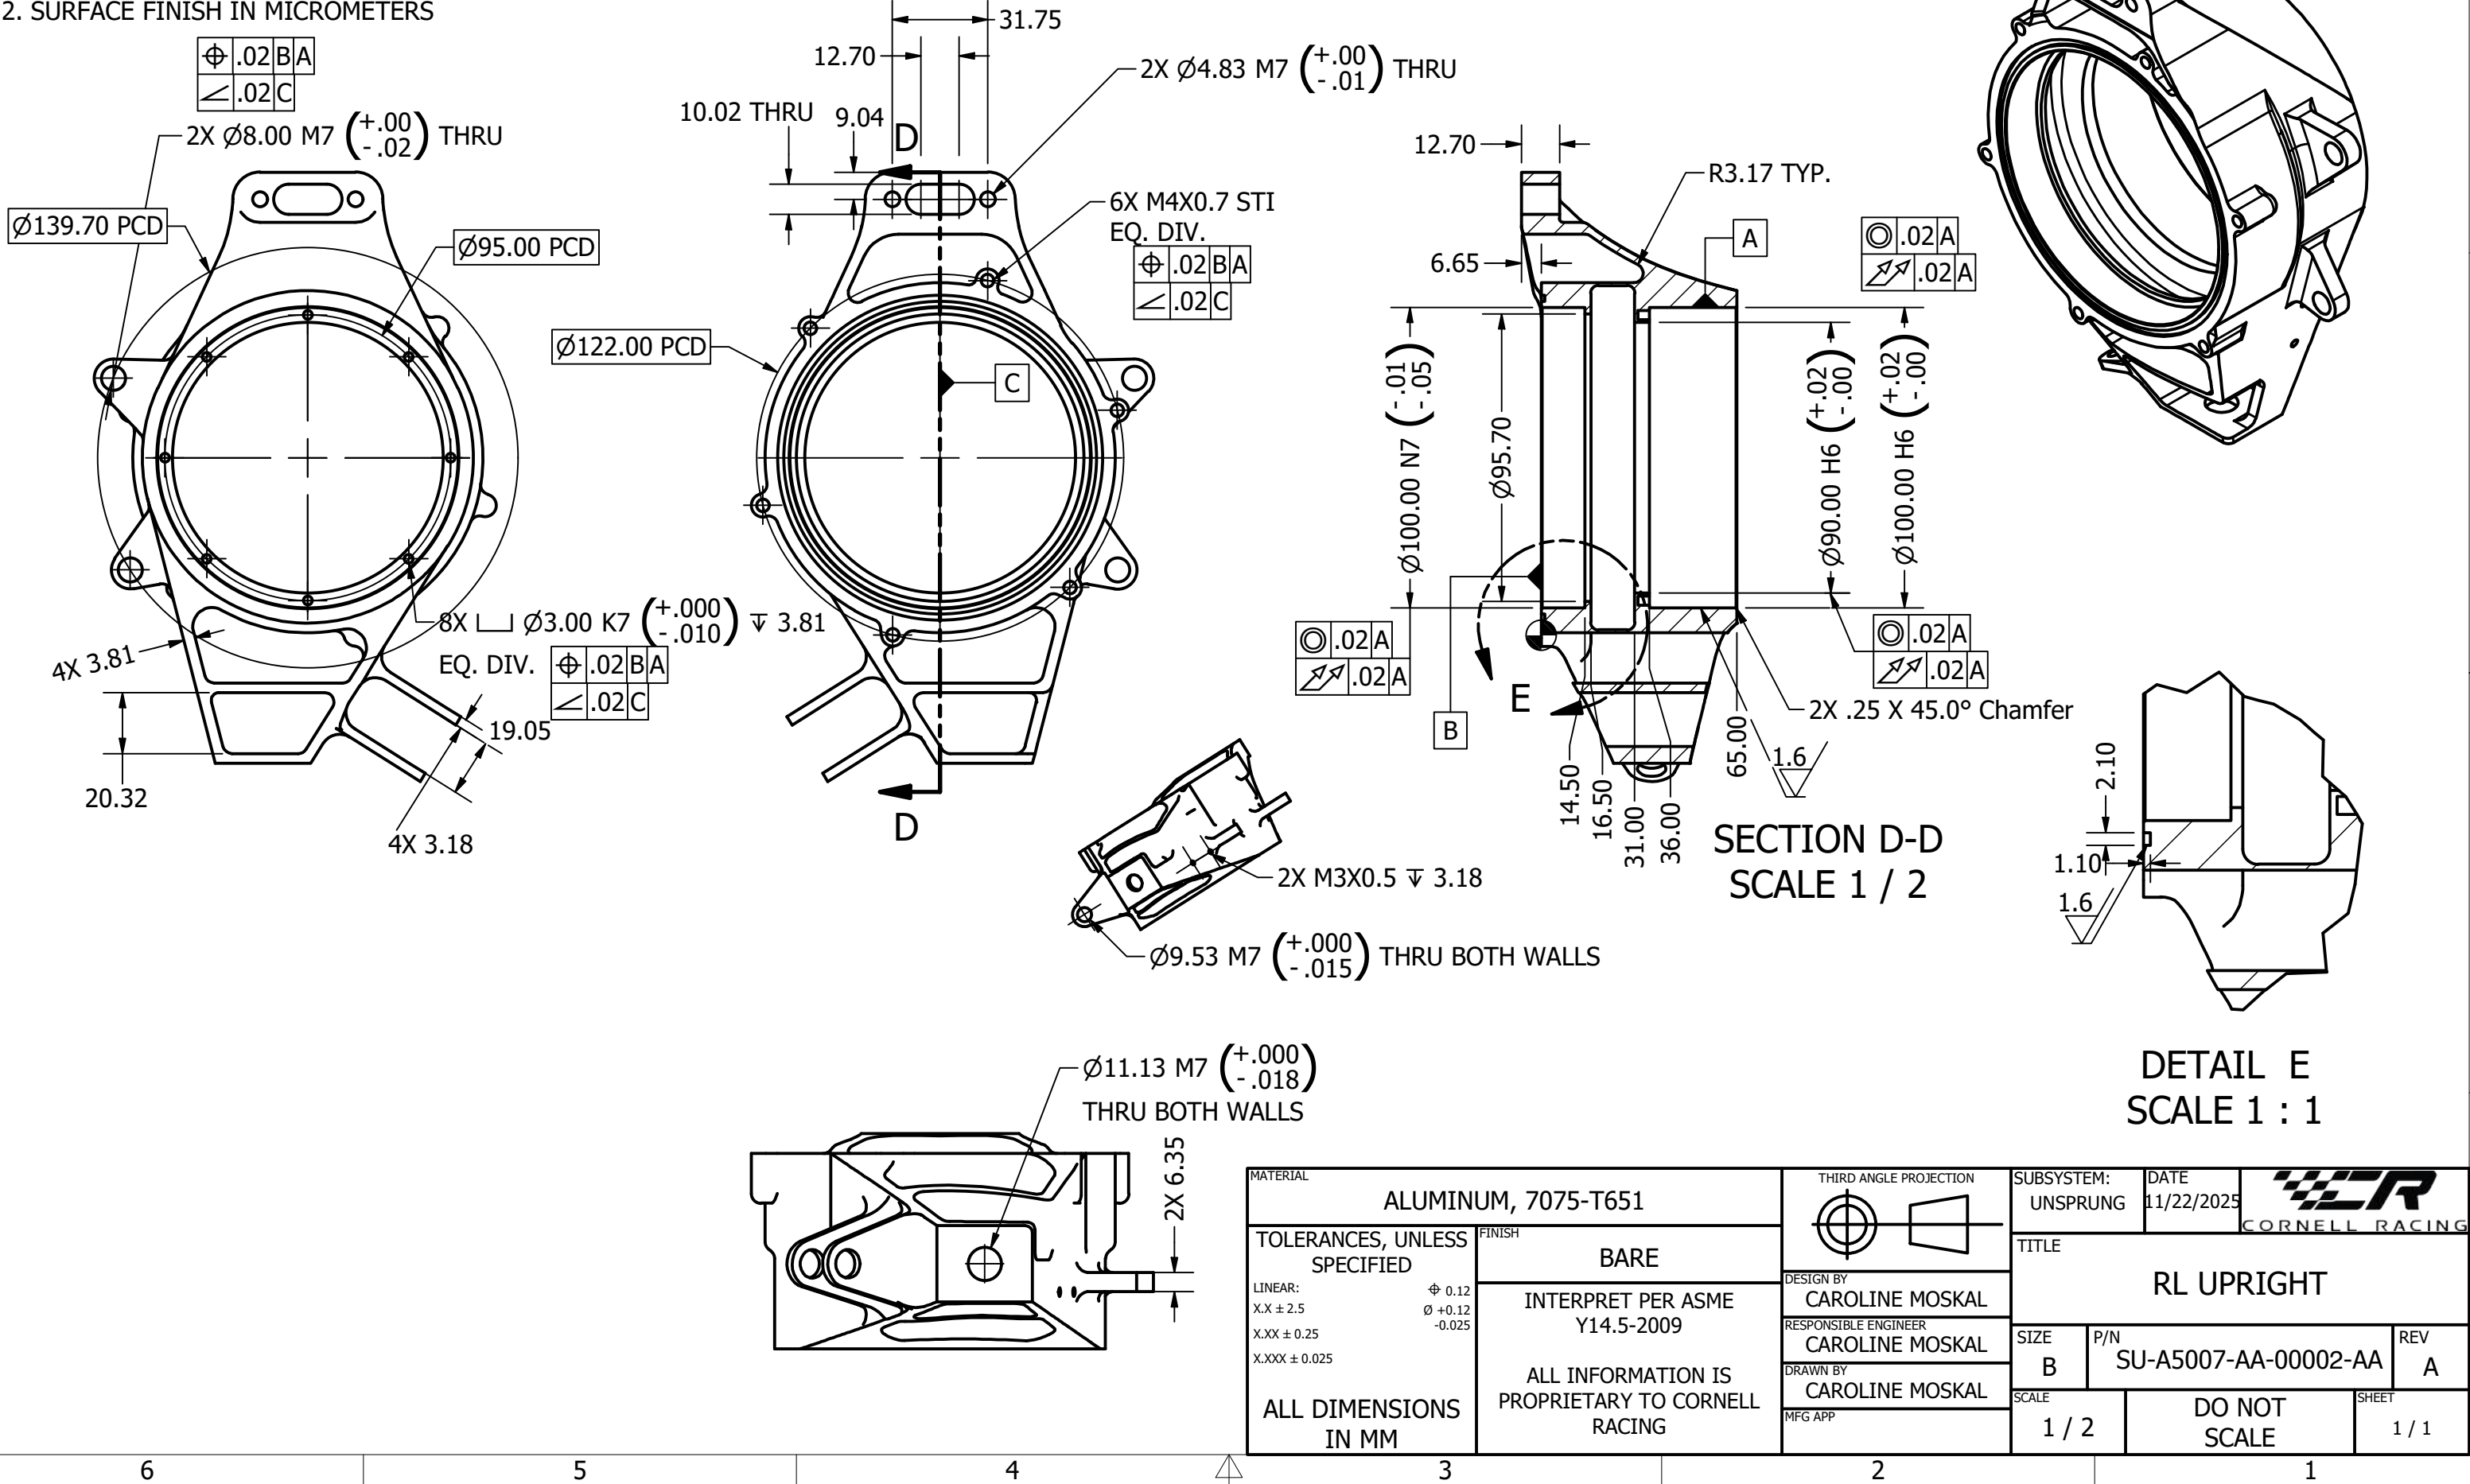





NOTES, UNLESS OTHERWISE SPECIFIED:
1. THIS IS A MINIMALIST DRAWING
REFER TO CAD FOR UNLISTED DIMENSION
2. SURFACE FINISH IN MICROMETERS

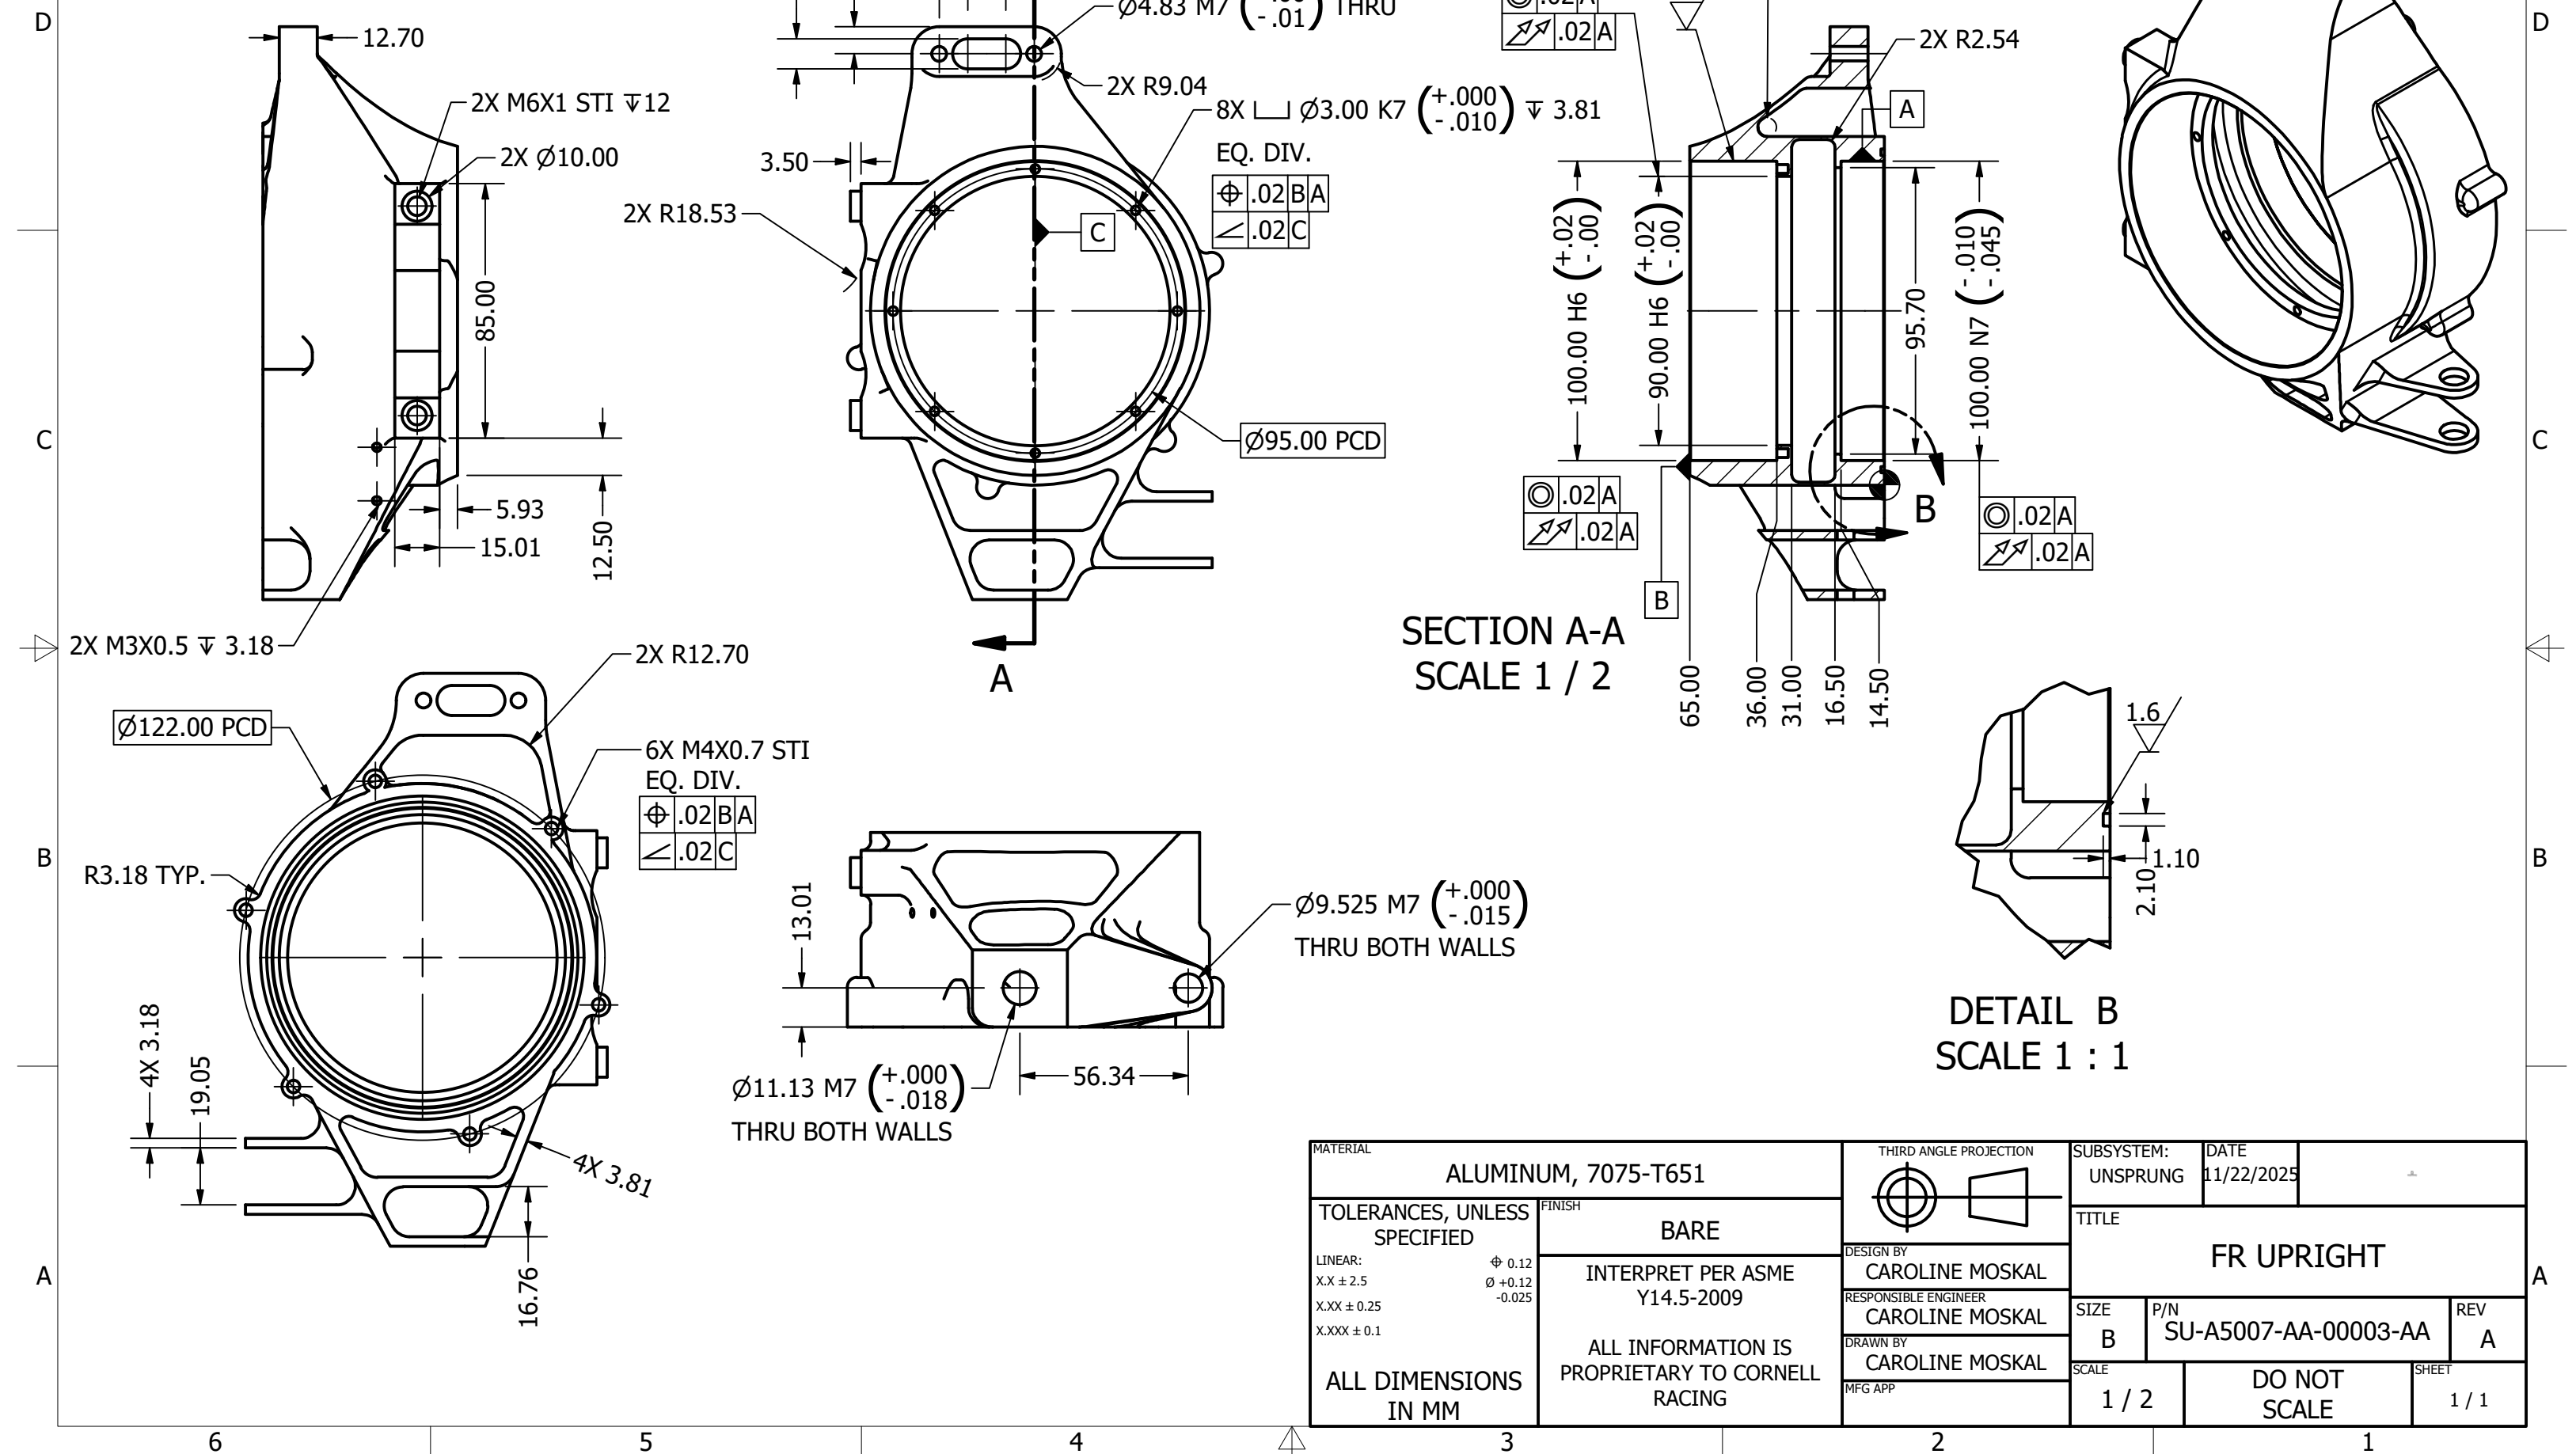

NOTES, UNLESS OTHERWISE SPECIFIED:
1. THIS IS A MINIMALIST DRAWING
REFER TO CAD FOR UNLISTED DIMENSION
2. SURFACE FINISH IN MICROMETERS

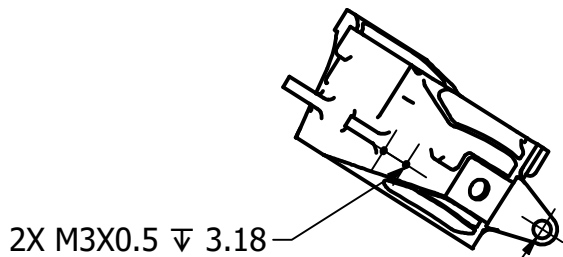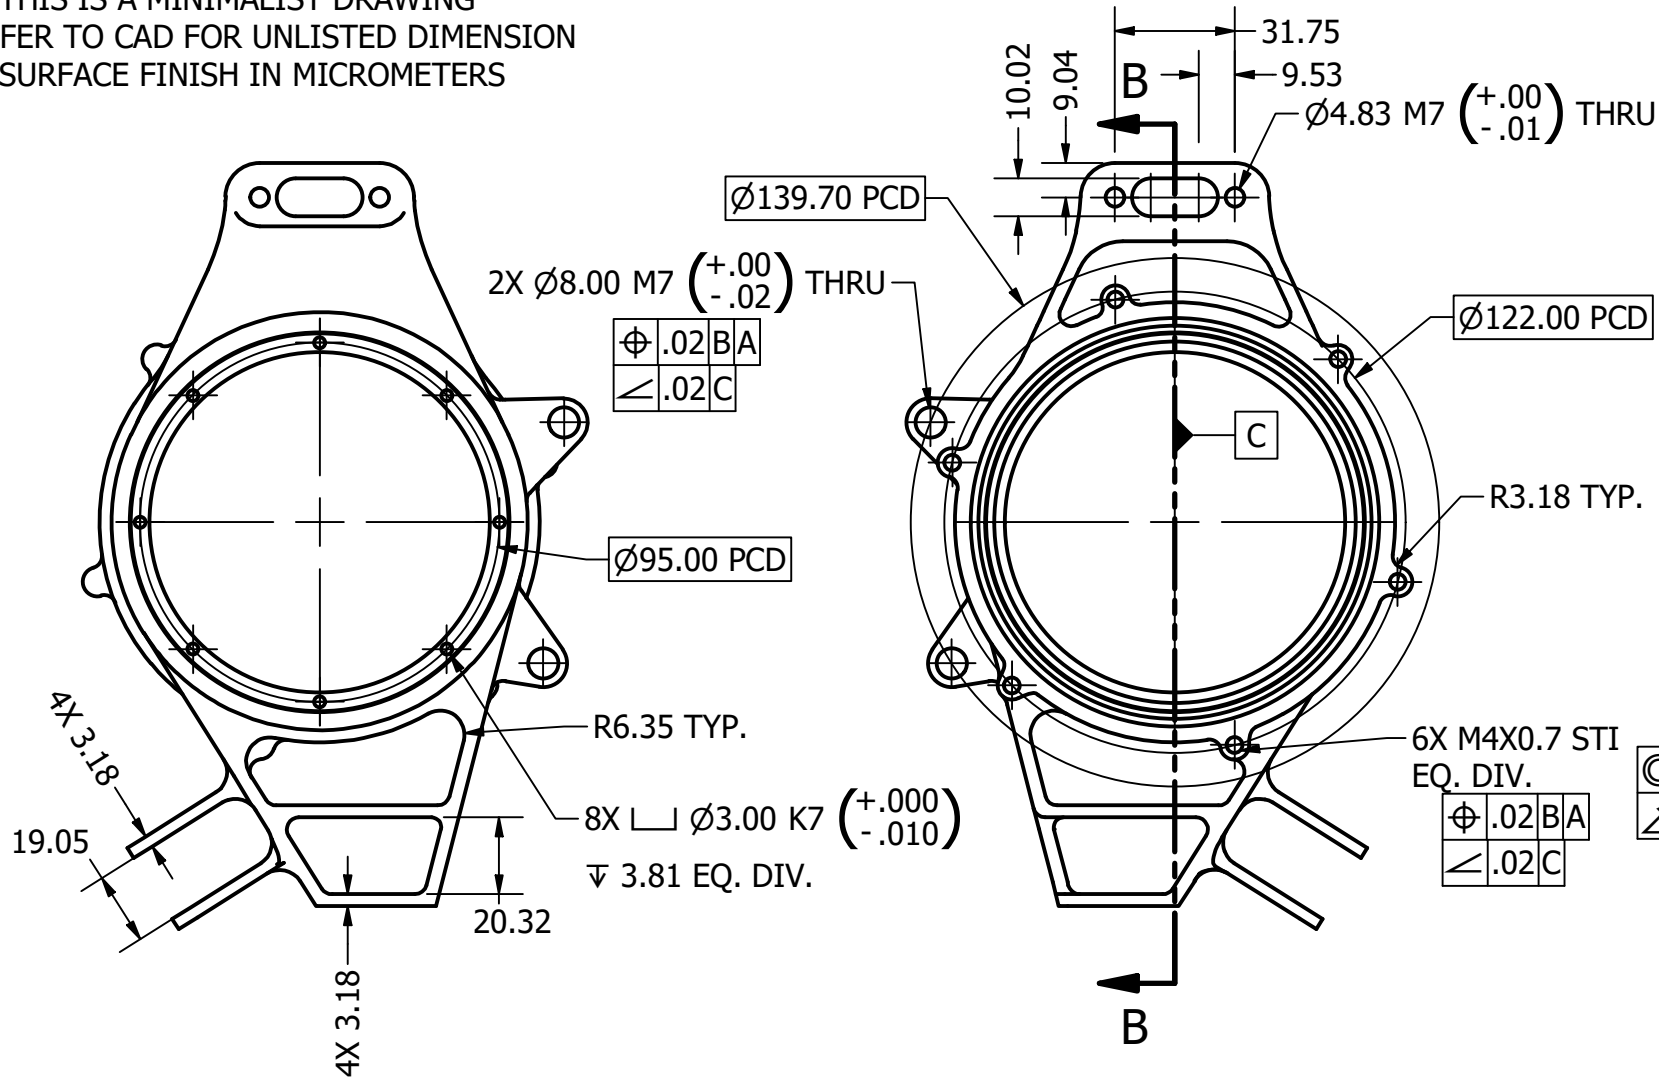

$\varnothing 9.53$ M7 $\left(\begin{smallmatrix} +.000 \\ -.015 \end{smallmatrix} \right)$
THRU BOTH WALLS

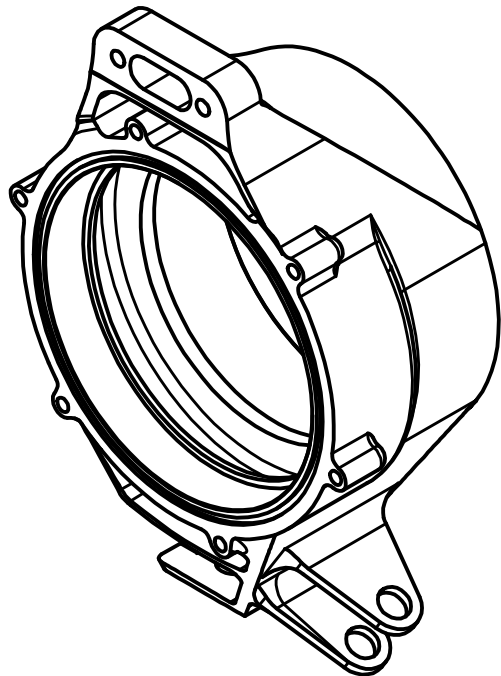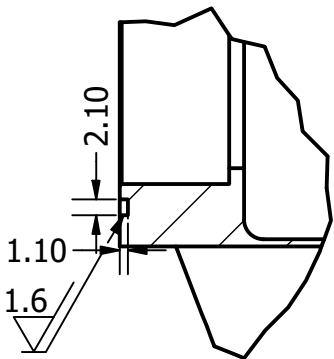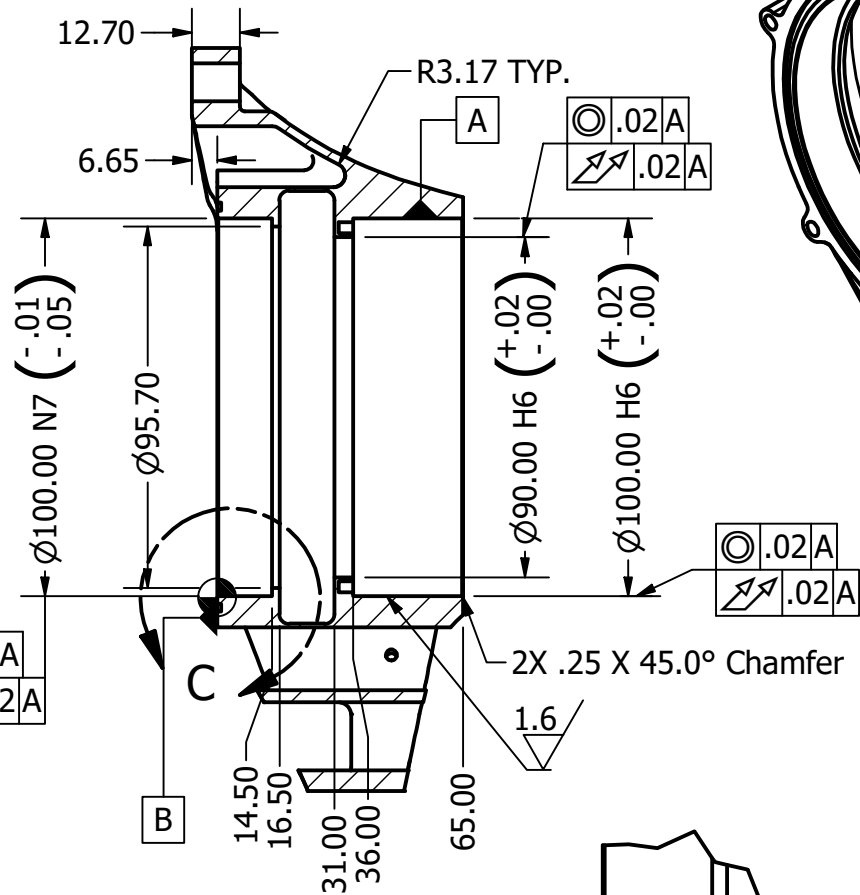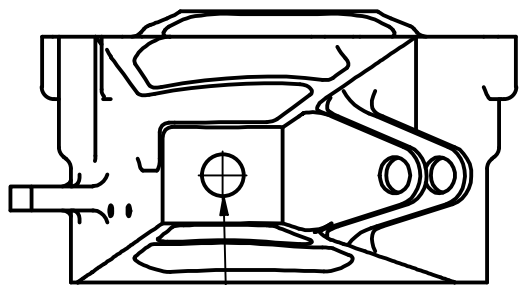


SECTION B-B
SCALE 1 / 2

DETAIL C
SCALE 1 : 1


MATERIAL ALUMINUM, 7075-T651		THIRD ANGLE PROJECTION 		SUBSYSTEM: UNSPRUNG	DATE 11/22/2025	
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X $\pm$ 2.5 X.XX $\pm$ 0.25 X.XXX $\pm$ 0.1 ALL DIMENSIONS IN MM		FINISH BARE INTERPRET PER ASME Y14.5-2009 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		TITLE RR UPRIGHT		
		DESIGN BY CAROLINE MOSKAL RESPONSIBLE ENGINEER CAROLINE MOSKAL DRAWN BY CAROLINE MOSKAL MFG APP		SIZE B	P/N SU-A5007-AA-00004-AA	REV A
				SCALE 1 / 2	DO NOT SCALE	SHEET 1 / 1

NOTES, UNLESS OTHERWISE SPECIFIED:

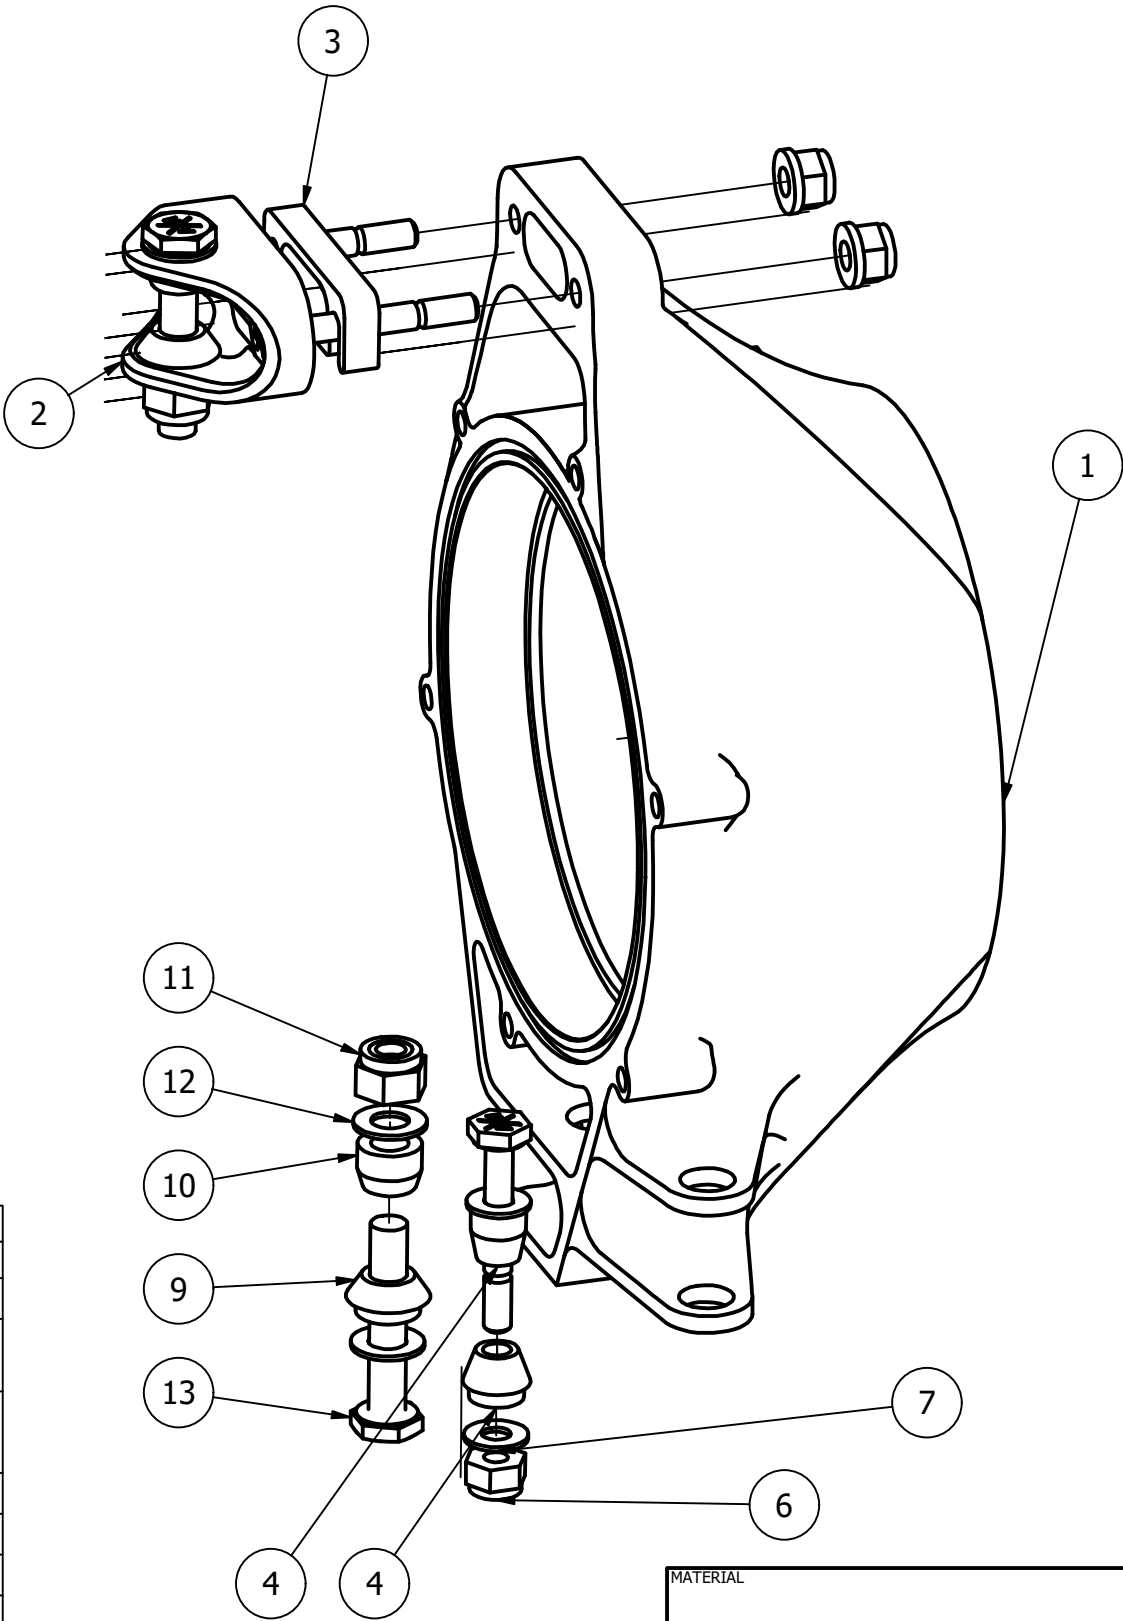


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5007-AA-00001-AA	FRONT UPRIGHT
2	1	N/A	OUTBOARD CLEVIS ASSEMBLY
3	1	SU-A5008-AA-00001-AA	0.250_CHAMBER_SHIM
4	1	SU26_A0301_P03	SUC-AN3 THRU CONE
5	1	SU26_A0301_P02	SUC-AN3 HAT CONE
6	1	N/A	AN3 NYLOC
7	2	N/A	AN3 WASHER
8	1	N/A	AN3-13 BOLT
9	2	SU-A5002-AA-00016-AA	SOC HAT CONE
10	2	SU-A5002-AA-00015-AA	SOC THRU CONE
11	2	N/A	AN4 NYLOC
12	2	N/A	AN4 WASHER
13	1	N/A	AN4-13 BOLT

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:	DATE		
TOLERANCES, UNLESS SPECIFIED		FINISH		UNSPRUNG	11/10/2025		
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		BARE		DESIGNER CAROLINE MOSKAL		DESCRIPTION FRONT UPRIGHT ASSY	
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER CAROLINE MOSKAL		SIZE B	P/N SU-A5007-AA-FRONT
				DRAWN BY A. ROONGTA		SCALE 1 :1.3	REV
				APPROVAL		DO NOT SCALE	
						SHEET 1 / 1	

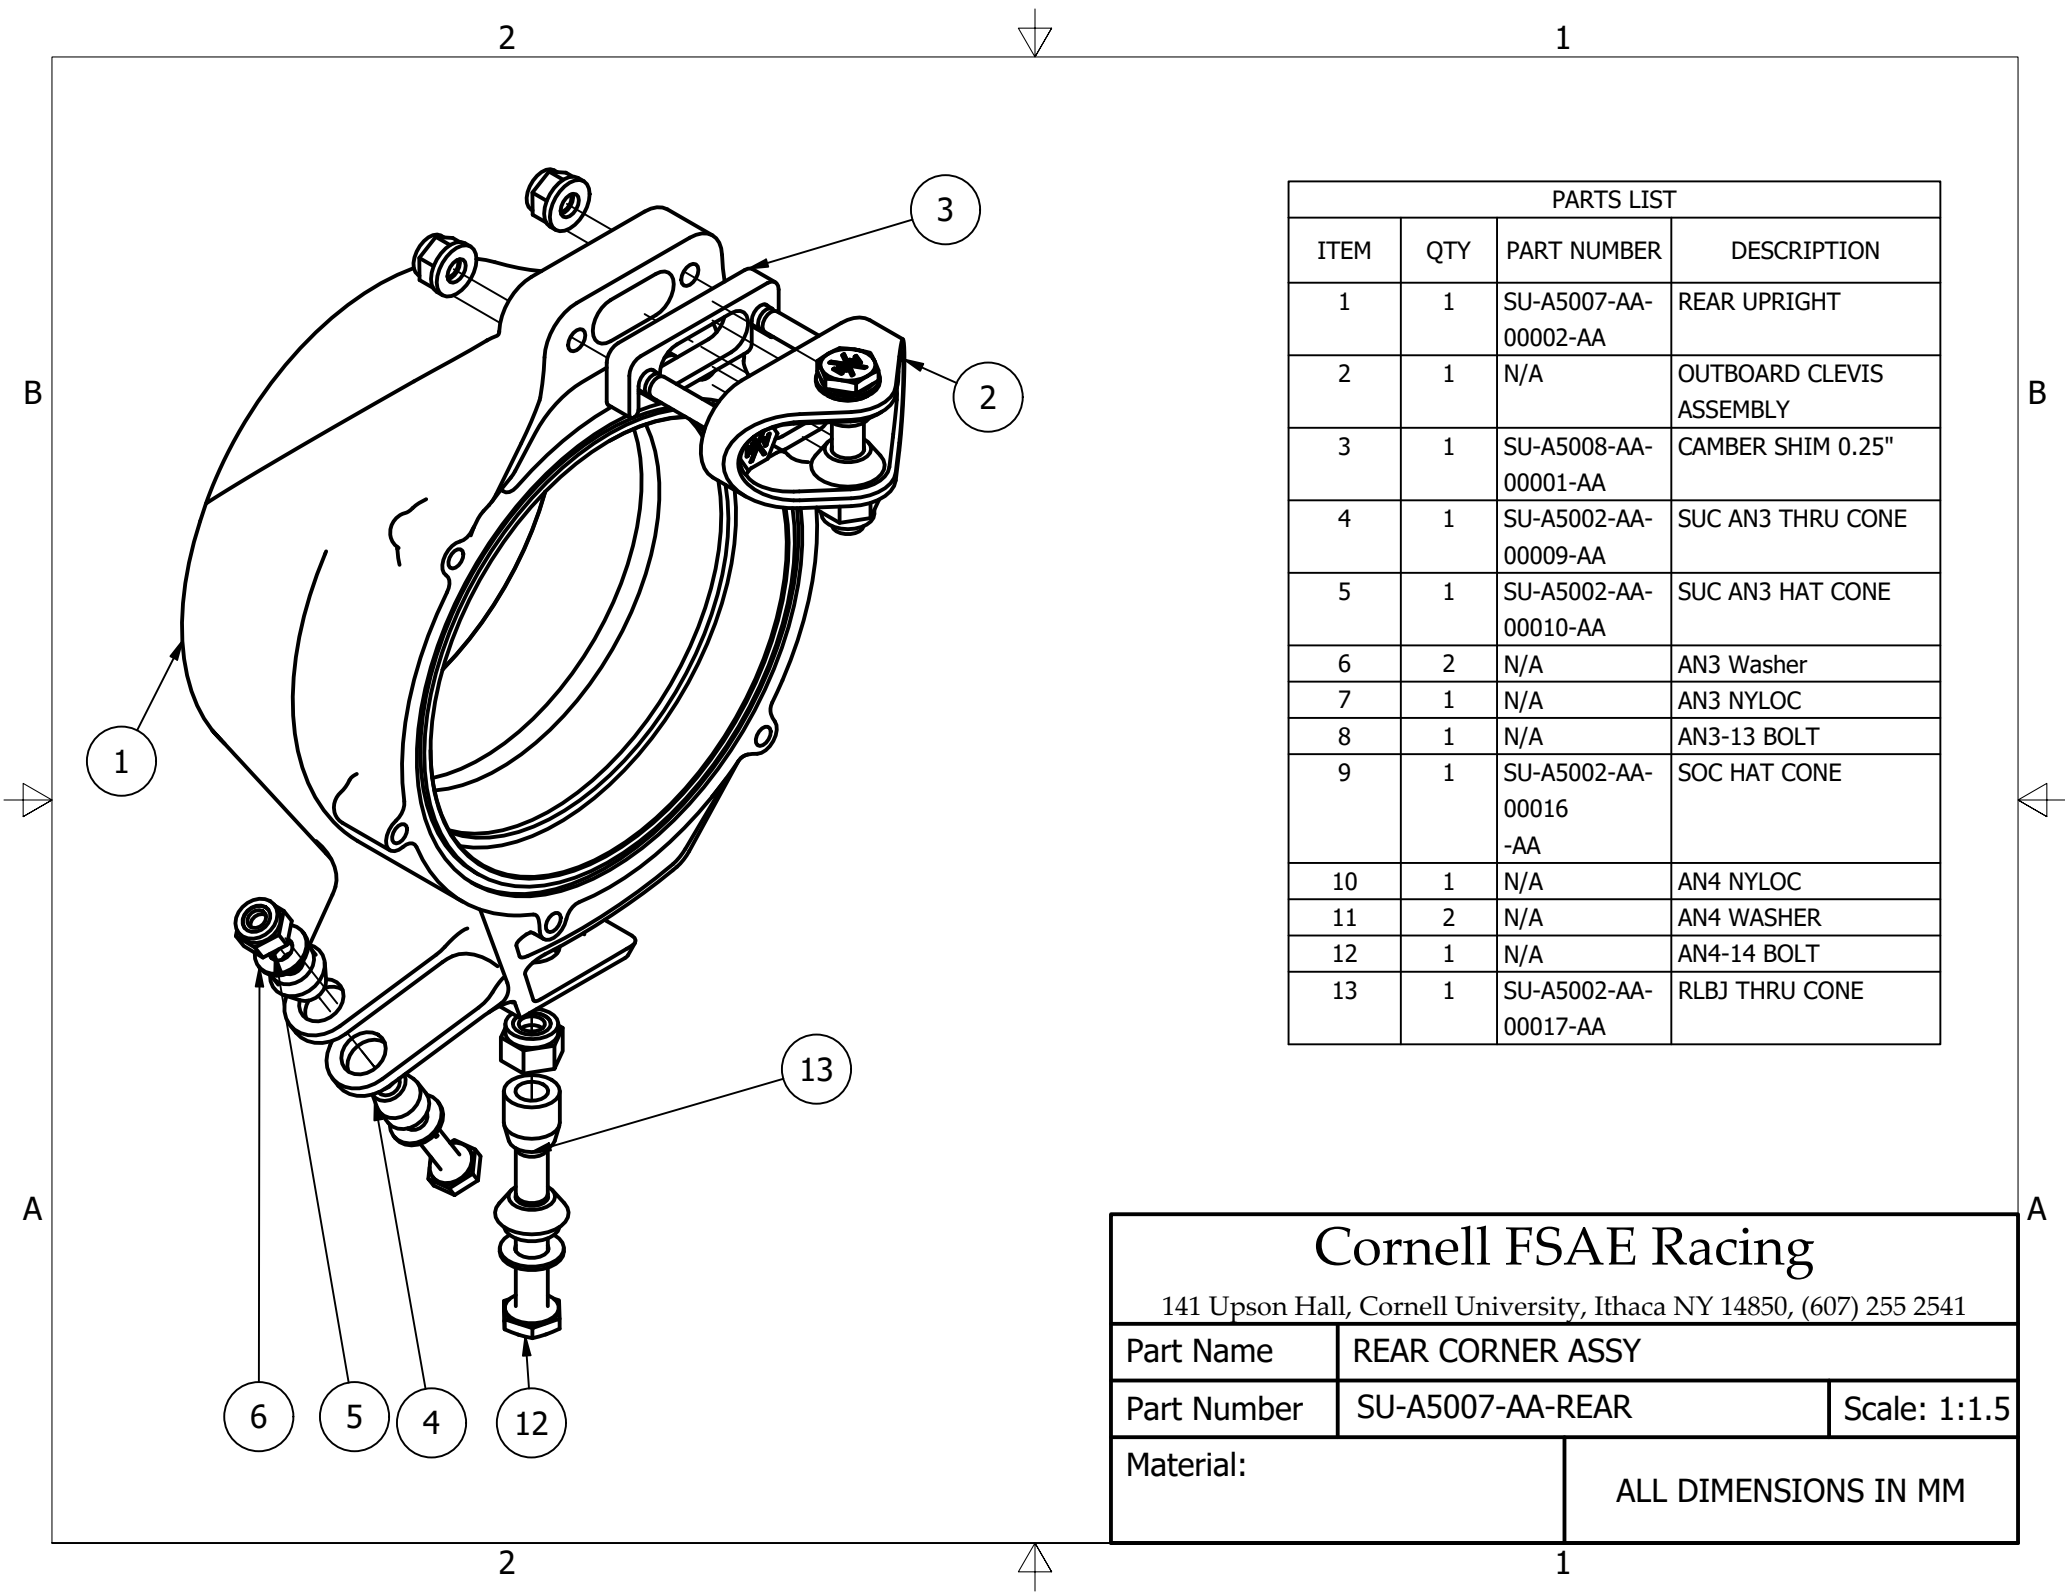

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU-A5007-AA-00002-AA	REAR UPRIGHT
2	1	N/A	OUTBOARD CLEVIS ASSEMBLY
3	1	SU-A5008-AA-00001-AA	CAMBER SHIM 0.25"
4	1	SU-A5002-AA-00009-AA	SUC AN3 THRU CONE
5	1	SU-A5002-AA-00010-AA	SUC AN3 HAT CONE
6	2	N/A	AN3 Washer
7	1	N/A	AN3 NYLOC
8	1	N/A	AN3-13 BOLT
9	1	SU-A5002-AA-00016-AA	SOC HAT CONE
10	1	N/A	AN4 NYLOC
11	2	N/A	AN4 WASHER
12	1	N/A	AN4-14 BOLT
13	1	SU-A5002-AA-00017-AA	RLBJ THRU CONE



Cornell FSAE Racing		
141 Upson Hall, Cornell University, Ithaca NY 14850, (607) 255 2541		
Part Name	REAR CORNER ASSY	
Part Number	SU-A5007-AA-REAR	Scale: 1:1.5
Material:		ALL DIMENSIONS IN MM

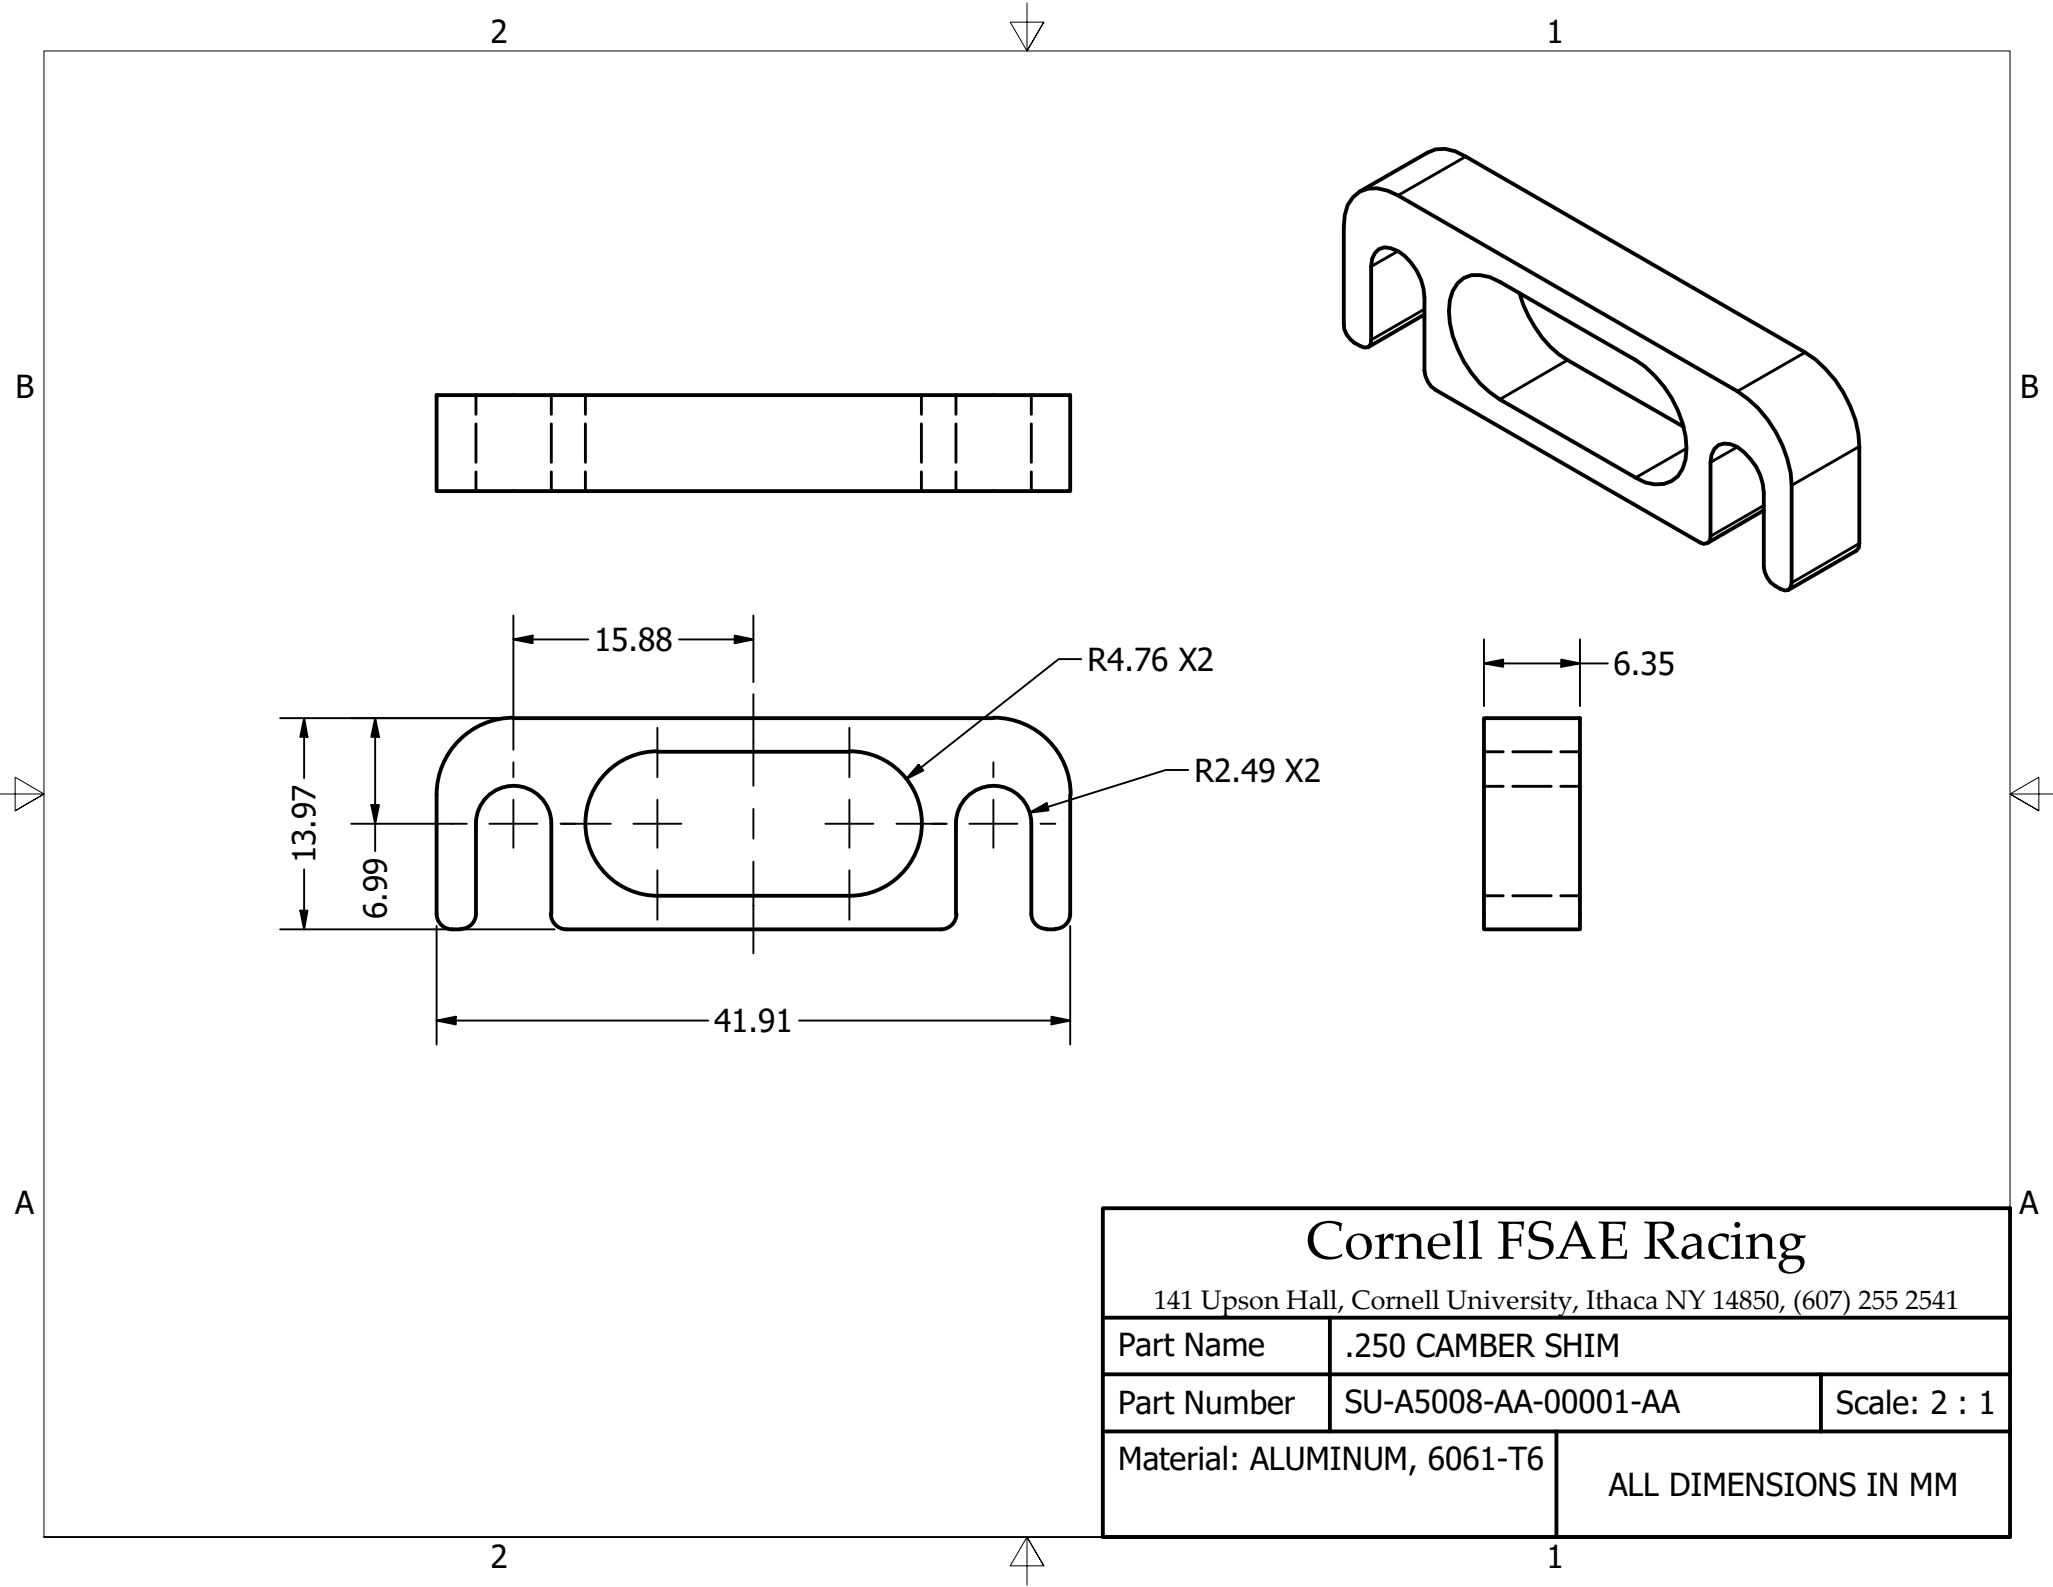

NOTES, UNLESS OTHERWISE SPECIFIED:


1. #9 DRILL

.125

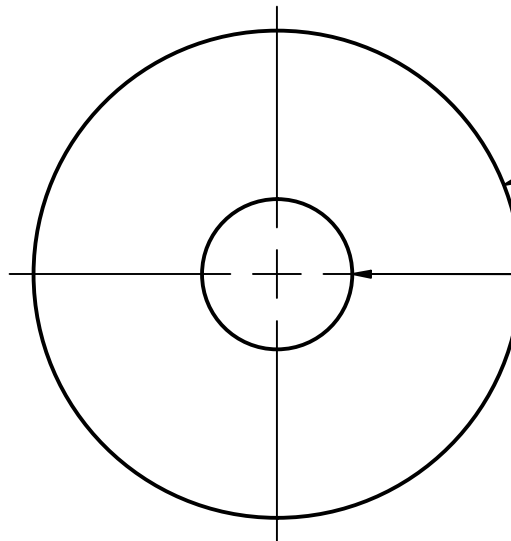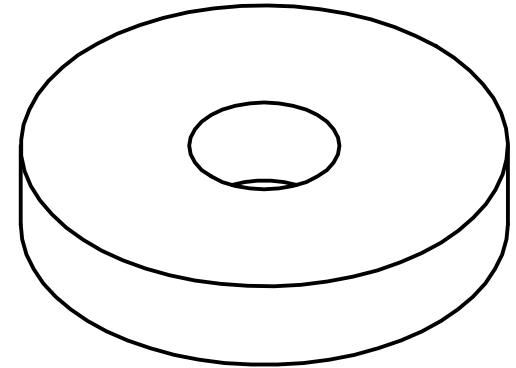



Ø.634

Ø.196 THRU
NOTE 1

MATERIAL ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE	DATE 12/4/2024	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 FINISH: BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER SUJAN MUNVER RESPONSIBLE ENGINEER SUJAN MUNVER DRAWN BY SUJAN MUNVER APPROVAL		DESCRIPTION AN3 WASHER			
ALL DIMENSIONS IN INCHES		SCALE 4:1		SIZE A	P/N SU25_A0804_P01	REV A	SHEET 1 / 1
				DO NOT SCALE			

NOTES, UNLESS OTHERWISE SPECIFIED:
1. F DRILL

.125

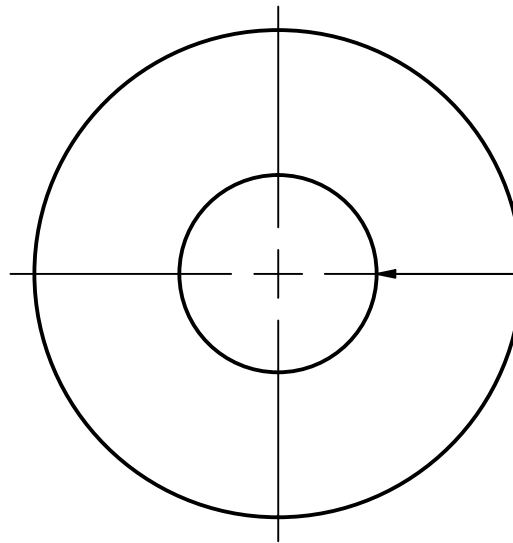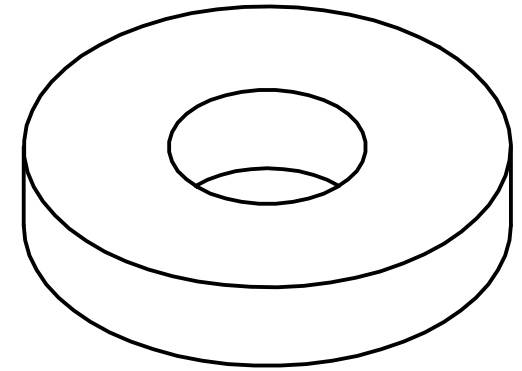




$\varnothing .634^{+.000}_{-.010}$

$\varnothing .257$ THRU
NOTE 1

MATERIAL ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE	DATE 12/4/2024	 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 FINISH: $\varnothing$ 0.005 $\varnothing$ +0.006 -0.001		BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER SUJAN MUNVER RESPONSIBLE ENGINEER SUJAN MUNVER DRAWN BY SUJAN MUNVER APPROVAL				
ALL DIMENSIONS IN INCHES		AN4 WASHER				SIZE A	P/N SU25_A0804_P02	REV A
		SCALE 4:1		DO NOT SCALE		SHEET 1 / 1		

NOTES, UNLESS OTHERWISE SPECIFIED:

1. F DRILL

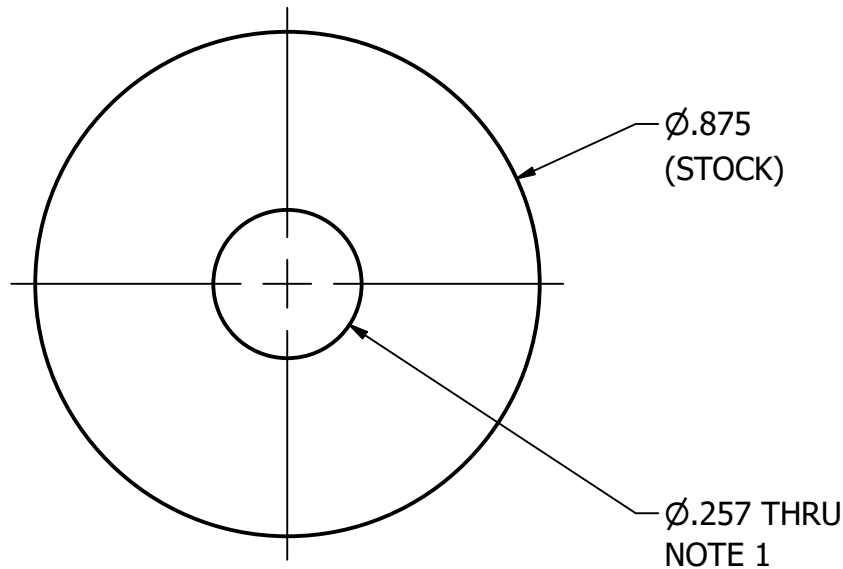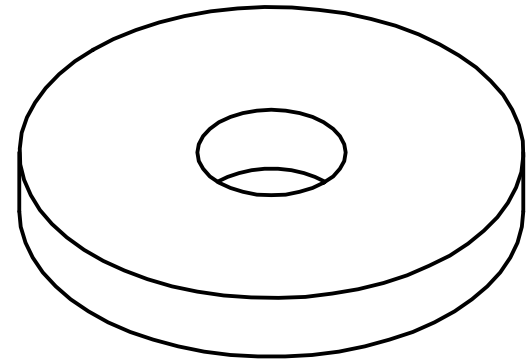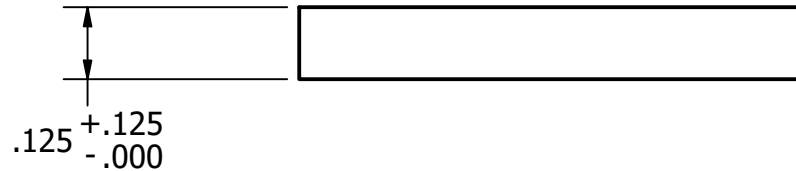

MATERIAL ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE	DATE 12/29/2024	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 FINISH Ø 0.005 Ø +0.006 -0.001		BARE INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESCRIPTION AN4 WASHER LARGE			
ALL DIMENSIONS IN INCHES		DESIGNER SUJAN MUNVER RESPONSIBLE ENGINEER SUJAN MUNVER DRAWN BY SUJAN MUNVER APPROVAL		SIZE A	P/N SU25_A0804_P03	REV A	
				SCALE 3:1	DO NOT SCALE		SHEET 1 / 1

NOTES, UNLESS OTHERWISE SPECIFIED:
ENSURE ALL PARTS ARE WELDING COMPATABLE
(NO DANGEROUS COATING)

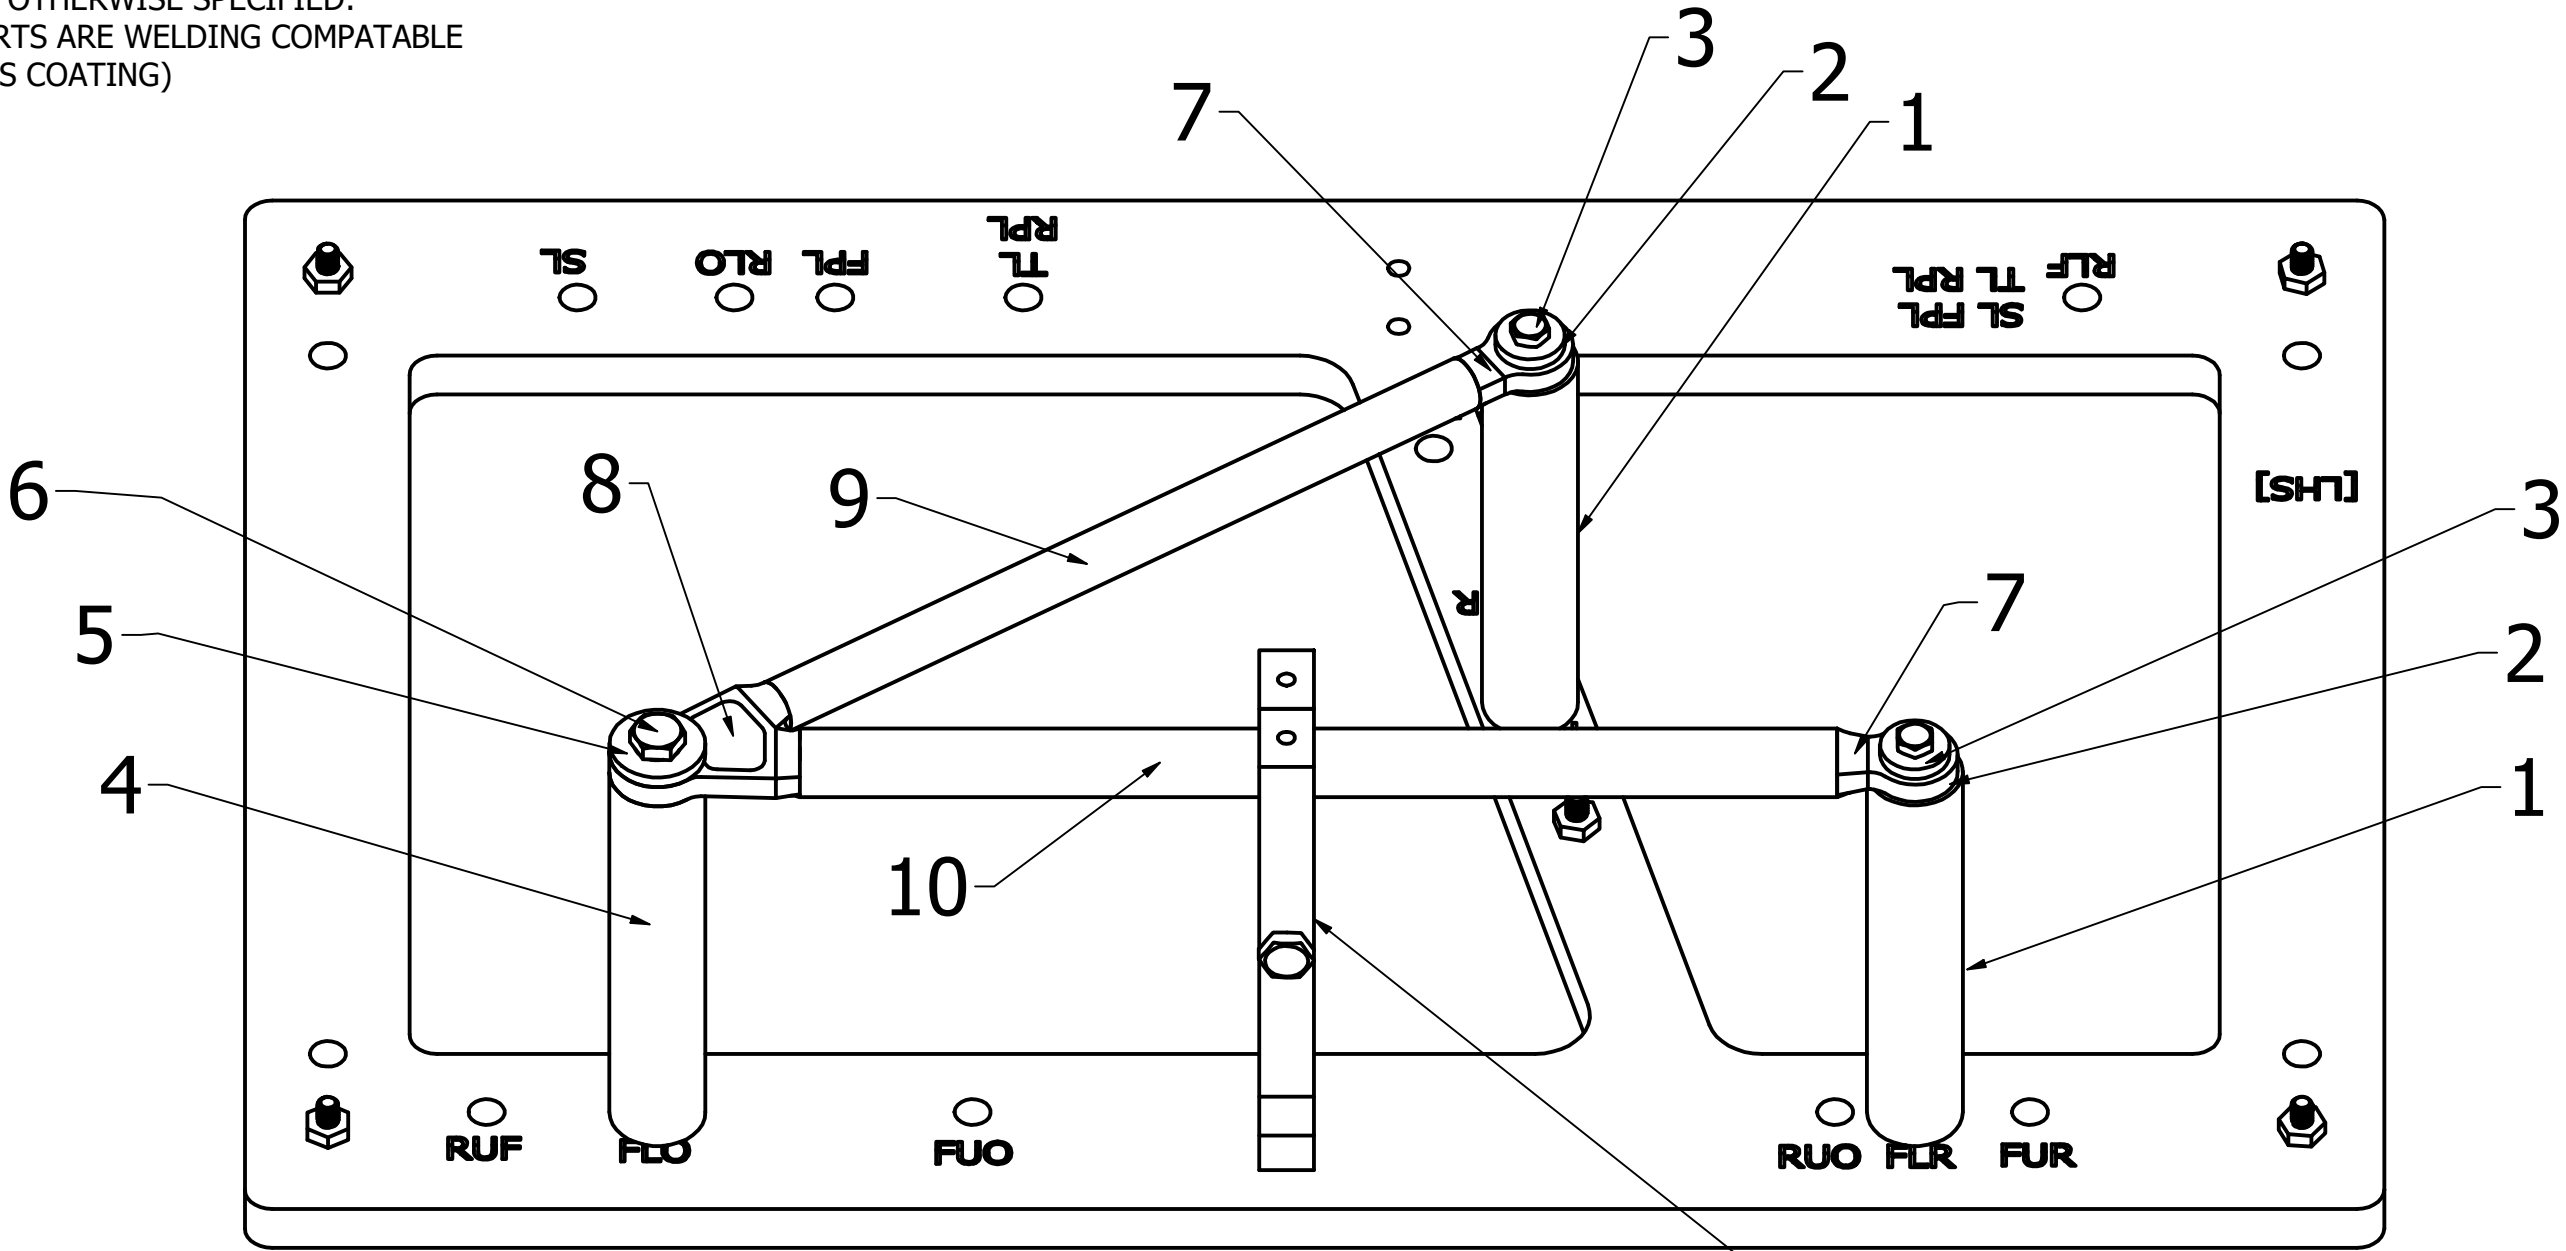


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	FRONT LOWER INBOARD ADAPTER	2
8	LINKS	FRONT LOWER OUTBOARD ADAPTER	1
9	LINKS	FRONT LOWER FRONT TUBE	1
10	LINKS	FRONT LOWER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE	DATE 12/16/2025	 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED				DESCRIPTION [LHS] FRONT LOWER ASSEMBLY				
FINISH		BARE		DESIGNER D. RATTANAVIJAI	SIZE B	P/N SU26_A08		REV
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER D. RATTANAVIJAI				
Ø 0.005 Ø +0.006 -0.001		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DRAWN BY D. RATTANAVIJAI				
ALL DIMENSIONS IN INCHES				APPROVAL	SCALE 1/1.75	DO NOT SCALE		SHEET 1 / 1

NOTES, UNLESS OTHERWISE SPECIFIED:
ENSURE ALL PARTS ARE WELDING COMPATABLE
(NO DANGEROUS COATING)

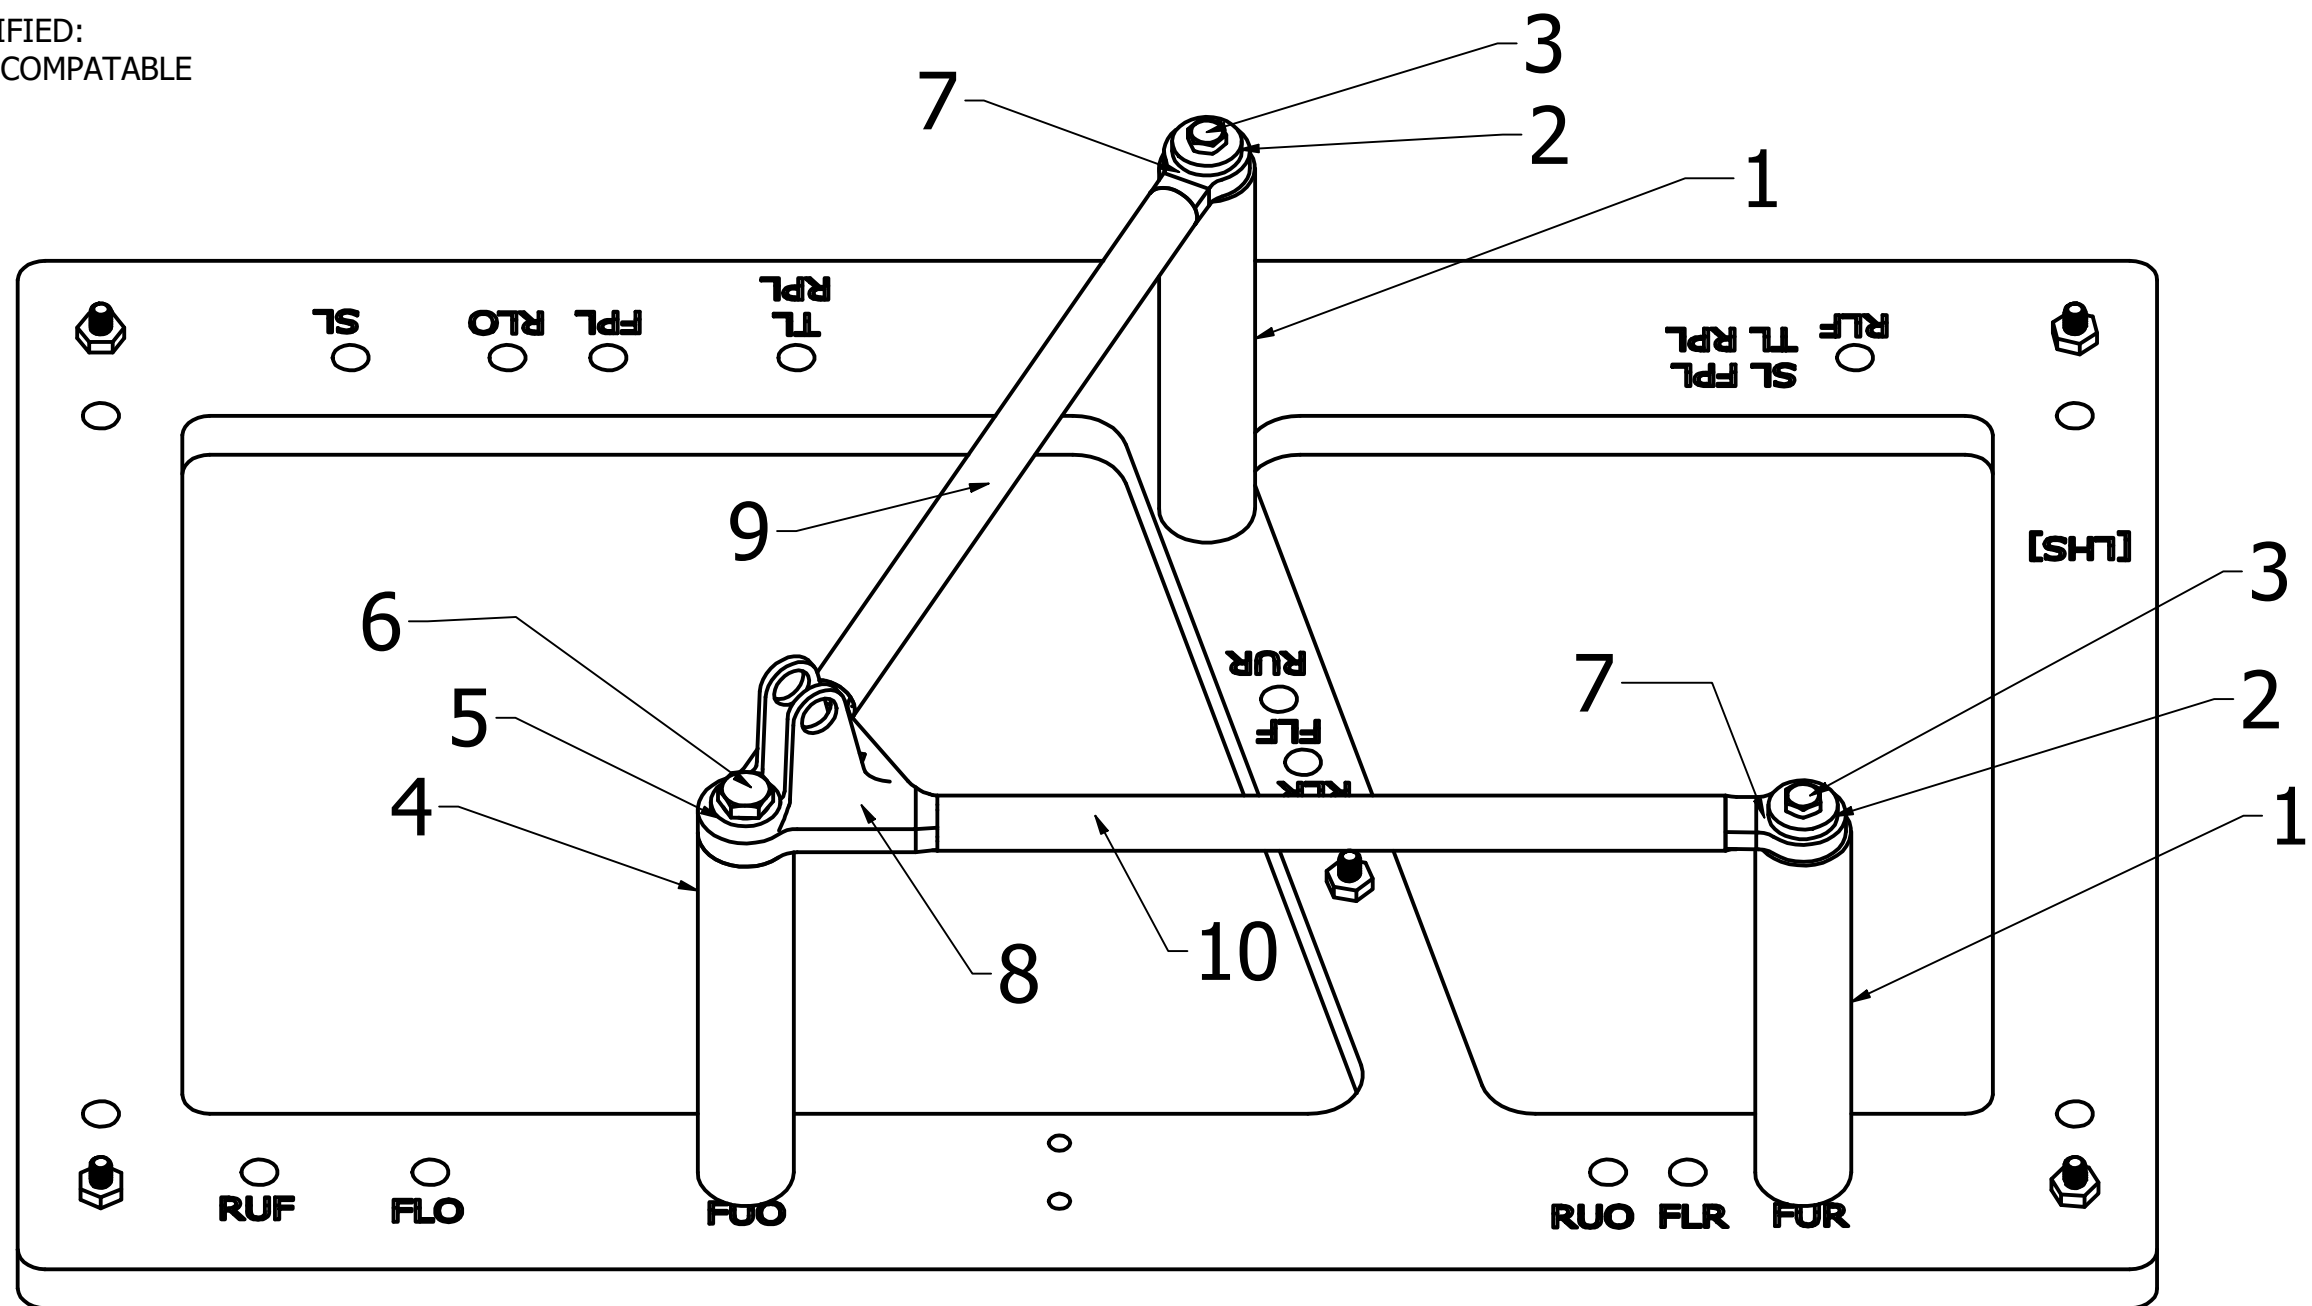


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	FRONT UPPER INBOARD ADAPTER	2
8	LINKS	FRONT UPPER OUTBOARD ADAPTER	1
9	LINKS	FRONT UPPER FRONT TUBE	1
10	LINKS	FRONT UPPER REAR TUBE	1

MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE		DATE 12/16/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED				FINISH BARE		DESCRIPTION [LHS] FRONT UPPER ASSEMBLY					
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018									
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER D. RATTANAVIJAI		SIZE B		P/N SU26_A08		REV	
				RESPONSIBLE ENGINEER D. RATTANAVIJAI		SCALE 1/1.75		DO NOT SCALE		SHEET 1 / 1	
				DRAWN BY D. RATTANAVIJAI							
				APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:
ENSURE ALL PARTS ARE WELDING COMPATABLE
(NO DANGEROUS COATING)

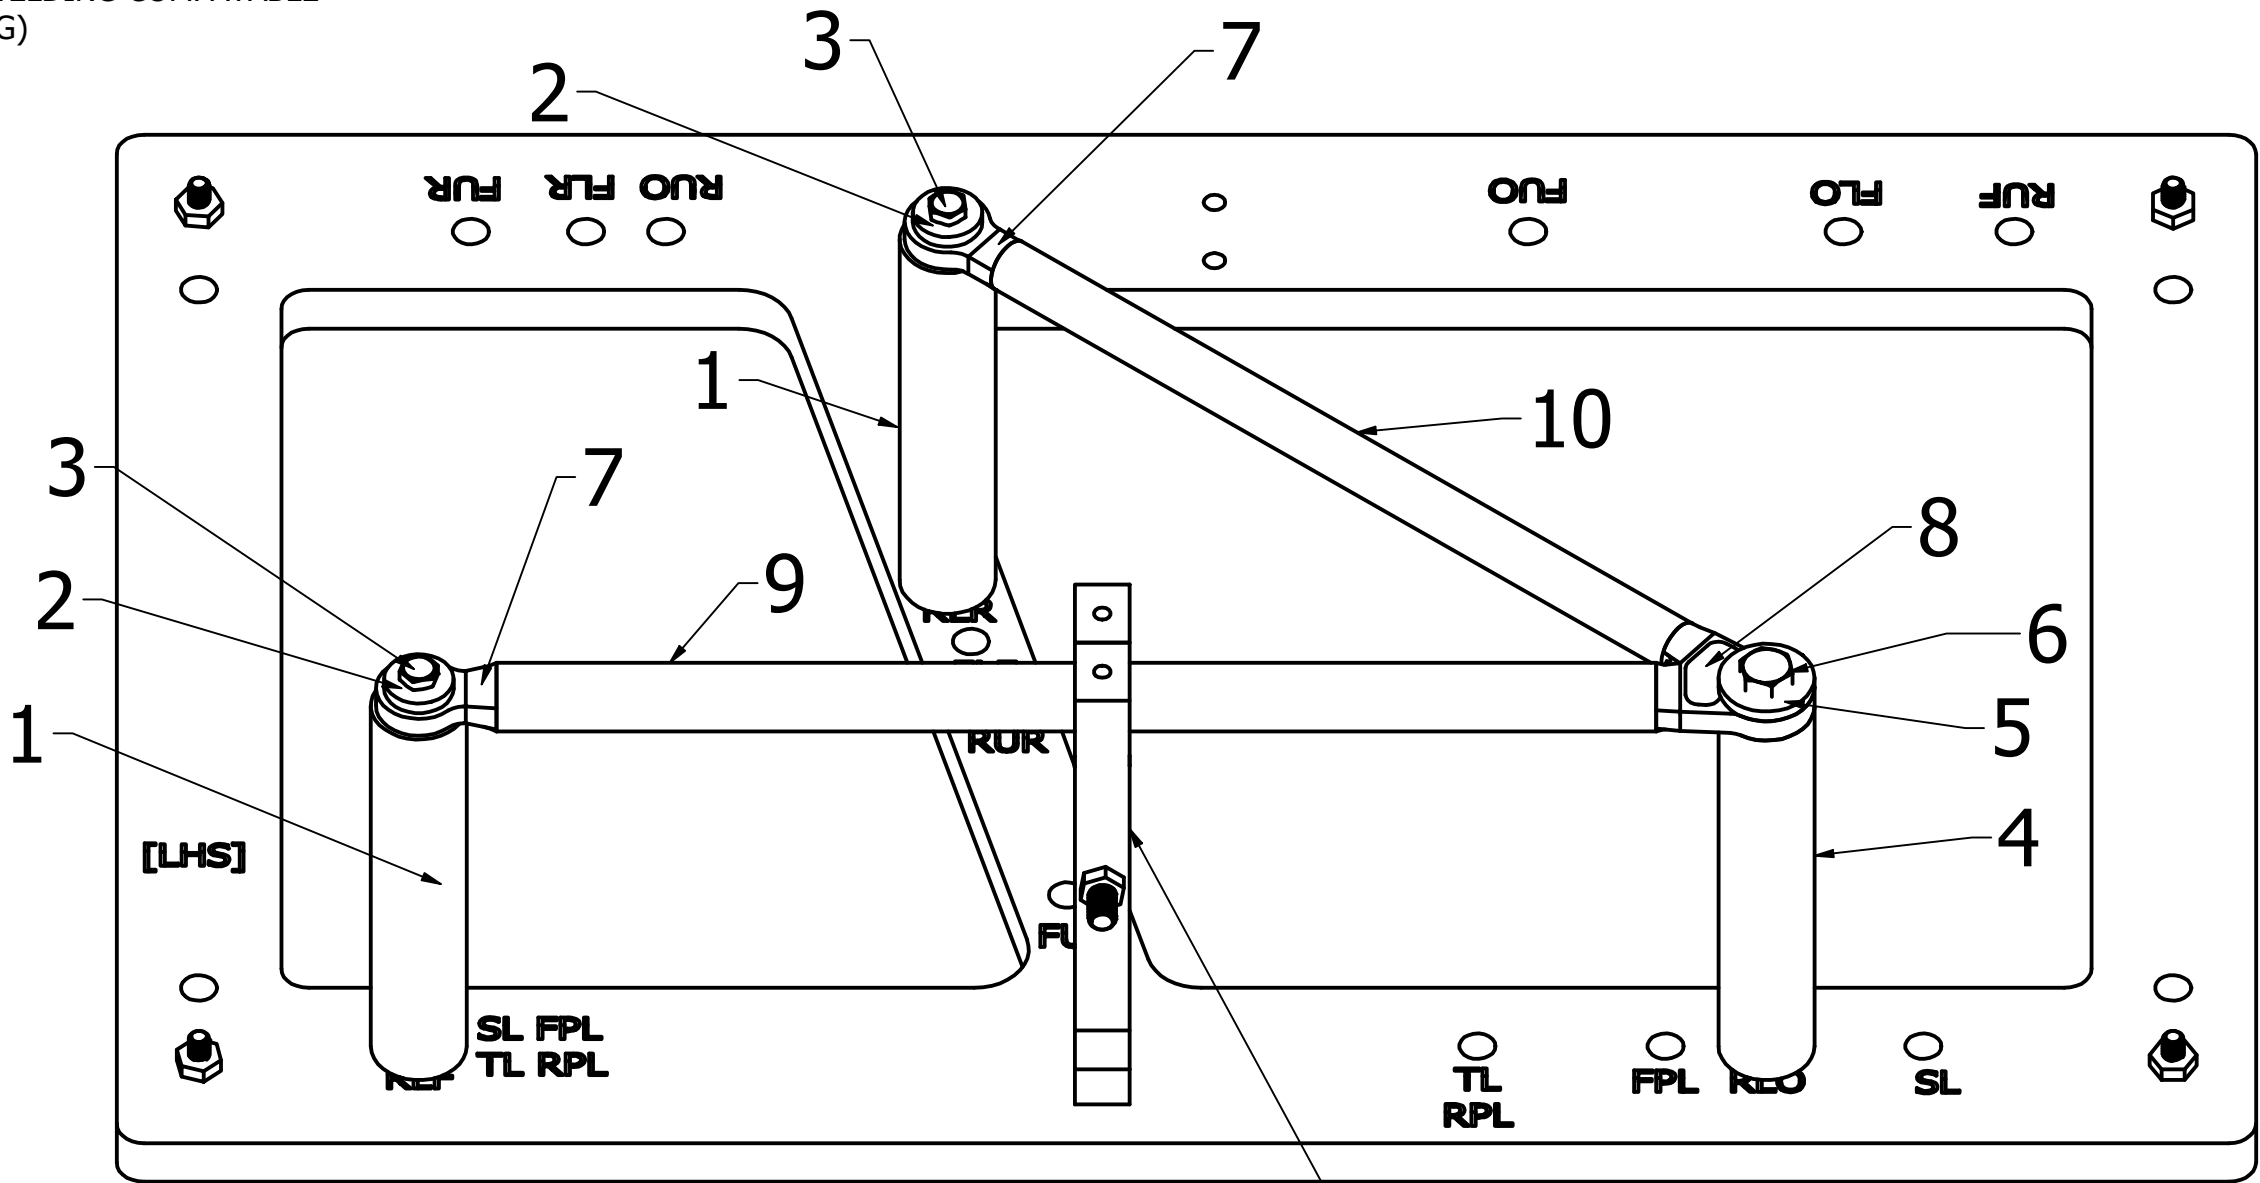


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	REAR LOWER INBOARD ADAPTER	2
8	LINKS	REAR LOWER OUTBOARD ADAPTER	1
9	LINKS	REAR LOWER FRONT TUBE	1
10	LINKS	REAR LOWER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:	DATE		
TOLERANCES, UNLESS SPECIFIED		FINISH		JIG PLATE	12/16/2025		
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		BARE		DESIGNER D. RATTANAVIJAI		DESCRIPTION [LHS] REAR LOWER ASSEMBLY	
ALL DIMENSIONS IN INCHES		INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER D. RATTANAVIJAI		SIZE B	P/N SU26_A08
				DRAWN BY D. RATTANAVIJAI		SCALE 1/1.75	REV
				APPROVAL		DO NOT SCALE	SHEET 1 / 1

NOTES, UNLESS OTHERWISE SPECIFIED:
ENSURE ALL PARTS ARE WELDING COMPATABLE
(NO DANGEROUS COATING)

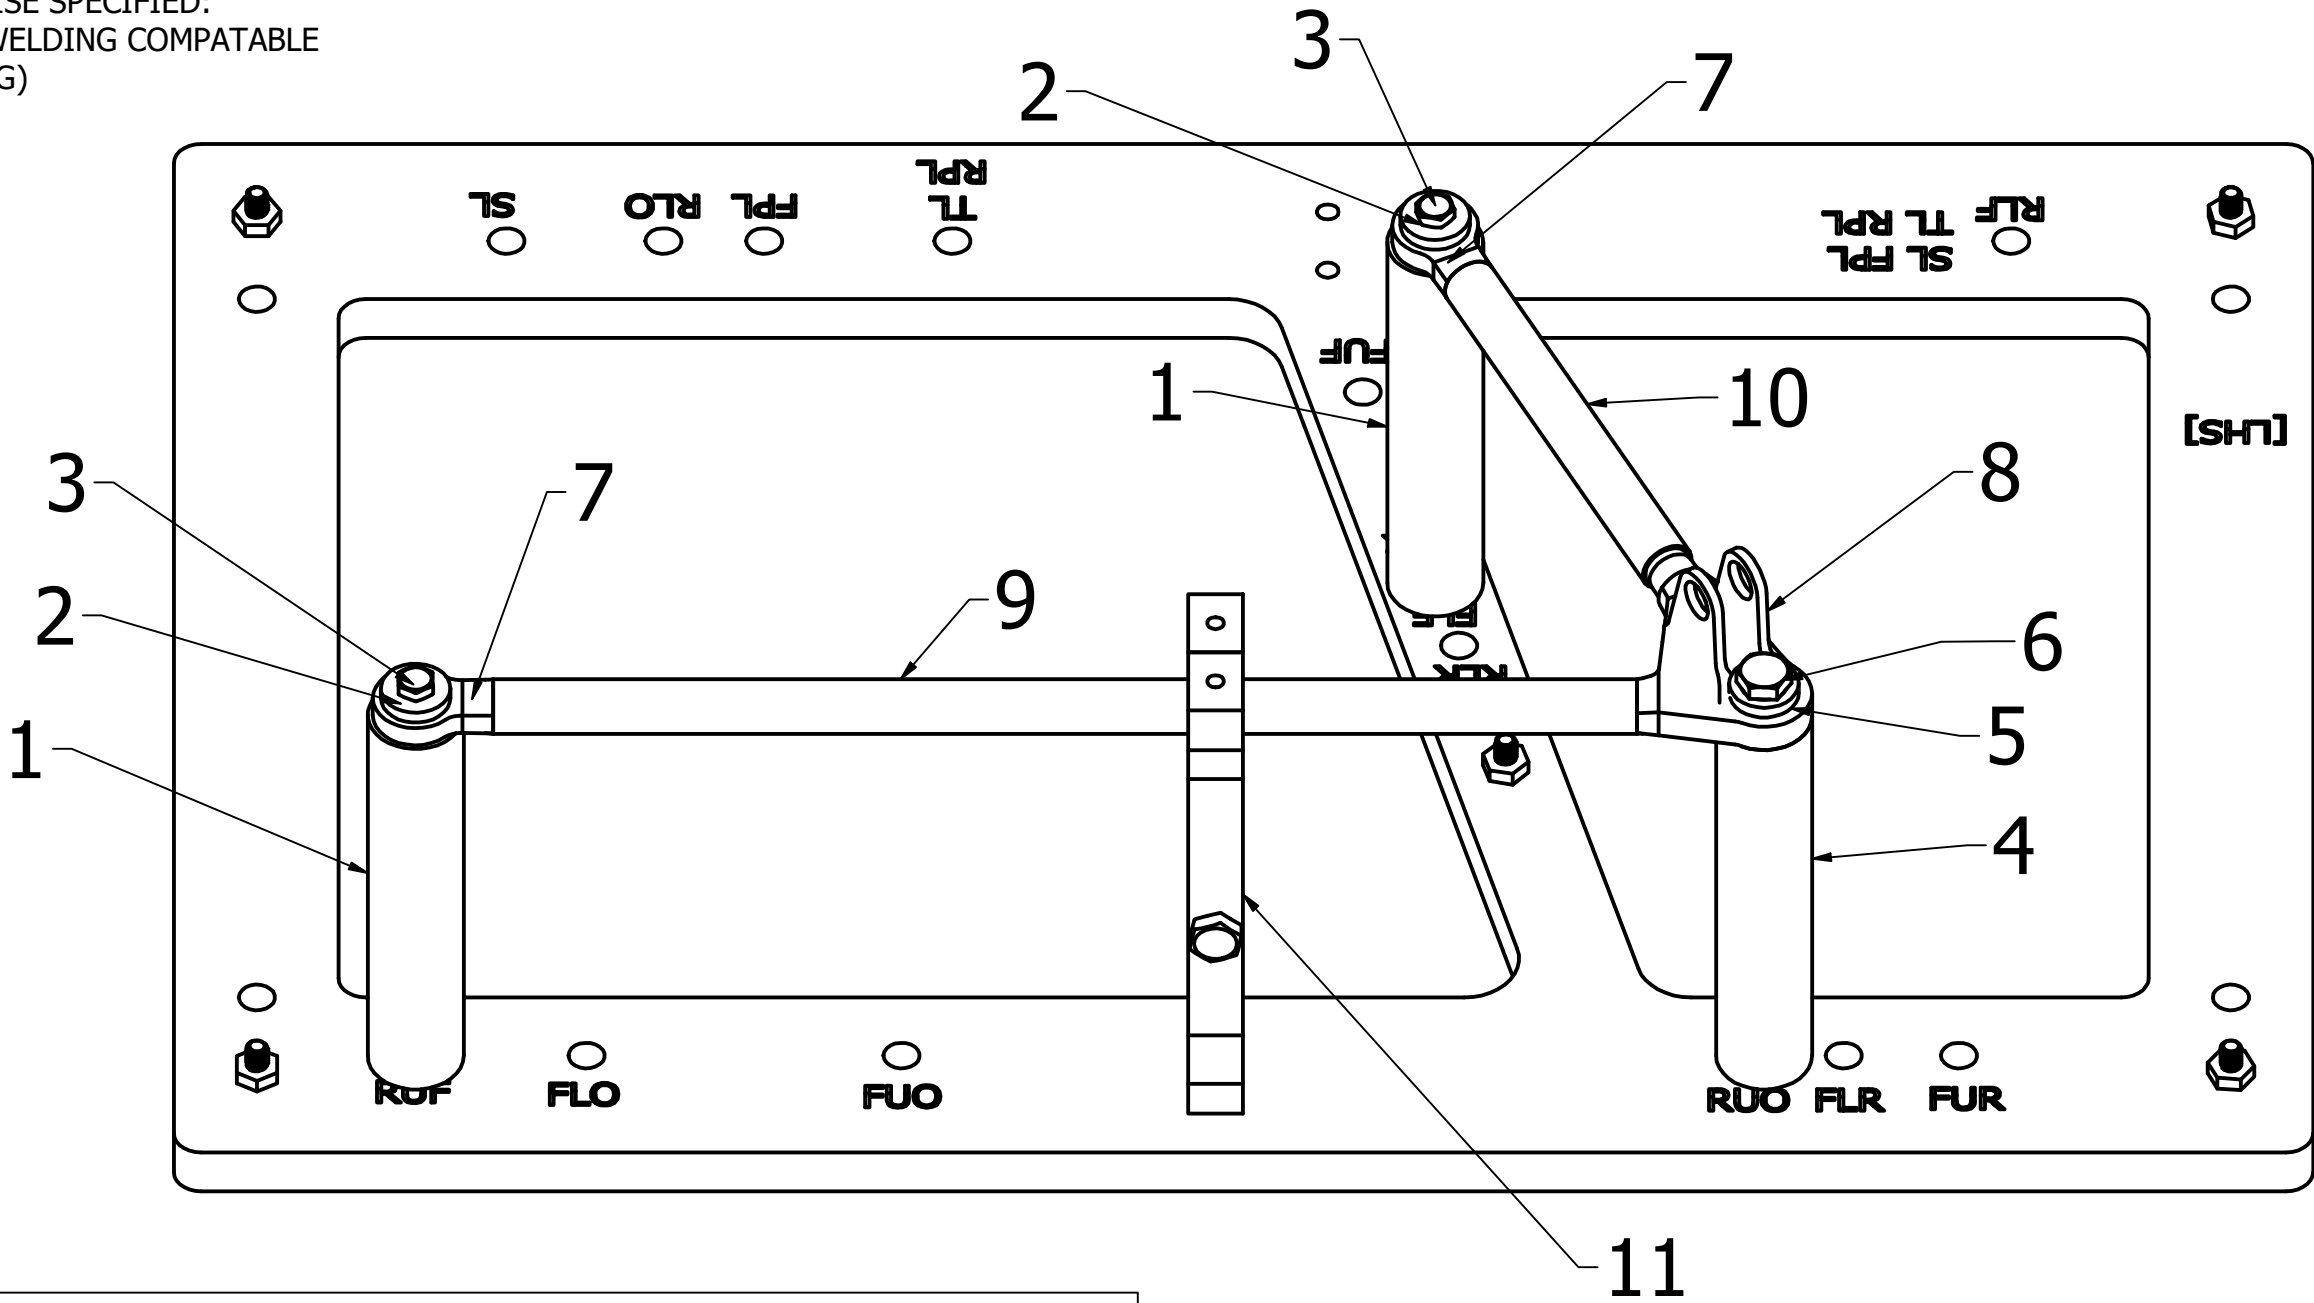


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	REAR UPPER INBOARD ADAPTER	2
8	LINKS	REAR UPPER OUTBOARD ADAPTER	1
9	LINKS	REAR UPPER FRONT TUBE	1
10	LINKS	REAR UPPER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE	DATE 12/16/2025	 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED				DESCRIPTION				
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ⌀ 0.005 ⌀ +0.006 -0.001 ALL DIMENSIONS IN INCHES		FINISH BARE		[LHS] REAR UPPER ASSEMBLY				
		INTERPRET PER ASME Y14.5-2018						
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER D. RATTANAVIJAI		SIZE B	P/N SU26_A08	REV
				RESPONSIBLE ENGINEER D. RATTANAVIJAI				
		DRAWN BY D. RATTANAVIJAI		SCALE 1/1.75	DO NOT SCALE		SHEET 1 / 1	
		APPROVAL						

NOTES, UNLESS OTHERWISE SPECIFIED:

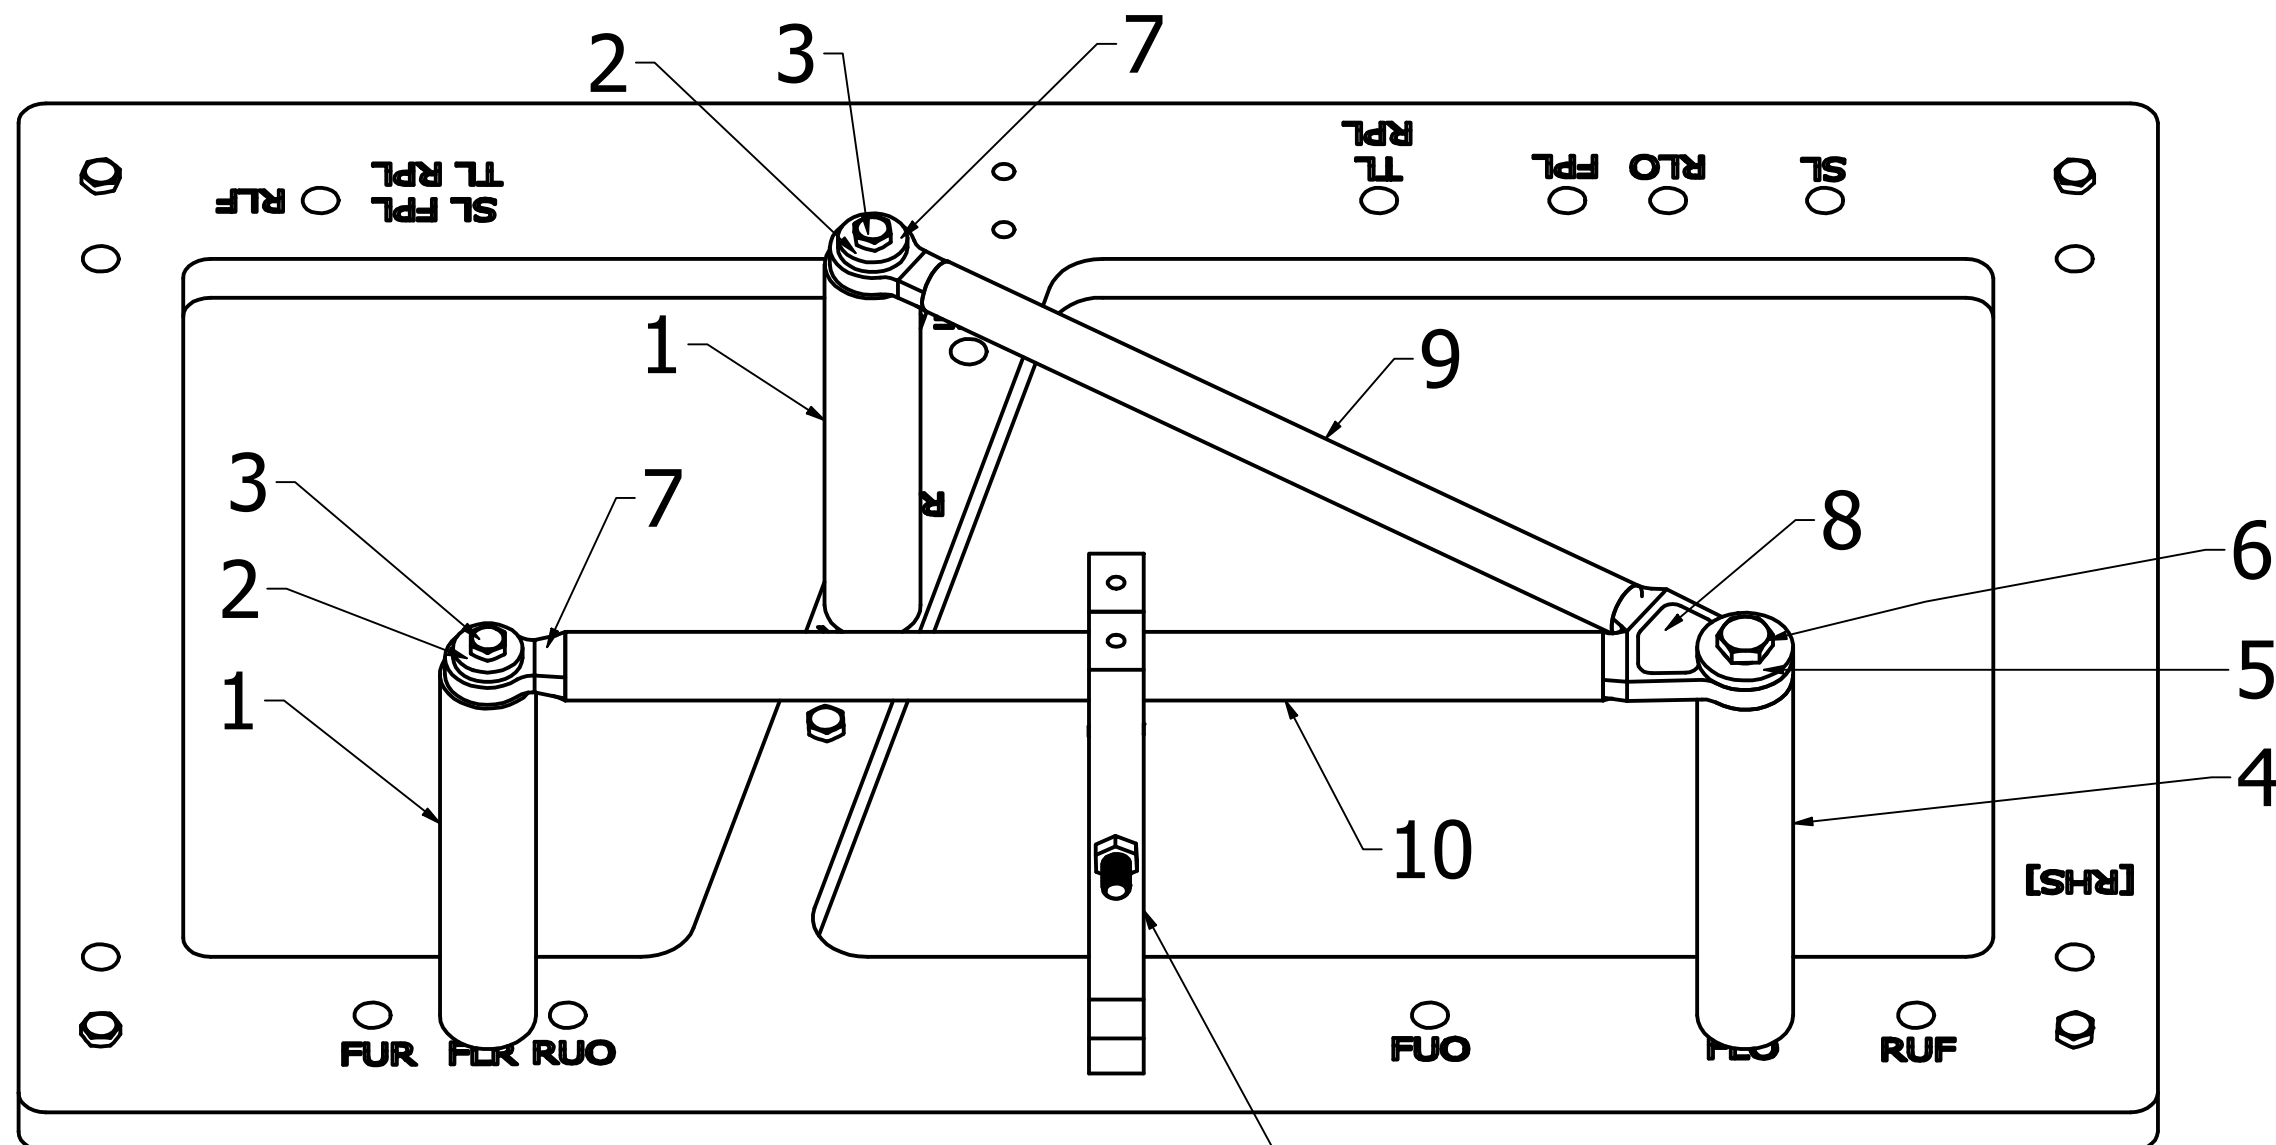


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	FRONT LOWER INBOARD ADAPTER	2
8	LINKS	FRONT LOWER OUTBOARD ADAPTER	1
9	LINKS	FRONT LOWER FRONT TUBE	1
10	LINKS	FRONT LOWER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE		DATE 12/16/2025		 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 X.X ± 0.1 $\varnothing +0.006$ X.XX ± 0.02 -0.001 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES		FINISH BARE		DESCRIPTION [RHS] FRONT LOWER ASSEMBLY						
		INTERPRET PER ASME Y14.5-2018								
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING								
		DESIGNER D. RATTANAVIJAI		SIZE B		P/N SU26_A08			REV	
		RESPONSIBLE ENGINEER D. RATTANAVIJAI		SCALE 1/1.75		DO NOT SCALE			SHEET 1 / 1	
		DRAWN BY								
		APPROVAL								

A



6	5	4
---	---	---

	3	2	1
--	---	---	---

NOTES, UNLESS OTHERWISE SPECIFIED:

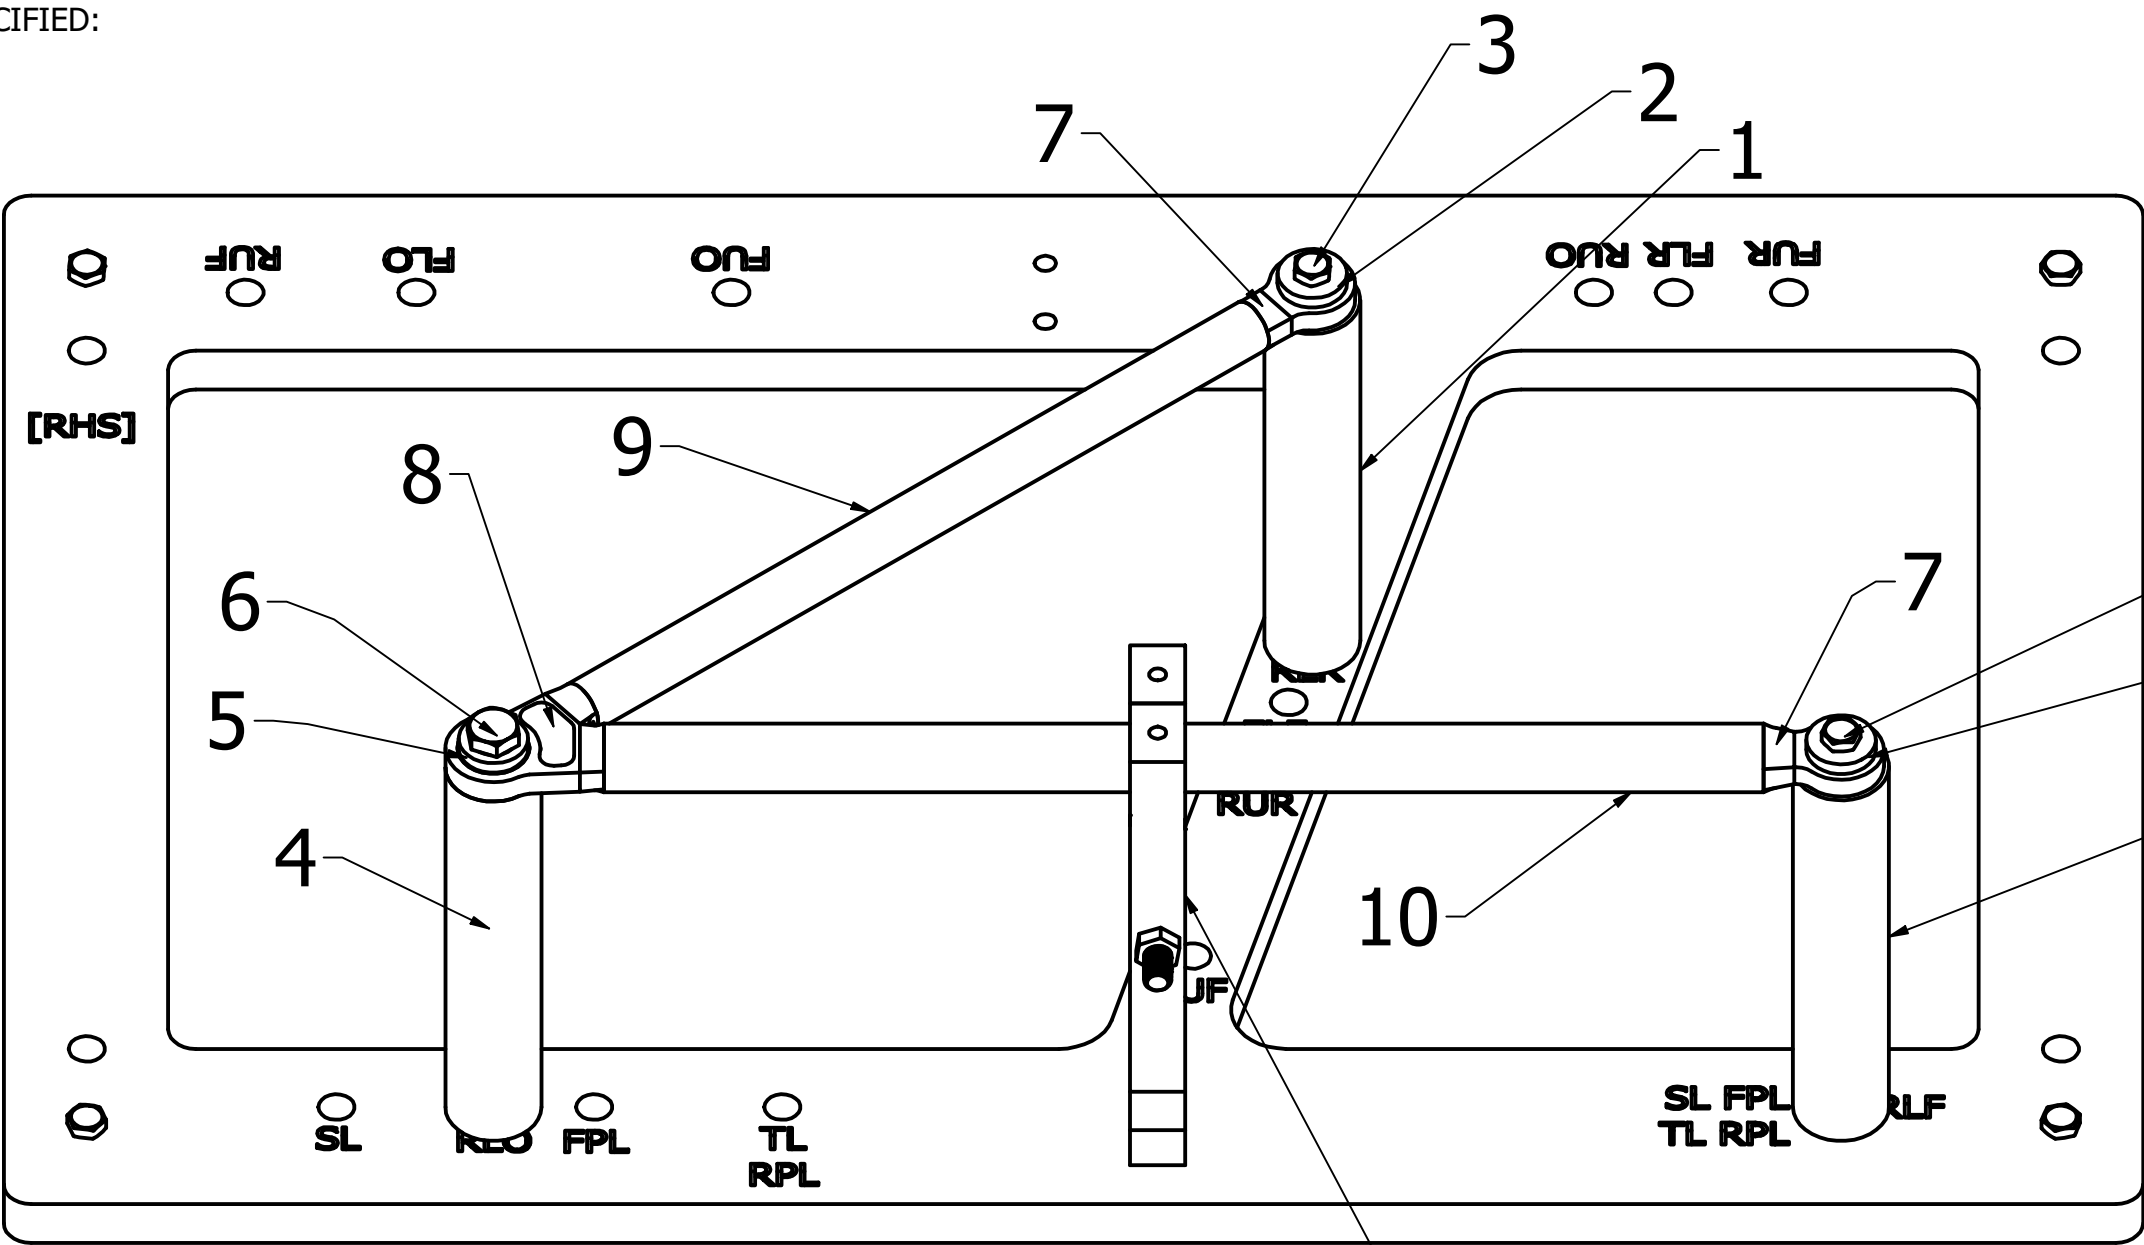


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	REAR LOWER INBOARD ADAPTER	2
8	LINKS	REAR LOWER OUTBOARD ADAPTER	1
9	LINKS	REAR LOWER FRONT TUBE	1
10	LINKS	REAR LOWER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE	DATE 12/16/2025		
TOLERANCES, UNLESS SPECIFIED				DESCRIPTION			
FINISH		BARE		[RHS] REAR LOWER ASSEMBLY			
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		INTERPRET PER ASME Y14.5-2018					
ALL DIMENSIONS IN INCHES		DESIGNER D. RATTANAVIJAI		SIZE B	P/N SU26_A08		REV
		RESPONSIBLE ENGINEER D. RATTANAVIJAI		SCALE 1/1.75			
		DRAWN BY					
		APPROVAL		DO NOT SCALE		SHEET 1 / 1	
ALL INFORMATION IS PROPRIETARY TO CORNELL RACING							

NOTES, UNLESS OTHERWISE SPECIFIED:

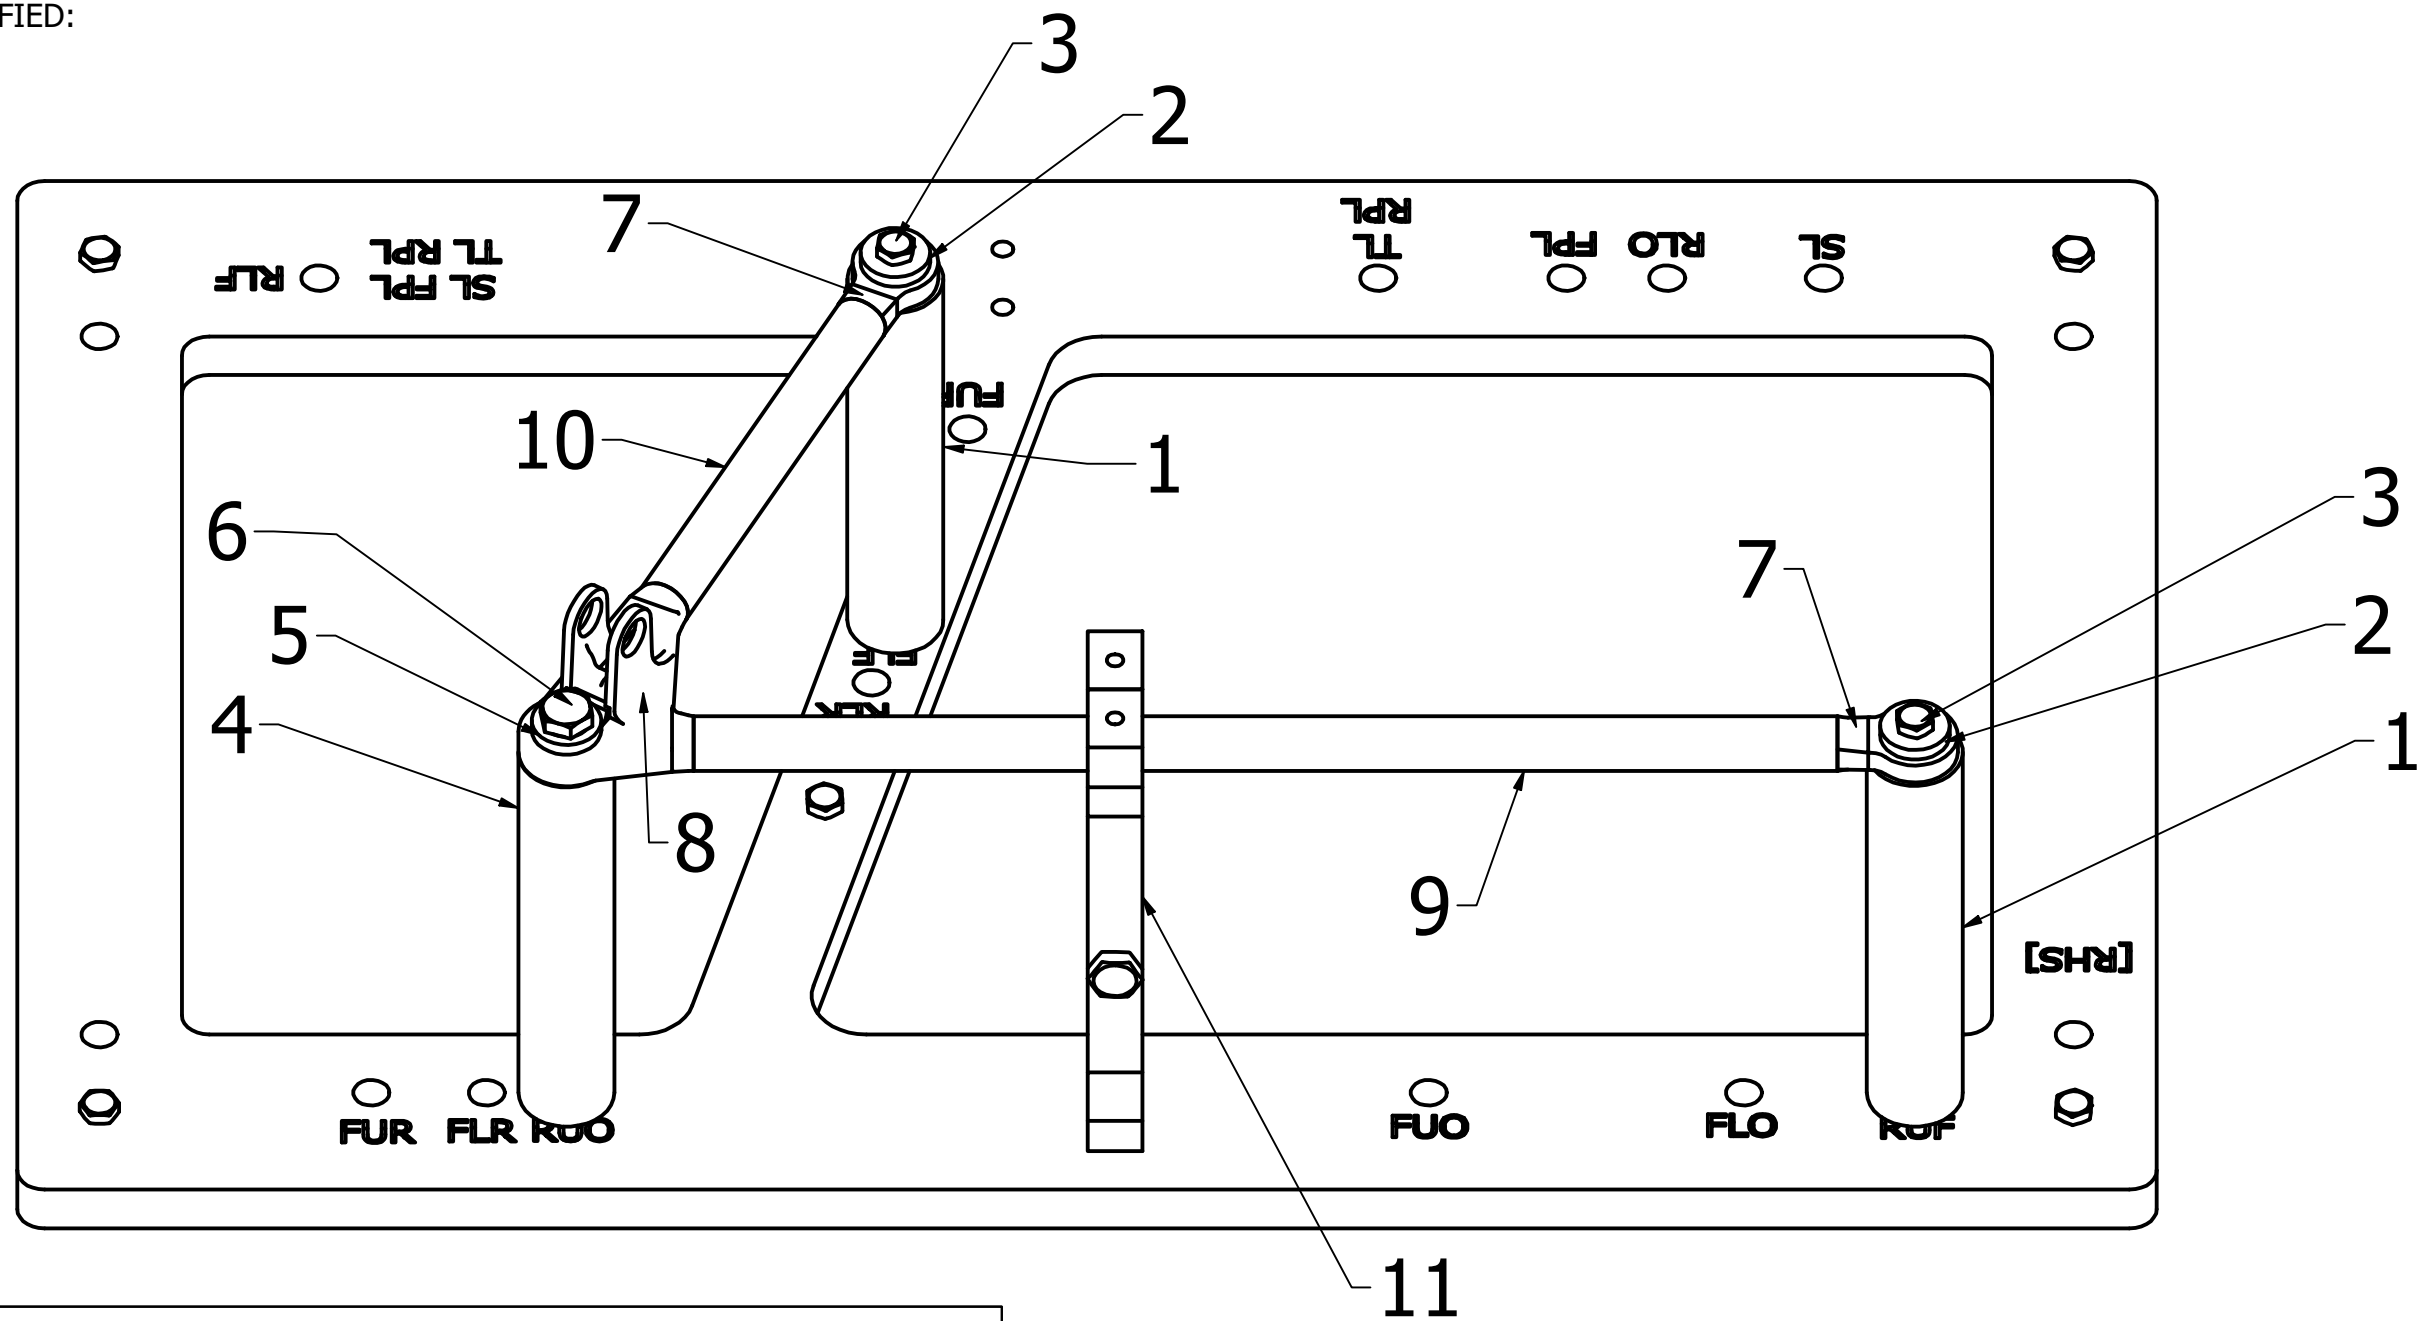



TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLES STEEL)	1
4	JIG	AN4 BEARING POST	1
5	JIG	AN4 WASHER	1
6	JIG	AN4 BOLT (STAINLES STEEL)	1
7	LINKS	REAR UPPER INBOARD ADAPTER	2
8	LINKS	REAR UPPER OUTBOARD ADAPTER	1
9	LINKS	REAR UPPER FRONT TUBE	1
10	LINKS	REAR UPPER REAR TUBE	1
11	JIG	MIDPOINT SUPPORT x2, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE		DATE 12/16/2025		 CORNELL RACING					
TOLERANCES, UNLESS SPECIFIED				FINISH BARE		DESCRIPTION [RHS] REAR UPPER ASSEMBLY							
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		Ø 0.005 Ø +0.006 -0.001		INTERPRET PER ASME Y14.5-2018		DESIGNER D. RATTANA VIJAI		SIZE B		P/N SU26_A08		REV	
ALL DIMENSIONS IN INCHES		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER D. RATTANA VIJAI		SCALE 1/1.75		DO NOT SCALE		SHEET 1 / 1			
				DRAWN BY									
				APPROVAL									

NOTES, UNLESS OTHERWISE SPECIFIED:

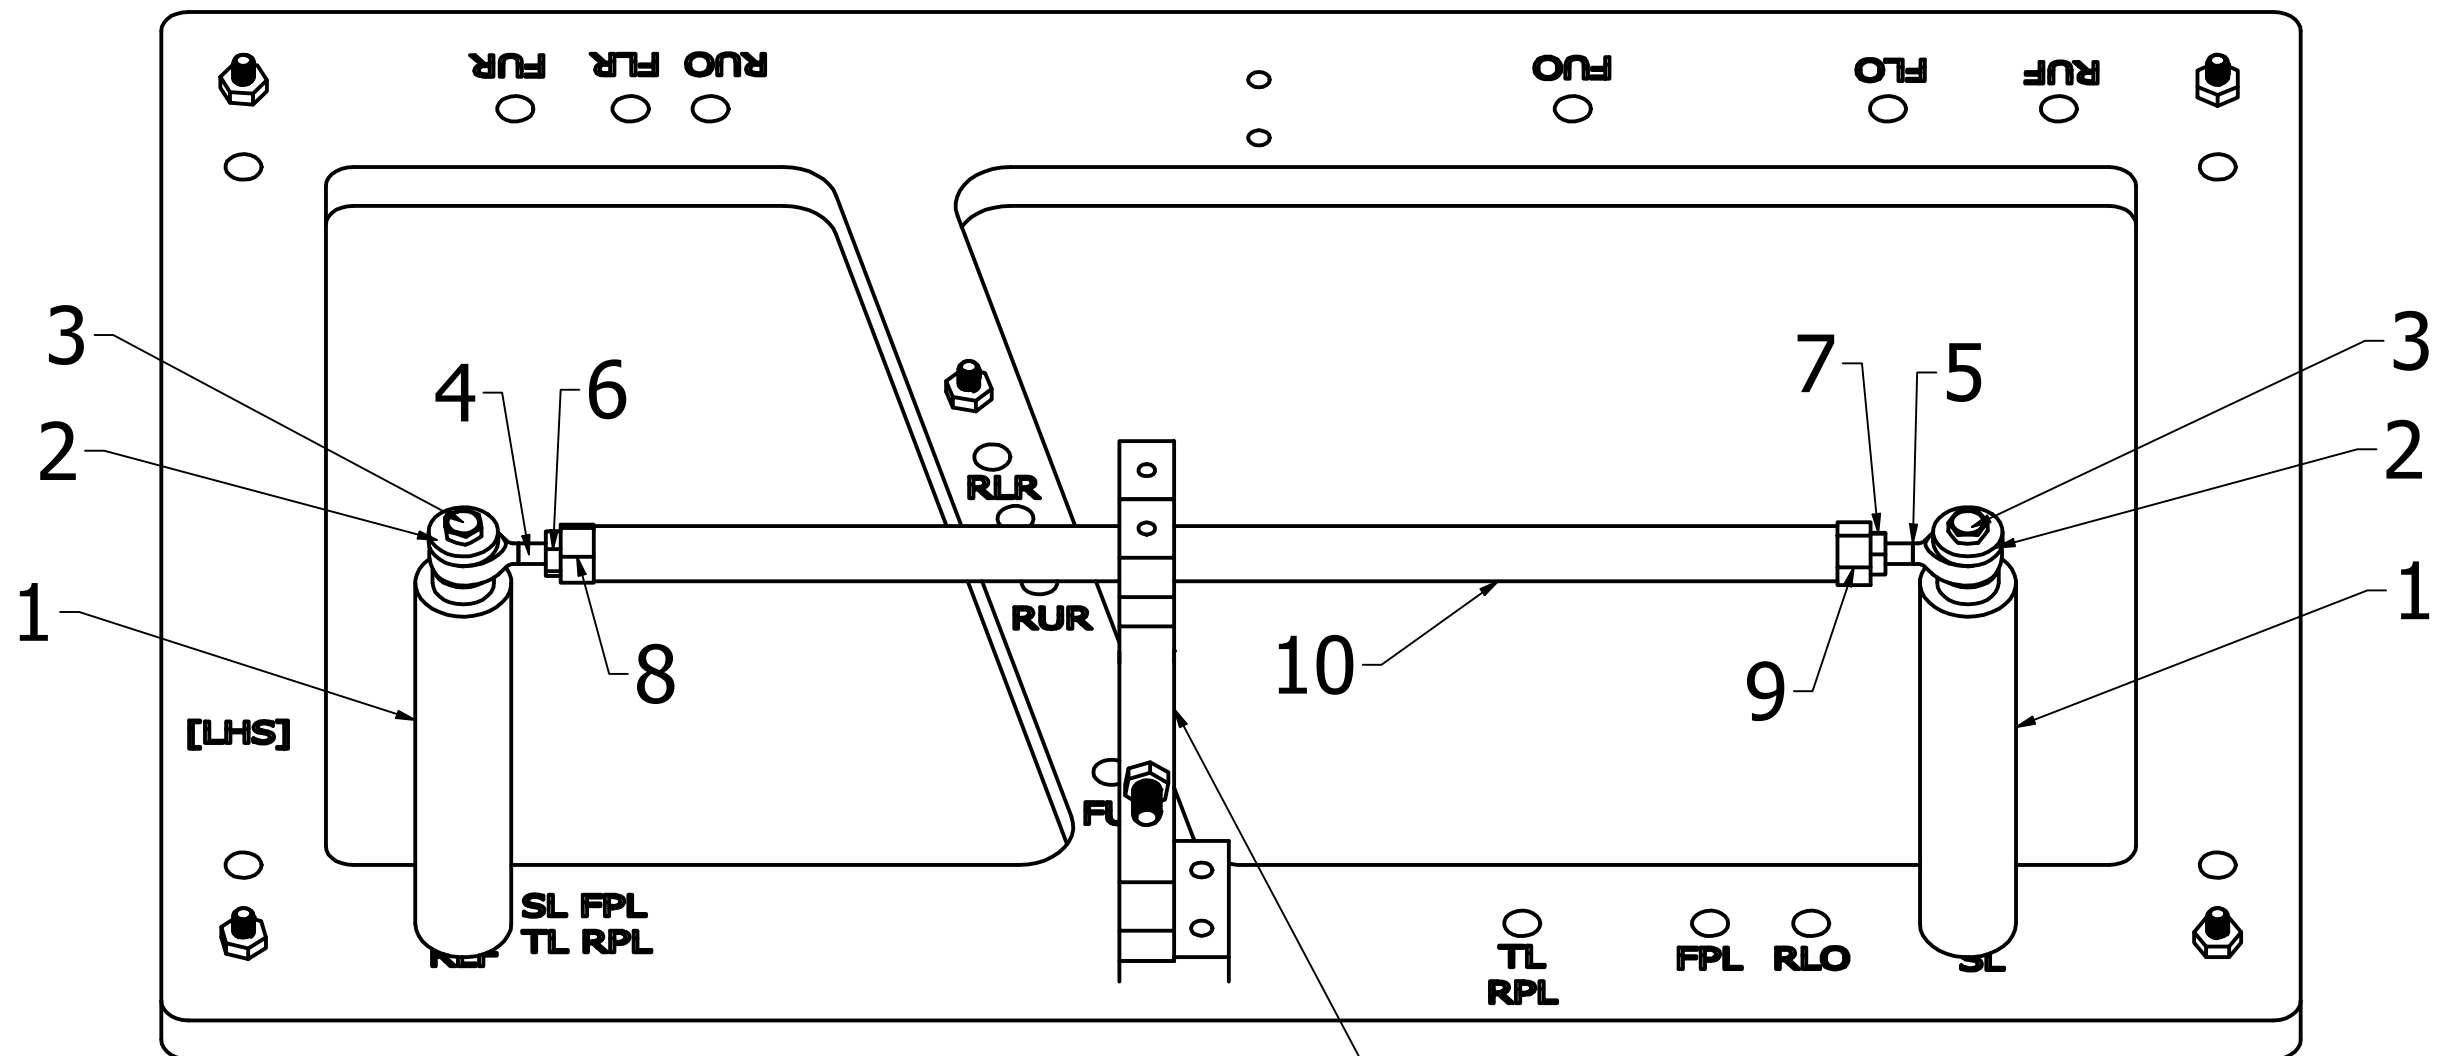


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLESS STEEL)	2
4	JIG	AN3 ROD LH (NON PLATED)	1
5	JIG	AN3 ROD END RH (NON PLATED)	1
6	JIG	AN3 NUT LH (STAINLESS STEEL)	1
7	JIG	AN3 NUT RH (STAINLESS STEEL)	1
8	LINKS	STEERING LINK INSERT LH	1
9	LINKS	STEERING LINK INSERT RH	1
10	LINKS	STEERING LINK TUBE	1
11	JIG	MIDPOINT SUPPORT x2, SHIM x1, AN3 BOLT 2" x1, AN3 NUT x1	1

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM: JIG PLATE		DATE		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 $\varnothing \pm 0.006$ ± 0.002 ± 0.010				DESCRIPTION STEERING LINK ASSEMBLY					
FINISH		DESIGNER D. RATTANAUIJAI		SIZE B		P/N SU26_A08		REV	
BARE		RESPONSIBLE ENGINEER D. RATTANAUIJAI		SCALE 1/1.75		DO NOT SCALE		SHEET 1 / 1	
INTERPRET PER ASME Y14.5-2018		DRAWN BY							
ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		APPROVAL							
ALL DIMENSIONS IN INCHES									

NOTES, UNLESS OTHERWISE SPECIFIED:
ENSURE ALL PARTS ARE WELDING COMPATABLE
(NO DANGEROUS COATING)






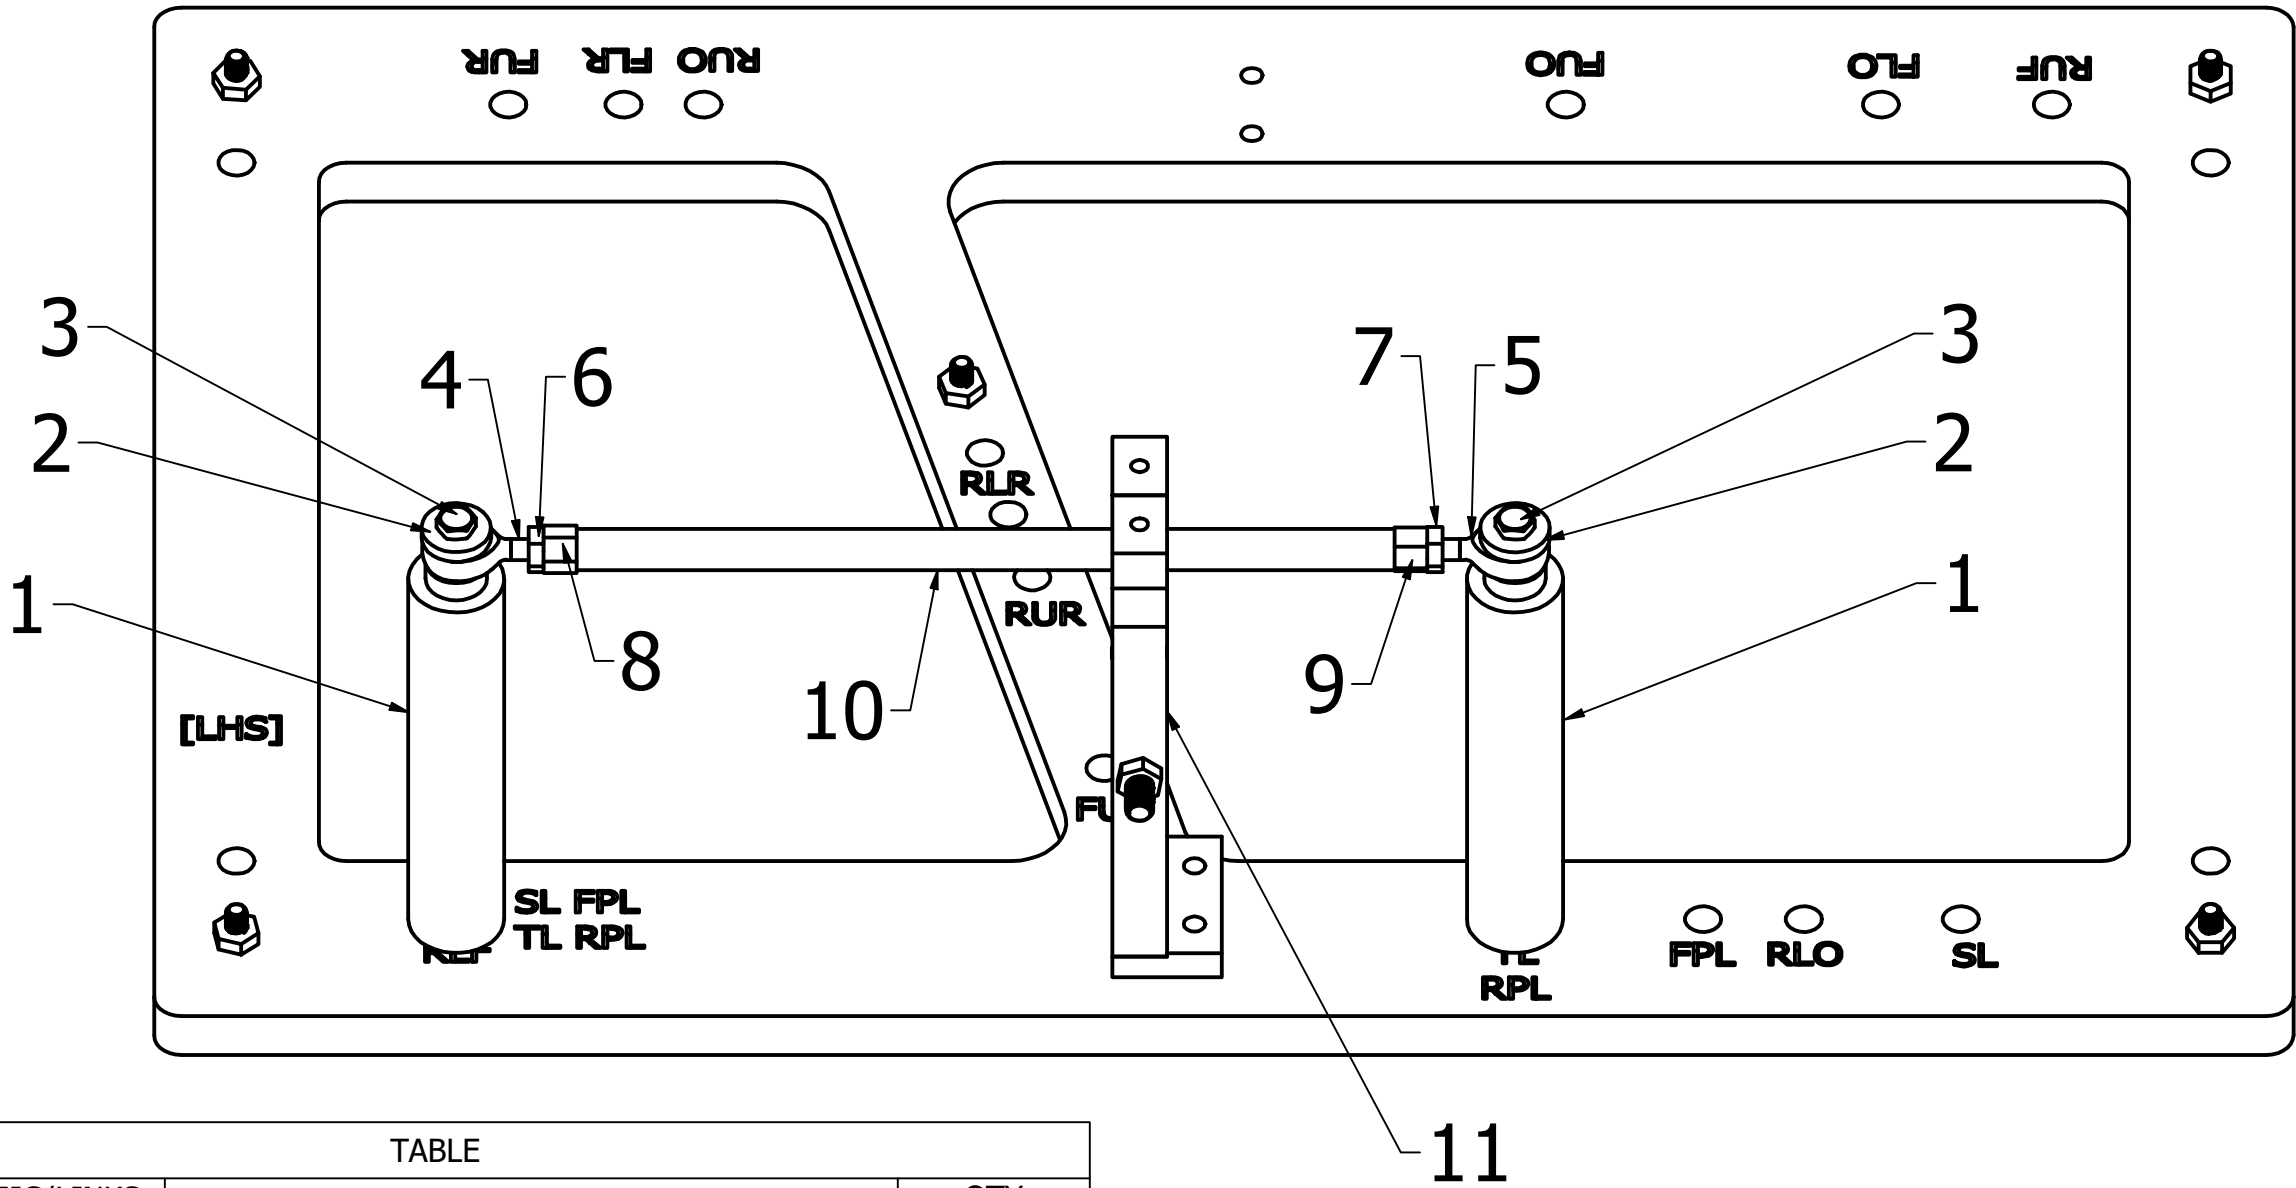


TABLE			
PART	JIG/LINKS	DESCRIPTION	QTY
1	JIG	AN3 BEARING POST	2
2	JIG	AN3 WASHER	2
3	JIG	AN3 BOLT (STAINLESS STEEL)	2
4	JIG	AN3 ROD LH (NON PLATED)	1
5	JIG	AN3 ROD END RH (NON PLATED)	1
6	JIG	AN3 NUT LH (STAINLESS STEEL)	1
7	JIG	AN3 NUT RH (STAINLESS STEEL)	1
8	LINKS	TOE LINK INSERT LH	1
9	LINKS	TOE LINK INSERT RH	1
10	LINKS	TOE LINK TUBE	1
11	JIG	MIDPOINT SUPPORT x2, SHIM x1, AN3 BOLT 2" x1, AN3 NUT x1	1


MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE	DATE 12/16/2025	 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES				DESCRIPTION TOE LINK ASSEMBLY				
		FINISH BARE				SIZE B	P/N SU26_A08	REV
		INTERPRET PER ASME Y14.5-2018						
RESPONSIBLE ENGINEER D. RATTANAVIJAI				SCALE 1/1.75	DO NOT SCALE	SHEET 1 / 1		
DRAWN BY D. RATTANAVIJAI								
APPROVAL								


NOTES, UNLESS OTHERWISE SPECIFIED:

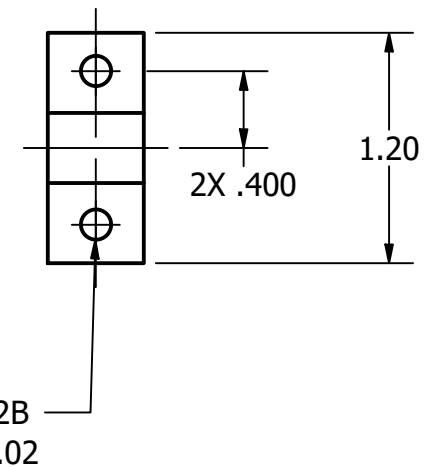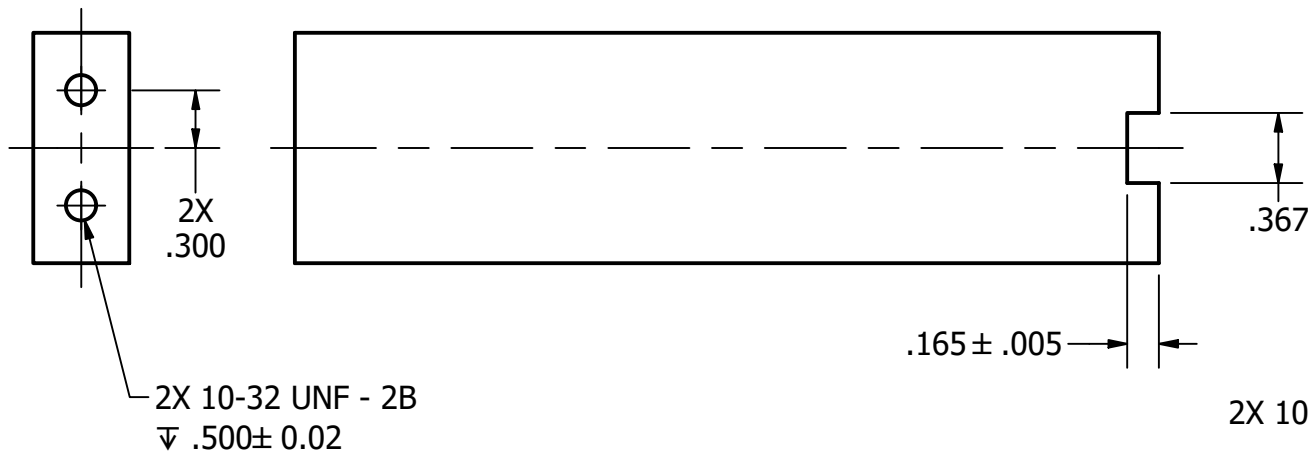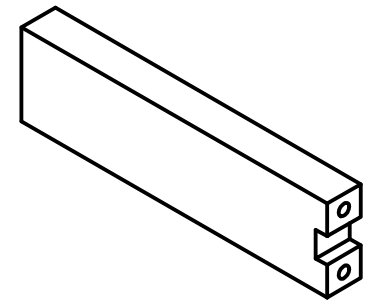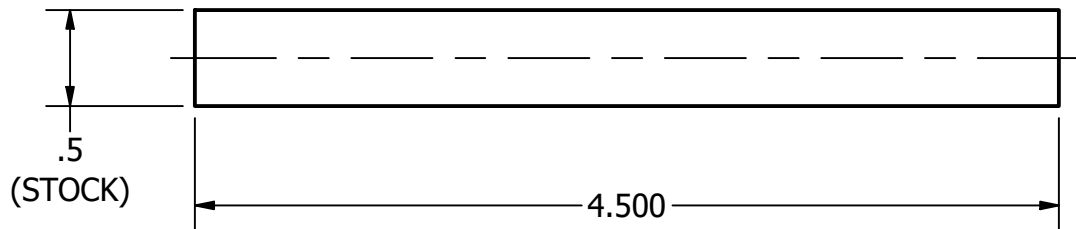




MATERIAL ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION 		SUBSYSTEM: ANTI-ROLL		DATE 4/20/2026			
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 $X.X \pm 0.1$ $X.XX \pm 0.02$ $X.XXX \pm 0.010$ ALL DIMENSIONS IN INCHES	FINISH BARE	DESIGNER JUNSEOK KANG		DESCRIPTION REAR TB INSERT SUPPORT					
	INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	RESPONSIBLE ENGINEER JUNSEOK KANG							
		DRAWN BY JUNSEOK KANG		SCALE 1 : 1		DO NOT SCALE			SHEET 1 / 1
		APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:
1. BOUNDING BOX DIMENSIONS ARE NOT
CRITICAL. USE AVAILABLE STOCK.


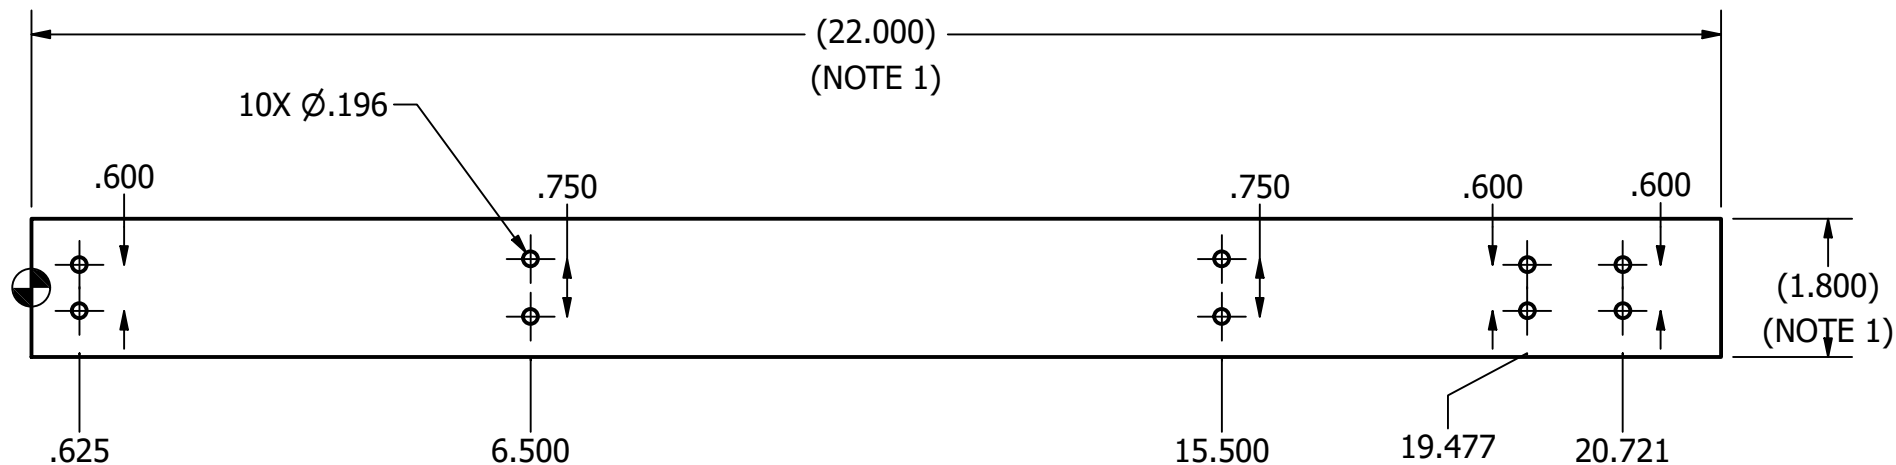


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE				
ALUMINUM, 6061-T6				ANTI-ROLL		4/20/2026		CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION				
BARE		INTERPRET PER ASME Y14.5-2018		JUNSEOK KANG		ARB JIG BASE PLATE				
LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER JUNSEOK KANG		SIZE A		P/N SU26_A0505_P05		REV A
ALL DIMENSIONS IN INCHES				DRAWN BY JUNSEOK KANG		SCALE 1/2.5		DO NOT SCALE		SHEET 1 / 1
				APPROVAL						


NOTES, UNLESS OTHERWISE SPECIFIED:

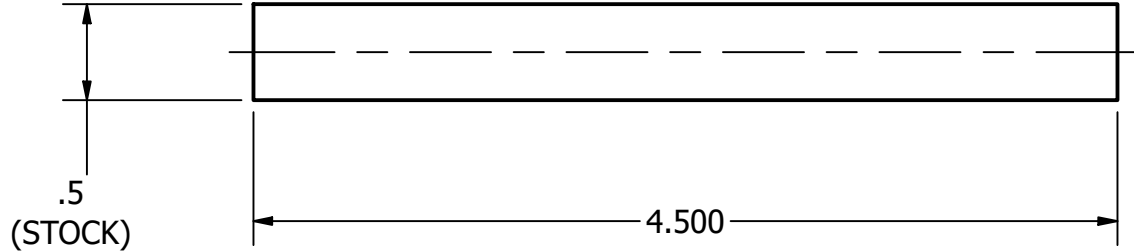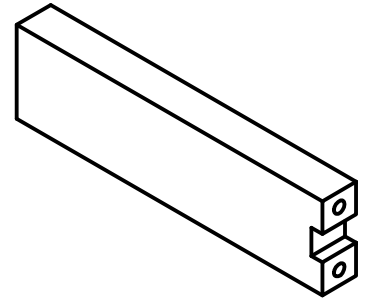

2X 10-32 UNF - 2B
▽ .500± 0.02

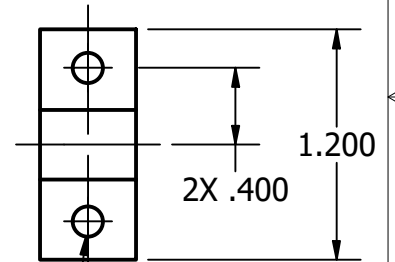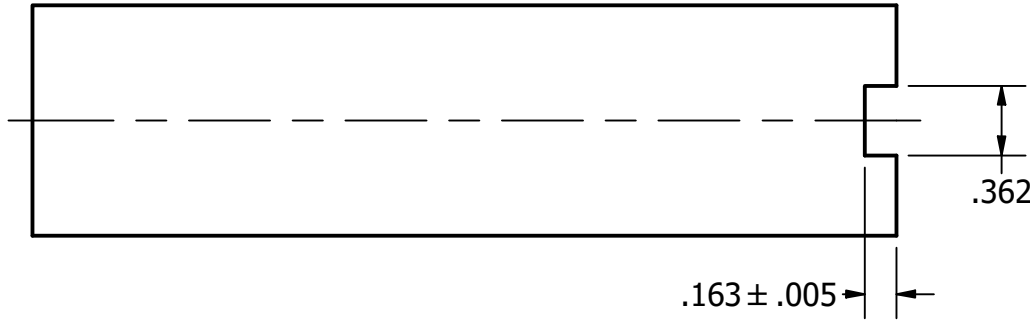

2X 10-32 UNF - 2B
▽ .500± 0.02

MATERIAL ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION 		SUBSYSTEM: ANTI-ROLL		DATE 4/20/2026	 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE			DESIGNER JUNSEOK KANG		DESCRIPTION FRONT TB INSERT SUPPORT		
	INTERPRET PER ASME Y14.5-2018 ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	RESPONSIBLE ENGINEER JUNSEOK KANG		SIZE A	P/N SU26_A0505_P06			
		DRAWN BY JUNSEOK KANG	SCALE 1 : 1		DO NOT SCALE		SHEET 1 / 1	
		APPROVAL						

NOTES, UNLESS OTHERWISE SPECIFIED:

D

C

B


A


D

C



B


A

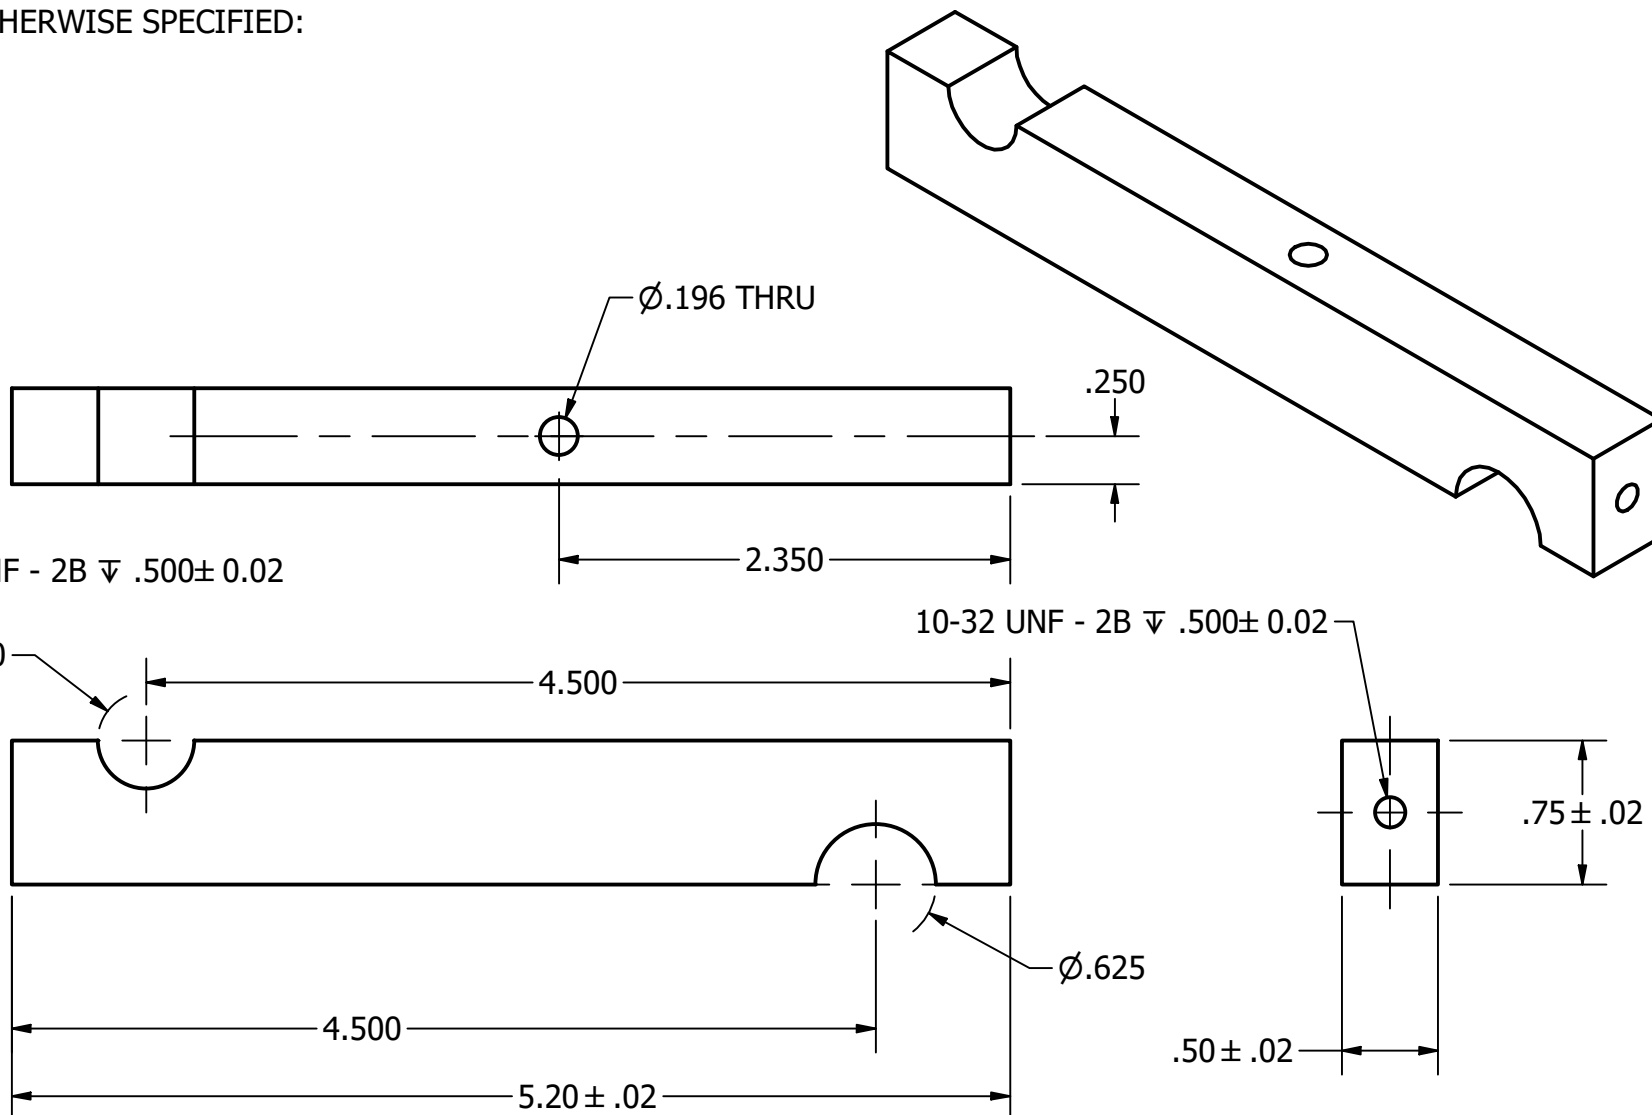





MATERIAL		ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION		SUBSYSTEM: ANTI-ROLL		DATE 3/20/2026			
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 $X.X \pm 0.1$ $X.XX \pm 0.02$ $X.XXX \pm 0.010$ ALL DIMENSIONS IN INCHES		FINISH BARE				DESCRIPTION MIDPOINT SUPPORT HALF					
		INTERPRET PER ASME Y14.5-2018									
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING									
		DESIGNER JUNSEOK KANG									
		RESPONSIBLE ENGINEER JUNSEOK KANG									
		DRAWN BY JUNSEOK KANG		SIZE A		P/N SU26_A0505_P07				REV A	
		APPROVAL		SCALE 1 : 1		DO NOT SCALE				SHEET 1 / 1	


NOTES, UNLESS OTHERWISE SPECIFIED:

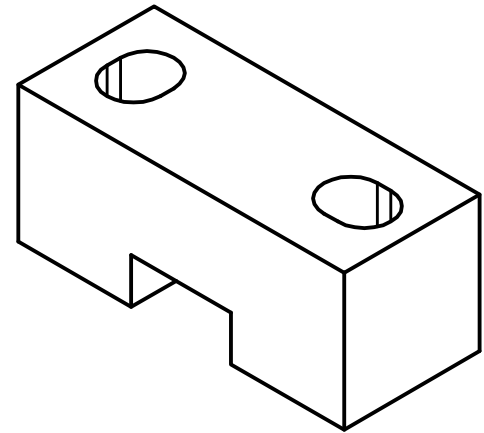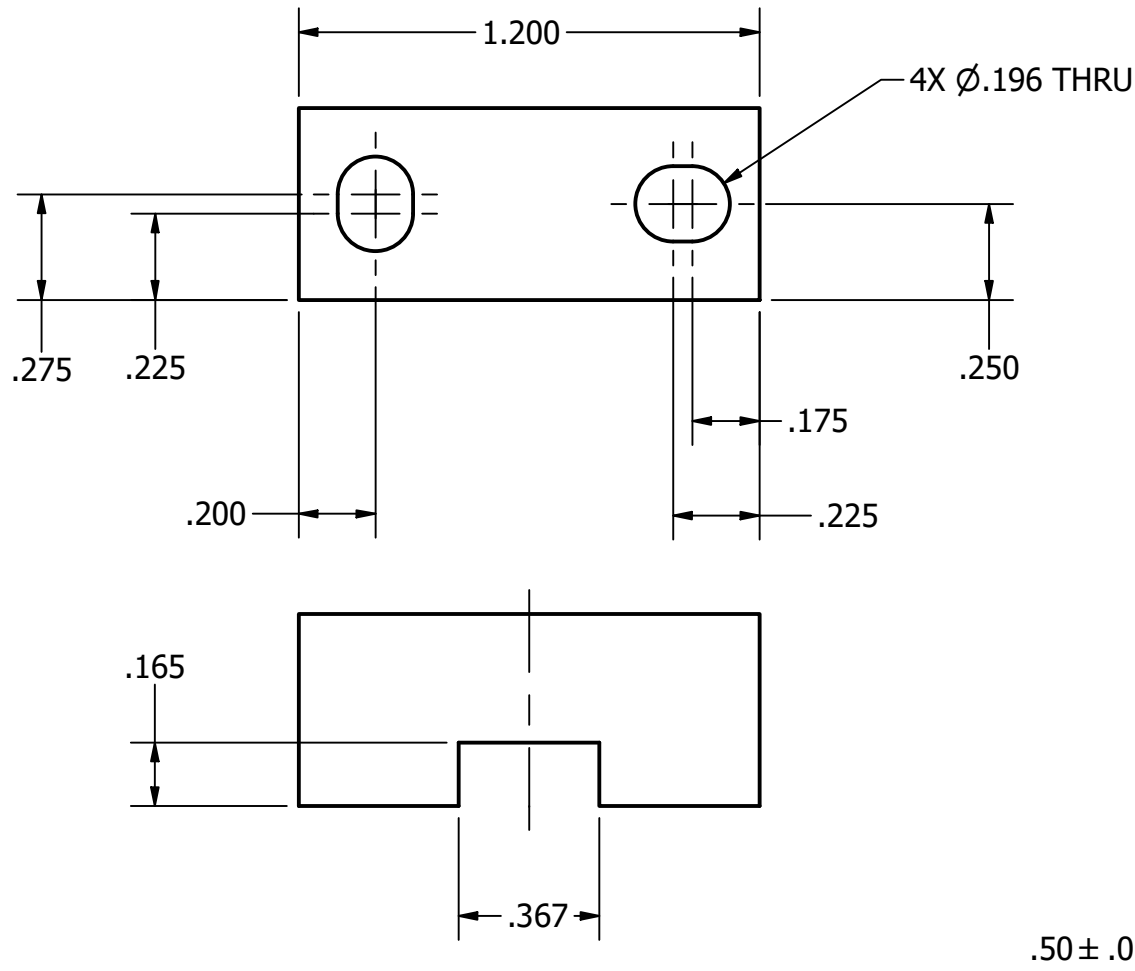


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 6061-T6				ANTI-ROLL		3/20/2026		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION			
BARE		JUNSEOK KANG		REAR TB INSERT SUPPORT 2					
INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		JUNSEOK KANG		A		SU26_A0505_P08		A	
ALL DIMENSIONS IN INCHES		DRAWN BY		SCALE		DO NOT SCALE		SHEET	
		JUNSEOK KANG		2 : 1				1 / 1	
		APPROVAL							

NOTES, UNLESS OTHERWISE SPECIFIED:

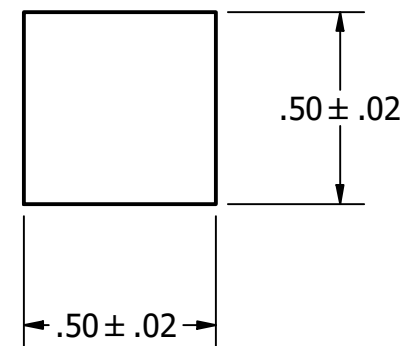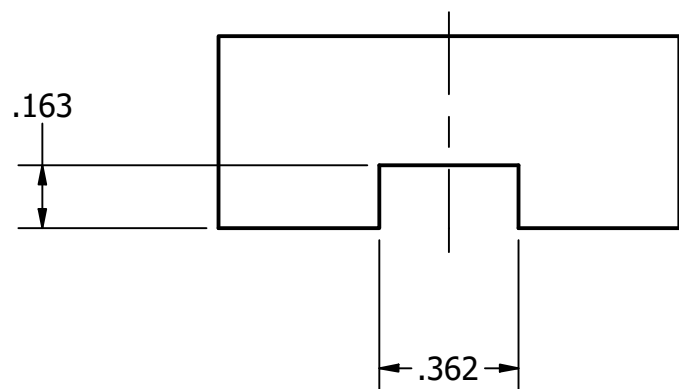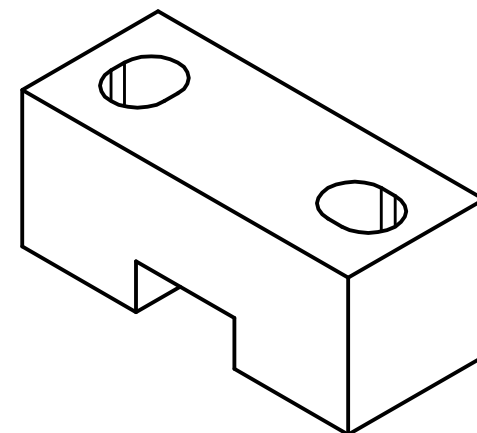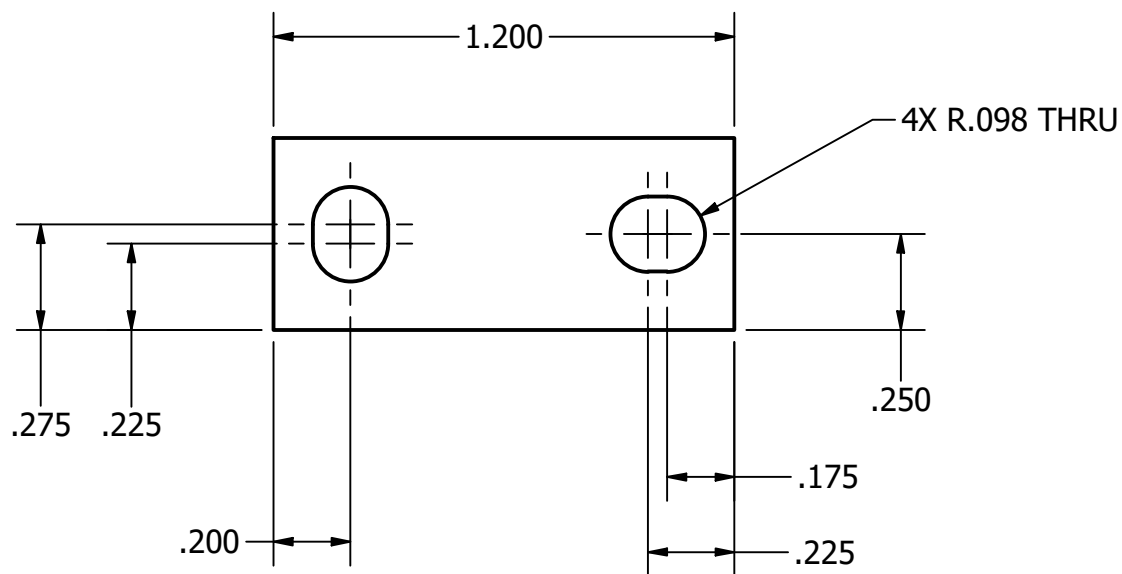

MATERIAL ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION 		SUBSYSTEM: ANTI-ROLL		DATE 3/20/2026		 CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED				FINISH BARE		DESCRIPTION FRONT TB INSERT SUPPORT 2			
LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		Ø 0.005 Ø +0.006 -0.001		DESIGNER JUNSEOK KANG		RESPONSIBLE ENGINEER JUNSEOK KANG		DRAWN BY JUNSEOK KANG	
INTERPRET PER ASME Y14.5-2018		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		SIZE A		P/N SU26_A0505_P09		REV A	
ALL DIMENSIONS IN INCHES				APPROVAL		SCALE 2 : 1		DO NOT SCALE	
								SHEET 1 / 1	

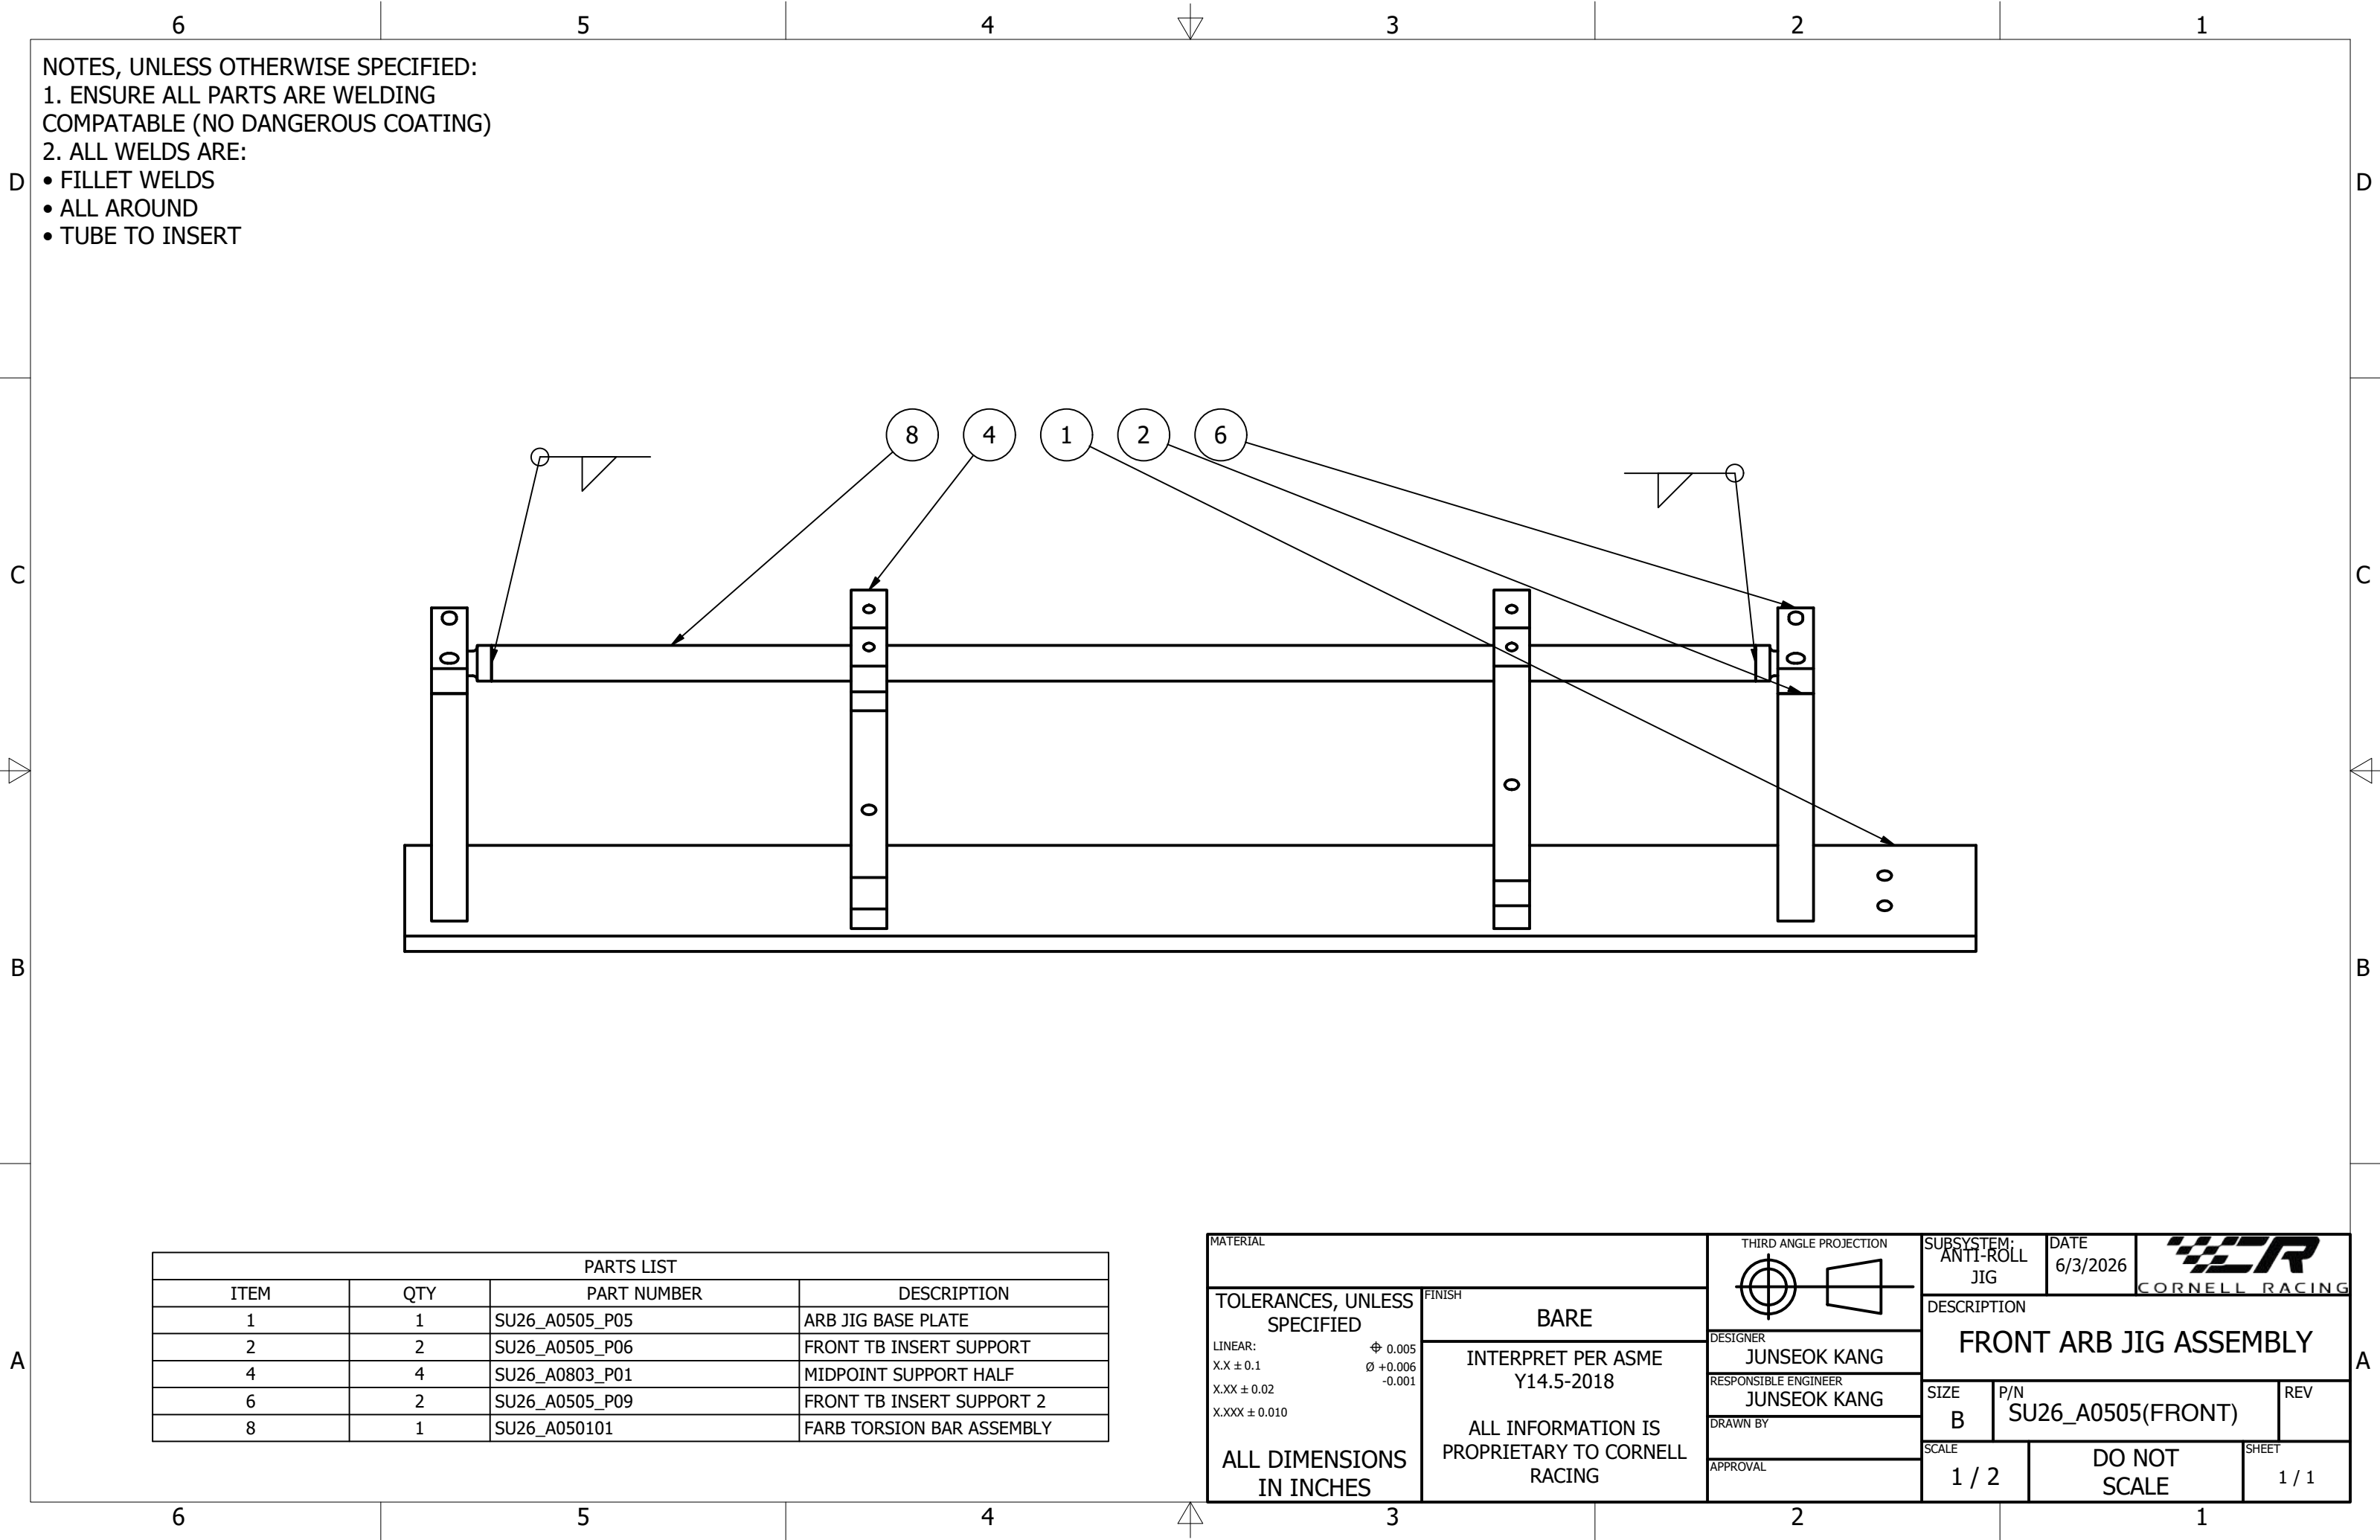

NOTES, UNLESS OTHERWISE SPECIFIED:


1. ENSURE ALL PARTS ARE WELDING COMPATABLE (NO DANGEROUS COATING)

2. ALL WELDS ARE:

- FILLET WELDS
- ALL AROUND
- TUBE TO INSERT

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU26_A0505_P05	ARB JIG BASE PLATE
2	2	SU26_A0505_P06	FRONT TB INSERT SUPPORT
4	4	SU26_A0803_P01	MIDPOINT SUPPORT HALF
6	2	SU26_A0505_P09	FRONT TB INSERT SUPPORT 2
8	1	SU26_A050101	FARB TORSION BAR ASSEMBLY


MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: ANTI-ROLL JIG	DATE 6/3/2026						
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES				FINISH BARE		DESCRIPTION FRONT ARB JIG ASSEMBLY					
		INTERPRET PER ASME Y14.5-2018									
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DESIGNER JUNSEOK KANG		SIZE B		P/N SU26_A0505(FRONT)		REV	
				RESPONSIBLE ENGINEER JUNSEOK KANG		SCALE 1 / 2		DO NOT SCALE		SHEET 1 / 1	
				DRAWN BY							
		APPROVAL									

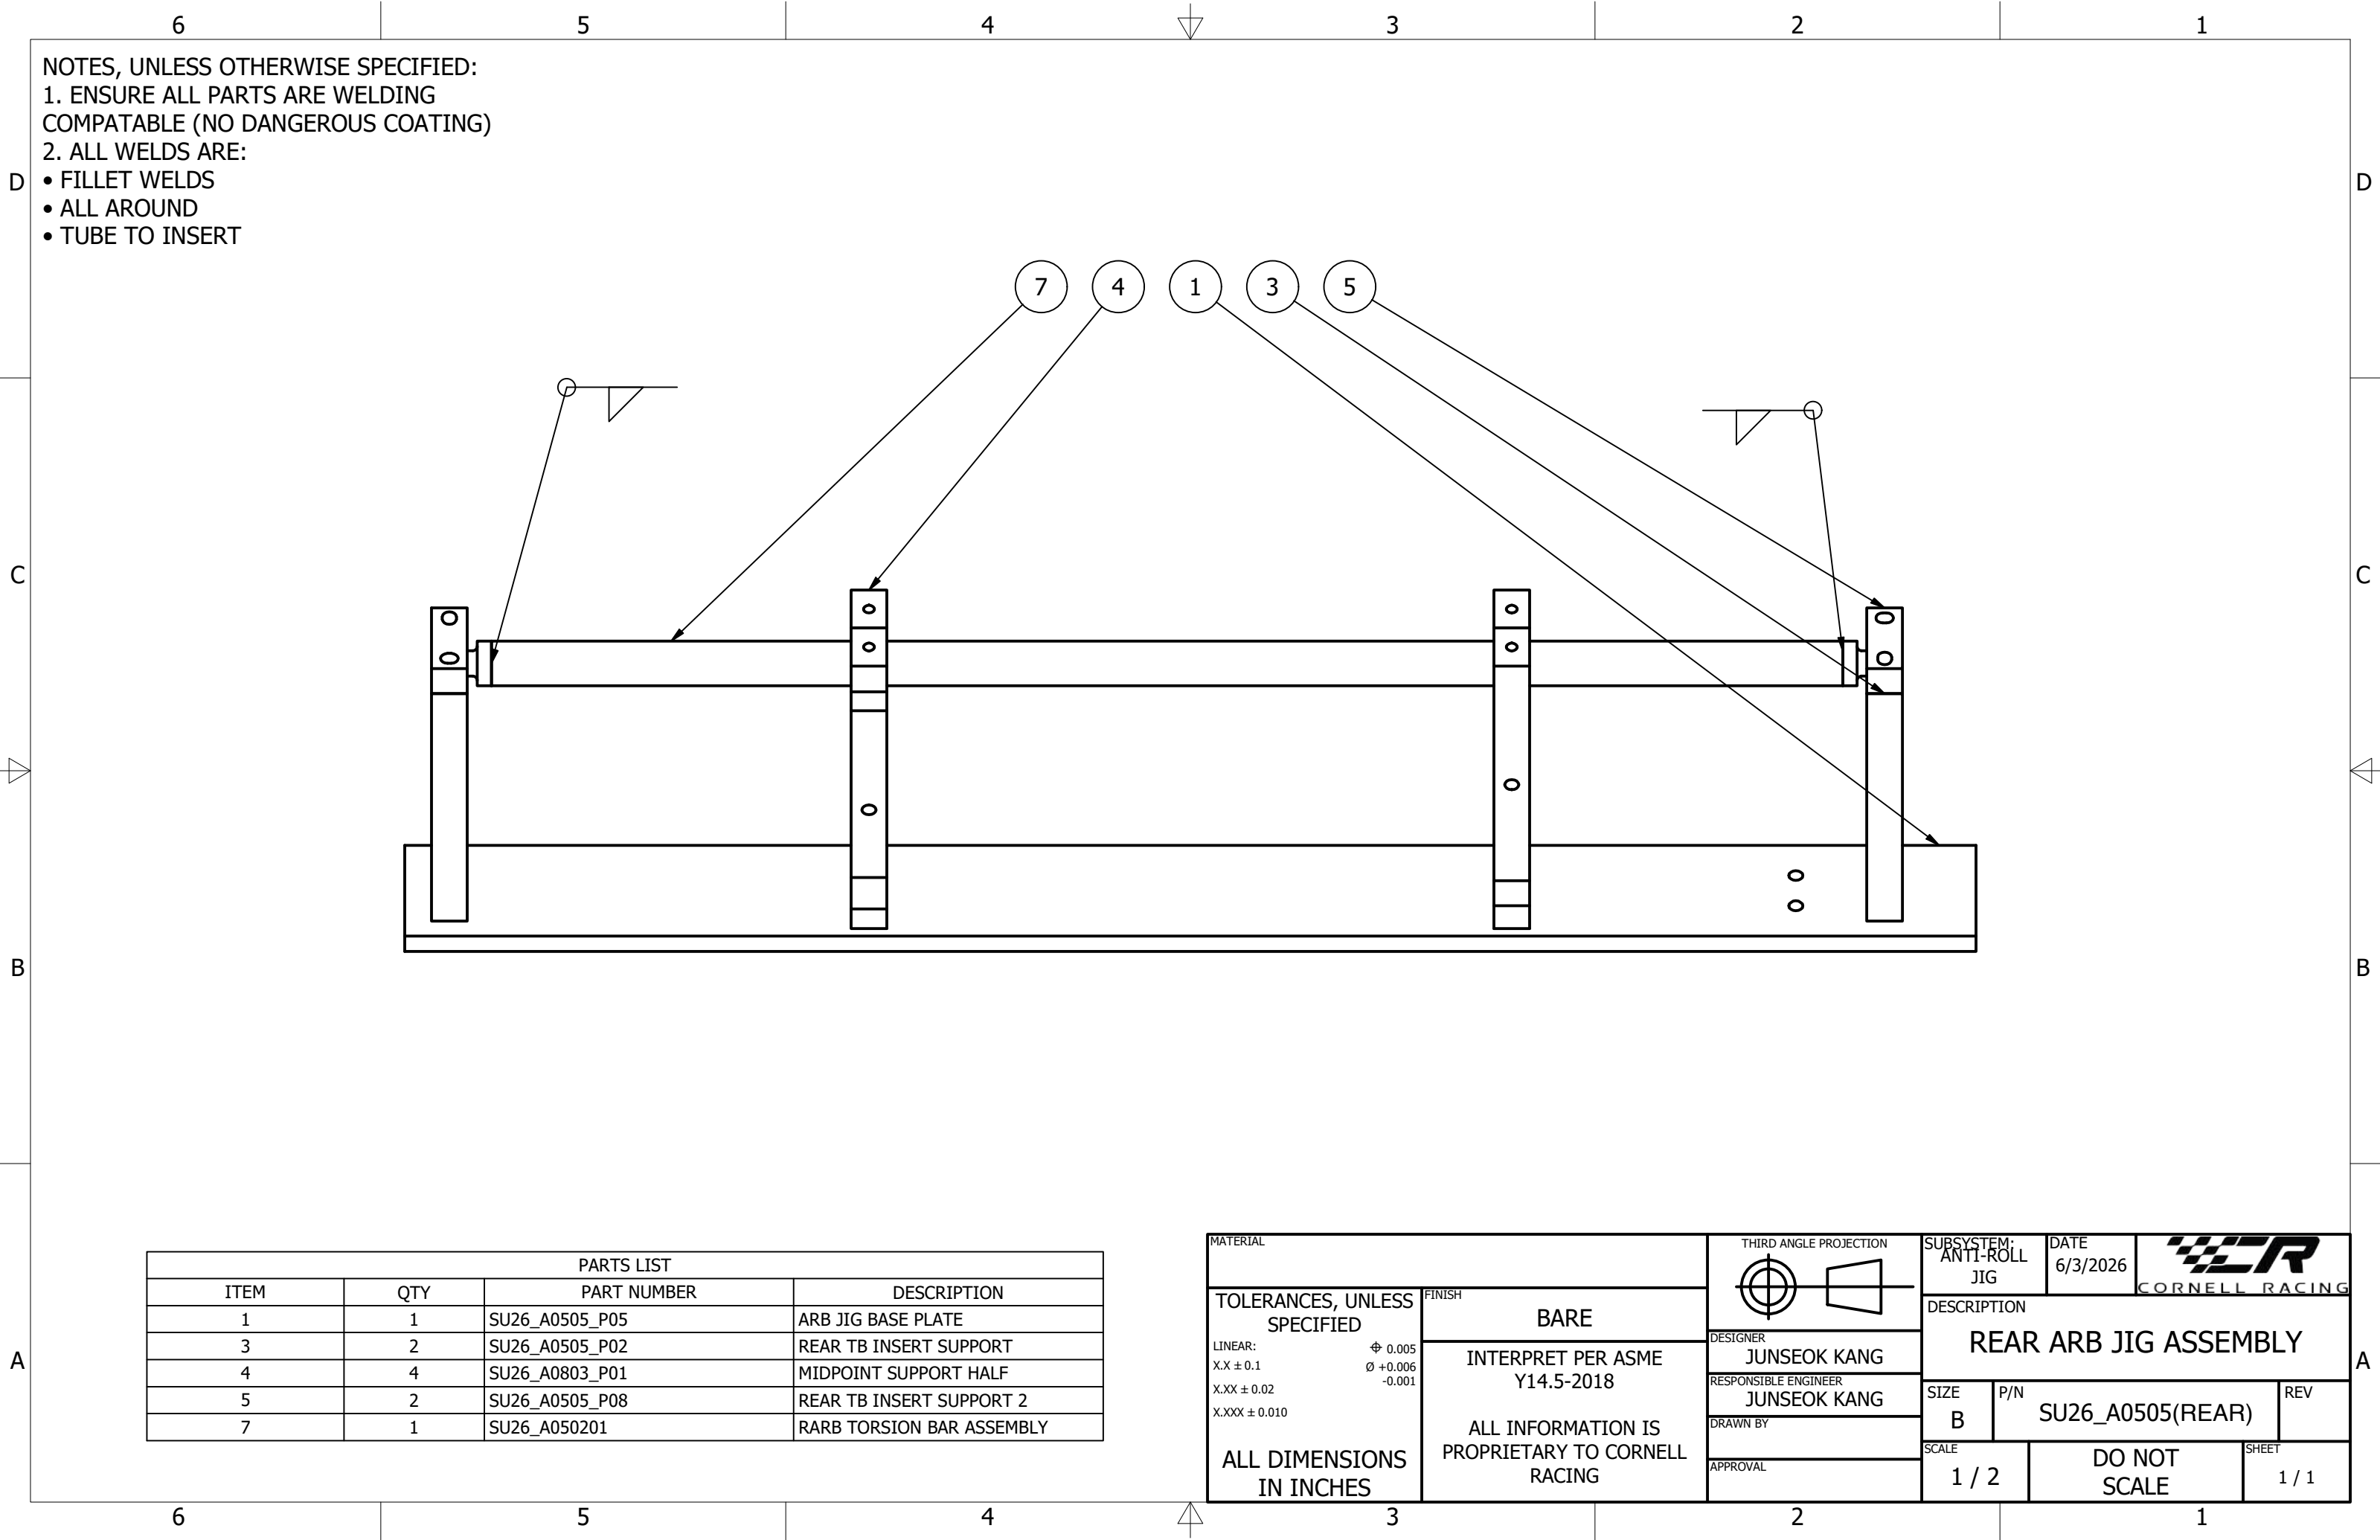


NOTES, UNLESS OTHERWISE SPECIFIED:
1. ENSURE ALL PARTS ARE WELDING COMPATABLE (NO DANGEROUS COATING)
2. ALL WELDS ARE:
• FILLET WELDS
• ALL AROUND
• TUBE TO INSERT


PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	SU26_A0505_P05	ARB JIG BASE PLATE
3	2	SU26_A0505_P02	REAR TB INSERT SUPPORT
4	4	SU26_A0803_P01	MIDPOINT SUPPORT HALF
5	2	SU26_A0505_P08	REAR TB INSERT SUPPORT 2
7	1	SU26_A050201	RARB TORSION BAR ASSEMBLY

MATERIAL		THIRD ANGLE PROJECTION 		SUBSYSTEM: ANTI-ROLL JIG	DATE 6/3/2026	 CORNELL RACING		
TOLERANCES, UNLESS SPECIFIED LINEAR: X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010 ALL DIMENSIONS IN INCHES	FINISH BARE			DESCRIPTION REAR ARB JIG ASSEMBLY				
	INTERPRET PER ASME Y14.5-2018							
	ALL INFORMATION IS PROPRIETARY TO CORNELL RACING			DESIGNER JUNSEOK KANG	RESPONSIBLE ENGINEER JUNSEOK KANG	SIZE B	P/N SU26_A0505(REAR)	REV
		DRAWN BY	SCALE 1 / 2	DO NOT SCALE		SHEET 1 / 1		
		APPROVAL						

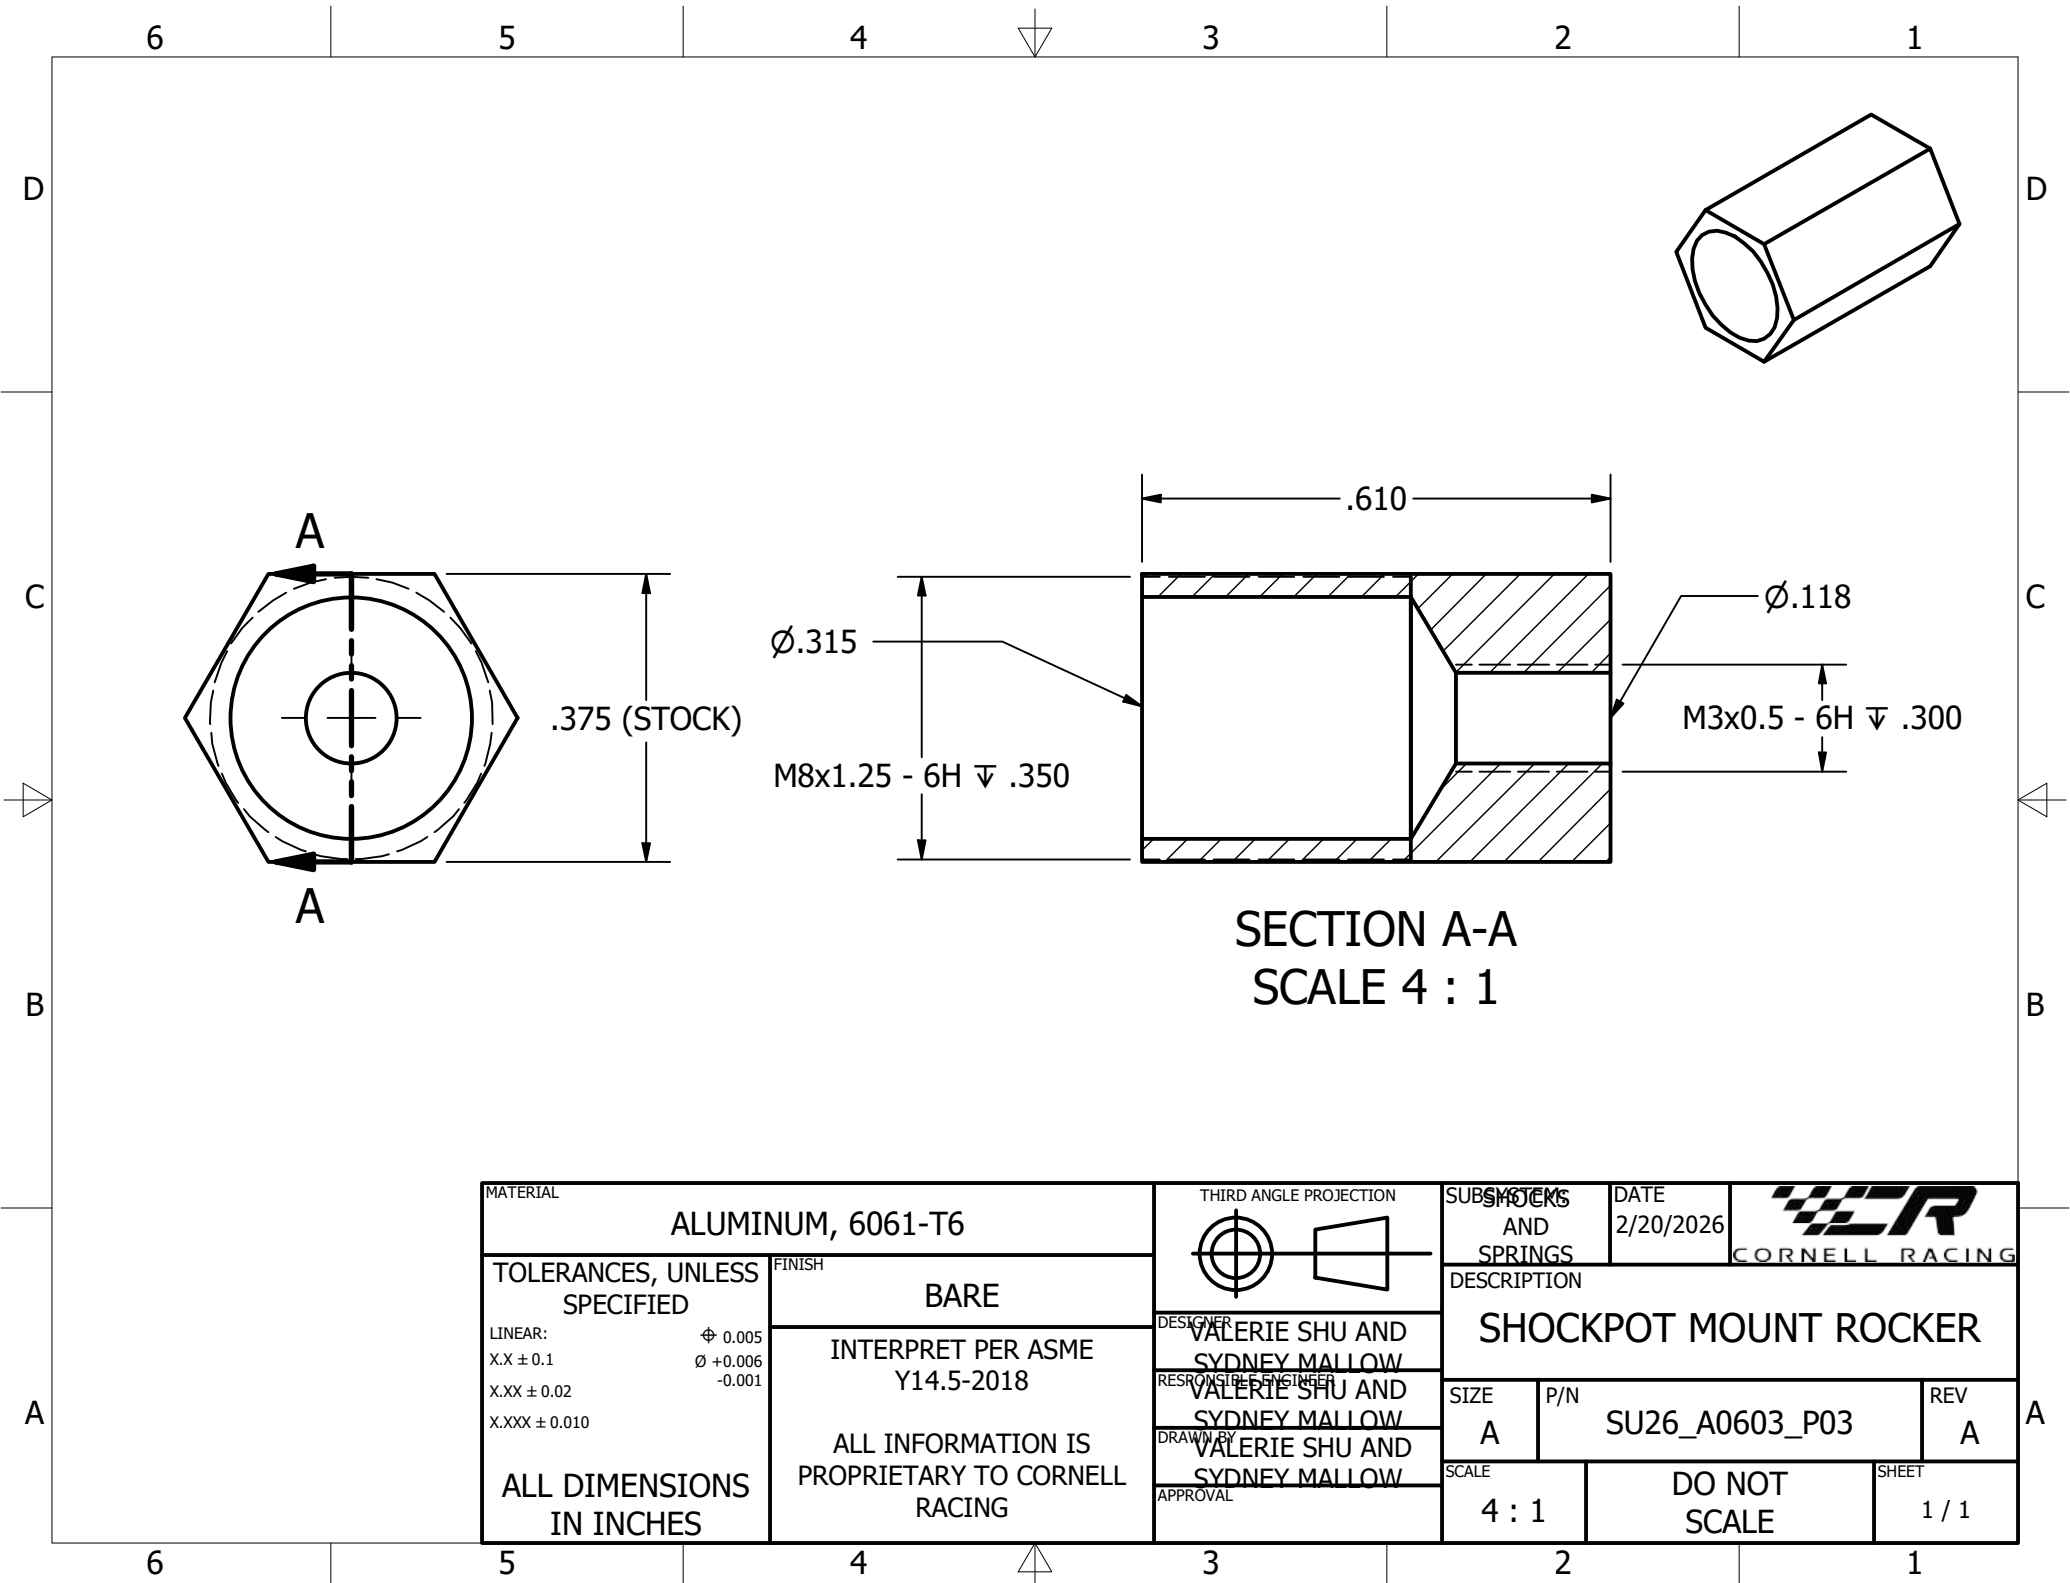


6	5	4	3	2	1
D					D
C					C
B					B
A					A



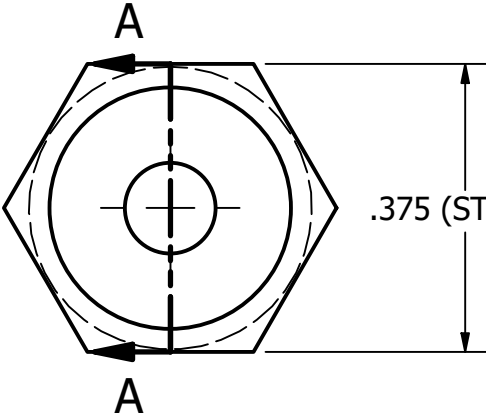

.375 (STOCK)

A

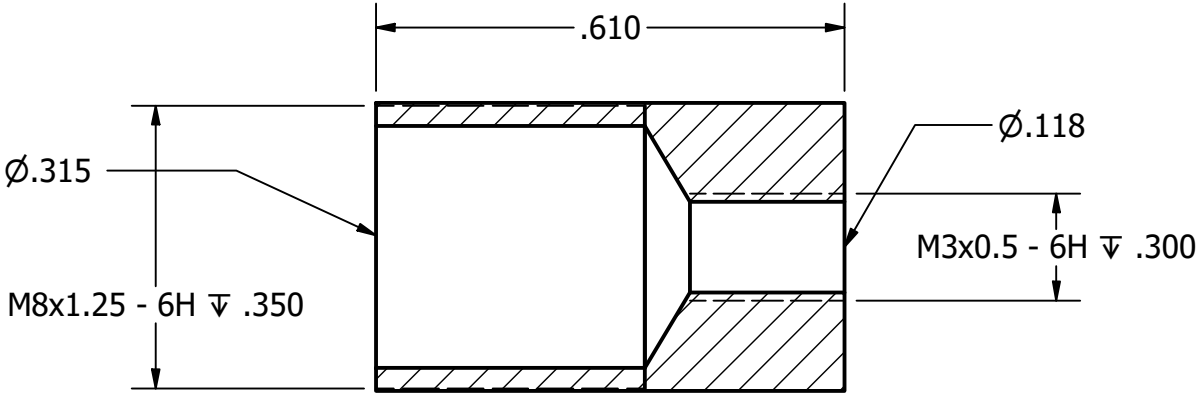

.610

Ø.315

M8x1.25 - 6H .350

Ø.118


M3x0.5 - 6H .300

SECTION A-A


SCALE 4 : 1


MATERIAL		ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION		SUBSTOCKS AND SPRINGS		DATE	2/20/2026		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION						
LINEAR: X.X ± 0.1		BARE		SYDNEY MALLOW		SHOCKPOT MOUNT ROCKER						
X.XX ± 0.02		INTERPRET PER ASME Y14.5-2018		RESPONSIBLE ENGINEER		SIZE		P/N		REV		
X.XXX ± 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		DRAWN BY		A		SU26_A0603_P03		A		
ALL DIMENSIONS IN INCHES		APPROVAL		SYDNEY MALLOW		SCALE		DO NOT SCALE		SHEET		
						4 : 1				1 / 1		

6	5	4	3	2	1
D					D
C					C
B					B
A					A

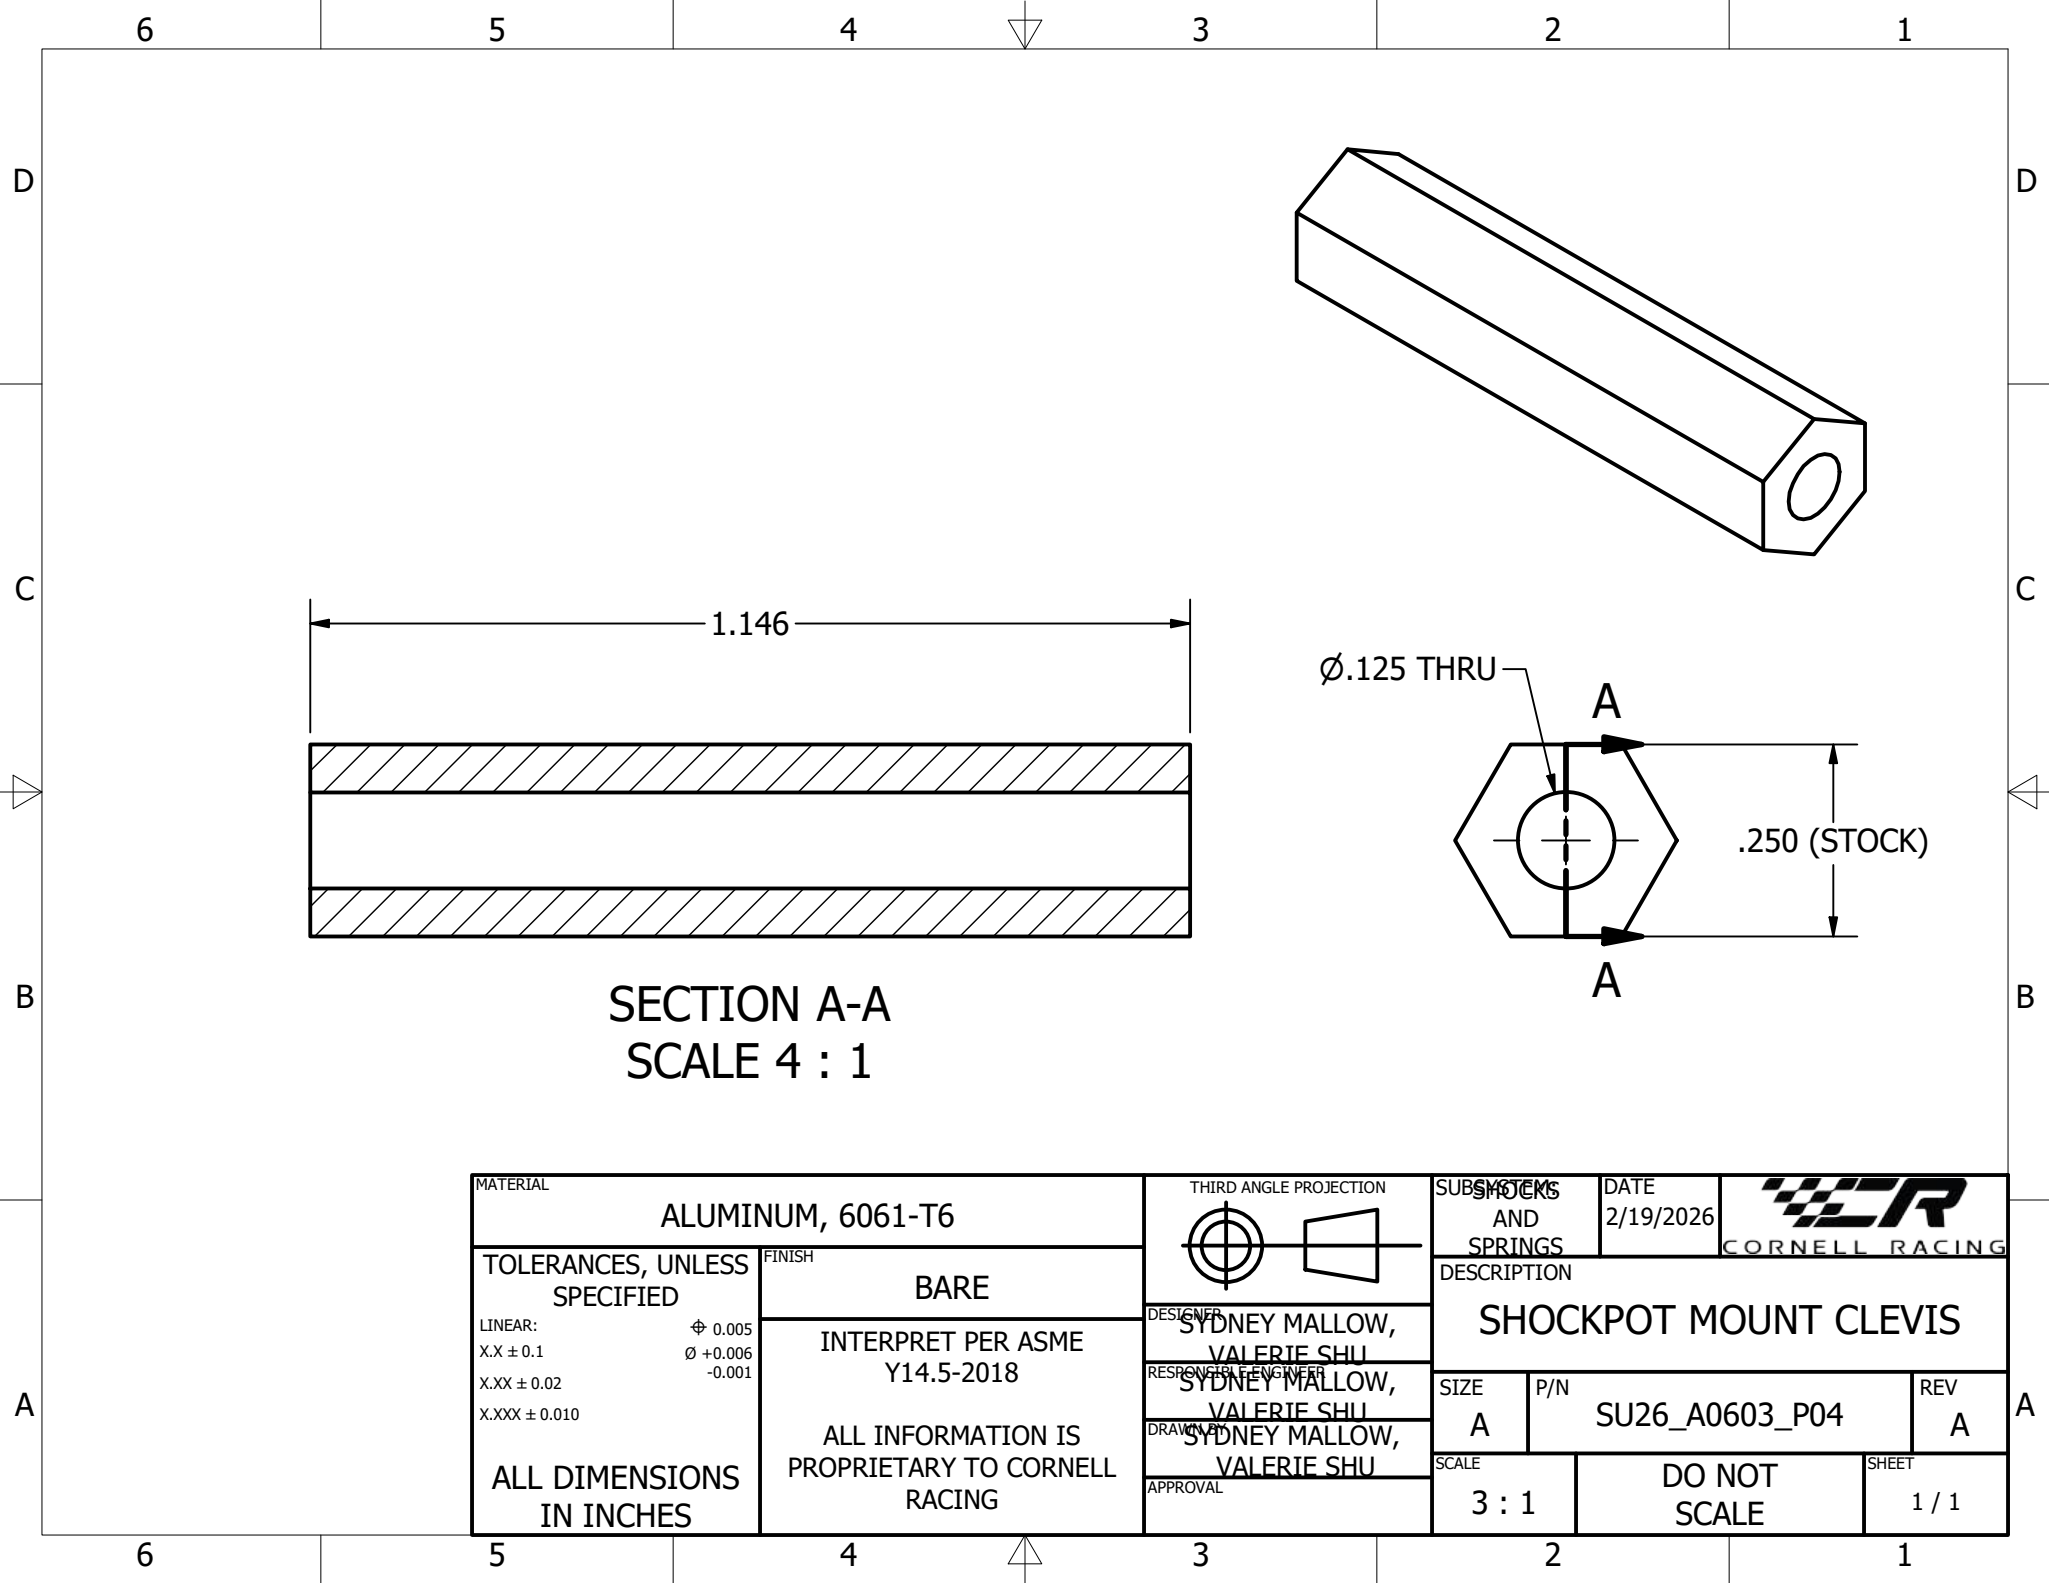



NOTES, UNLESS OTHERWISE SPECIFIED:

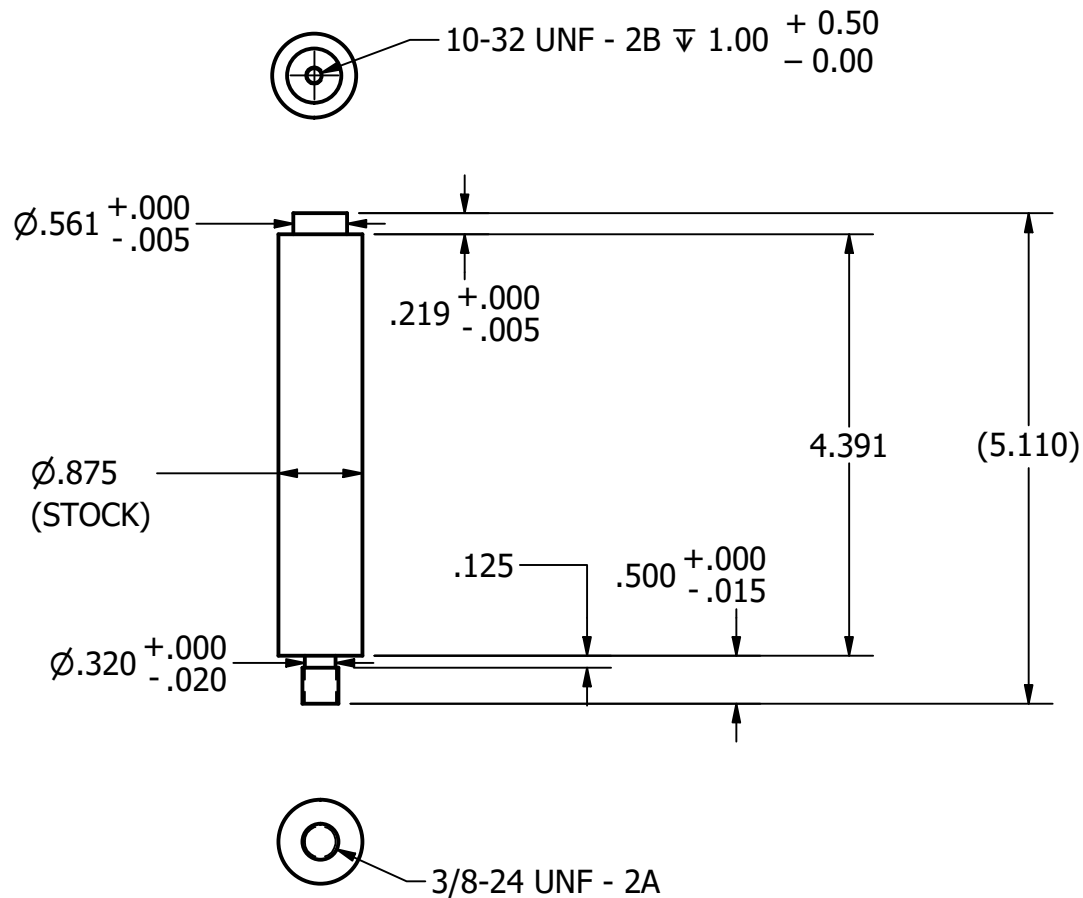

MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE					
ALUMINUM, 6061-T651				JIG PLATE		11/13/2025		CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED		FINISH		DESIGNER		DESCRIPTION					
BARE		INTERPRET PER ASME Y14.5-2018		D. RATTANAVIJAI		AN3 BEARING POST					
LINEAR: $\varnothing \pm 0.005$ X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		RESPONSIBLE ENGINEER		SIZE		P/N		REV	
				D. RATTANAVIJAI		A		SU26_A0802_P01		A	
ALL DIMENSIONS IN INCHES				DRAWN BY		SCALE		DO NOT SCALE		SHEET	
				D. RATTANAVIJAI		1/2				1 / 1	
				APPROVAL							





NOTES, UNLESS OTHERWISE SPECIFIED

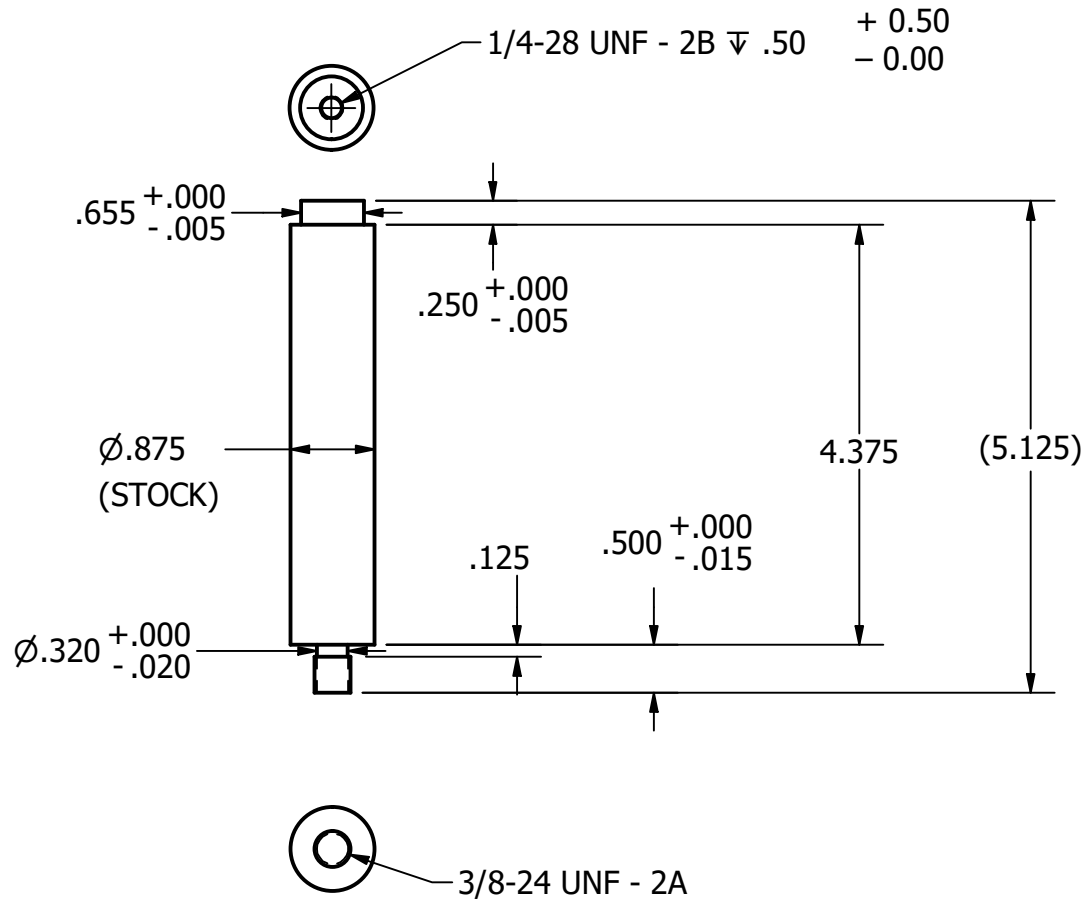


MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 6061-T651				JIG PLATE		11/13/2025		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH	BARE		DESCRIPTION					
		INTERPRET PER ASME Y14.5-2018		AN4 BEARING POST					
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		SIZE		P/N		REV	
		ALL DIMENSIONS IN INCHES		A		SU26_A0802_P02		A	
				SCALE		DO NOT SCALE		SHEET	
LINEAR: ± 0.005 X.X ± 0.1 X.XX ± 0.02 X.XXX ± 0.010		ϕ 0.005 ϕ +0.006 -0.001		DESIGNER		1/2		1 / 1	
				D. RATTANAVIJAI					
				RESPONSIBLE ENGINEER					
				D. RATTANAVIJAI					
				DRAWN BY					
				D. RATTANAVIJAI					
				APPROVAL					


NOTES, UNLESS OTHERWISE SPECIFIED:

10-32 UNF - 2B ∇ .50

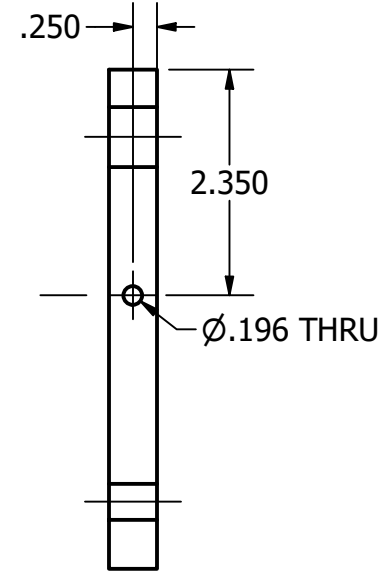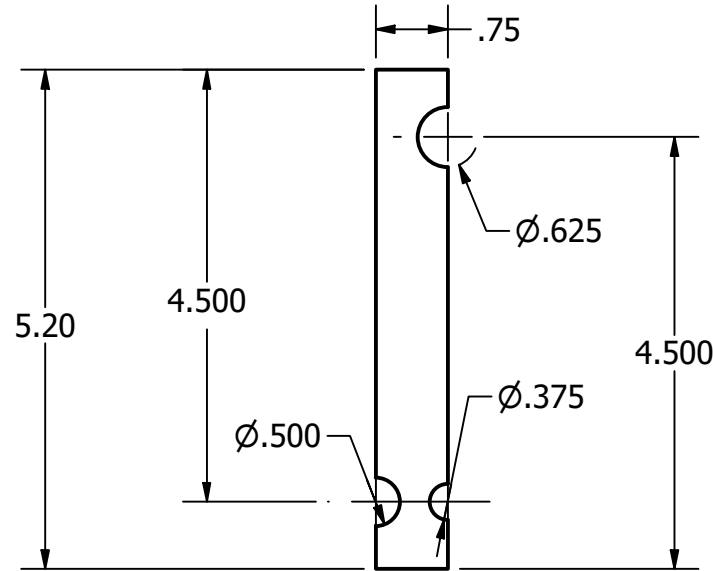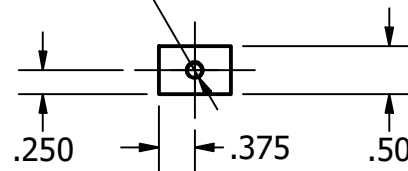



10-32 UNF - 2B ∇ .50



MATERIAL		THIRD ANGLE PROJECTION		SUBSYSTEM:		DATE			
ALUMINUM, 6061-T651				JIG PLATE		11/16/2025		CORNELL RACING	
TOLERANCES, UNLESS SPECIFIED	FINISH	BARE		DESIGNER		DESCRIPTION			
		INTERPRET PER ASME Y14.5-2018		D. RATTANAVIJAI		MIDPOINT SUPPORT HALF			
				RESPONSIBLE ENGINEER		SIZE		P/N	
				D. RATTANAVIJAI		A		SU26_A0803_P01	
				DRAWN BY				REV	
		ALL INFORMATION IS PROPRIETARY TO CORNELL RACING		D. RATTANAVIJAI				A	
				APPROVAL		SCALE		DO NOT SCALE	
						1 / 2		SHEET	
								1 / 1	

NOTES, UNLESS OTHERWISE SPECIFIED:

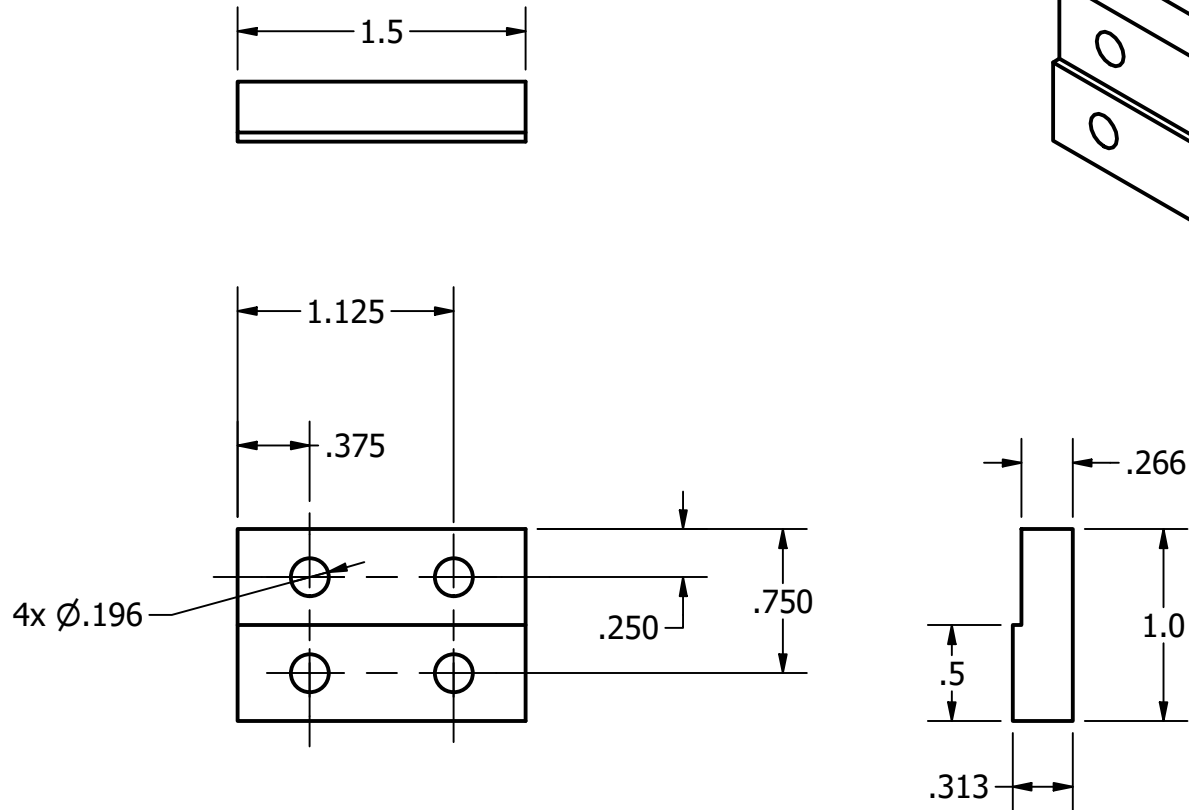

MATERIAL ALUMINUM, 6061-T6		THIRD ANGLE PROJECTION 		SUBSYSTEM: JIG PLATE		DATE 11/10/2025		 CORNELL RACING			
TOLERANCES, UNLESS SPECIFIED LINEAR: ± 0.005 $X.X \pm 0.1$ $X.XX \pm 0.02$ $X.XXX \pm 0.010$ ALL DIMENSIONS IN INCHES	FINISH BARE	DESIGNER D. RATTANAVIJAI		DESCRIPTION MIDPOINT SUPPORT SHIM							
	INTERPRET PER ASME Y14.5-2018	RESPONSIBLE ENGINEER D. RATTANAVIJAI		SIZE A		P/N SU26_A0803_P02			REV A		
	ALL INFORMATION IS PROPRIETARY TO CORNELL RACING	DRAWN BY D. RATTANAVIJAI		SCALE 1 : 1		DO NOT SCALE				SHEET 1 / 1	
		APPROVAL									