
This sheet shows external connections to an NHD-0420CW-Axx display.


NHD-0420CW-Axx display Configured for 5V serial operation

Serial Interface:


Pin No.	Symbol	External Connection	Function Description
1	V_{SS}	Power Supply	Ground
2	V_{DD}	Power Supply	Supply Voltage for OLED and Logic V_{DD}=2.8V for 2.8V operation, V_{DD}=5V for 5V operation
3	$REGV_{DD}$	Power Supply	Internal 5V I/O Regulator select signal $REGV_{DD}$=0V for 2.8V operation, $REGV_{DD}$=5V for 5V operation
4-6	NC	-	No Connect. Tie to Ground
7	SCLK	MPU	Serial Clock signal
8	SDI	MPU	Serial Data Input signal
9	SDO	MPU	Serial Data Output signal
10-14	NC	-	No Connect. Tie to Ground
15	/CS	MPU	Active LOW Chip Select signal
16	/RES	MPU	Active LOW Reset signal
17-19	BS0 – BS2	MPU	MPU interface select signal
20	V_{SS}	Power Supply	Ground

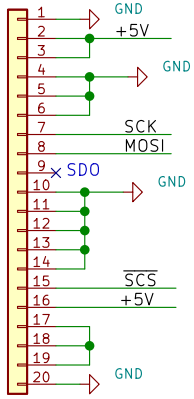

Conn_01x20
J501

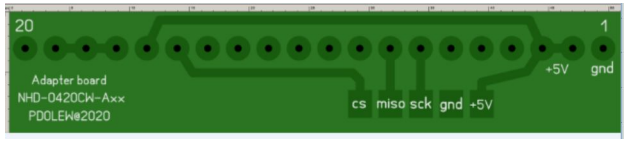



RA8875 Header J4
header5x2



NHD-0420CW-Axx display (J4 pins):
RA8875-5: CS (NHD pin 15)
RA8875-7: SDIN (NHD pin 8)
RA8875-8: SCLK (NHD pin 7)
RA8875-3_4: VDD
RA8875-1_2: VSS

J502
Conn_02x05_Odd_Even





Provide for solder pads and a box header. Allows use of insulation displacement cable between display and cpu board.

J.G. Holstein

PDOLEW

Sheet: /
File: PWR_SWR_NHDdisplay_V1.0.sch

Title: External connections NHD display

Size: A4	Date: 2020-11-28	**Rev: 1.0**
KiCad E.D.A.	eeschema 5.1.8-db983349188ubuntu20.04.1	Id: 1/1