




IQ IO select

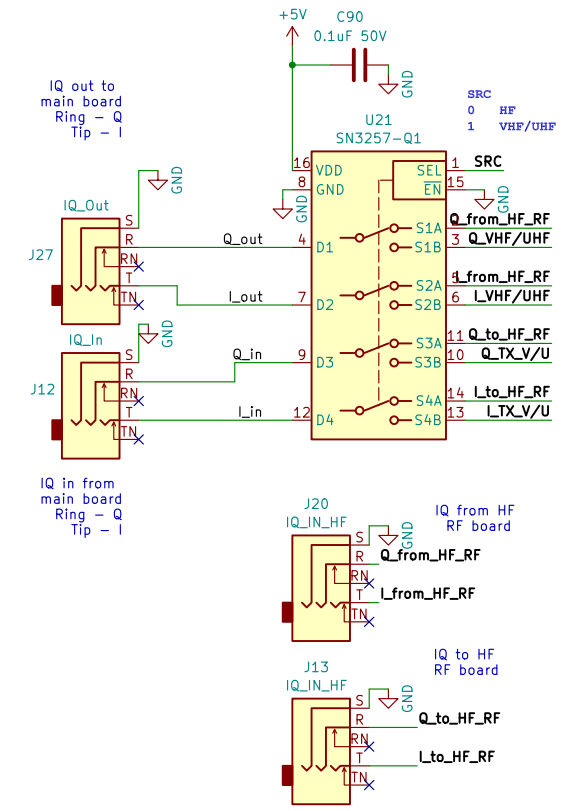

LPF

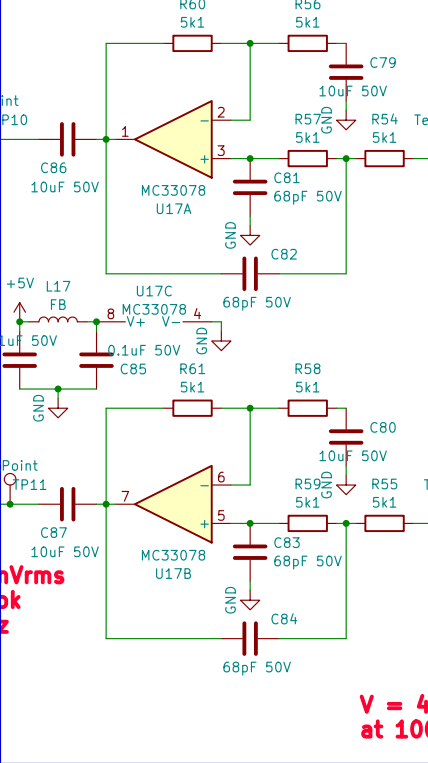

Subtract & level shift


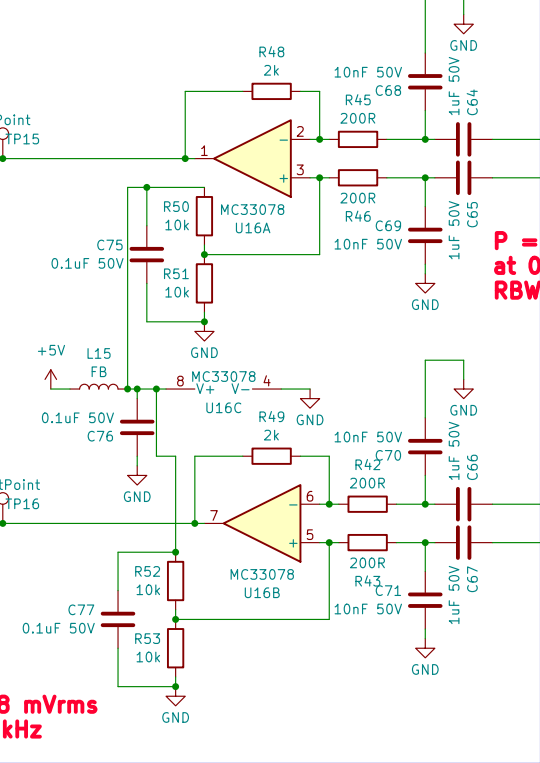


P = -25.6 dBm
at 0.1 MHz
RBW 300 kHz


Receive chain

P = -49 dBm
at 400.1 MHz
RBW 300 kHz


Local Oscillator

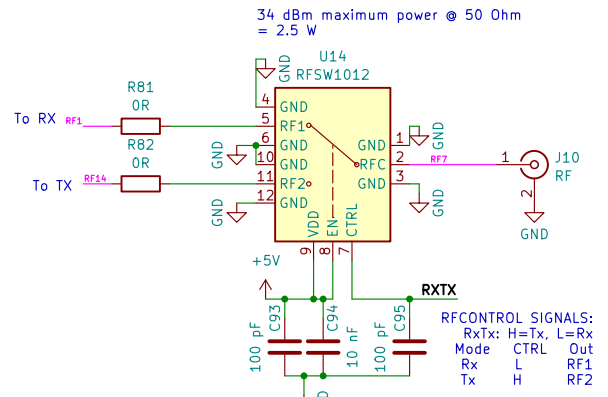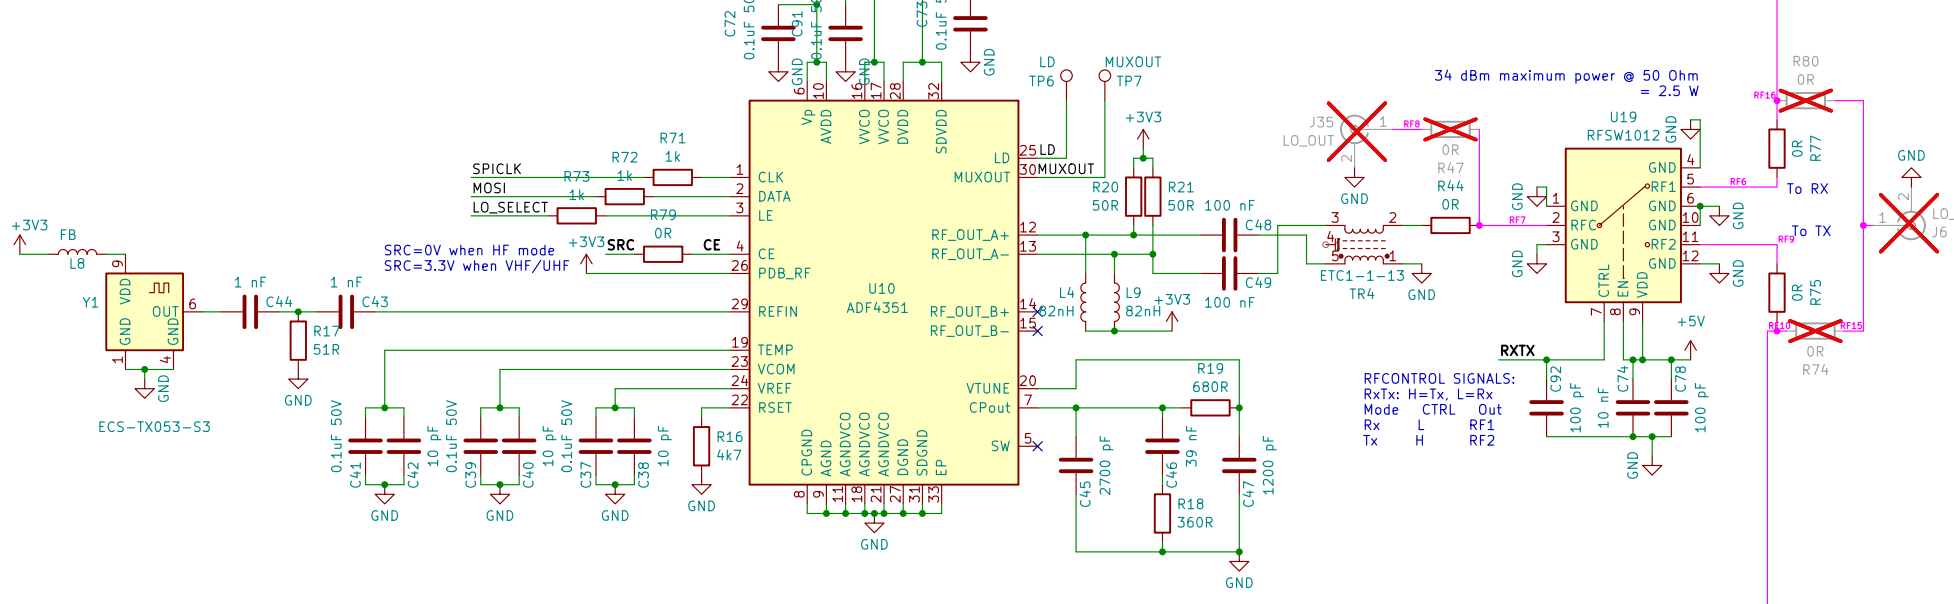



Level shift

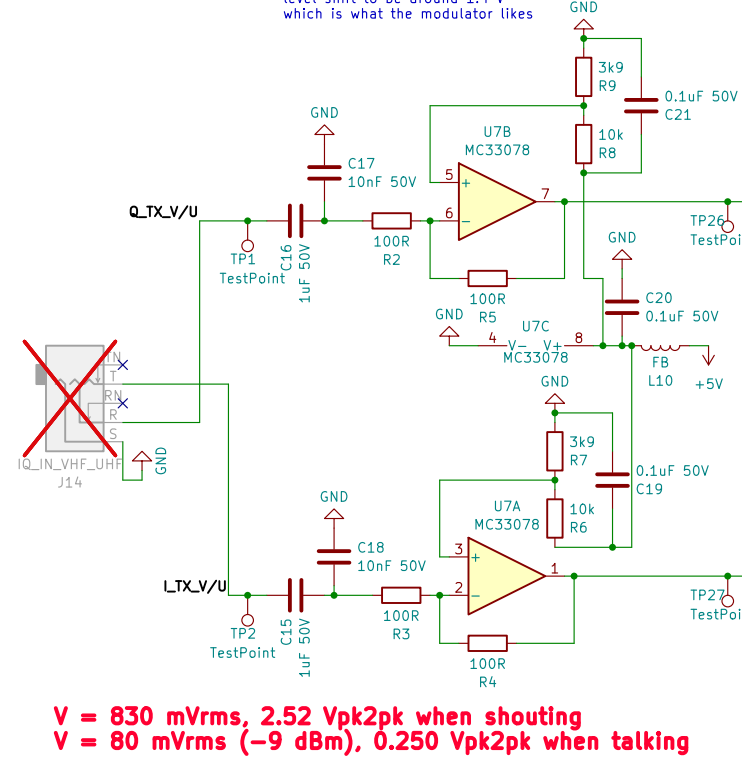


LPF

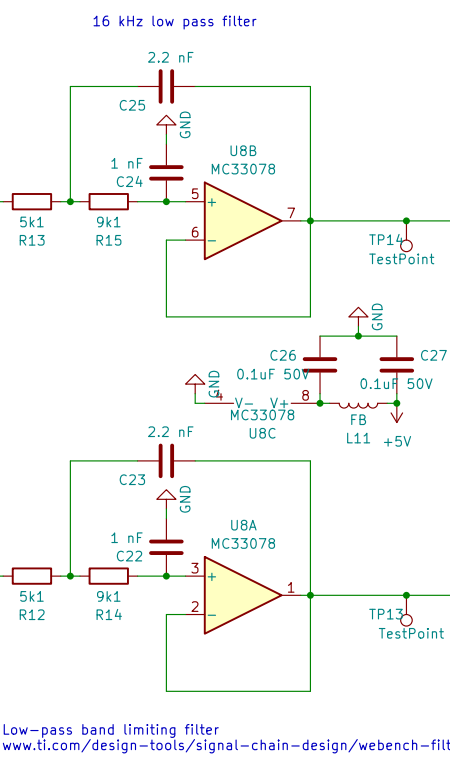


Differential driver

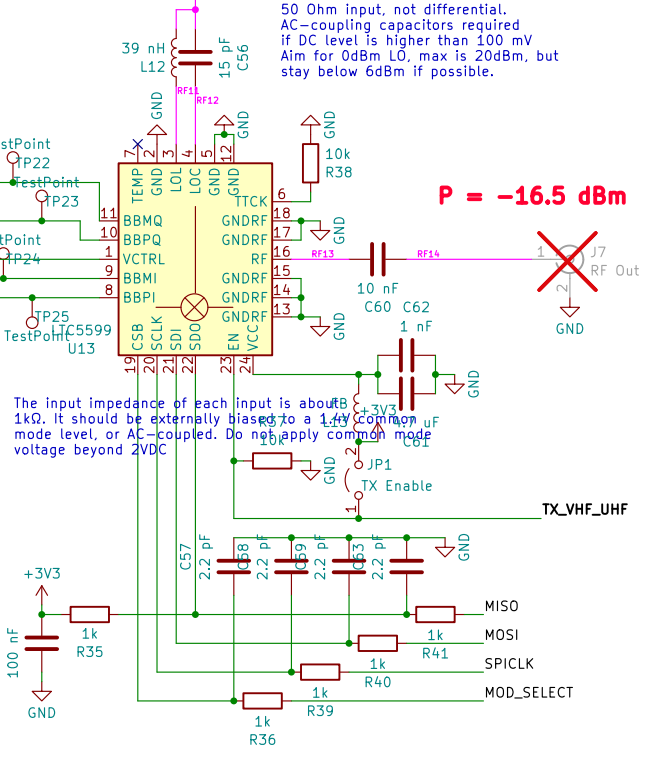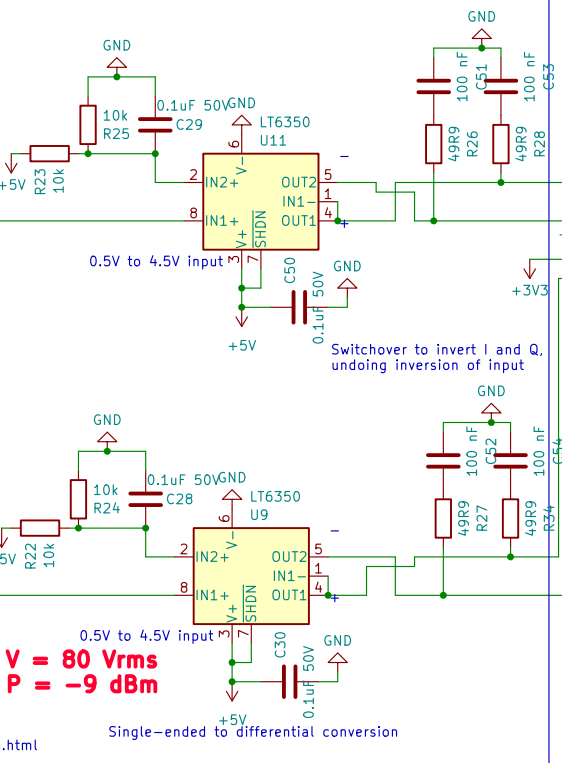


Transmit chain

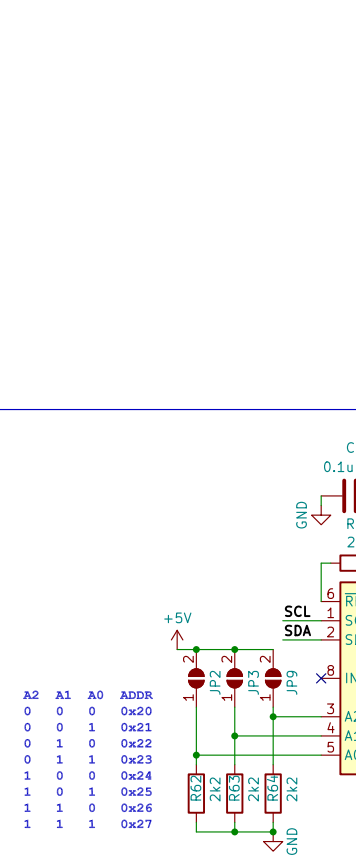

Control

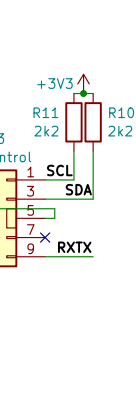

I2C to SPI

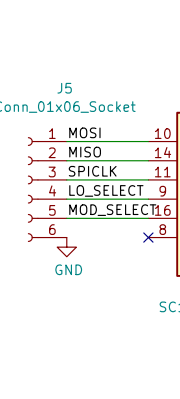

Power

