



Changelog (17-02-2025)

- D1 and R2 as indicator LED (tht for only bottom soldering)
- Attached STBY to D7 with pulldown

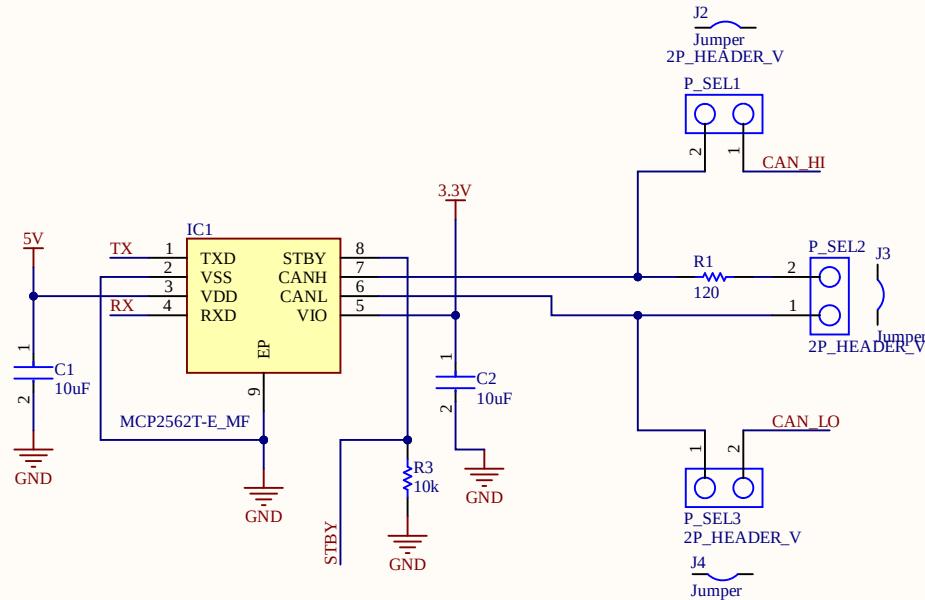

3.3V IO to CAN Transceiver
5V to CAN output driver

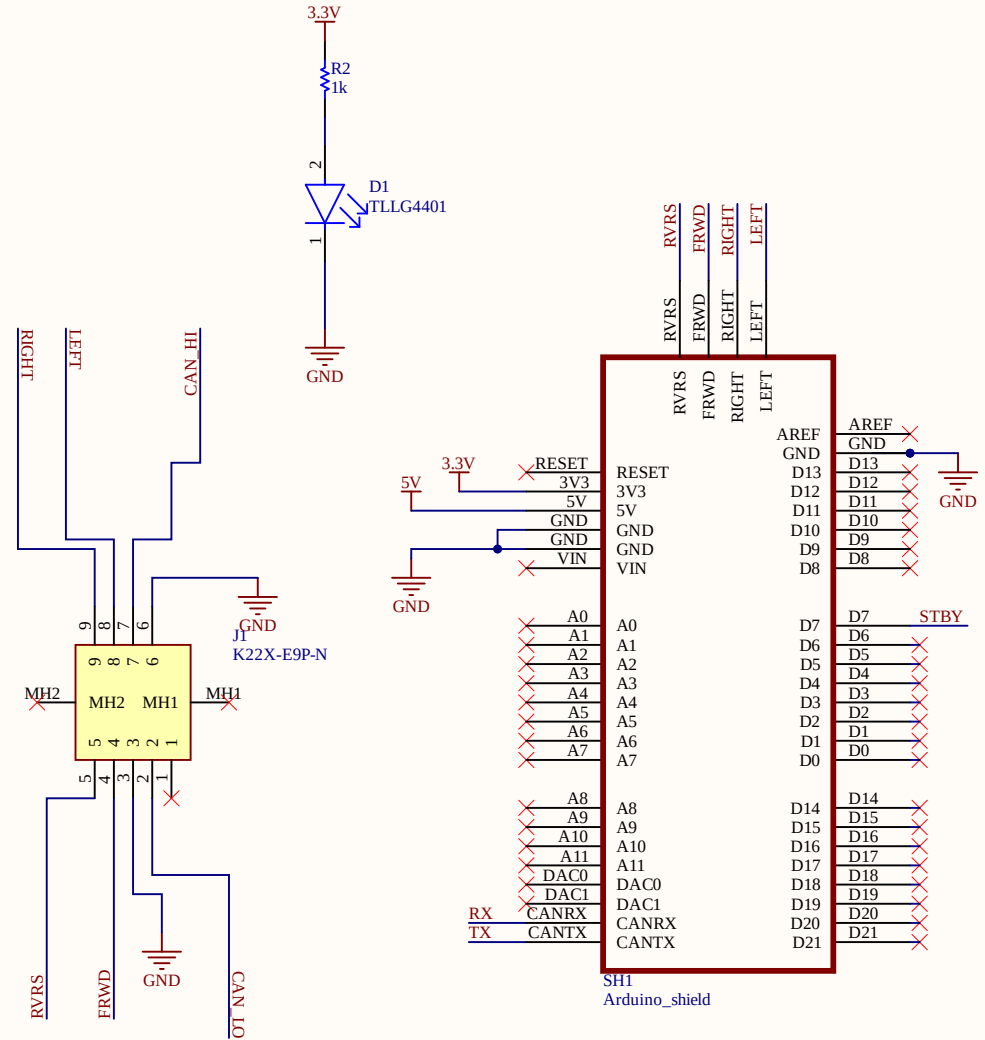

Title		
Size A4	Number	Revision
Date:	4/01/2025	Sheet of
File:	C:\Users\...\Shield.SchDoc	Drawn By:

