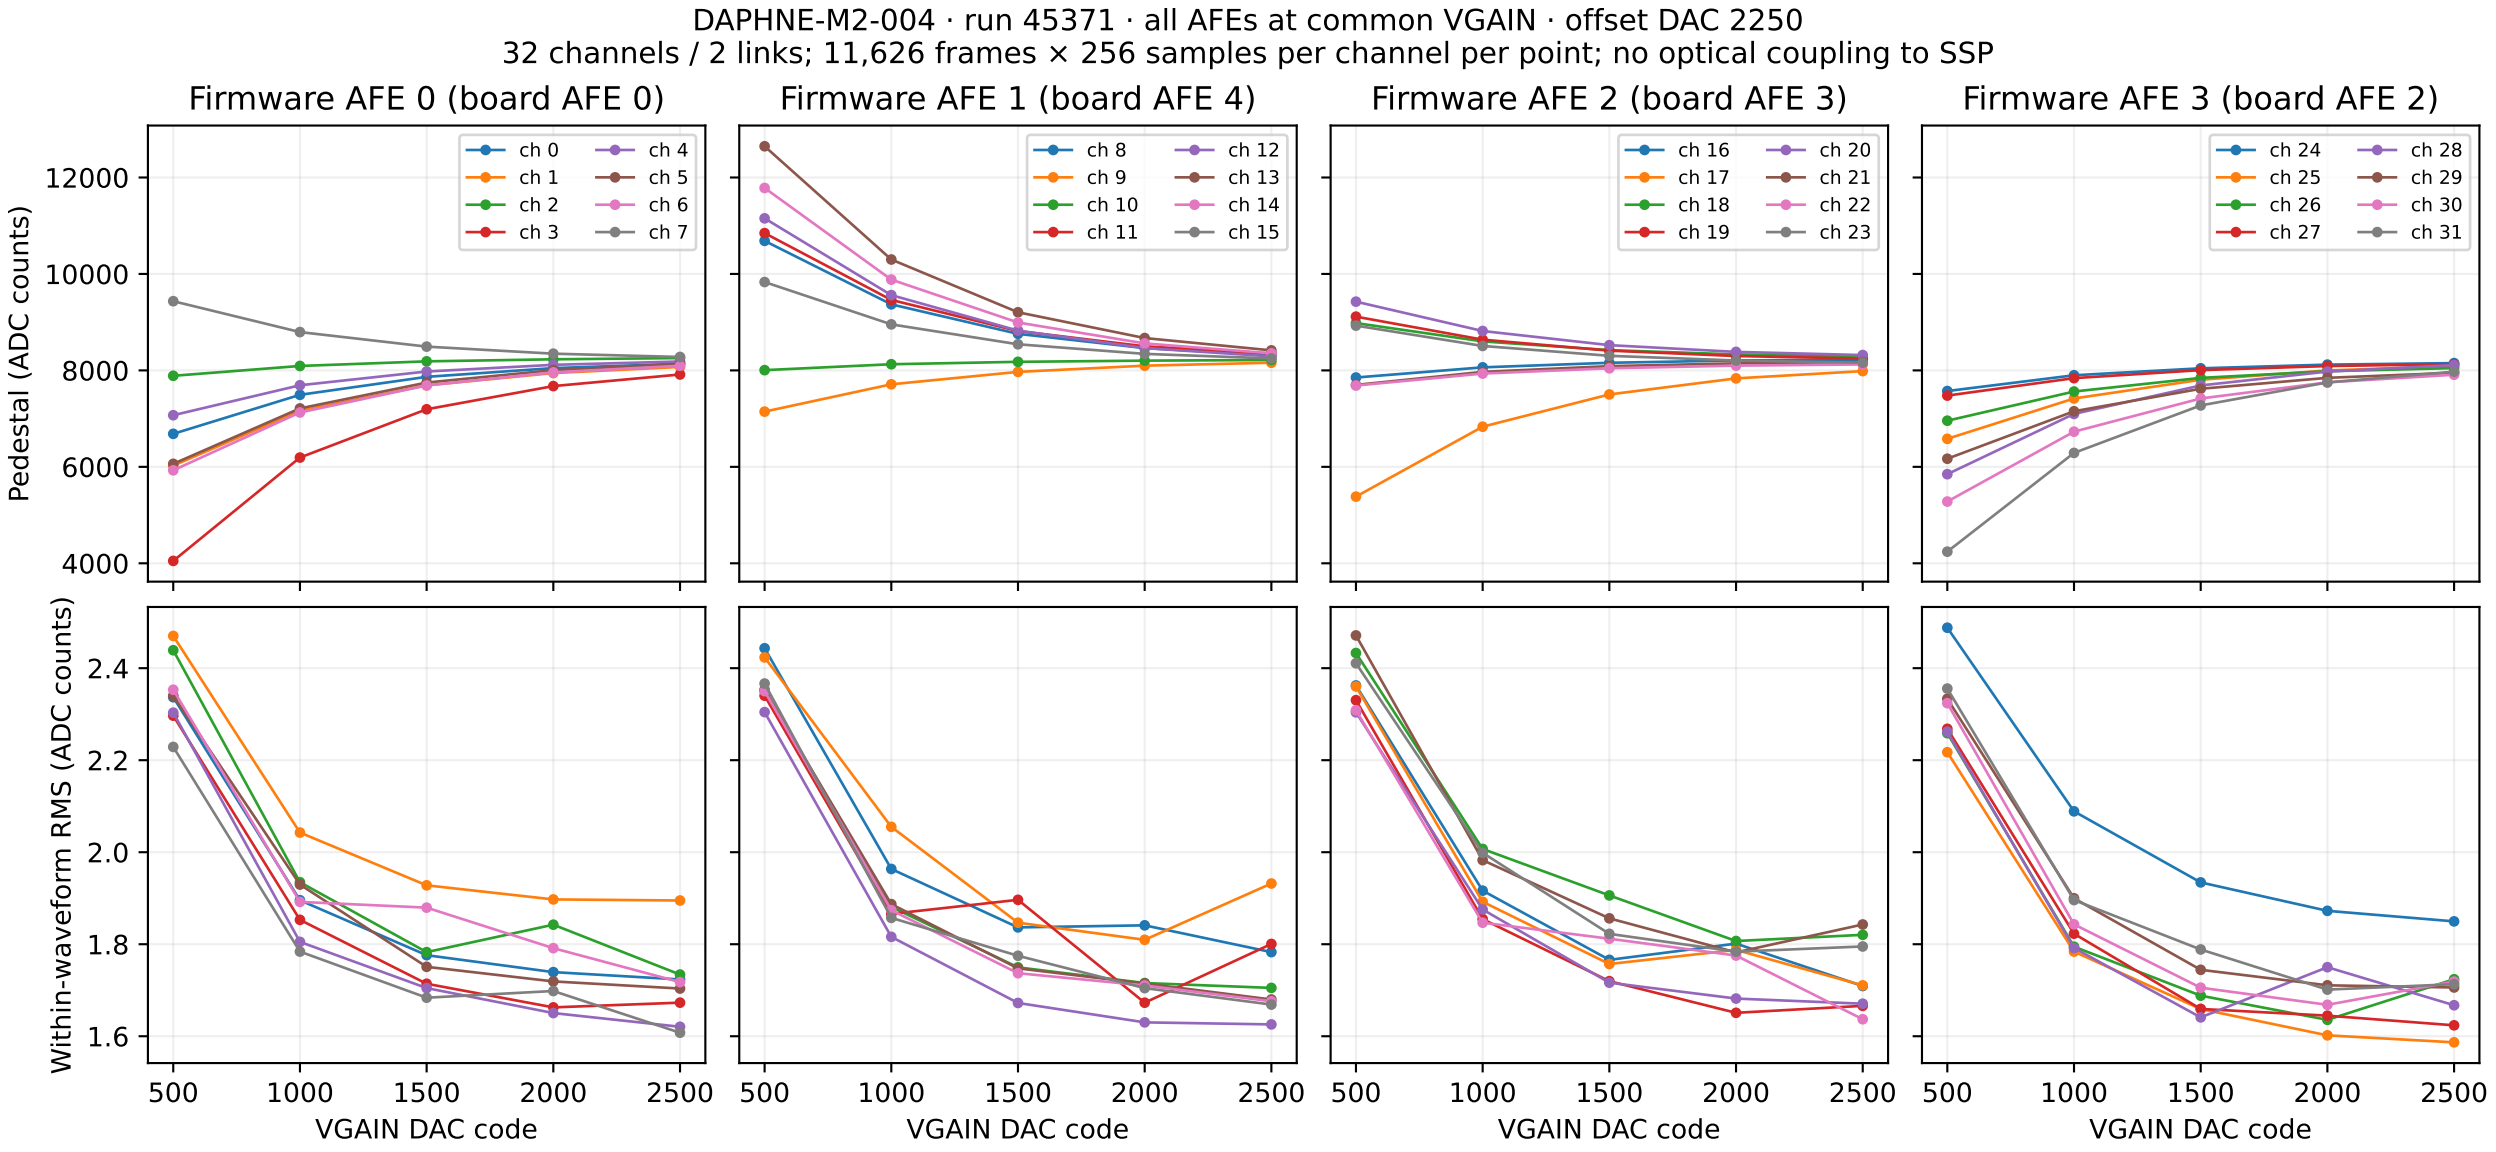
DAPHNE-M2-004 · run 45371 · all AFEs at common VGAIN · offset DAC 2250
32 channels / 2 links; 11,626 frames × 256 samples per channel per point; no optical coupling to SSP
Firmware AFE 0 (board AFE 0)
Firmware AFE 1 (board AFE 4)
Firmware AFE 2 (board AFE 3)
Firmware AFE 3 (board AFE 2)
Pedestal (ADC counts)
Within-waveform RMS (ADC counts)
VGAIN DAC code
ch 0
ch 1
ch 2
ch 3
ch 4
ch 5
ch 6
ch 7
ch 8
ch 9
ch 10
ch 11
ch 12
ch 13
ch 14
ch 15
ch 16
ch 17
ch 18
ch 19
ch 20
ch 21
ch 22
ch 23
ch 24
ch 25
ch 26
ch 27
ch 28
ch 29
ch 30
ch 31