

Faculty of Engineering

Internal Design Document

InfluxDB Design for Distributed Real-Time Telemetry System for QUT Microgrid

Date: October 11, 2026

Student Engineer: Dylan Hessing

Student ID: n11245310

Supervisor: Assoc. Prof. Geoff Walker

Version History

Version	Date	Author	Changes / Comments
1	April 21, 2026	Dylan Hessing	Initial Design
2	October 11, 2026	Dylan Hessing	Updated to as-built implementation

Contents

1 Overview **4**

2 Scope **4**

3 Architecture Overview **4**

4 InfluxDB Version Selection **5**

5 Schema & Data Model **5**

5.1 Organisation 6

5.2 Buckets 6

5.3 Measurement 6

5.4 Tags 6

5.5 Fields 7

5.6 Timestamp 7

5.7 Representative Schema 8

6 Ingestion Pipeline **8**

6.1 Overview 8

6.2 Telegraf Configuration 8

6.3 Burst Payload Path 9

6.4 Write Batching 10

6.5 QoS Alignment 10

6.6 Error Handling 10

7 Full-Rate Waveform Ingestion **11**

7.1 Purpose 11

7.2 Why a Dedicated Service 11

7.3 Schema 11

7.4 Aggregation 12
7.5 Flow Control and Data Quality 12
7.6 Storage Sizing 12
7.7 Verification 13

8 Query & Retention Policies 13

8.1 Retention Design 13
8.2 Downsampling 13
8.3 Key Query Patterns 14
8.4 Grafana Integration 15

9 PTP Timestamping Integration 16

9.1 Timestamp Authority 16
9.2 Timescale 16
9.3 Clock Domain Consistency 16
9.4 Out-of-Order Writes 16
9.5 PTP Status Logging 16
9.6 Timestamp Quality Validation 17

10 Security 17

10.1 Posture 17
10.2 InfluxDB Access Control 17
10.3 Network Binding 17
10.4 Grafana Authentication 18
10.5 Future Hardening 18

11 Deployment & Infrastructure 18

11.1 Host Configuration 18
11.2 Docker Compose 18

11.3 Persistent Volumes 20

11.4 Environment File 20

12 Validation Approach **20**

12.1 Objectives 20

12.2 Component-Level Tests 21

12.3 End-to-End Validation 21

12.4 Instrumentation 21

13 Resolved Design Questions **22**

1 Overview

This document describes the design of the InfluxDB historian component within the distributed microgrid telemetry system. The historian is responsible for receiving time-series electrical measurements from distributed DAQ nodes, persisting them with nanosecond-precision timestamps derived from PTP-synchronised STM32 firmware, and exposing them for downstream query and analysis.

Version 2 of this document records the historian as built. Where the implementation departed from the original design, the as-built behaviour is described, and design elements that were not implemented are listed as deferred in the relevant section.

2 Scope

This document assumes the MQTT protocol design described in the companion document *MQTT Protocol Design for Distributed Real-Time Telemetry System for QUT Microgrid* (version 2). In particular, it assumes:

- Mosquitto as the broker,
- Telegraf as the historian bridge,
- the four-level topic hierarchy `microgrid/<node_id>/<subsystem>/<metric>`, and
- JSON burst payloads carrying `ts`, `sync`, `dt_ns`, and a 20-element `v` array.

Hardware design, DAQ node fabrication, and RTOS/firmware decisions are out of scope.

3 Architecture Overview

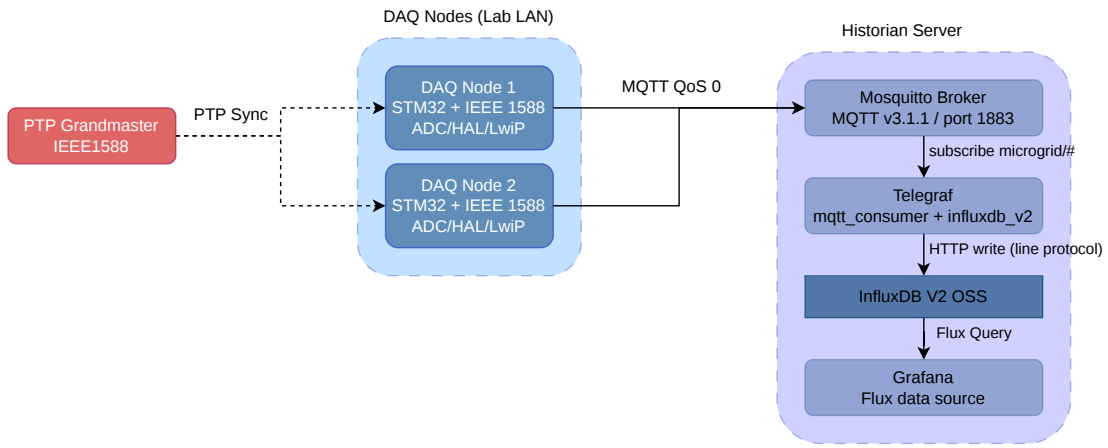


Figure 1: Historian system architecture: PTP-synchronised DAQ nodes publish over MQTT to the Mosquitto broker, Telegraf bridges to InfluxDB, and Grafana queries via Flux

Mosquitto and InfluxDB are co-deployed on the same historian server, consistent with the MQTT design's broker configuration. Telegraf runs on the same server host as the intermediary bridge (no custom subscriber code is required).

4 InfluxDB Version Selection

InfluxDB v2 OSS is selected as the historian for this project. The justification centres on four properties that are directly required by the system design.

Flux query language and native task scheduling. The downsampling design (Section 8.2) relies on Flux scheduled tasks running aggregateWindow directly within the database, with no external processing component. InfluxDB v2 is the only version for which Flux is the primary, fully–supported query interface. The integrated task scheduler eliminates the need for an external Kapacitor instance, keeping the Docker Compose stack minimal and operationally simple, appropriate for a single–historian research testbed.

Telegraf influxdb_v2 output plugin. The ingestion pipeline is entirely configuration–driven via Telegraf's mqtt_consumer input and influxdb_v2 output plugin. This plugin (including the `json_time_key` and `json_time_format = "unix_ns"` features central to this design) is a first–class, mature integration with InfluxDB v2, with extensive documentation and community usage. No custom subscriber code is required.

Token-based access control. InfluxDB v2's token–based authentication model supports bucket–scoped write tokens, which is the basis of the planned security posture (Section 10): a write-only token scoped to the telemetry bucket for the Telegraf bridge, and a separate read-only token for Grafana. This fine-grained token model is native to v2, although the scoped tokens have not yet been issued.

Grafana Flux data source. Grafana's native Flux data source for InfluxDB v2 is stable and well–supported, enabling the dashboard panels (Section 8.4) to query the historian directly using the same Flux patterns used in the downsampling tasks.

Relationship to InfluxDB 3 Core. InfluxDB 3 Core reached general availability in April 2025. However, InfluxDB 3 Core is not positioned as a direct replacement for InfluxDB OSS v2, and v2 is not planned to reach end–of–life. The v3 architecture is a significant departure — it replaces Flux with native SQL and InfluxQL, and integrates a Python processing engine in place of the Kapacitor/task model used in v2. Migrating to v3 would require rewriting all Flux queries and tasks documented here, with no clear benefit at this testbed scale. InfluxDB v2 OSS therefore remains the appropriate and supported choice for a new deployment of this scope.

Docker image pinning note: The latest tag for InfluxDB Docker images will point to InfluxDB 3 Core from late May 2026 onward. The Compose file (Section 11.2) uses the explicit influxdb:2 tag to prevent an unintended upgrade during the thesis validation period. This must not be changed to latest.

5 Schema & Data Model

InfluxDB organises data as:

$$\text{Organisation} \rightarrow \text{Bucket} \rightarrow \text{Measurement} \rightarrow \text{Tags + Fields + Timestamp}$$

5.1 Organisation

A single InfluxDB organisation `qut-microgrid` is used, consistent with the Telegraf output configuration.

5.2 Buckets

Table 1: Buckets

Bucket	Purpose	Retention
`telemetry`	JSON snapshots via Telegraf	90 days
`waveform`	Full-rate samples via `daq2-ingest`	`RAW_RETENTION` (default 7 days)
`waveform_1s`	Per-second aggregates via `daq2-ingest`	Indefinite

The bucket name `telemetry` matches the Telegraf output configuration. The remainder of this section describes the `telemetry` schema; the `waveform` and `waveform_1s` schemas are described in Section 7. The `telemetry_1m` bucket of the original design was superseded by `waveform_1s` (Section 8.2).

5.3 Measurement

Burst points are written to the measurement `mqtt_consumer`, Telegraf's default for the MQTT consumer plugin, and the per-sample points produced from them to `samples`, with the same tags and the fields `v` and `sync`. The electrical quantity is distinguished by the `subsystem` tag rather than by measurement name. This departs from the original design, which mapped each subsystem to its own measurement; a single measurement keeps the Telegraf configuration minimal, and filtering on an indexed tag is equally efficient.

5.4 Tags

Tags are string-valued, indexed, and low-cardinality. All tags are populated by Telegraf from the four-level MQTT topic.

Table 2: Tags

Tag Key	Source	Example Values	Notes
`node_id`	Topic segment 2	`node_01`, `node_02`	Fixed at firmware flash time; MAC/IP addresses explicitly avoided
`subsystem`	Topic segment 3	`voltage`, `current`, `ptp_status`	Quantity; implies units (V or A) for the electrical subsystems
`metric`	Topic segment 4	`phase_a`, `phase_b`, `phase_c`	Phase
`topic`	Full topic	`microgrid/node_01/voltage/phase_a`	Added by Telegraf's `topic_tag`

5.5 Fields

Telegraf's JSON parser flattens the payload's `v` array into indexed fields, so each burst message becomes one point with 22 fields.

Table 3: Fields

Field Key	Type	Meaning
`v_0` … `v_19`	float	Sample values in V or A, from the payload's `v` array
`dt_ns`	float	Interval between samples in nanoseconds
`sync`	float	1 if the node's PTP servo was locked, otherwise 0

5.6 Timestamp

The point timestamp is the payload's `ts`: the time of the first sample in the burst, from the node's PTP-disciplined clock, written at nanosecond precision. The historian does not substitute broker receive time or Telegraf processing time. The time of sample k is reconstructed at query time as `_time` $+k\cdot$ `dt_ns`.

5.7 Representative Schema

Table 4: Representative Schema (one point per burst)

_measurement	node_id	subsystem	metric	_field	Example
mqtt_consumer	node_01	voltage	phase_a	v_0	231.45
mqtt_consumer	node_01	voltage	phase_a	...	
mqtt_consumer	node_01	voltage	phase_a	v_19	228.10
mqtt_consumer	node_01	voltage	phase_a	dt_ns	998424
mqtt_consumer	node_01	voltage	phase_a	sync	1
mqtt_consumer	node_01	current	phase_a	v_0	9.82

6 Ingestion Pipeline

6.1 Overview

The ingestion pipeline is fully configuration-driven via Telegraf's MQTT consumer input plugin, a regex processor, and the InfluxDB v2 output plugin. No custom subscriber code is required. Telegraf runs as a Docker container on the historian server alongside Mosquitto and InfluxDB.

6.2 Telegraf Configuration

The as-built configuration (`telegraf/telegraf.conf`) is:

```
[agent]
  interval = "10s"
  flush_interval = "10s"
  precision = "1ns"
  omit_hostname = true

[[inputs.mqtt_consumer]]
  servers = ["tcp://mosquitto:1883"]
  topics = ["microgrid/#"]
  qos = 0
  data_format = "json"
  json_time_key = "ts"
  json_time_format = "unix_ns"
  topic_tag = "topic"

[[processors.regex]]
  [[processors.regex.tags]]
    key = "topic"
    pattern = "^microgrid/([^/]+)/([^/]+)/([^/]+)$"
    replacement = "${1}"
    result_key = "node_id"
```

```
  # ... likewise ${2} -> subsystem, ${3} -> metric

[[outputs.influxdb_v2]]
  urls = ["http://influxdb:8086"]
  token = "${INFLUXDB_TOKEN}"
  organization = "qut-microgrid"
  bucket = "telemetry"
```

Notes:

- `json_time_key = "ts"` and `json_time_format = "unix_ns"` make Telegraf use the node's PTP-derived timestamp as the InfluxDB point timestamp verbatim, and `precision = "1ns"` preserves its full resolution.
- The full topic is kept as the `topic` tag, and the regex processor extracts `node_id`, `subsystem`, and `metric` from it. This replaced the `topic_parsing` block of the original design.
- Telegraf reaches the broker and database by container name over the internal Docker network.
- The InfluxDB token is injected via an environment variable and is never stored in the configuration file. The broker requires no credentials (see the MQTT design document).

6.3 Burst Payload Path

Each JSON burst `{"ts", "sync", "dt_ns", "v": [20 values]}` is parsed into a single point: Telegraf's JSON parser flattens the `v` array into fields `v_0` to `v_19`, and `sync` and `dt_ns` become numeric fields. The parser cannot reconstruct per-sample timestamps itself. Booleans and strings are dropped by the parser, which is why the firmware sends `sync` as an integer.

Burst Splitting A Starlark processor, run after the regex processor, splits each burst into individually timestamped points. For every burst point it emits 20 additional points in the `samples` measurement, sample k at `ts` $+k\cdot$ `dt_ns`, carrying the burst's tags and the fields `v` and `sync`:

```
[[processors.starlark]]
  order = 2
  source = '''
def apply(metric):
    if "dt_ns" not in metric.fields or "v_0" not in metric.fields:
        return metric
    dt = int(metric.fields["dt_ns"])
    sync = metric.fields.get("sync")
    out = [metric]
    for k in range(1024):
        key = "v_" + str(k)
        if key not in metric.fields:
            break
        sample = Metric("samples")
        for name, value in metric.tags.items():
            sample.tags[name] = value
        sample.fields["v"] = metric.fields[key]
```

```
        if sync != None:
            sample.fields["sync"] = sync
        sample.time = metric.time + k * dt
        out.append(sample)
    return out
'''
```

The original burst point is retained alongside the samples, so that existing dashboards and the liveness check are unaffected; at the JSON path's rate the duplication is negligible. This path is the low-rate fallback for when the full-rate stream is not in use. The full-rate binary stream on `daq2/<node_id>/samples` lies outside Telegraf's subscribed topic tree and is ingested separately (Section 7).

6.4 Write Batching

Table 5: Write Batching

Parameter	Value	Notes
`metric_batch_size`	1000 points (default)	Maximum points per write request
`flush_interval`	10s	Maximum time between flushes

At the as-built publish rate (six bursts per node every 5 s) these settings are conservative. If near-real-time dashboard visibility is required, `flush_interval` can be reduced to 1s without affecting the schema or pipeline architecture.

6.5 QoS Alignment

Telemetry is published at QoS 0, consistent with the MQTT design. The ingestion pipeline makes no attempt to detect or fill gaps in the historian record resulting from dropped packets or node disconnection. Gaps are visible in the historian and are acceptable for a research testbed.

6.6 Error Handling

Telegraf drops malformed payloads that fail JSON parsing and logs an error. No dead-letter queue is implemented. This is acceptable given:

- the two-node testbed operates on a wired LAN with low packet loss probability,
- telemetry is QoS 0 by design, so loss is already tolerated at the transport layer, and
- a dead-letter mechanism would add operational complexity disproportionate to the research context.

7 Full-Rate Waveform Ingestion

7.1 Purpose

The JSON path (Sections 5 and 6) stores one 20-sample cycle per channel every 5 s, a small fraction of the approximately 30 kHz the nodes acquire. To store every sample, nodes built with `MQTT_PUBLISH_DAQ2` publish each acquisition packet in binary on `daq2/<node_id>/samples` (see the MQTT design document), and a dedicated service, `daq2-ingest`, writes them to InfluxDB.

7.2 Why a Dedicated Service

Telegraf cannot be used for this stream. Each DAQ2 packet carries 64 frames whose individual sample times must be computed from the header's first-frame time, frame period, and per-channel offsets, which no Telegraf parser supports. At the full rate, two nodes also produce approximately 120 000 points per second, beyond what a JSON-based pipeline would sustain efficiently. `daq2-ingest` is a small Python service (`daq2-ingest/`) running as a fifth container in the Docker Compose stack. It subscribes to `daq2/+/samples`, decodes each packet, and writes gzip-compressed line protocol to the InfluxDB HTTP API in batches.

7.3 Schema

Table 6: Full-Rate Schema (all points tagged `node_id`)

Bucket	Measurement	Fields	One point per
`waveform`	`voltage`	`a`, `b`, `c` (integer mV)	frame (~33 µs)
	`current`	`a`, `b`, `c` (integer mA)	frame
	`neutral`	`v`, `i` (neutral mode only)	frame
	`daq2_packet`	sequence, frame index, lock and time-valid flags, PTP and configuration epochs, timing uncertainty	packet (64 frames)
`waveform_1s`	`voltage`, `current`, `neutral`	RMS, mean, minimum, and maximum of each field (float V/A), frame count, lock flag	UTC second
	`daq2_ingest`	service statistics	10 s

Design decisions:

- **One point per signal group per frame.** The three phase voltages are sampled simultaneously in one ADC slot, and the three currents in the next, approximately 16.6 µs later. Each group is written as one point at its own exact sampling time, rather than collapsing all six channels onto one timestamp, which would introduce a phase error of 0.3° at 50 Hz between voltage and current.
- **Integer storage.** Raw values are written as integers in mV and mA, which preserves the same 0.001 V/A precision as a three-decimal float. InfluxDB delta-encodes integers, and consecutive samples at 30 kHz differ only slightly, so integers compress approximately 4.8 times better than

floats on noisy waveform data (Section 7.6).

- **Only trustworthy timestamps are written.** The firmware clears a packet's time-valid flag whenever the PTP servo adjusted the clock rate during it, which happens on every Sync (about once a second), as well as across clock steps and failed clock reads. A rate adjustment skews sample times by only nanoseconds over one packet, so such packets are kept if their first-frame time lies within 10 µs of the time predicted from the previous packet and the clock epoch is unchanged; they are recorded with `time_valid` = 0 in `daq2_packet`. Packets spanning a clock step or showing a timestamp discontinuity are skipped and counted, as are packets more than a day from the server's clock, which a node publishes before its first PTP step while its clock still counts from boot. Before this rule, one 64-frame packet per second (0.2% of the data) was discarded.
- **Timescale.** The nodes' TAI timestamps are converted to UTC with the same fixed 37 s offset as the JSON path.

7.4 Aggregation

As it ingests each packet, the service accumulates per-channel sums for the current UTC second and emits the RMS, mean, minimum, and maximum once the second completes. These are written to `waveform_1s`, which is retained indefinitely, so that long-term trends remain available after the raw data expires. A complete second contains approximately 30 048 frames; a lower `frames` count marks a partial second at start-up or after a gap. This replaces the Flux downsampling task of the original design (Section 8.2).

7.5 Flow Control and Data Quality

MQTT callbacks only enqueue payloads; one worker thread decodes them and a writer thread batches the resulting lines to InfluxDB. If InfluxDB falls behind, up to approximately 10 s of raw data is buffered in memory before the oldest raw lines are dropped; aggregates are never dropped. Every loss is counted rather than silent: the service logs, and writes to `daq2_ingest` every 10 s, the number of packets and frames received, gaps in the nodes' frame indices (data acquired but not delivered), packets skipped for invalid timestamps, queue and buffer drops, and write errors.

7.6 Storage Sizing

Storage was measured by writing 60 s of synthetic three-phase data for one node, with Gaussian noise added (0.3 V and 0.03 A RMS) so that it compresses no better than a real signal:

Table 7: Measured Storage per Value

Format	Bytes per value	Two nodes, per day
Float (V/A, 3 decimals)	7.9	~246 GB
Integer (mV/mA)	1.63	~51 GB

Integer storage is therefore approximately 4.8 times smaller, and is the default. At approximately 51 GB per day for two nodes, the default 7-day raw retention requires approximately 360 GB, and 30 days approximately 1.5 TB; requirements scale linearly with the number of nodes. The `waveform_1s` bucket grows by

approximately 1 MB per day. Raw retention should be set from the historian server's available disk, leaving headroom for InfluxDB compactions, and checked against actual usage once real data is flowing.

7.7 Verification

The service was verified on a development machine (16 cores, 16 GB RAM) in three ways:

- **Unit tests** check packet decoding against the firmware's `daq_packet_t` layout, sample time calculation, per-group timestamps, neutral-mode packets, rejection of malformed packets, integer conversion, gap and invalid-time counting, and per-second RMS (a 230 V sine yields 230.0 V).
- **A load test** published synthetic packets for two nodes at the firmware's real rate (30 048 frames/s each) for 60 s. All 56 342 packets were received, and InfluxDB held exactly 1 802 944 voltage and 1 802 944 current points per node, with no drops, gaps, or write errors. The service used approximately 55% of one CPU core and InfluxDB approximately 77%, with writes occupying approximately 42% of the writer's time.
- The per-second aggregates reported 230.0 V RMS and 30 048 frames for each complete second.

Performance on the historian server, and the nodes' ability to sustain the DAQ2 output on hardware, remain to be verified.

8 Query & Retention Policies

8.1 Retention Design

Retention is configured at the bucket level in InfluxDB v2, and the bucket-level setting is the sole retention mechanism. The `telemetry` bucket's retention is set on first start by `DOCKER_INFLUXDB_INIT_RETENTION`; the `waveform` buckets' retention is set by `daq2-ingest` when it first creates them.

Table 8: Retention

Bucket	Retention	Rationale
`telemetry`	90 days	Covers the thesis validation period
`waveform`	7 days (default)	Set by disk capacity (Section 7)
`waveform_1s`	Indefinite	Long-term trends at small storage cost

At the as-built publish rate of one burst per channel every 5 s, storage growth is small, and 90 days of data from two nodes is well within the capacity of the historian host.

8.2 Downsampling

The original design specified a Flux scheduled task, `downsample_1m`, aggregating the `telemetry` bucket into an indefinitely retained `telemetry_1m` bucket. This was superseded by the full-rate path:

`daq2-ingest` computes per-second RMS, mean, minimum, and maximum values from every sample as it ingests them, and writes them to the indefinitely retained `waveform_1s` bucket (Section 7). Computing aggregates in the ingestion service avoids a scheduled task re-reading around 21 million raw points per minute, and RMS, rather than the mean used in the original design, is the meaningful long-term quantity for AC waveforms, whose mean over a whole number of cycles is approximately zero.

The `telemetry` bucket itself is not downsampled; at one burst per channel every 5 s, 90-day retention does not constrain storage.

8.3 Key Query Patterns

The following Flux examples cover the primary query patterns, written against the as-built schema.

A single channel, one row per burst with `sync`, `dt_ns`, and `v_0` to `v_19` as columns:

```
from(bucket: "telemetry")
  |> range(start: -1h)
  |> filter(fn: (r) => r._measurement == "mqtt_consumer"
                    and r.node_id == "node_01"
                    and r.subsystem == "voltage"
                    and r.metric == "phase_a")
  |> pivot(rowKey: ["_time"], columnKey: ["_field"], valueColumn: "_value")
```

Data written since the burst-splitting processor was added is also available one point per sample in the `samples` measurement (filter on `_measurement == "samples"` and `_field == "v"`). For older data, per-sample timestamps are reconstructed as `_time` $+k\cdot$ `dt_ns` for field `v_`k; the export script `grafana_export.py` performs this expansion when exporting to CSV with `--samples`.

Cross-node comparison for the same channel, using the first sample of each burst:

```
from(bucket: "telemetry")
  |> range(start: -1h)
  |> filter(fn: (r) => r._measurement == "mqtt_consumer"
                    and r.subsystem == "voltage"
                    and r.metric == "phase_a"
                    and r._field == "v_0")
  |> group(columns: ["node_id"])
```

Cross-node comparisons are only meaningful where both nodes report `sync` = 1 for the bursts concerned.

All channels from a single node (debugging):

```
from(bucket: "telemetry")
  |> range(start: -15m)
  |> filter(fn: (r) => r.node_id == "node_01")
```

PTP lock state over a window:

```
from(bucket: "telemetry")
  |> range(start: -1h)
  |> filter(fn: (r) => r._measurement == "mqtt_consumer"
                    and r._field == "sync")
  |> group(columns: ["node_id"])
```

8.4 Grafana Integration

Grafana connects to InfluxDB v2 via the native Flux data source. Both the data source and the dashboard are provisioned from the repository, so a fresh deployment needs no manual configuration:

- The data source (`grafana/provisioning/datasources/influxdb.yml`) reads its token from `INFLUXDB_TOKEN`, which Docker Compose passes to the Grafana container. Its uid is pinned to the value Grafana originally generated for it, so that existing panels and the export script continue to reference it.
- The *DAQboard* dashboard (`grafana/provisioning/dashboards/daqboard.json`) is loaded into a *Microgrid* folder. It may be edited in Grafana, but must be exported back to the repository for changes to persist.

Table 9: DAQboard Panels (selected node via a `node_id` variable)

Panel	Source and query pattern
Node status	Online if the node's newest point in `telemetry` or `waveform` is less than 30 s old
PTP lock state	Newest `locked` (servo status or DAQ2 packet) or `sync` (JSON burst) value
Full-rate frames/s, timing uncertainty	Newest `waveform_1s` frame count and `daq2_packet` uncertainty
Ingest losses	Sums of the `daq2_ingest` loss counters over the time range
Full-rate voltage and current waveforms	The newest 100 ms that all three phases have reached in `waveform`, plotted against milliseconds so the axis fits the window
Voltage and current RMS	`waveform_1s` RMS fields, aggregated to the display resolution
PTP offset, path delay, frequency correction	`ptp_status` servo points, one per Sync
Snapshots (JSON fallback)	Per-sample points from the `samples` measurement, and frames per second over time

9 PTP Timestamping Integration

9.1 Timestamp Authority

The STM32 nodes are the authoritative timestamp source. Each node disciplines its local clock to the PTP grandmaster using hardware timestamping in the Ethernet peripheral. The `ts` field of each burst is the time of its first sample, computed in firmware from a hardware timer that shares the PTP clock's 100 MHz source, at the centre of that sample's accumulated ADC burst; it is not broker receive time or Telegraf processing time.

Telegraf's `json_time_key` and `json_time_format = "unix_ns"` configuration ensures this timestamp is used as the InfluxDB timestamp verbatim.

9.2 Timescale

PTP time is TAI. The firmware converts it to UTC by subtracting a fixed 37 s offset before publishing, as it does not yet parse the UTC offset advertised in the grandmaster's Announce messages. A future leap second would therefore require a firmware update. Before the servo first locks, the node's clock counts from boot; such early bursts carry `sync` = 0.

9.3 Clock Domain Consistency

All nodes share a single PTP clock domain. The historian server's system clock must be on UTC, synchronised to the same grandmaster or to a sufficiently accurate NTP source, so that Flux query time ranges expressed in wall-clock time correspond correctly to stored point timestamps.

9.4 Out-of-Order Writes

MQTT QoS 0 with no ordering guarantees means Telegraf may deliver points to InfluxDB with timestamps older than recently written points. InfluxDB handles out-of-order writes within a shard natively. Default shard duration in InfluxDB v2 is one week; behaviour at shard boundaries should be verified if a node reconnects after an outage longer than one week, though this is unlikely in a lab testbed context.

9.5 PTP Status Logging

Each burst carries a `sync` field, set to 1 when the node's PTP servo was locked at capture. The servo reports lock after eight consecutive offsets within 1 µs of the grandmaster, with a Sync message received within the last 3 s. Bursts are only started on data whose timestamp is valid (no clock step or rate change during capture), and are restarted if a clock step occurs mid-collection.

In addition, on every Sync each node publishes its servo state on `microgrid/<node_id>/ptp_status/servo`: the measured offset, the path delay, the frequency correction, the servo state, and the lock and step flags (see the MQTT design document). Telegraf stores these as one point per Sync in `mqtt_consumer`, with `subsystem` = `ptp_status` and `metric` = `servo`, so the historian holds a continuous record of syn-

chronisation quality for post-hoc assessment of any data window. The original design's HOLDOVER state is not implemented; a node that stops receiving Sync messages reports unlocked after 3 s.

9.6 Timestamp Quality Validation

Before cross-node comparisons are drawn from the historian, `sync` should be confirmed as 1 for all nodes across the relevant time window. Alignment between nodes can be measured independently of the historian by comparing the 1 pulse-per-second outputs of the nodes on an oscilloscope. This validation is a prerequisite for any result that relies on cross-node temporal alignment.

10 Security

10.1 Posture

The historian operates on a university research lab LAN and is not exposed to the public internet. The security design is therefore pragmatic and aligned with the phased approach documented in the companion MQTT design document. This section describes historian-side measures only; broker-side authentication, ACLs, and TLS are covered in the MQTT design document.

10.2 InfluxDB Access Control

InfluxDB v2 uses token-based authentication for all API access. As built, a single admin token, set on first start from `INFLUXDB_TOKEN` in the `.env` file, is used by Telegraf to write and by Grafana to read.

Deferred The design specified scoped tokens, so that a compromised token has a limited blast radius:

Table 10: Planned InfluxDB API Tokens

Token	Scope	Used by
Telegraf write token	Write-only to `telemetry` bucket	Telegraf bridge
Grafana read token	Read-only on `telemetry` bucket	Grafana data source
Admin token	Full organisation access	Local admin / ad-hoc Flux queries

Tokens are stored as environment variables and injected into the Telegraf configuration at runtime via `${INFLUXDB_TOKEN}`. They are never written to configuration files or committed to version control.

10.3 Network Binding

The InfluxDB HTTP API is published only on the host's loopback interface by the Docker port mapping (`127.0.0.1:8086:8086`), so it is not reachable from the lab LAN directly. Telegraf and Grafana reach it over the internal Docker network by container name. Administrators access the InfluxDB UI through an SSH tunnel to the historian server.

10.4 Grafana Authentication

Grafana is published on all interfaces (port 3000) so that dashboards can be viewed from the lab LAN. Anonymous access is disabled, and the `admin` password is set on first start from `GRAFANA_ADMIN_PASSWORD`.

Deferred A separate read-only `viewer` account for demonstrations was designed but not provisioned.

10.5 Future Hardening

Consistent with the MQTT design's phased security model, the following measures are deferred:

Table 11: Deferred Security Measures

Measure	Trigger
Scoped Telegraf and Grafana tokens	Before any wider deployment
Grafana `viewer` account	If demonstration access is needed
TLS on InfluxDB API (`https://`)	If historian is accessed from outside the lab VLAN
Grafana OAuth / SSO	If multi-user access beyond the research team is required
InfluxDB audit logging	If data integrity evidence is required

11 Deployment & Infrastructure

11.1 Host Configuration

All components (Mosquitto, Telegraf, InfluxDB, and Grafana) are co-deployed as Docker containers on a single historian server running Ubuntu Server 24.04 LTS on the lab LAN. Co-deployment is justified at the two-node testbed scale; resource contention between components is not anticipated.

Table 12: Component Deployment Summary

Component	Image	Host port	Purpose
Mosquitto	`eclipse-mosquitto:2`	`127.0.0.1:1883`†	MQTT broker
InfluxDB	`influxdb:2`	`127.0.0.1:8086`	Time-series database
Telegraf	`telegraf:latest`	none	MQTT to InfluxDB bridge
Grafana	`grafana/grafana:latest`	`0.0.0.0:3000`	Dashboards

† Changed to `1883:1883` when real DAQ nodes are connected.

11.2 Docker Compose

All components are managed via a single Docker Compose file. This ensures reproducible deployment, simplifies inter-service networking, and allows the full stack to be brought up or torn down with a single command, appropriate for a research testbed where the environment may need to be rebuilt. The as-built `docker-compose.yml` is:

```
services:
  mosquitto:
    image: eclipse-mosquitto:2
    container_name: mosquitto
    ports:
      - "127.0.0.1:1883:1883"
    volumes:
      - ./mosquitto/config:/mosquitto/config
      - ./mosquitto/data:/mosquitto/data
      - ./mosquitto/log:/mosquitto/log
    restart: unless-stopped

  influxdb:
    image: influxdb:2
    container_name: influxdb
    ports:
      - "127.0.0.1:8086:8086"
    volumes:
      - influxdb-data:/var/lib/influxdb2
      - ./influxdb/init:/docker-entrypoint-initdb.d
    environment:
      - DOCKER_INFLUXDB_INIT_MODE=setup
      - DOCKER_INFLUXDB_INIT_USERNAME=${INFLUXDB_ADMIN_USER}
      - DOCKER_INFLUXDB_INIT_PASSWORD=${INFLUXDB_ADMIN_PASSWORD}
      - DOCKER_INFLUXDB_INIT_ORG=qut-microgrid
      - DOCKER_INFLUXDB_INIT_BUCKET=telemetry
      - DOCKER_INFLUXDB_INIT_RETENTION=90d
      - DOCKER_INFLUXDB_INIT_ADMIN_TOKEN=${INFLUXDB_TOKEN}
    restart: unless-stopped

  telegraf:
    image: telegraf:latest
    container_name: telegraf
    depends_on:
      - mosquitto
      - influxdb
    volumes:
      - ./telegraf/telegraf.conf:/etc/telegraf/telegraf.conf:ro
    environment:
      - INFLUXDB_TOKEN=${INFLUXDB_TOKEN}
    restart: unless-stopped

  grafana:
    image: grafana/grafana:latest
    container_name: grafana
    ports:
      - "3000:3000"
    volumes:
      - grafana-data:/var/lib/grafana
```

```
      - ./grafana/provisioning:/etc/grafana/provisioning
    environment:
      - GF_SECURITY_ADMIN_PASSWORD=${GRAFANA_ADMIN_PASSWORD}
      - GF_AUTH_ANONYMOUS_ENABLED=false
      - GF_DASHBOARDS_MIN_REFRESH_INTERVAL=1s
    depends_on:
      - influxdb
    restart: unless-stopped

volumes:
  influxdb-data:
  grafana-data:
```

The InfluxDB and Mosquitto ports are bound to loopback by default; Grafana is published on all interfaces for dashboard access from the lab LAN (Section 10). Sensitive values are passed via environment variables sourced from a `.env` file that is excluded from version control.

11.3 Persistent Volumes

InfluxDB and Grafana state are stored in named Docker volumes. Mosquitto data and logs are bind-mounted to host directories for visibility. The Telegraf configuration is bind-mounted read-only.

11.4 Environment File

A `.env` file in the Compose project root holds all secrets:

```
INFLUXDB_ADMIN_USER=admin
INFLUXDB_ADMIN_PASSWORD=<redacted>   # minimum 8 characters
INFLUXDB_TOKEN=<redacted>
GRAFANA_ADMIN_PASSWORD=<redacted>
```

This file must not be committed to version control. Its values are applied only on the first start of the containers; changing them later requires resetting the volumes. Step-by-step setup instructions are given in the repository `README.md`.

12 Validation Approach

12.1 Objectives

The validation approach verifies that the historian correctly receives, stores, and exposes PTP-timestamped measurements from the DAQ nodes. Three properties are of primary interest:

- **Correctness**: data written to InfluxDB matches the values published by the STM32 nodes
- **Timestamp fidelity**: the PTP timestamp from the STM32 is preserved end-to-end with no substitution or modification

- **Cross-node alignment**: points from two synchronised nodes at the same physical instant share consistent timestamps within the expected PTP accuracy bound

12.2 Component-Level Tests

Before end-to-end validation, each pipeline stage is verified in isolation.

Table 13: Component-Level Validation Tests

Test	Method	Pass condition
Telegraf MQTT subscription	Publish a known burst with `mosquitto_pub`; inspect Telegraf logs	Payload parsed, point written to `telemetry` bucket
Timestamp preservation	Publish a burst with a known `ts`; query InfluxDB and compare	Stored `_time` matches `ts` to nanosecond precision
Tag extraction	Publish to a known topic; query tags on the stored point	`node_id`, `subsystem`, and `metric` match the topic segments
Burst flattening	Publish a 20-sample burst; query the stored point	Fields `v_0` to `v_19` hold the published values in order; `sync` and `dt_ns` present

12.3 End-to-End Validation

End-to-end validation uses the two-node testbed with both STM32 nodes publishing live measurements.

Timestamp fidelity test: A known electrical event (e.g. a step load change) is applied. The time of the event as recorded in the historian for each node, reconstructed from `_time` and `dt_ns`, is compared. The difference should be within the expected PTP synchronisation accuracy. A large discrepancy indicates either a timestamp substitution error in the pipeline or a PTP synchronisation failure. Because each node publishes only one 20 ms window every 5 s, the event must fall within a published window on both nodes; the full-rate binary stream removes this constraint.

Data completeness test: Both nodes publish for a fixed duration. The number of points in the historian for each channel is compared against the expected count of one burst per channel every 5 s. Any gap is investigated against Telegraf and Mosquitto logs and the node's UART counters.

PTP lock test: The `sync` field is queried over a sustained period. It should remain 1 throughout normal operation once the servo has locked.

12.4 Instrumentation

Ingestion health is monitored through Telegraf's container logs (`docker compose logs telegraf`) and, on the node side, the acquisition and MQTT counters printed once per second on each node's debug UART.

Deferred Telegraf's `internal` input plugin, writing pipeline metrics (points received, write errors, flush latency) to a separate `telegraf_internal` bucket, was designed but not enabled.

13 Resolved Design Questions

The following questions were open when this design was first written, and have been resolved by the implementation.

Table 14: Resolved Design Questions

#	Question	Resolution
1	ADC sample rate per channel	Approximately 30 kHz acquisition; one 50 Hz cycle per channel is published every 5 s, decimated to approximately 1 kHz (20 samples).
2	Single-sample vs burst payload	Burst. Each burst is stored as one point with fields `v_0` to `v_19`; per-sample timestamps are reconstructed at query time.
3	TAI vs UTC in STM32 PTP stack	PTP runs on TAI; the firmware publishes UTC using a fixed 37 s offset. The historian server's clock must be on UTC.
4	Grafana on same host or separate	Same host. InfluxDB stays bound to loopback; Grafana is published on port 3000.
5	`sync_state` as string or integer field	Replaced by an integer `sync` field (0/1) in each burst, as Telegraf's JSON parser drops strings and booleans.
6	`min/max` downsampling required	Deferred; downsampling not implemented (Section 8.2).
7	Historian server hardware confirmed	Ubuntu Server 24.04 LTS host running the Docker Compose stack.
8	90-day raw retention vs disk capacity	90 days retained; storage growth is small at the as-built publish rate.