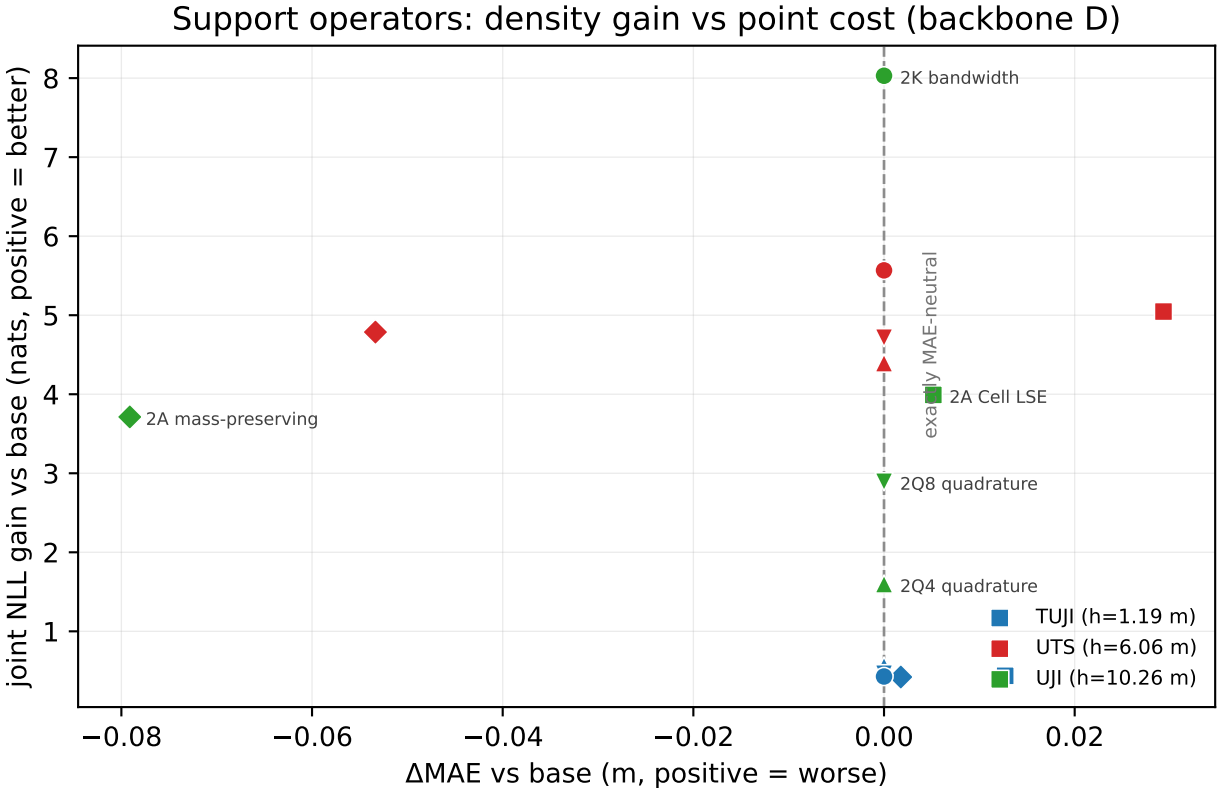
Support operators: density gain vs point cost (backbone D)
joint NLL gain vs base (nats, positive = better)
ΔMAE vs base (m, positive = worse)
8
7
6
5
4
3
2
1
−0.08
−0.06
−0.04
−0.02
0.00
0.02
2K bandwidth
exactly MAE-neutral
2A Cell LSE
2A mass-preserving
2Q8 quadrature
2Q4 quadrature
TUJI (h=1.19 m)
UTS (h=6.06 m)
UJI (h=10.26 m)