


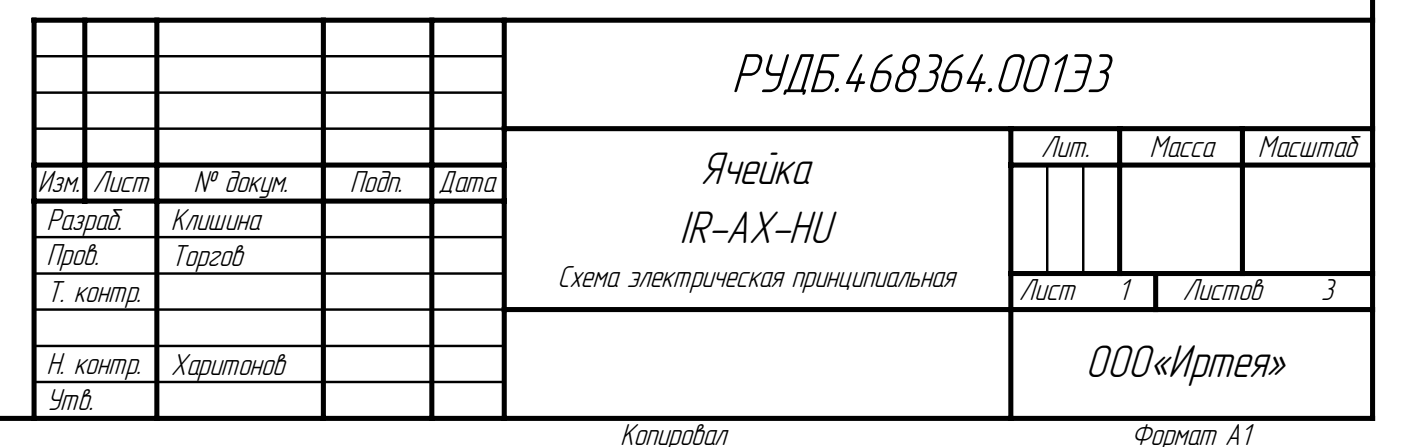
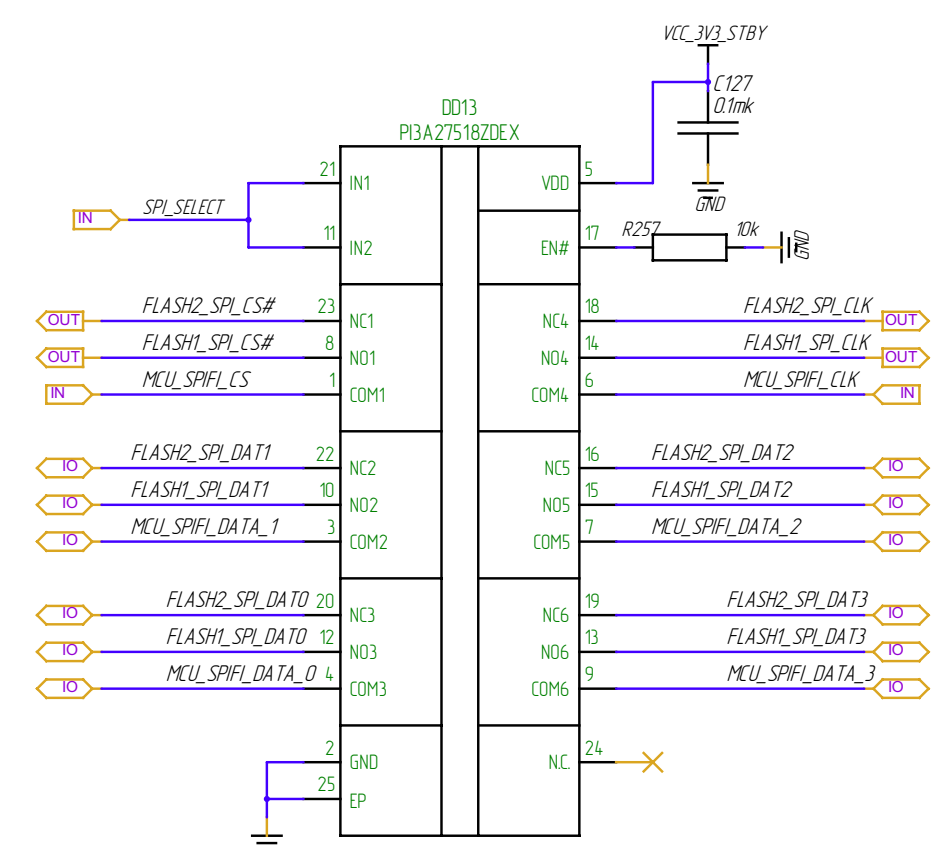
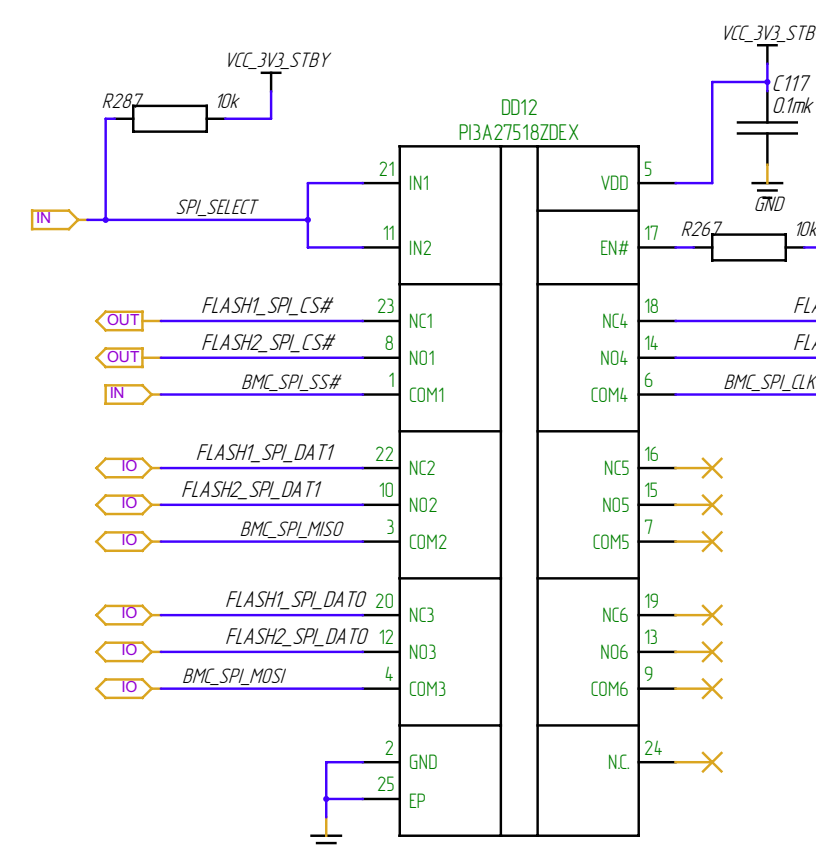
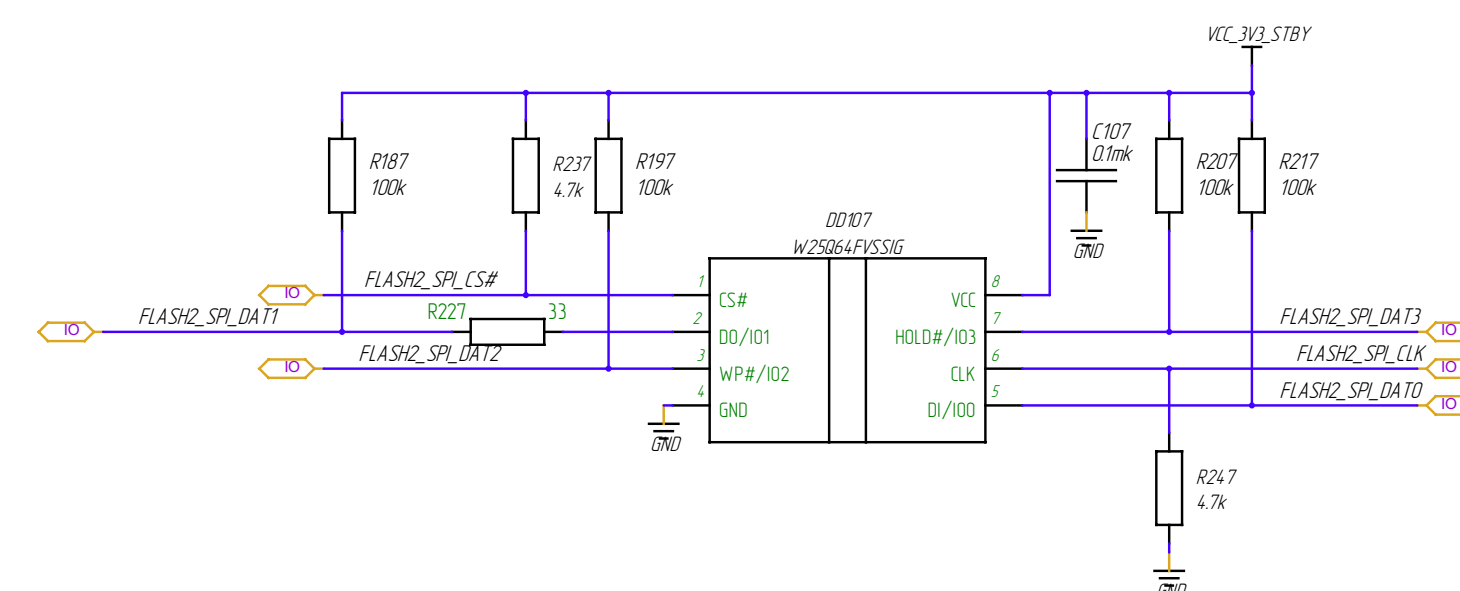
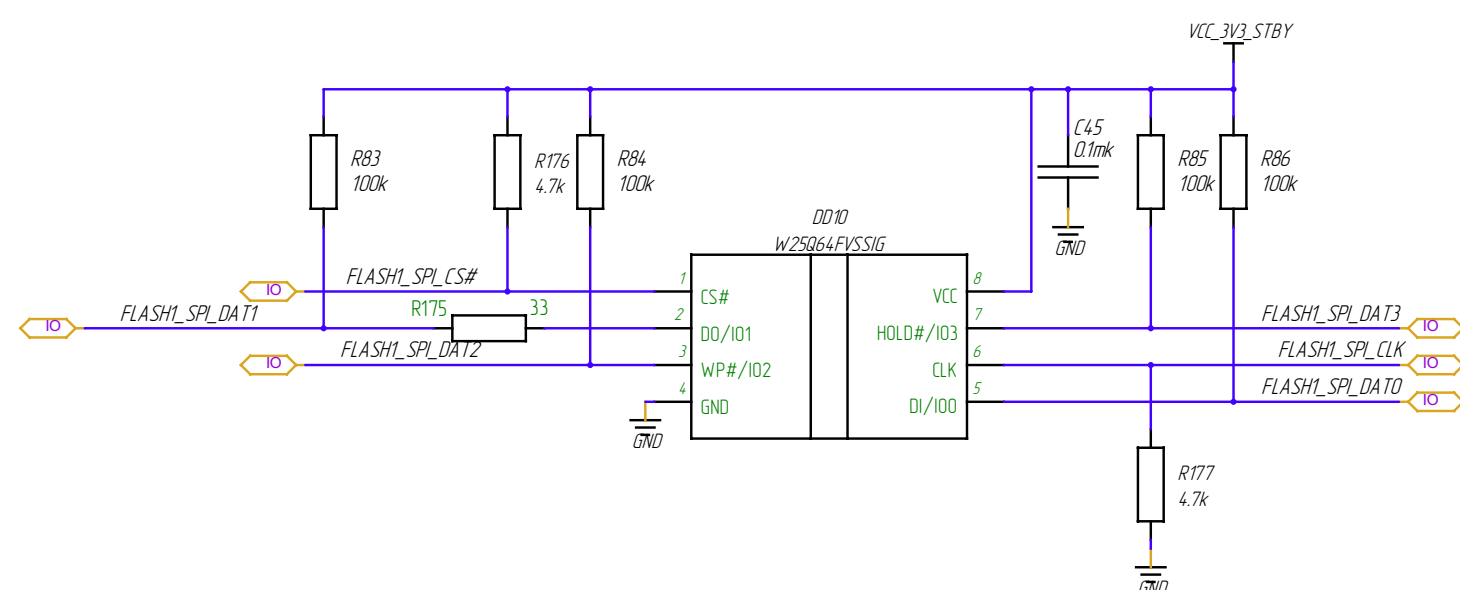
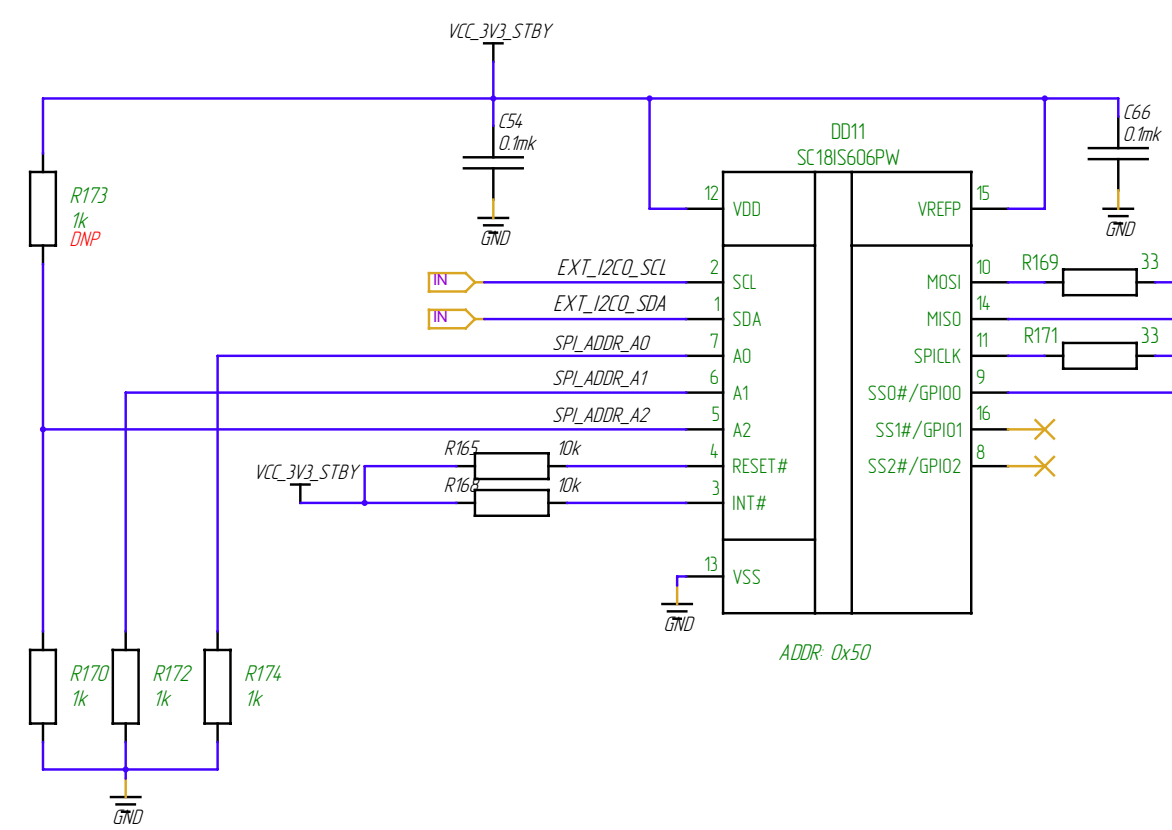
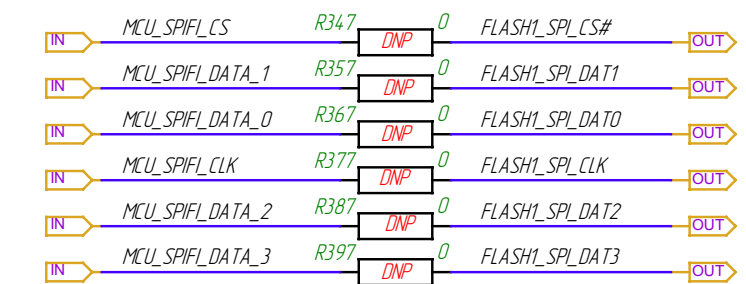
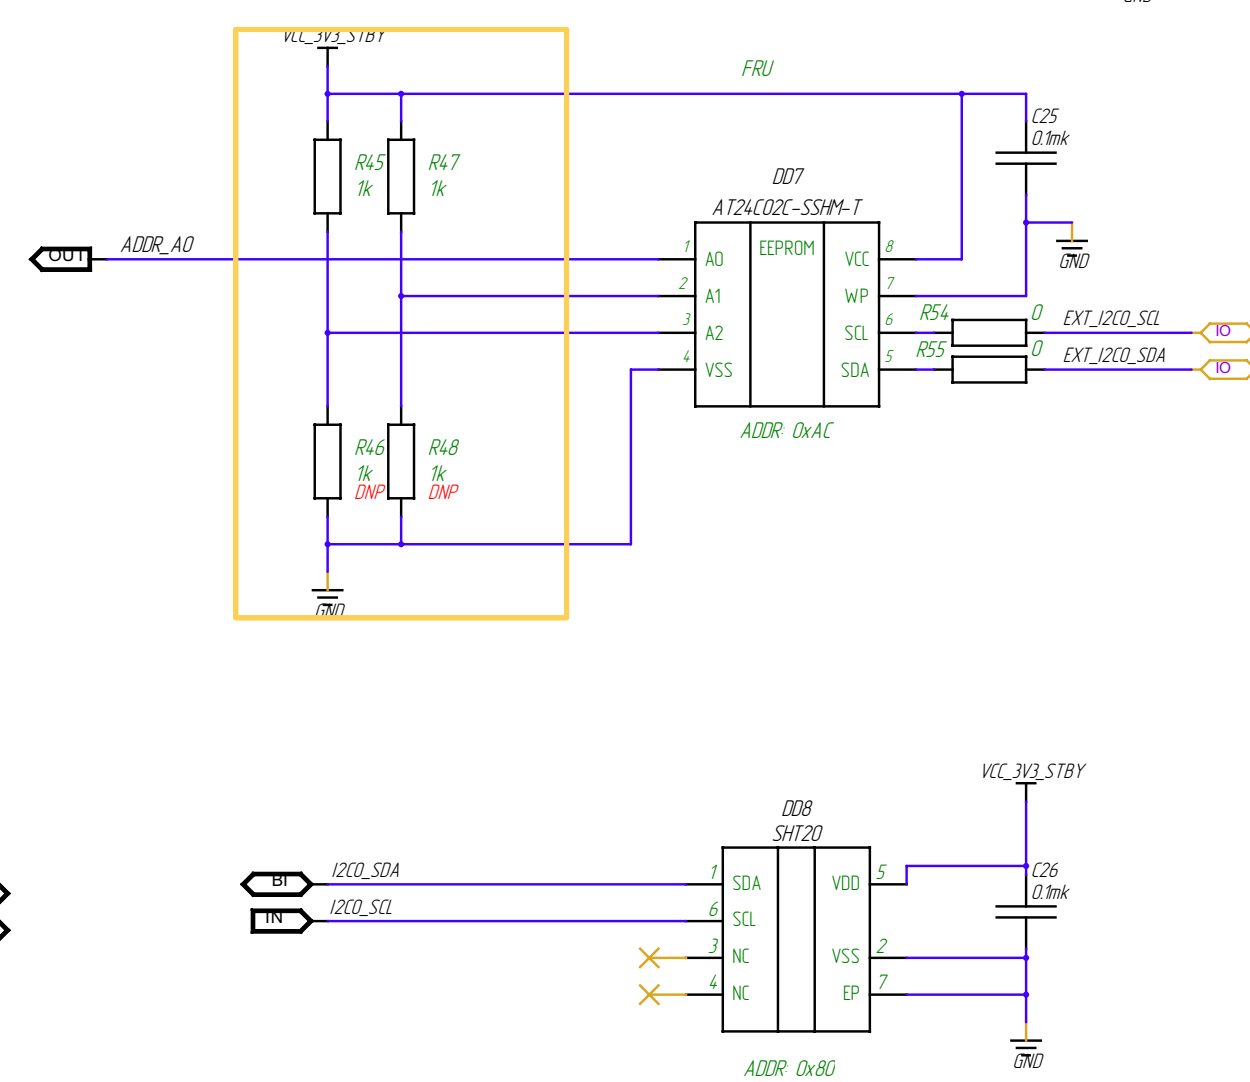
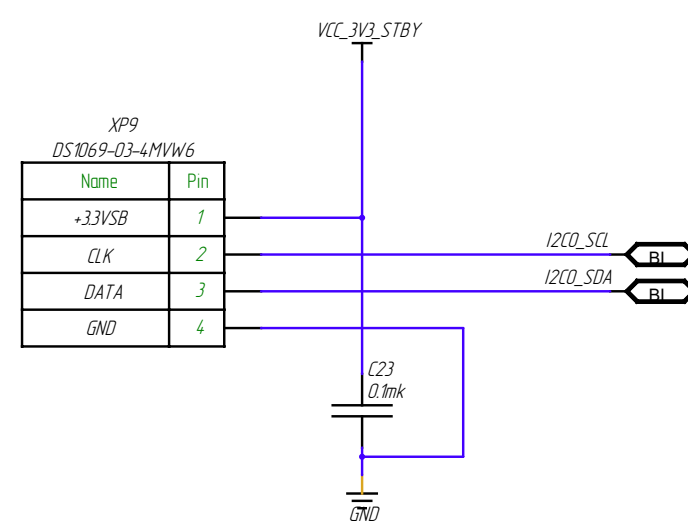
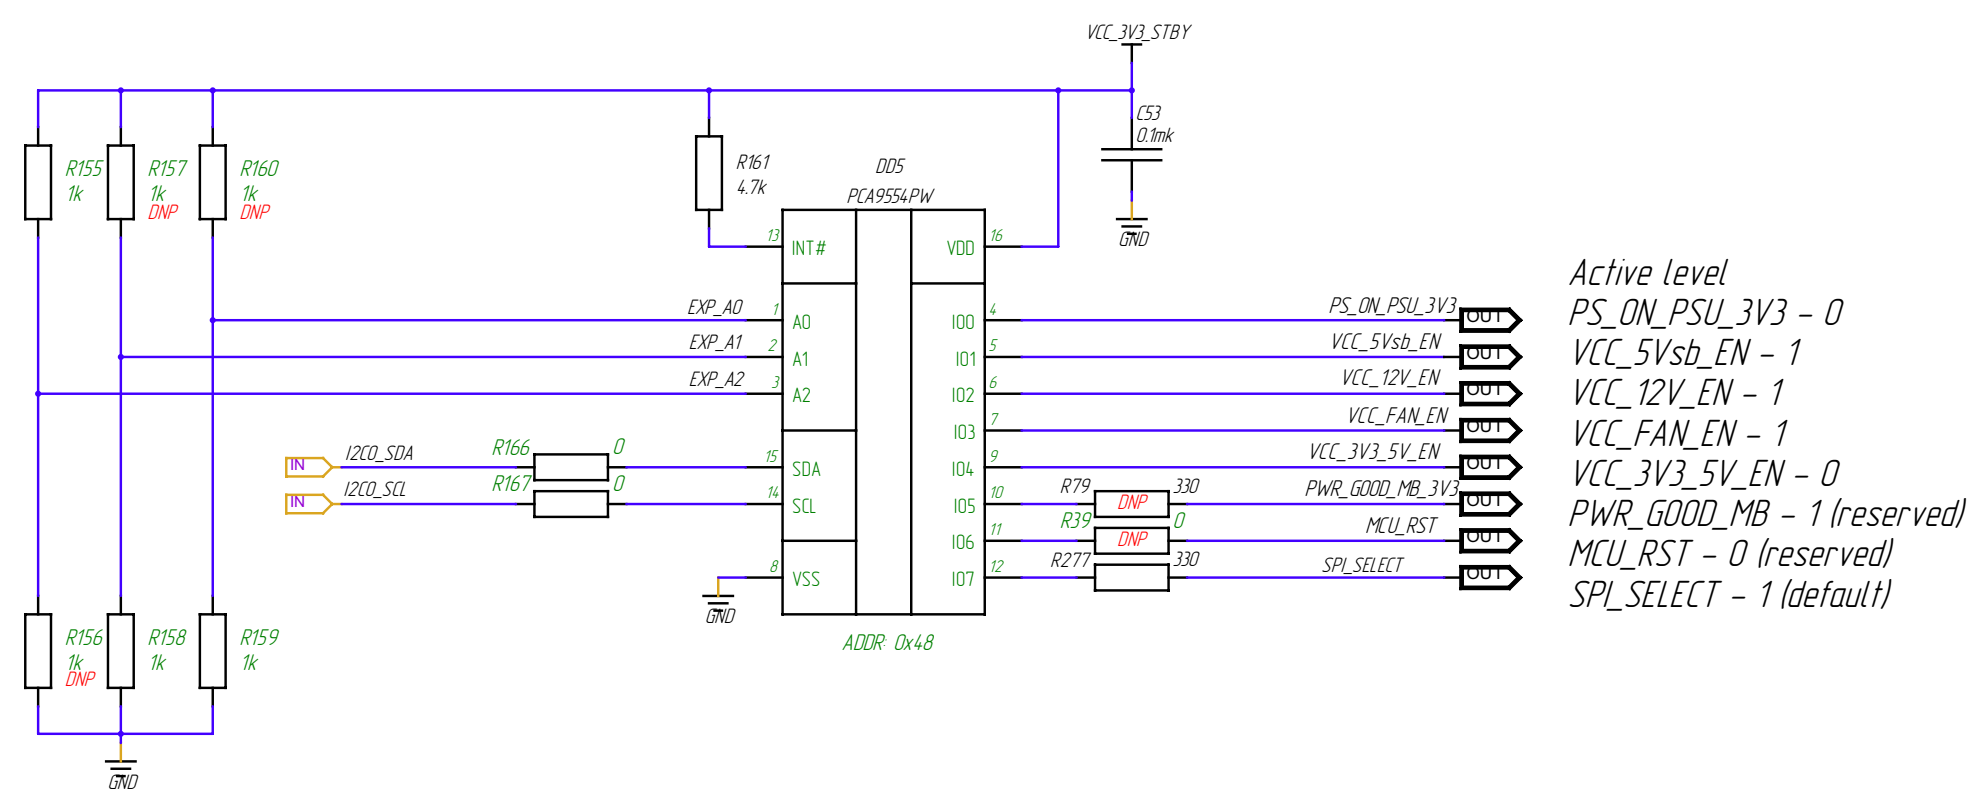
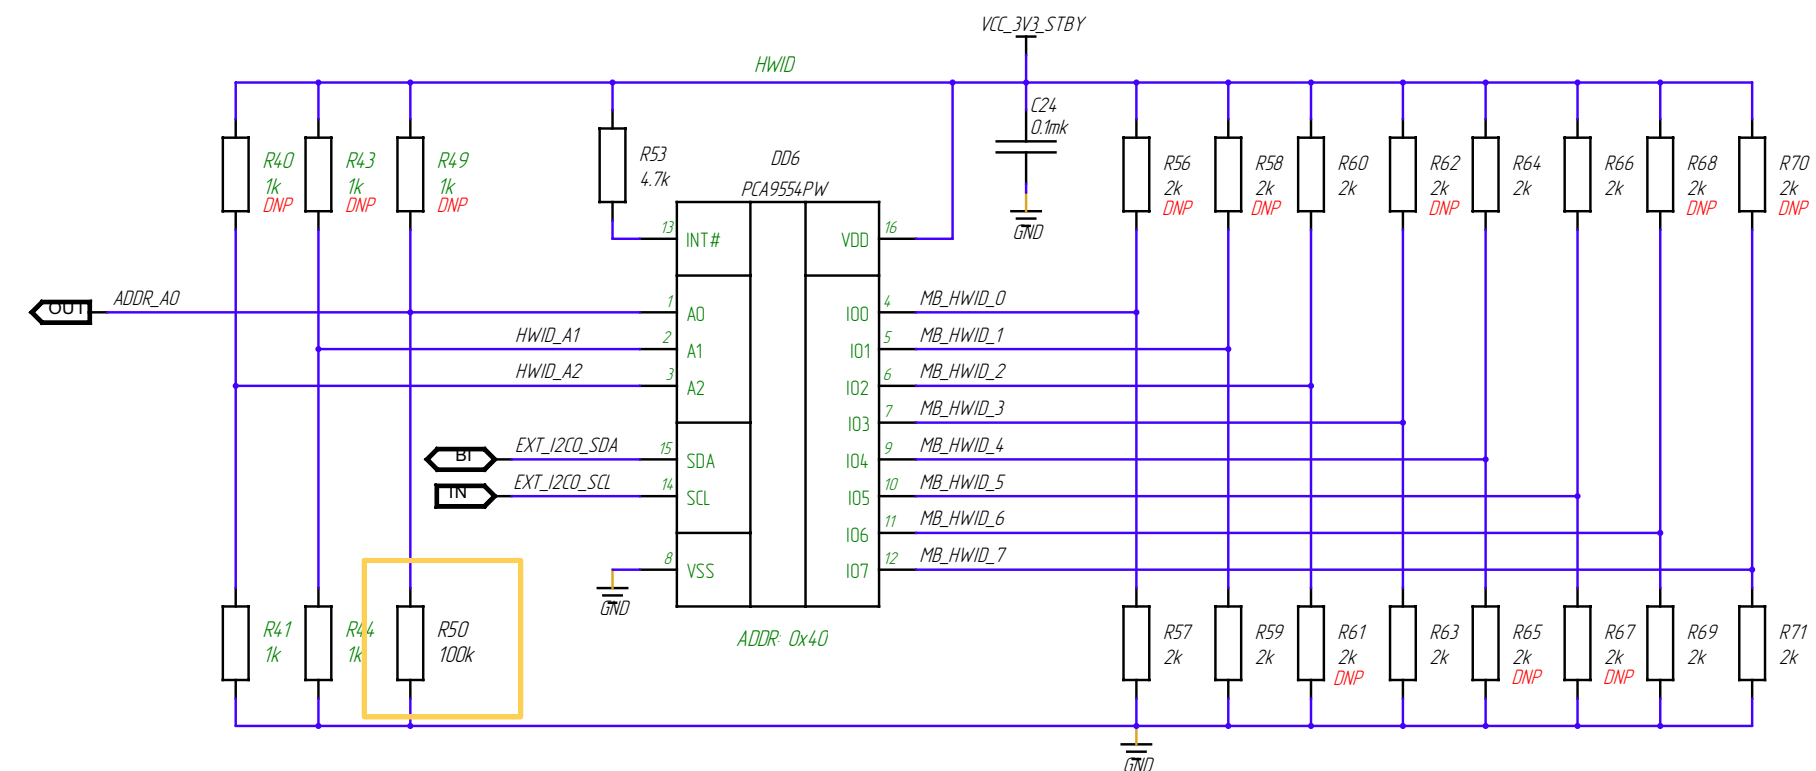
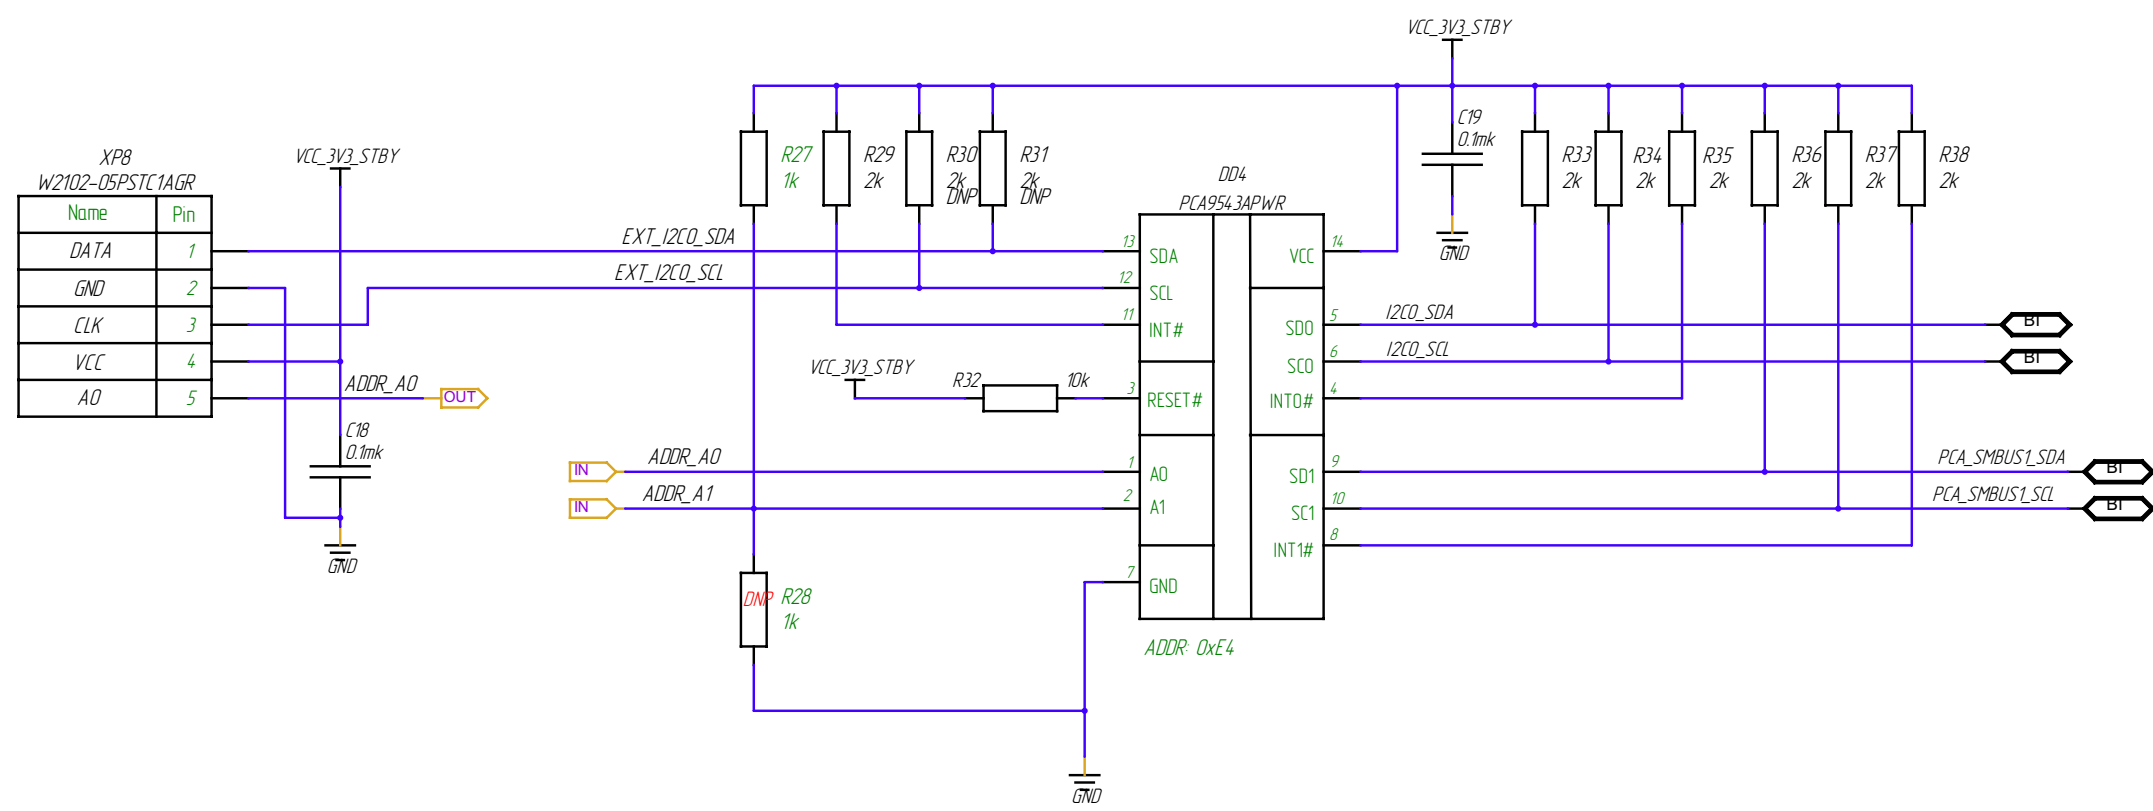
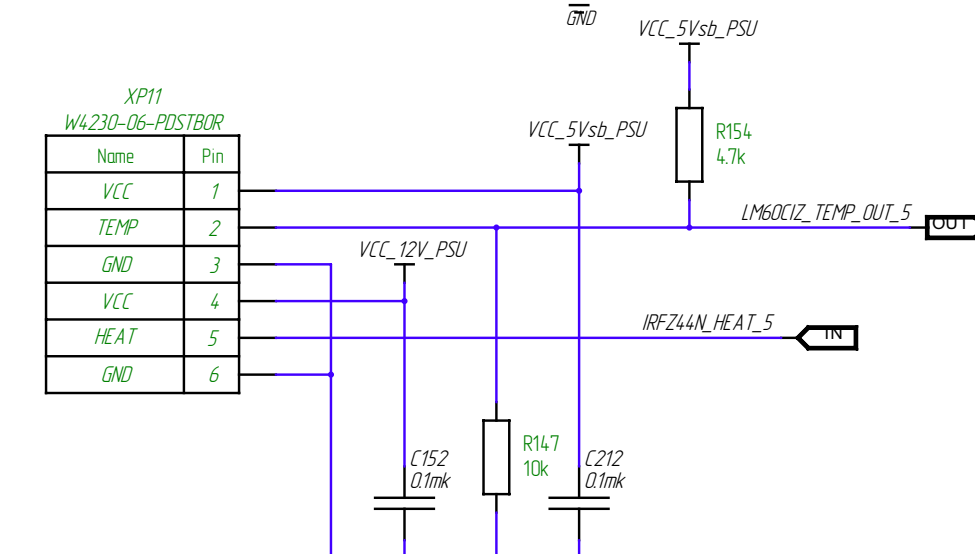
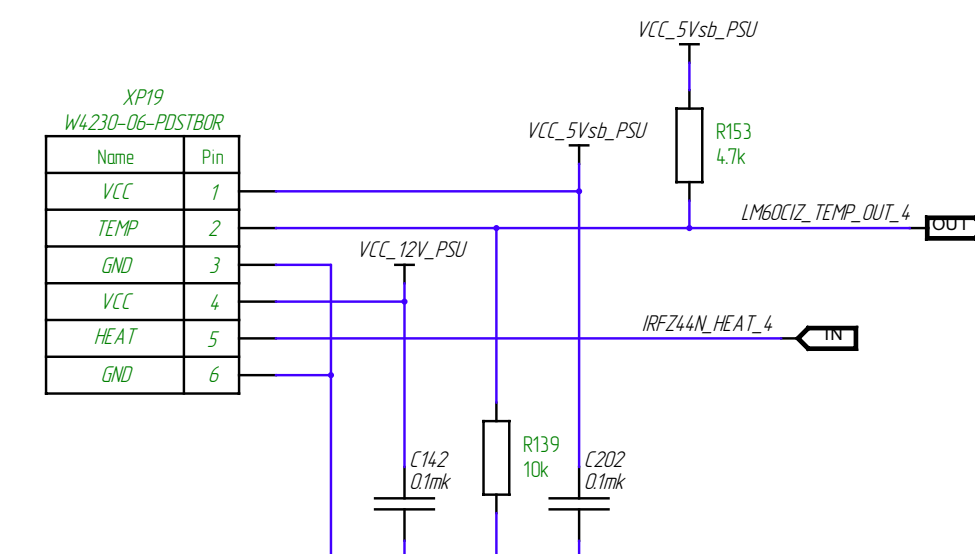
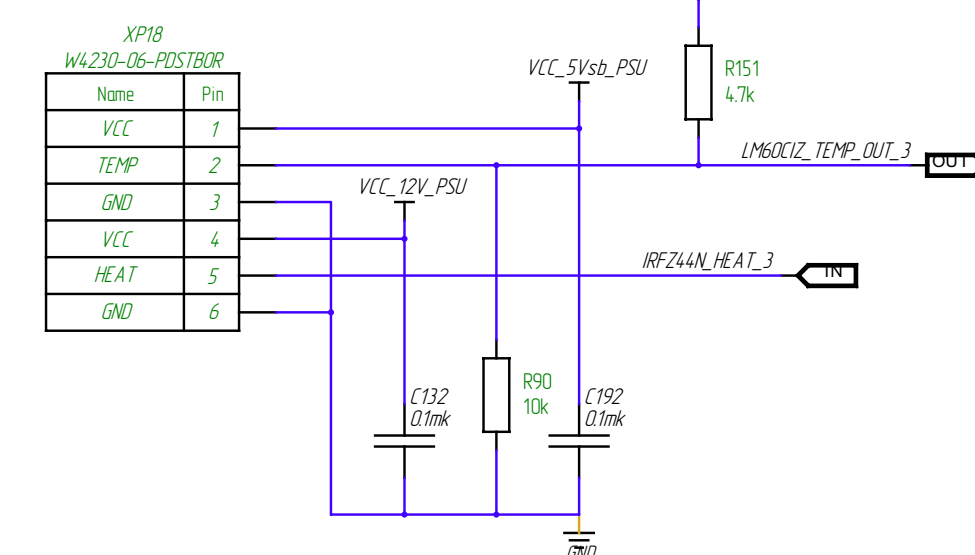
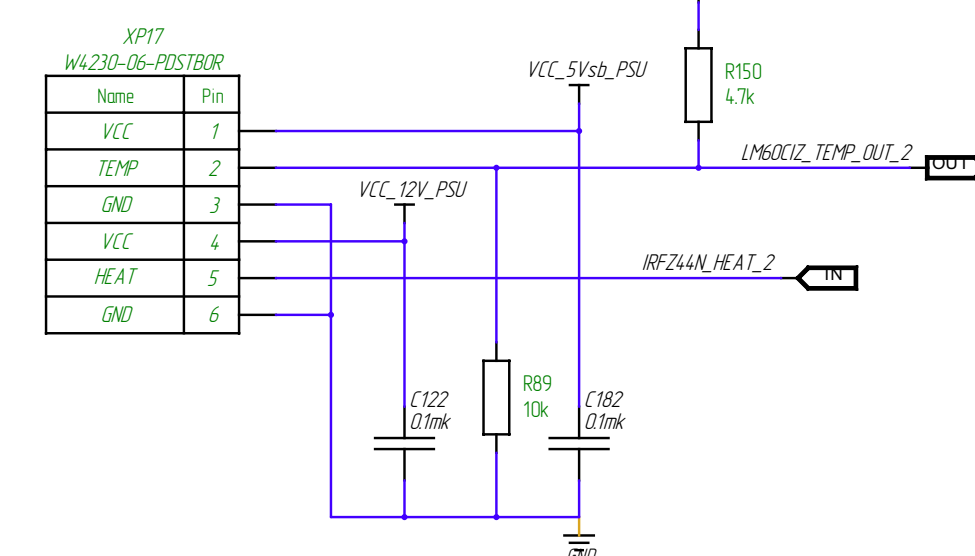
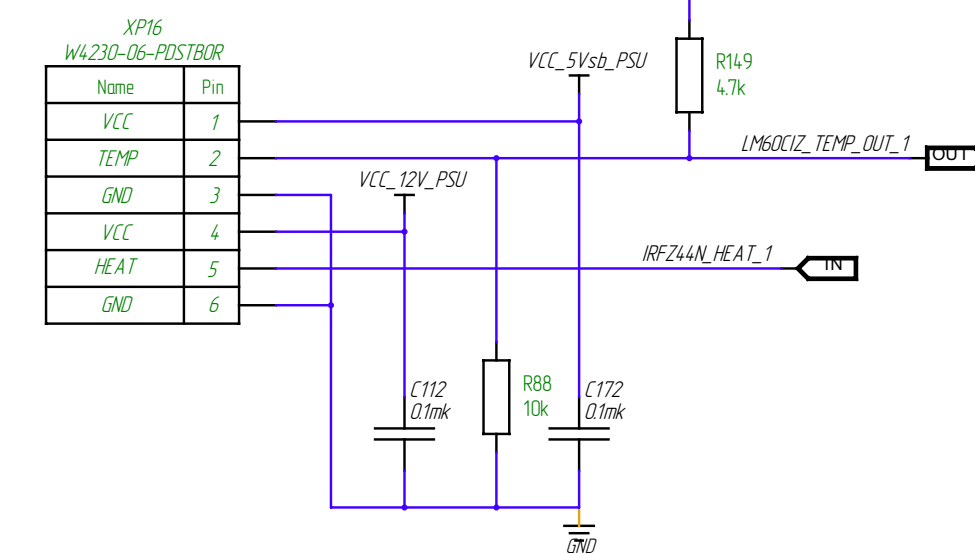
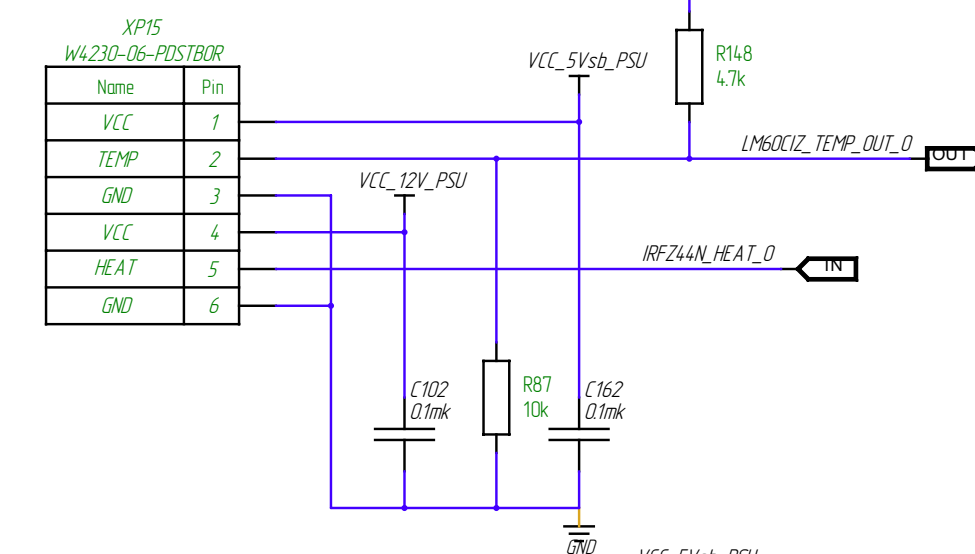
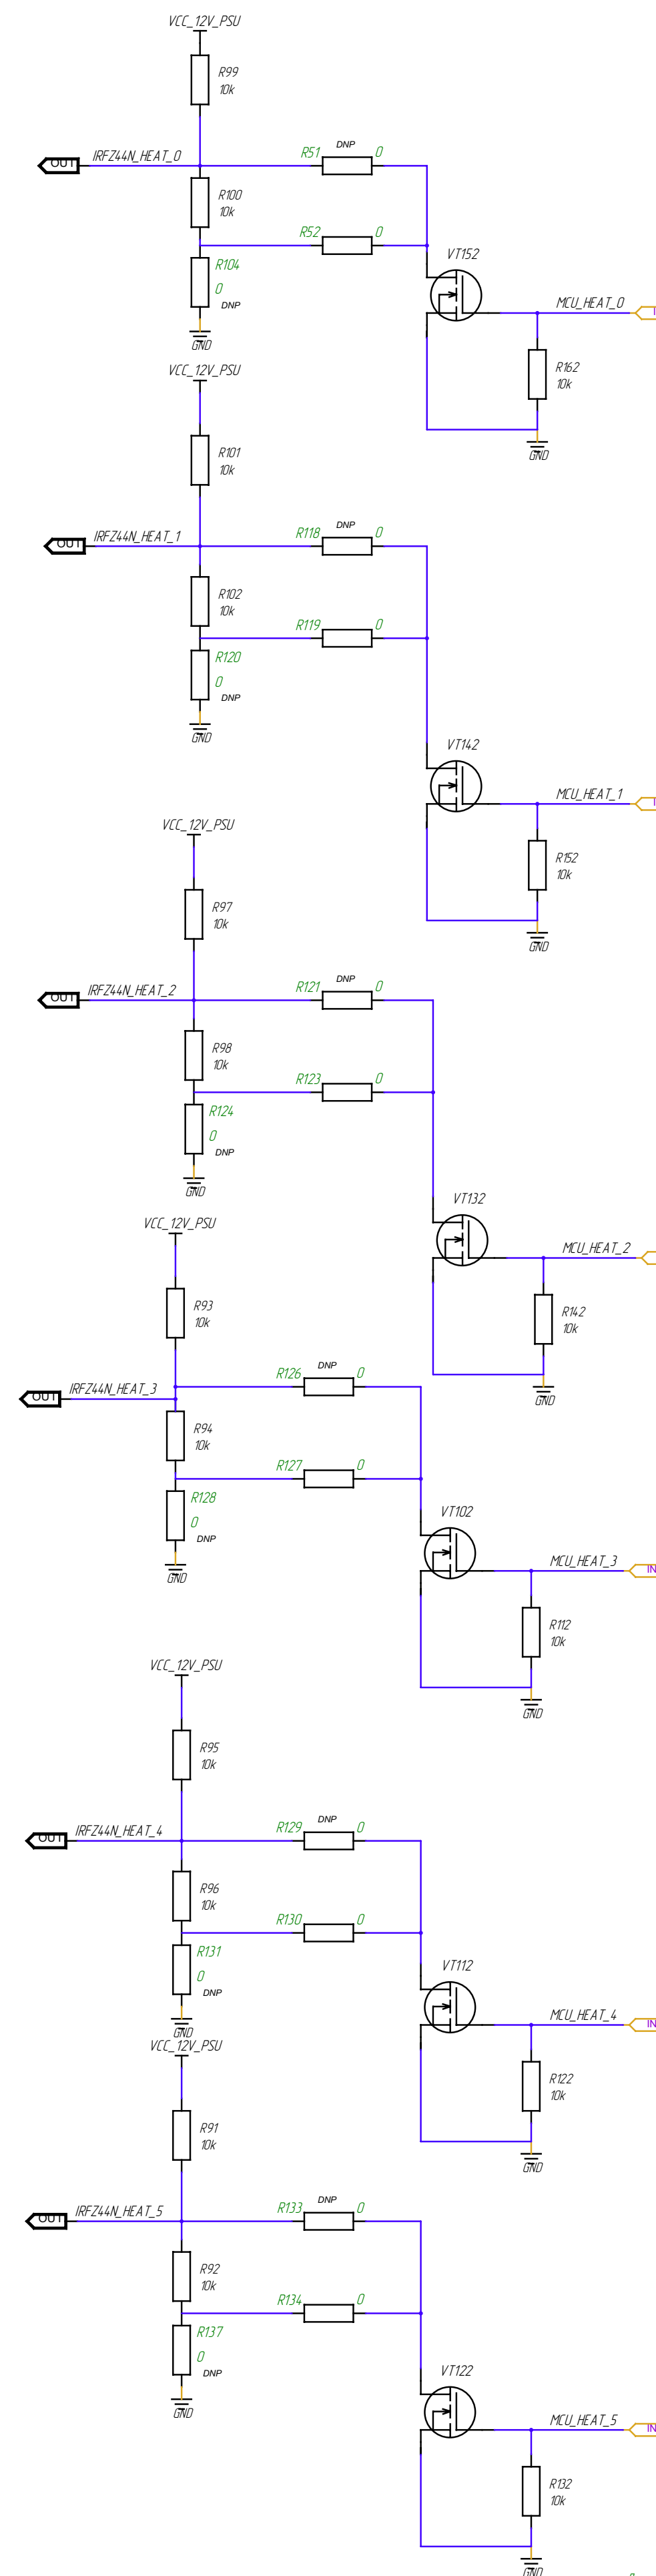
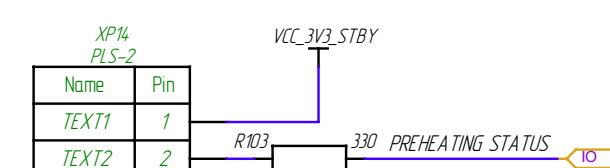
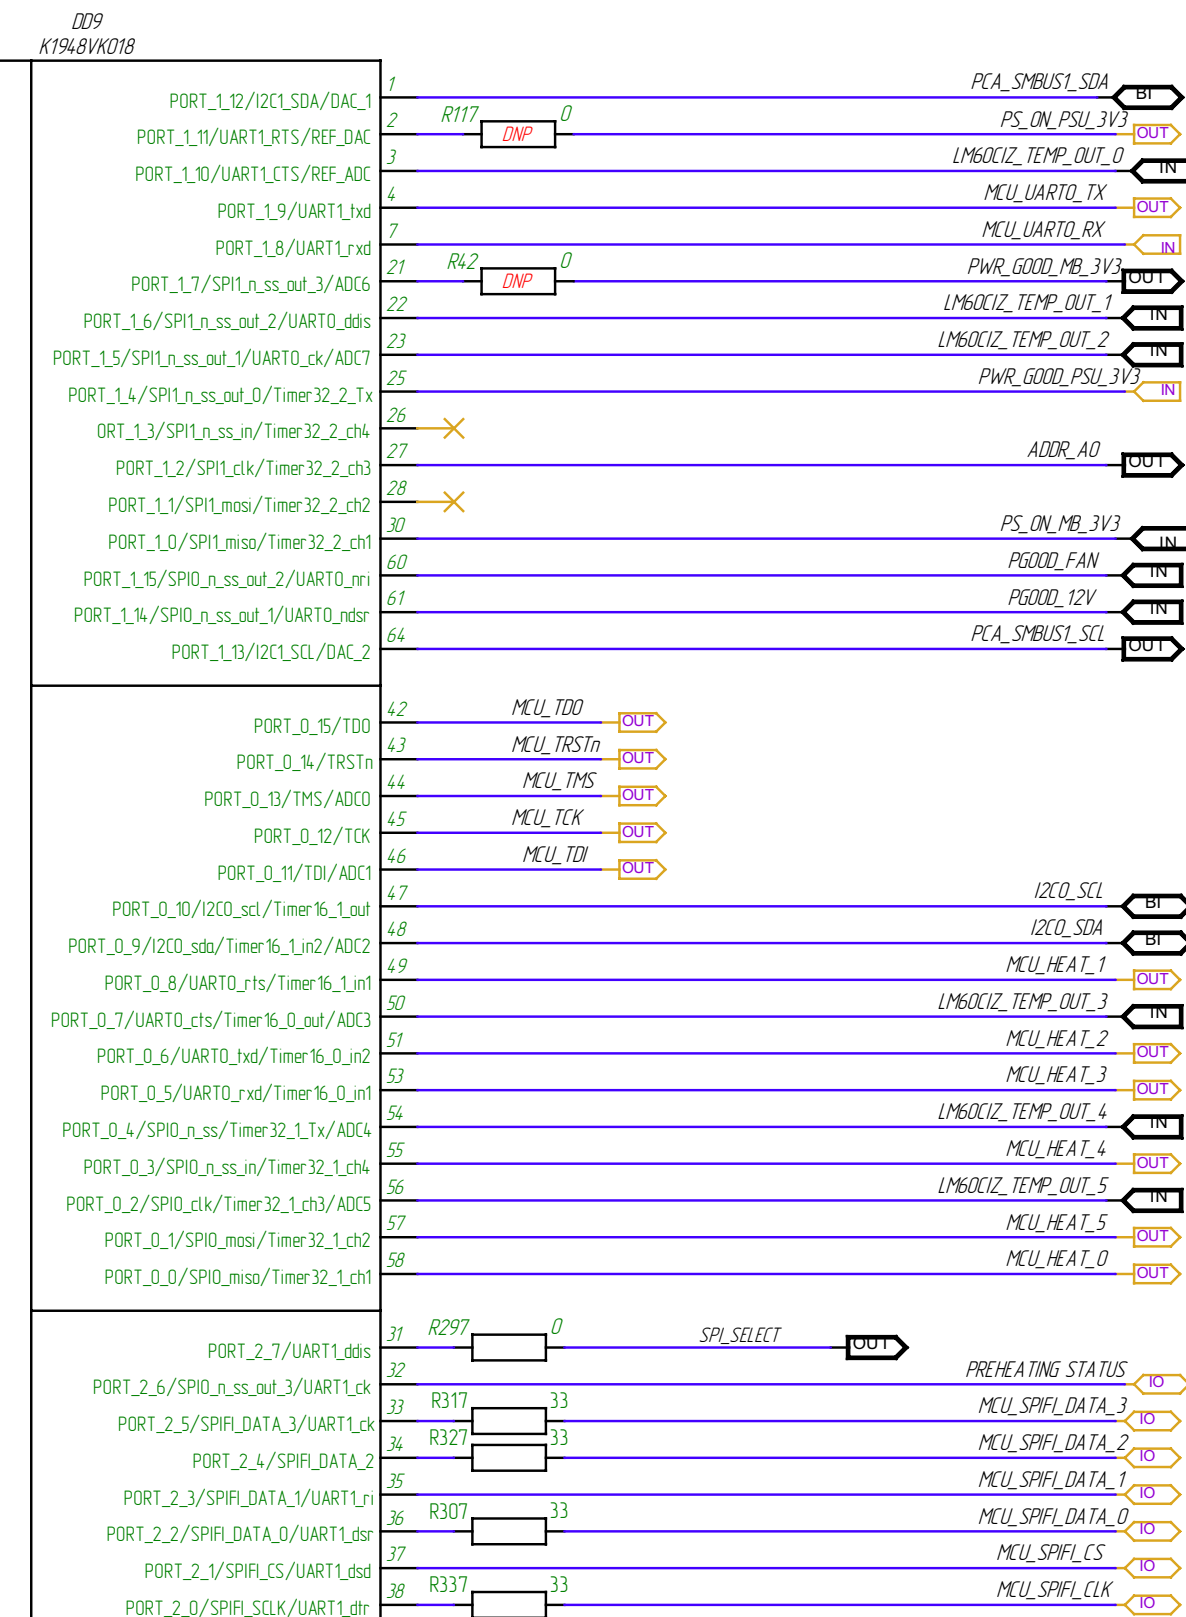
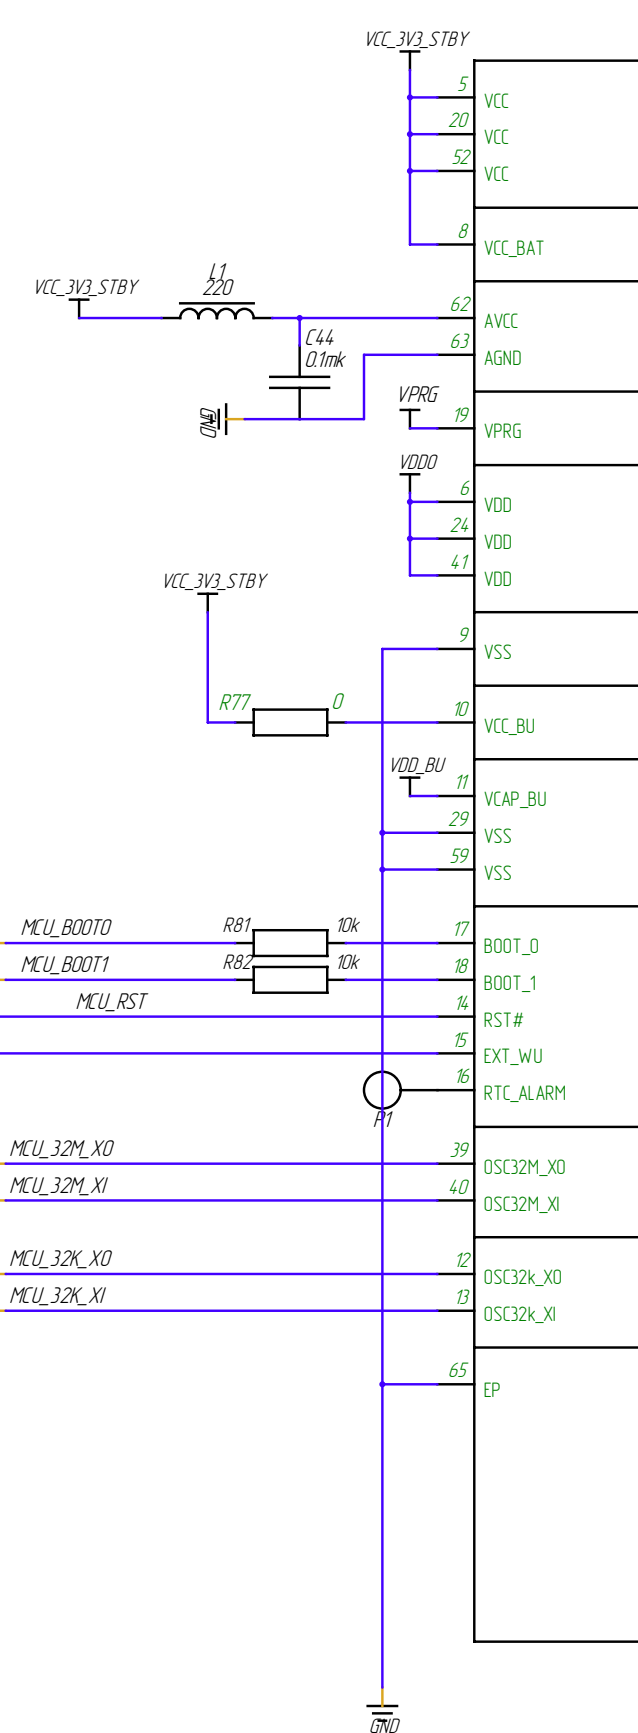
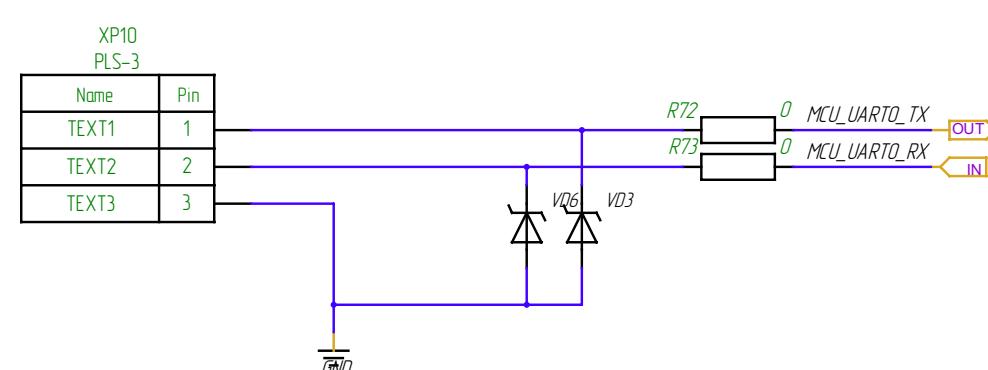

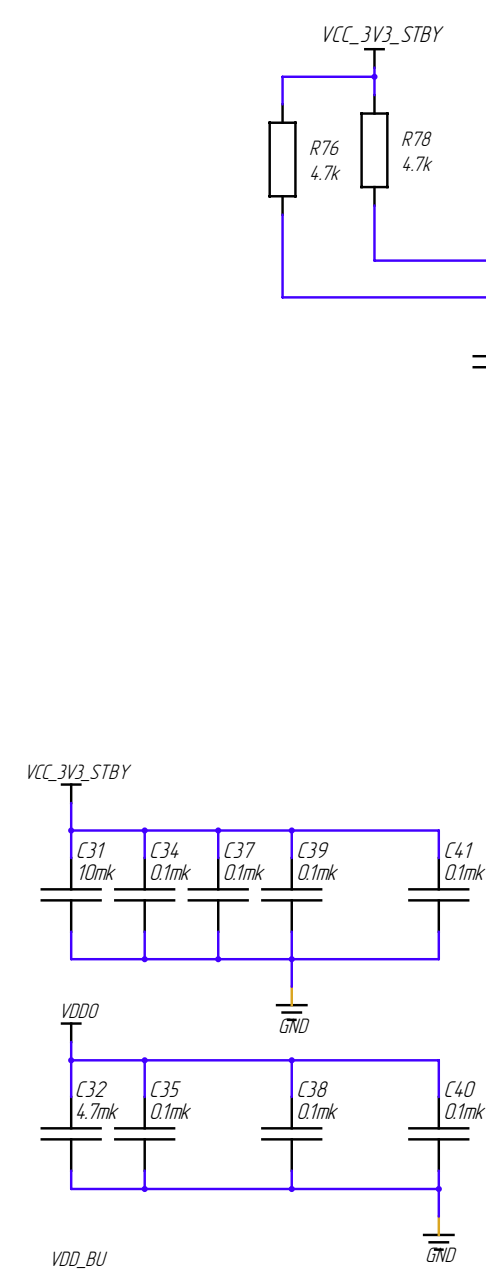


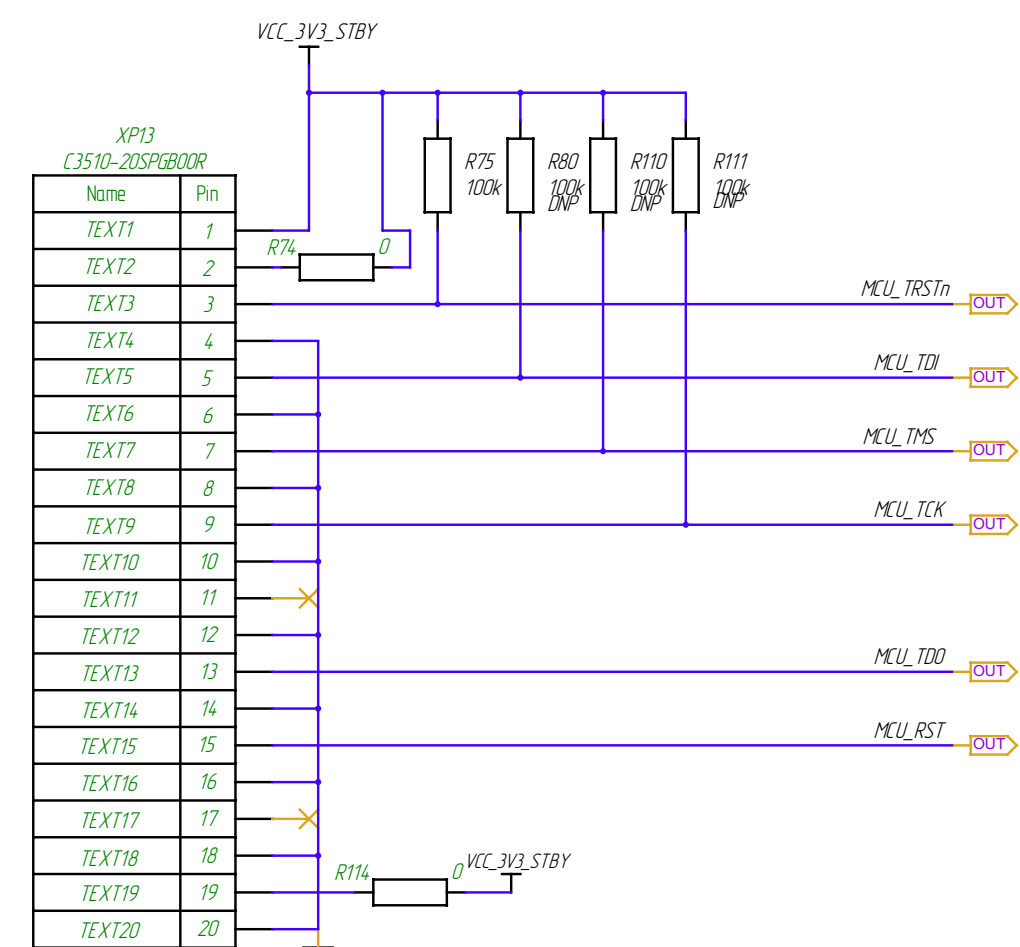

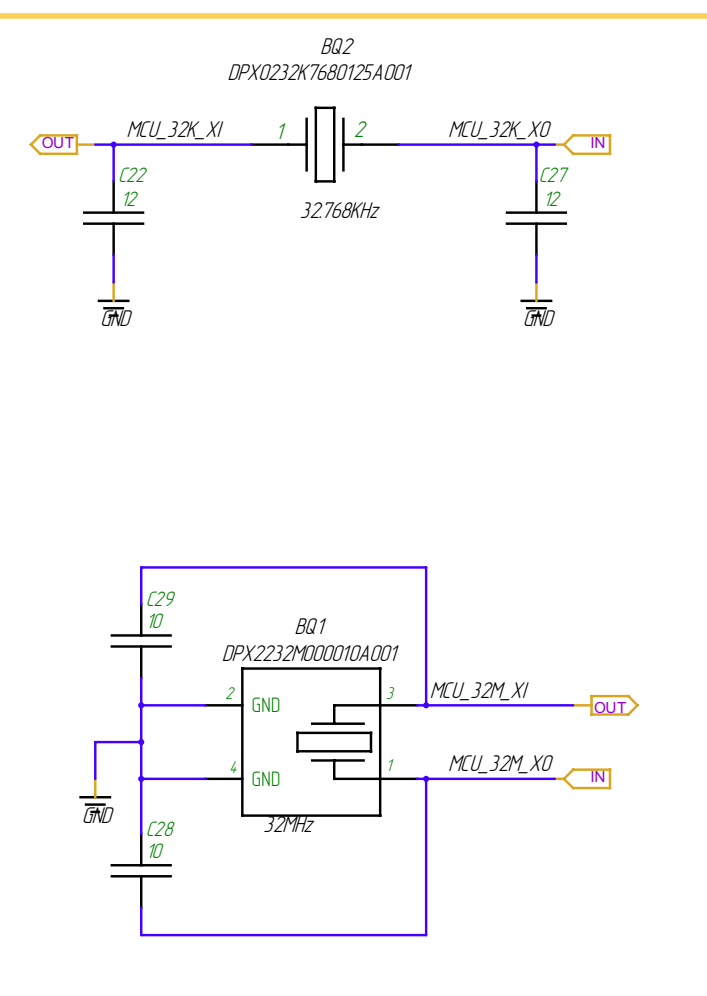

Default logic:
SPL_SELECT = 1 (default / no actions) :
FLASH1 to AMUR, FLASH2 to BMC
SPL_SELECT = 0 (driven by IO_Exp (DD5) or AMUR) :
FLASH1 to BMC, FLASH2 to AMUR

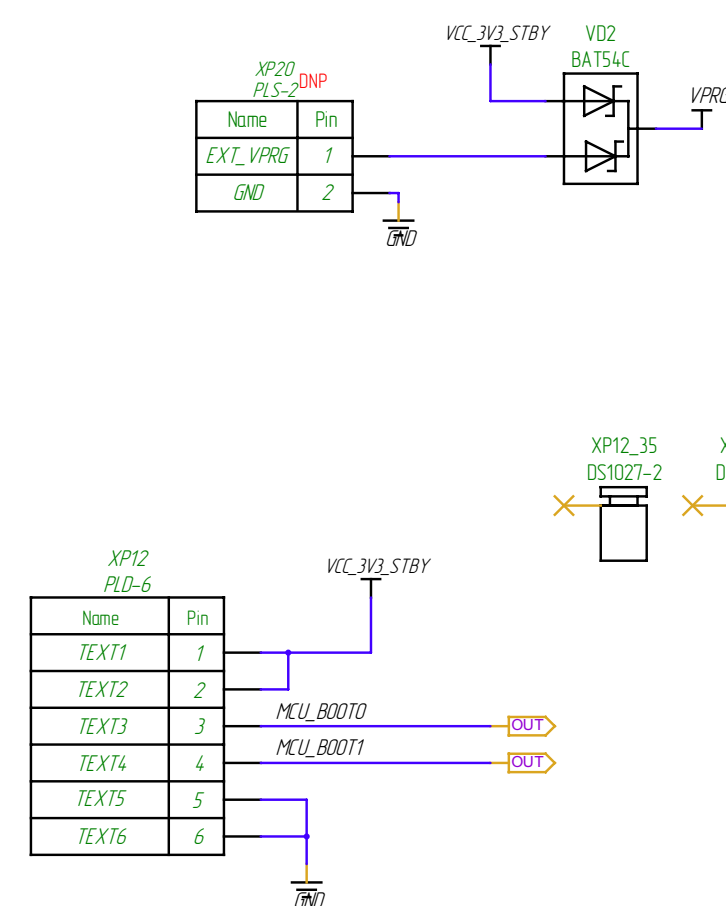

Для подогрева транзистором установить резистор 12 Ом 5 Вт с подтяжкой на VCC_12V_PSL