

TWO-TAC LLC DBA

AMERI ECANS

SELECT EQUIPMENT OVERVIEW



Doing whatever it takes,



To stand unrivaled in our field



10-STATION RESTROOM TRAILER




DESCRIPTION

- Total Functional Areas: 2, male and female compartments.
- Stall Types & Features: Male side has 2 toilets, 3 urinals, 2 sinks; female side has 5 toilets, 2 sinks; all commodes are foot-activated flushing with stainless-steel metered sinks.
- Interior Features: Non-wood, moisture-resistant interiors; internal vent fans; neutral palette; locking stalls.
- Comfort & Climate Control: HVAC; interior/exterior lighting; winterized.
- Accessibility Features: Standard step access.
- AMERI-CANS Build Notes: High-traffic durability and serviceability for large crews.

CRITICAL SPECIFICATIONS

- Power Requirements: 1×50A/240v CS6364C inlet or 3×20A/120v or 4×30A/120v NEMA L5-30 or 4×15A/120v.
- Fresh Water Capacity: 200 gallons or city-fill hookup.
- Waste Capacity: 980 gallons
- Footprint: 30' L (including tongue) × 12'6" W (stairs down) × 11'8" H.

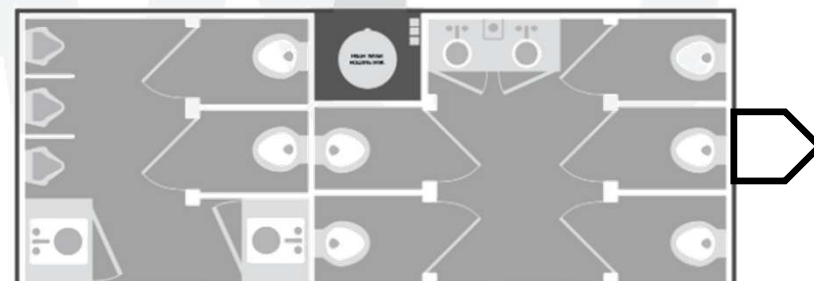

CRITICAL SPECS



Type	Nomenclature	Total Compartments	Total Women's Compartment Toilets	Total Men's Compartment Toilets	Individual Compartment Toilets	Urinals	Sinks	Overall Length (w/Tongue)	Overall Width (stairs down)	Overall Height	Tare Weight	Onboard Water Capacity (gal)	Onboard Waste Capacity (gal)	Evacuation / Dump Valve Size	City Fill Size	Power Supply	Minimum Functional Power (without heat)	MOCP Rating
Restroom Trailer	8-Stall	8	N/A	N/A	8	8	8	35	11ft	11.5ft	12,940 lbs	400 (2x200)	1000	3"	Std. Garden Hose	1x50A/240v Cali-Standard (CS6364C) Inlet or 3x 20A/120v	2x 20A/120v	50A
Restroom Trailer	10-Station	2	5	2	N/A	3	4	29	11ft	11.5ft	11,900 lbs	200	1000	3"	Std. Garden Hose	1x50A/240v Cali-Standard (CS6364C) Inlet or 3x 20A/120v	2x 20A/120v	50A
Seacan Restroom	10-Stall	10	N/A	N/A	10	8	10	40ft	8.5ft	9.5ft	22,000 lbs	1000	1100	3"	N/A	1x100A/240v direct to panel or Series 16 Cam connections	1x100A/240v	100A
Restroom Trailer	10-Station	2	5	2	N/A	3	4	30ft	12.6ft	11.8ft	9,800 lbs	200	950	2"	Std. Garden Hose	4x30A/120v NEMA L5-30 Twist Lock 120v or 4x 15A/120v	2x 15A/120v	30A
Restroom Trailer	4-Stall	4	N/A	N/A	4	0	4	19ft	7.6ft	11.3	5,280 lbs	200	440	2"	Std. Garden Hose	3x30A/120v NEMA L5-30 Twist Lock 120v or 3x 15A/120v	2x15A/120v	30A
Restroom Trailer	4-Stall	4	N/A	N/A	4	2	4	23ft	11ft	11.3	6,960 lbs	200	480	3"	Std. Garden Hose	1x50A/240v Cali-Standard (CS6364C) Inlet or 3x 20A/120v	2x 20A/120v	50A
Seacan Restroom	10-Station-F (Flushing)	2	2	6	N/A	2	3	40ft	8.5ft	9.5ft	26,000 lbs	850	1000	2"	N/A	1x100A/240v direct to panel or Series 16 Cam connections	1x100A/240v	100A
Seacan Restroom	12-Station-Handwash (non-Flushing)	2	2	8	N/A	2	3	40ft	8.5ft	9.5ft	22,000 lbs	270 (3x90gal)	250	2"	N/A	1x100A/240v direct to panel or Series 16 Cam connections	1x100A/240v	100A
Seacan Restroom	15-Station (non-Flushing)	2	3	10	N/A	2	0	40ft	8.5ft	9.5ft	20,000 lbs	N/A	N/A	N/A	N/A	1x100A/240v direct to panel or Series 16 Cam connections	1x100A/240v	100A
Seacan Utility	Bootwash	1	N/A	N/A	N/A	N/A	N/A	20ft	8ft	9.5ft	8,000 lbs	400 (x2 200)	N/A	N/A	N/A	1x50A/240v Cali-Standard (CS6364C) Inlet	1x50A/240v	30A
Restrom Shower	8-Stall	8	N/A	N/A	N/A	N/A	8	32ft	10.5ft	11.6ft	12,500 lbs	200	1100	2"	Std. Garden Hose	4x30A/120v NEMA L5-30 Twist Lock 120v or 4x 15A/120v	2x 15A/120v	30A