

TWO-TAC LLC DBA

AMERI ECANS

SELECT EQUIPMENT OVERVIEW



Doing whatever it takes,



To stand unrivaled in our field



ADA +2 – FAMILY FRIENDLY RESTROOM TRAILER



KEY CHARACTERISTICS

- Total Functional Areas: 3 Stalls (2 standard + 1 ADA/family)
- Stall Types: 1 male (w/urinal), 1 female and 1 fully ADA compliant with baby changing station
- Interior Features: Non-wood moisture-resistant materials, vent fans, neutral palette
- Comfort & Climate Control: HVAC, interior/exterior lighting, winterized
- Accessibility: ADA ramp, hydraulic lowering, expanded space
- AMERI-CANS Build Notes: Durable, easy-clean, field-ready

CRITICAL SPECIFICATIONS

- Power Requirements: 4×30A/120v or 4×15A/120v
- Fresh Water Capacity: 200 gallons or city-fill hookup
- Waste Capacity: 425 gallons
- Footprint: 29'6" L × 12'8" W × 11'5" H



4-STALL RESTROOM TRAILER




KEY CHARACTERISTICS

- Total Functional Areas: 4 Stalls
- Stall Types: 4 each with toilet (marine or reservoir style available), sink, paper towels and soap dispensers
- Interior: Vent fans, moisture-resistant, doors direct to outside
- Comfort & Climate Control: HVAC, interior/exterior lighting, winterized
- AMERI-CANS Build Notes: flushing toilets, high durability

CRITICAL SPECIFICATIONS

- Power Requirements: 3×30A/120v NEMA L5-30 twist-lock or 3×15A/120v or 1×50A/240v CS6364C inlet or 3×20A/120v.
- Fresh Water Capacity: 200 gallons or city-fill hookup.
- Waste Capacity: 440 gallons
- Footprint: 19' L (marine toilet) or 23' L (reservoir toilet, including tongue) × 7'6" W (stairs down) × 11'6" H.

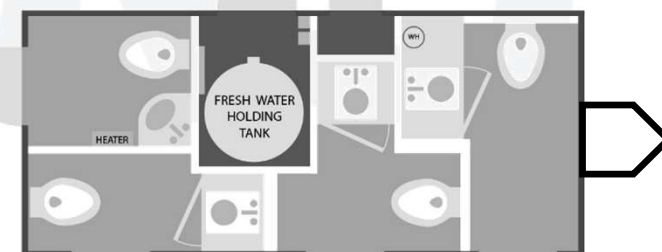

10-STATION RESTROOM TRAILER




DESCRIPTION

- Total Functional Areas: 2, male and female compartments.
- Stall Types & Features: Male side has 2 toilets, 3 urinals, 2 sinks; female side has 5 toilets, 2 sinks; all commodes are foot-activated flushing with stainless-steel metered sinks.
- Interior Features: Non-wood, moisture-resistant interiors; internal vent fans; neutral palette; locking stalls.
- Comfort & Climate Control: HVAC; interior/exterior lighting; winterized.
- Accessibility Features: Standard step access.
- AMERI-CANS Build Notes: High-traffic durability and serviceability for large crews.

CRITICAL SPECIFICATIONS

- Power Requirements: 1×50A/240v CS6364C inlet or 3×20A/120v or 4×30A/120v NEMA L5-30 or 4×15A/120v.
- Fresh Water Capacity: 200 gallons or city-fill hookup.
- Waste Capacity: 980 gallons
- Footprint: 30' L (including tongue) × 12'6" W (stairs down) × 11'8" H.

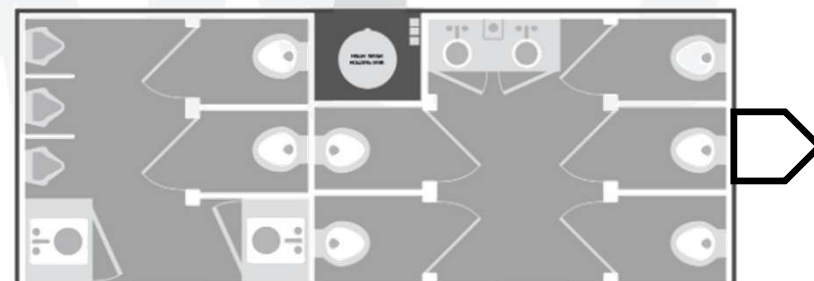

8-STALL RESTROOM TRAILER






DESCRIPTION

- Total Functional Areas: 8 independently accessed, private restrooms.
- Stall Types & Features: Each cabin includes a flushing reservoir toilet, urinal, sink, and soap dispenser.
- Interior Features: Industrial moisture-resistant floors; internal vent fans; neutral interior palette.
- Comfort & Climate Control: Compartment heaters and HVAC; fully winterized.
- Accessibility Features: Individual exterior-entry stalls for privacy and flow.
- AMERI-CANS Build Notes: Maximizes individual privacy and comfort; built-to-spec design without using marine toilets for superior survivability.

CRITICAL SPECIFICATIONS

- Power Requirements: 1x50A/240v CS6364C inlet or 3x20A/120v.
- Fresh Water Capacity: 400 gallons or city-fill hookup.
- Waste Capacity: 990 gallons
- Footprint: 35' L (including tongue) × 11' W (stairs down) × 11'5" H.

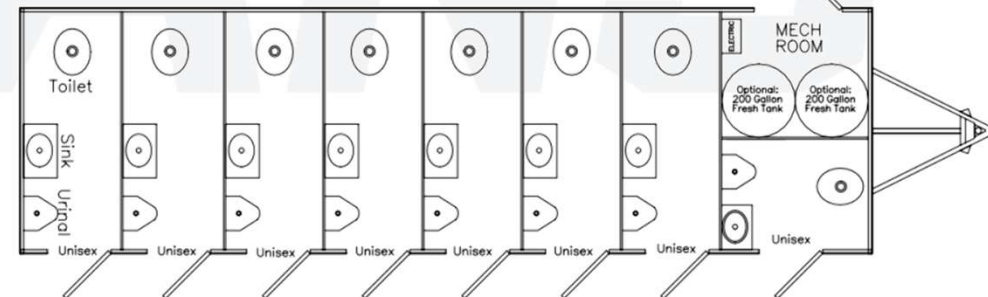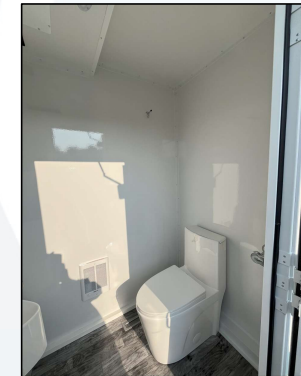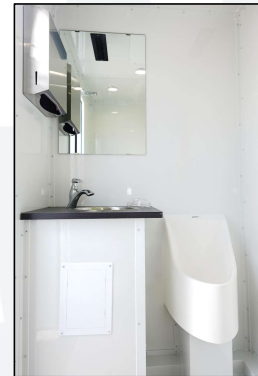

WATER STATION



DESCRIPTION

- Total Functional Areas: On-demand drinking water station with multi-point access.
- Features: Fully self-contained 4-phase filtration (sediment, carbon, lead/carbon, UV light) with onboard water chillers.
- Features: Rugged, environmentally conscious components protected by polycarbonate paneling.
- Comfort & Climate Control: Delivers clean, chilled drinking water on-demand, fully winterized.
- Accessibility Features: 4 wall-mounted pushback valves for easy user access.
- AMERI-CANS Build Notes: Reduces single-use plastic bottles and improves jobsite cleanliness and sustainability.

CRITICAL SPECIFICATIONS

- Power Requirements: 1×50A/240v or 1–3×20A/120v.
- Water Capacity: 300 gallons self-contained potable water tank.
- Dimensions (L × W × H): 5'6" D × 9'1" W × 7'3" H.
- Additional Technical Notes: hoisting points and adjustable casters.



8-STALL SHOWER TRAILER





DESCRIPTION

- Total Functional Areas: 8 private shower compartments.
- Stall Types & Features: Each cabin includes a shower with dressing area, garment hooks and a hygiene sink.
- Interior Features: Non-wood, moisture-resistant interiors; internal vent fans; neutral palette.
- Comfort & Climate Control: HVAC; fully winterized for year-round operation.
- Accessibility Features: Standard stair access with individual doors.
- AMERI-CANS Build Notes: Built for durability, sanitation, and high-throughput shower service.

CRITICAL SPECIFICATIONS

- Power Requirements: 4×30A/120v NEMA L5-30 or 4×15A/120v.
- Fresh Water Capacity: 200 gallons or city-fill hookup.
- Waste Capacity: 1,100 gallons
- Footprint: 32' L (including tongue) × 10'6" W (stairs down) × 11'6" H.

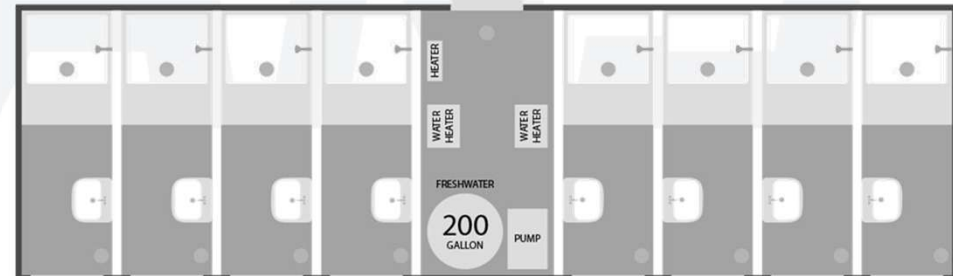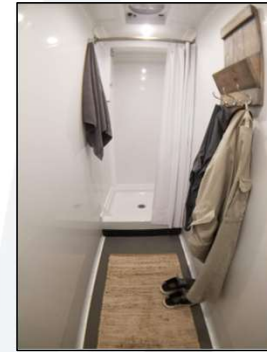

15-HEAD FLUSHLESS SEACAN – MARK I




DESCRIPTION

- Total Functional Areas: 15 total heads across 2 compartments.
- Stall Types & Features: Male side with 10 stalls and 2 urinals; female side with 3 stalls; all non-flushing basins with internal holding tanks.
- Interior Features: Durable HDPE toilet basins; locking stalls; hand sanitizer dispensers; LED lighting.
- Comfort & Climate Control: Temperature-regulated by a 2.5-ton Bard or equivalent mini-split HVAC system.
- Accessibility Features: Ground-step level entry at container doors.
- AMERI-CANS Build Notes: Replaces large banks of portables, eliminates blow-over risk, improves safety and sanitary conditions.

CRITICAL SPECIFICATIONS

- Power Requirements: 1×100A/240v direct to panel or Series 16 camlocks
- Fresh Water Capacity: N/A (flushless system).
- Waste Capacity: Internal holding tanks serviced by route technicians.
- Footprint (Required Pad): 40' L × 10' W level, packed surface.
- Additional Technical Notes: Requires grounding once permanent electrical service is connected and improved road access within 20' of entry doors.

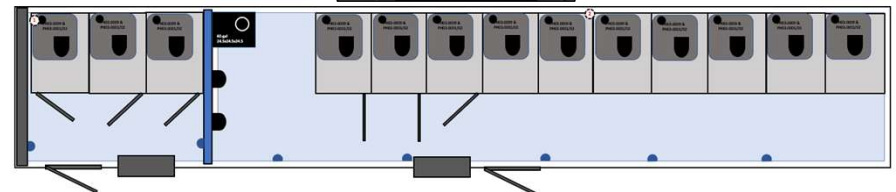

12-HEAD FLUSHLESS SEACAN w/ HOT WATER SINKS – MARK II




DESCRIPTION

- Total Functional Areas: 12 total heads across 2 compartments.
- Stall Types & Features: Male side with 8 stalls, 2 urinals, 2 hot-water sinks female side with 2 stalls and 1 hot-water sink.
- Interior Features: Durable HDPE toilet basins; mirrors; locking stalls; hot-handwash capability for ~500 hand-washes per fillup*.
- Comfort & Climate Control: HVAC via 2.5-ton Bard unit.
- Accessibility Features: Ground-step level container access.
- AMERI-CANS Build Notes: Eliminates the need for large banks of portables and reduces blow-over risk while enhancing sanitary conditions.

* Based on 20 seconds of average duration

CRITICAL SPECIFICATIONS

- Power Requirements: 1×100A/240v direct to panel or Series 16 camlocks
- Fresh Water Capacity: 300 gallons
- Waste Capacity: Proportionate to use; serviced by route technicians.
- Footprint (Required Pad): 40' L × 10' W level, packed surface.
- Additional Technical Notes: Requires grounding once permanent electrical service is connected and road access within 20' of entry doors.

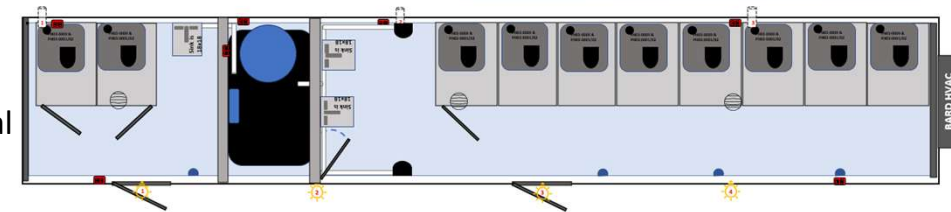

10-HEAD FLUSHING SEACAN w/ HOT WATER SINKS – MARK III





DESCRIPTION

- Total Functional Areas: 10 total heads across 2 compartments.
- Stall Types & Features: Male side with 6 stalls, 2 urinals, 2 hot-water sinks; female side with 2 stalls and 1 hot-water sink; all with flushing toilets.
- Interior Features: Durable reservoir toilets; mirrors; locking stalls; hot-water handwash and dependability of gravity waste flushing for ~460 uses.
- Comfort & Climate Control: 2.5-ton Bard HVAC for temperature control.
- Accessibility Features: Three-step container access on defined footprint.
- AMERI-CANS Standards & Build Notes: Self-contained unit delivering high-capacity, high-comfort sanitation far beyond standard portable toilets.

* Assumes each use is a toilet flush and 20sec handwash. Capacity will increase with urinal use instead of toilet.

CRITICAL SPECIFICATIONS

- Power Requirements: 1×100A/240v direct to panel or Series 16 camlocks.
- Fresh Water Capacity: 900 gallons
- Waste Capacity: 1000 gallons
- Footprint (Required Pad): 40' L × 10' W level, packed surface.
- Additional Technical Notes: Requires grounding and improved road access within 20' of entry doors.

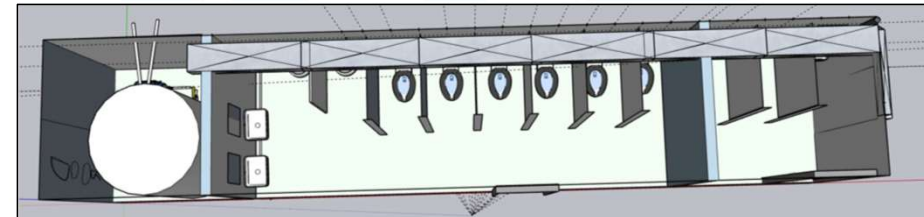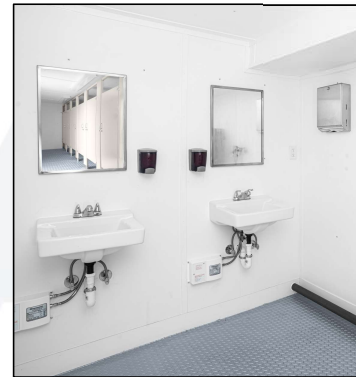

10-STALL FLUSHING SEACAN w/ HOT WATER SINKS – MARK IV




DESCRIPTION


- Total Functional Areas: 10 private, exterior-entry stalls.
 - Stall Types & Features: 8 stalls with urinals and 2 without; all equipped with flushing toilets, hot handwash, and hand dryers; access-enabled entry compatible with connected jobsite systems.
 - Interior Features: Dedicated supply and return HVAC per stall; wall-mounted fixtures; water-proof, reinforced industrial flooring; winterized.
 - Comfort & Climate Control: Full climate control in each stall
 - Accessibility Features: Exterior-entry private stalls for flexible user flow.
 - AMERI-CANS Build Notes: ~1,000 flushed uses per service cycle*; engineered to raise the standard, reduce cleaning time and exposure.
- * Assumes each use is a toilet flush and 20sec handwash. Use capacity will increase with urinal use instead of toilet.

CRITICAL SPECIFICATIONS

- Power Requirements: 1x100A/240v direct to panel or Series 16 camlocks.
- Fresh Water Capacity: 1000 gallons
- Waste Capacity: 1100 gallons
- Footprint (Required Pad): 40' L x 10' W level, packed surface.
- Additional Technical Notes: Requires grounding and improved road access within 20' of entry doors.

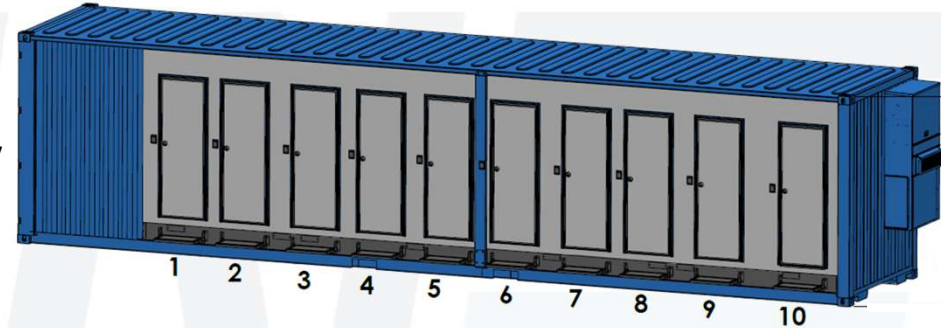

**Current Design – In Production,
December 15th, 2025 – Initial
Delivery January 2025**

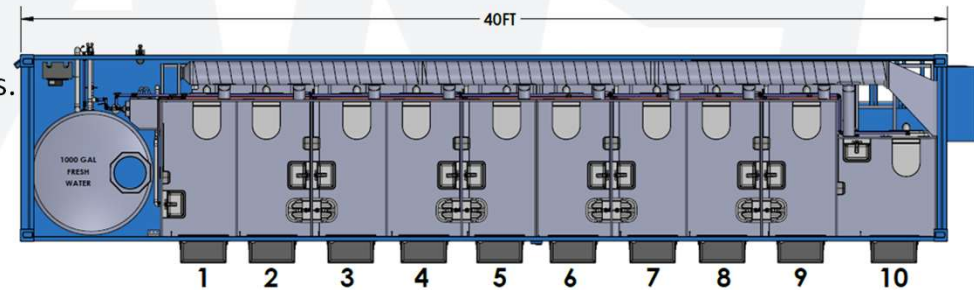

BOOTWASH STATION



DESCRIPTION

- Total Functional Areas: 1 open bootwash and gear-rinse station.
- Stall Types & Features: 4 handheld washdown lines co-located with a stability bar to support thorough rinse from all angles.
- Interior Features: Climate-controlled container interior designed for rugged, wet, muddy environments.
- Comfort & Climate Control: Temperature-regulated
- Accessibility Features: Two ingress/egress points supporting one-way foot-traffic flowthrough from one side to the other.
- AMERI-CANS Build Notes: Helps prevent “goop creep” by stopping mud, grime, and jobsite mess from reaching common areas, break tents, offices, or parking lots; supports site cleanliness, safety, and professionalism.

CRITICAL SPECIFICATIONS

- Power Requirements: 1x50A/240v CS6364C inlet.
- Fresh Water Capacity: 400 gallons onboard water storage.
- Waste Capacity: Dependent on site drainage or collection design.
- Footprint (Required Pad): 20' L x 10' W level, packed surface.
- Additional Technical Notes: Requires grounding once permanent electrical service is connected and improved road access within 20' of entry doors.



CRITICAL SPECS



Type	Nomenclature	Total Compartments	Total Women's Compartment Toilets	Total Men's Compartment Toilets	Individual Compartment Toilets	Urinals	Sinks	Overall Length (w/Tongue)	Overall Width (stairs down)	Overall Height	Tare Weight	Onboard Water Capacity (gal)	Onboard Waste Capacity (gal)	Evacuation / Dump Valve Size	City Fill Size	Power Supply	Minimum Functional Power (without heat)	MOCP Rating
Restroom Trailer	8-Stall	8	N/A	N/A	8	8	8	35	11ft	11.5ft	12,940 lbs	400 (2x200)	1000	3"	Std. Garden Hose	1x50A/240v Cali-Standard (CS6364C) Inlet or 3x 20A/120v	2x 20A/120v	50A
Restroom Trailer	10-Station	2	5	2	N/A	3	4	29	11ft	11.5ft	11,900 lbs	200	1000	3"	Std. Garden Hose	1x50A/240v Cali-Standard (CS6364C) Inlet or 3x 20A/120v	2x 20A/120v	50A
Seacan Restroom	10-Stall	10	N/A	N/A	10	8	10	40ft	8.5ft	9.5ft	22,000 lbs	1000	1100	3"	N/A	1x100A/240v direct to panel or Series 16 Cam connections	1x100A/240v	100A
Restroom Trailer	10-Station	2	5	2	N/A	3	4	30ft	12.6ft	11.8ft	9,800 lbs	200	950	2"	Std. Garden Hose	4x30A/120v NEMA L5-30 Twist Lock 120v or 4x 15A/120v	2x 15A/120v	30A
Restroom Trailer	4-Stall	4	N/A	N/A	4	0	4	19ft	7.6ft	11.3	5,280 lbs	200	440	2"	Std. Garden Hose	3x30A/120v NEMA L5-30 Twist Lock 120v or 3x 15A/120v	2x15A/120v	30A
Restroom Trailer	4-Stall	4	N/A	N/A	4	2	4	23ft	11ft	11.3	6,960 lbs	200	480	3"	Std. Garden Hose	1x50A/240v Cali-Standard (CS6364C) Inlet or 3x 20A/120v	2x 20A/120v	50A
Seacan Restroom	10-Station-F (Flushing)	2	2	6	N/A	2	3	40ft	8.5ft	9.5ft	26,000 lbs	850	1000	2"	N/A	1x100A/240v direct to panel or Series 16 Cam connections	1x100A/240v	100A
Seacan Restroom	12-Station-Handwash (non-Flushing)	2	2	8	N/A	2	3	40ft	8.5ft	9.5ft	22,000 lbs	270 (3x90gal)	250	2"	N/A	1x100A/240v direct to panel or Series 16 Cam connections	1x100A/240v	100A
Seacan Restroom	15-Station (non-Flushing)	2	3	10	N/A	2	0	40ft	8.5ft	9.5ft	20,000 lbs	N/A	N/A	N/A	N/A	1x100A/240v direct to panel or Series 16 Cam connections	1x100A/240v	100A
Seacan Utility	Bootwash	1	N/A	N/A	N/A	N/A	N/A	20ft	8ft	9.5ft	8,000 lbs	400 (x2 200)	N/A	N/A	N/A	1x50A/240v Cali-Standard (CS6364C) Inlet	1x50A/240v	30A
Restrom Shower	8-Stall	8	N/A	N/A	N/A	N/A	8	32ft	10.5ft	11.6ft	12,500 lbs	200	1100	2"	Std. Garden Hose	4x30A/120v NEMA L5-30 Twist Lock 120v or 4x 15A/120v	2x 15A/120v	30A