

Mobile Computing Sending Sensor Data to IoT Platforms

CC BY-SA, Thomas Amberg, FHNW
(Screenshots considered fair use)

Slides: tmb.gr/mc-eco

Overview


These slides show *IoT platforms, HTTP and MQTT*.

How to send data to an IoT platform / dashboard.


With HTTP and MQTT, two popular IoT protocols.

Define API, data format and information model.

Reference model

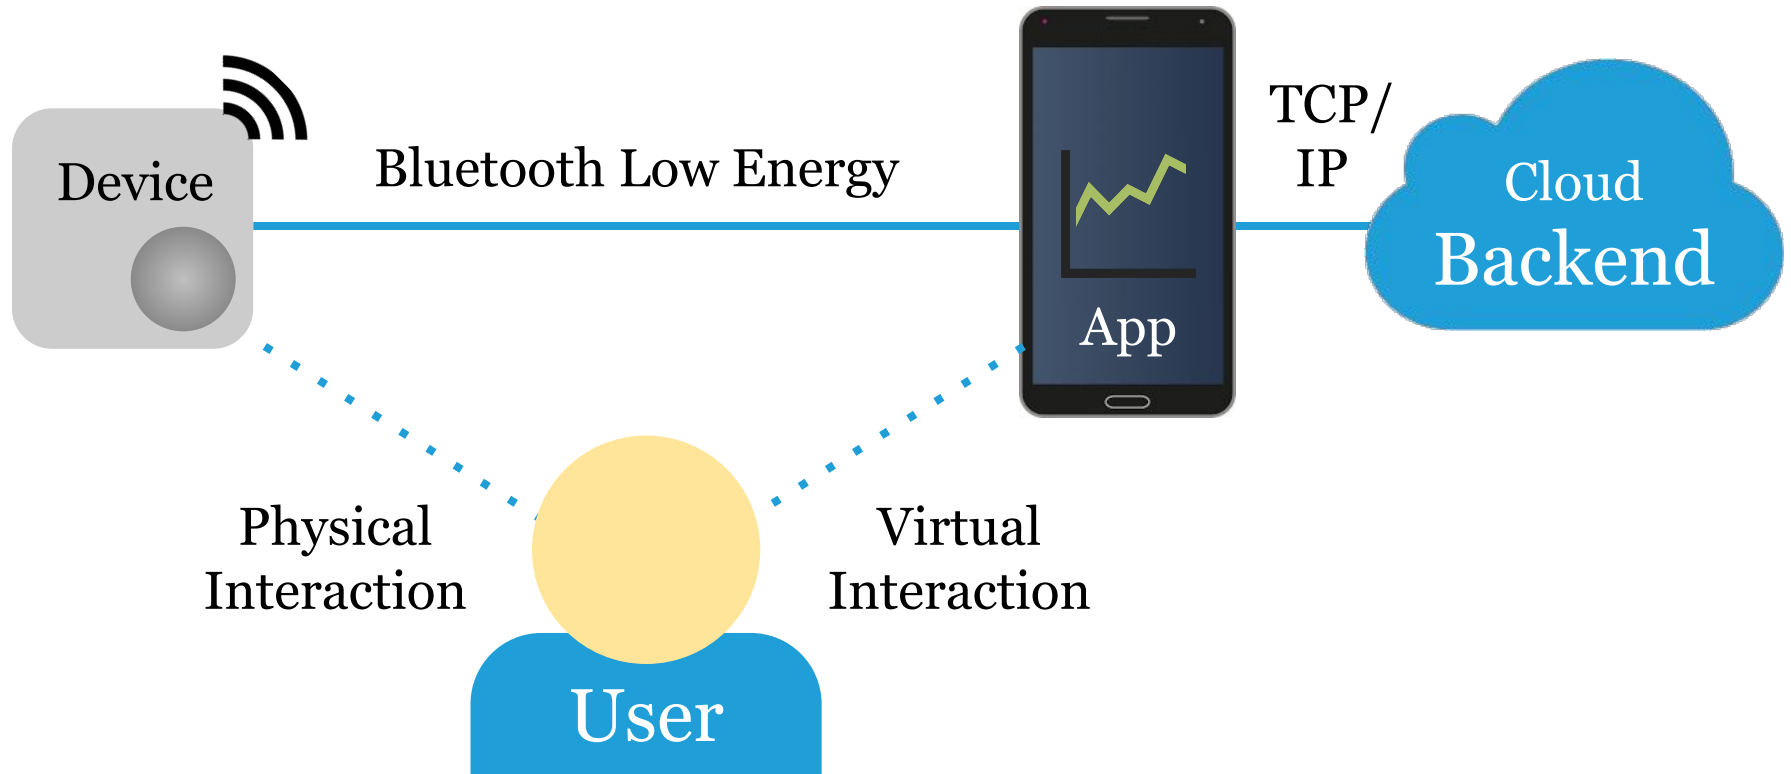

App has two roles

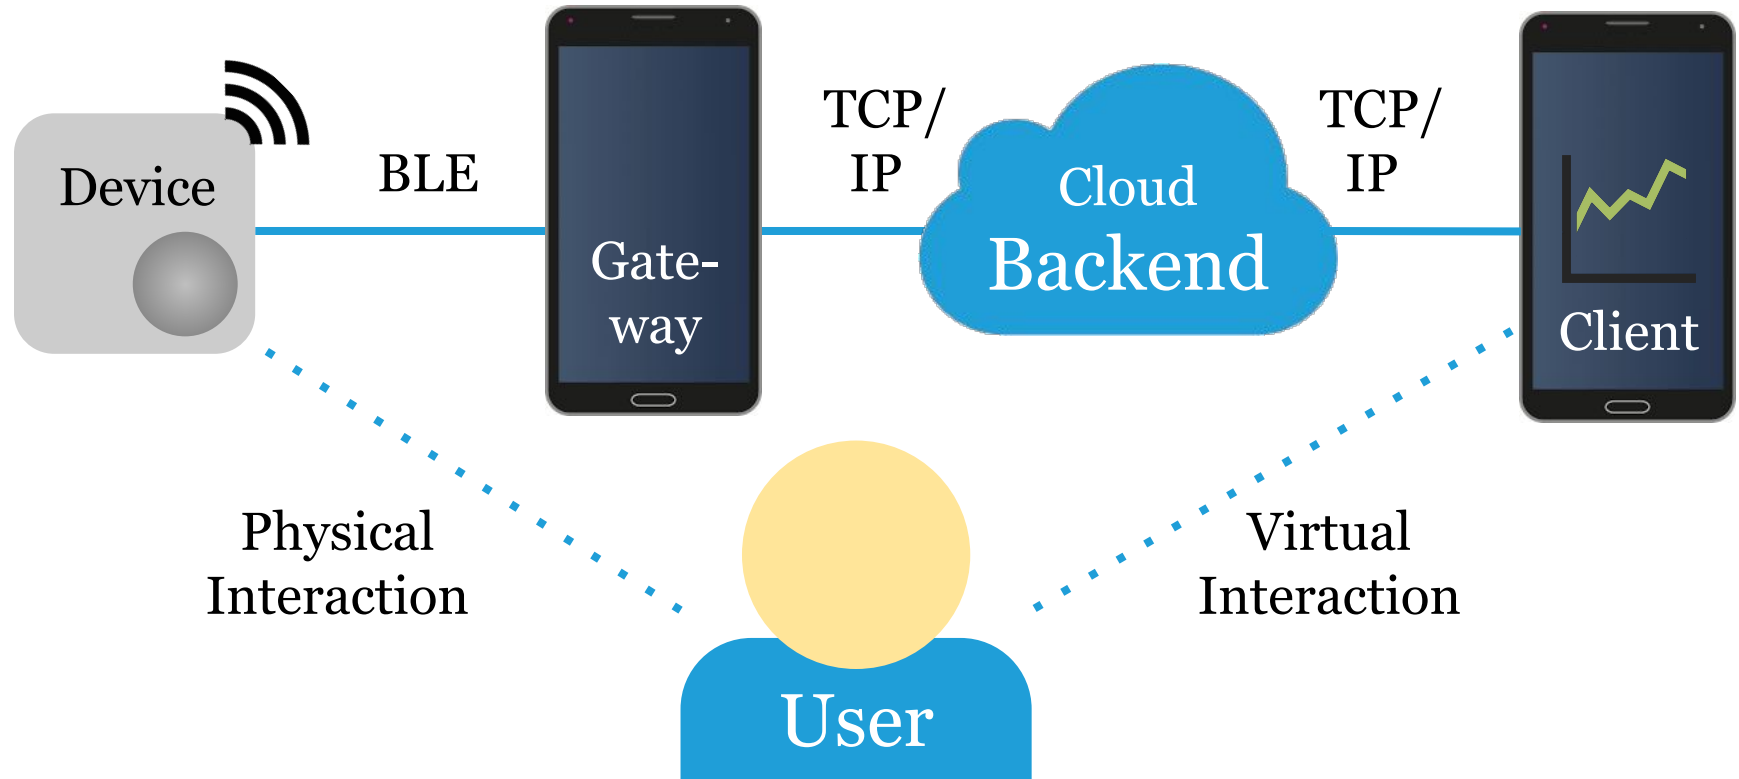

IoT platforms

IoT platforms make data available at a central point.

There are many examples, incl. [AWS](#) and [Azure IoT](#).

We will look at an IoT platform which is free to use:

[ThingSpeak](#) provides data storage and visualisation.

It receives and provides data via HTTP or MQTT.

Internet protocol suite layers

RFC 1122 layers are loosely based on the **OSI model**:

Application layer, process to process, HTTP, MQTT, ...

Transport layer, host to (remote) host, UDP or TCP.

Internet layer, inter-network addressing and routing.

Link layer, details of connecting hosts in a network.

Hypertext Transfer Protocol (HTTP)

[HTTP](#), the "Web protocol", is specified in [RFC 2616](#).

It uses TCP/IP as its transport, on port 80 and 443.

A client sends a request, the server sends a response.


Request and response *headers* are encoded in [ASCII](#).

The content type and length are declared in headers.

HTTP

Web request w/
host header.

Web response
with headers
and content.

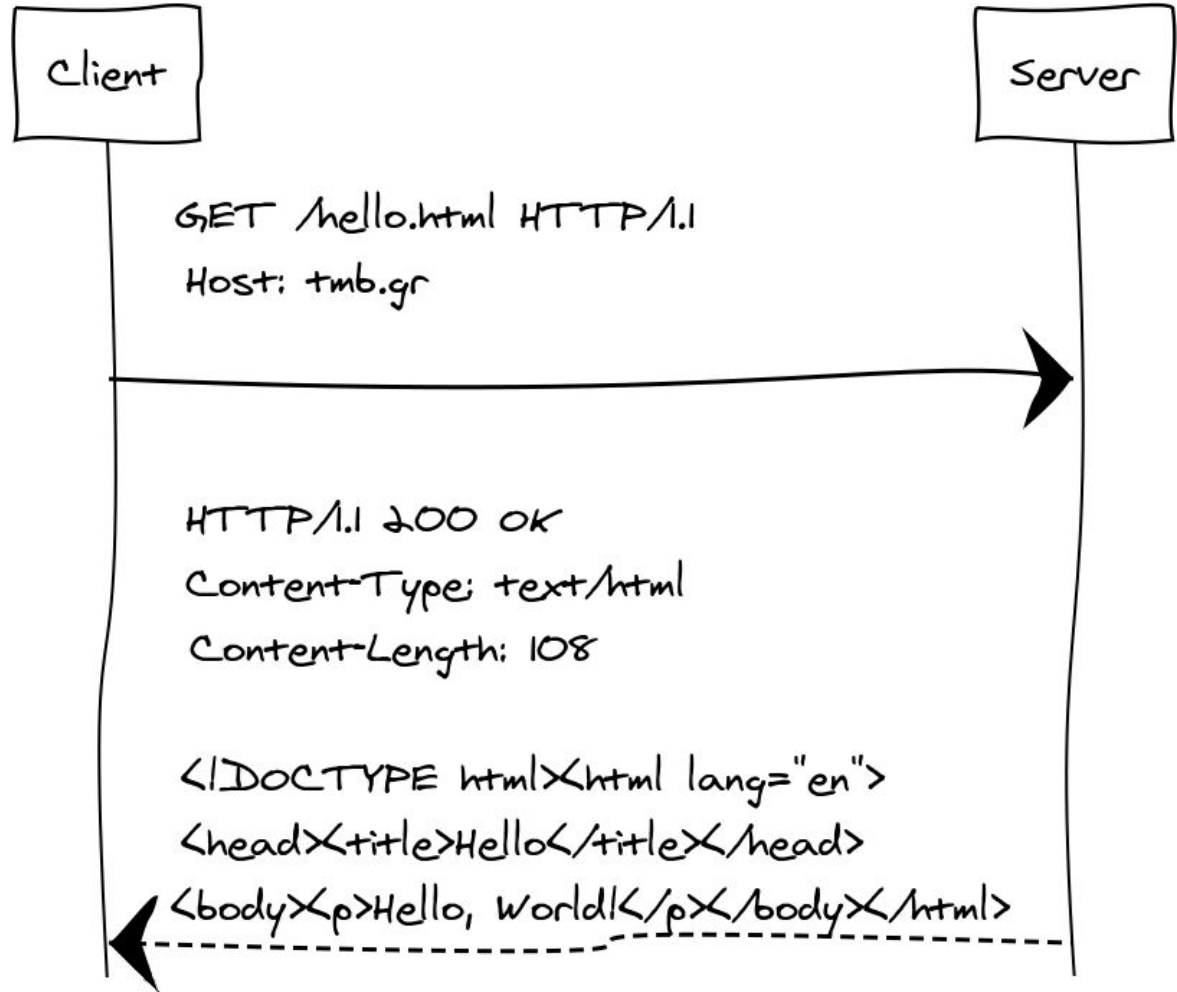

Debugging HTTP with Curl and PostBin

Curl (<https://curl.haxx.se/>) is a generic Web client.

It's useful to test Web APIs, try this GET request:

```
$ curl -v http://tmb.gr/hello.json
```

Or create a [PostBin](#) and send a POST request with:

```
$ curl --data "hello" https://postb.in/...
```

Here's the [manual](#) and a book on [Everything Curl](#).

ThingSpeak HTTP API

ThingSpeak has a [device-](#) and [client-side HTTP API](#).

Host: `api.thingspeak.com`

Port: 80 or 443

POST `/update?api_key=WRITE_API_KEY&field1=3`

GET `/channels/CHANNEL_ID/feed.json?`

`api_key=READ_API_KEY`

See Wiki for [ThingSpeak cURL examples](#).

Uniontown Weather Data

Channel ID: 3


Author: [iothans](#)

Access: Public


Weather data from Uniontown, PA

🔑 [temperature](#), [humidity](#), [weather station](#), [dew point](#), [channel_3](#)

Field 1 Chart

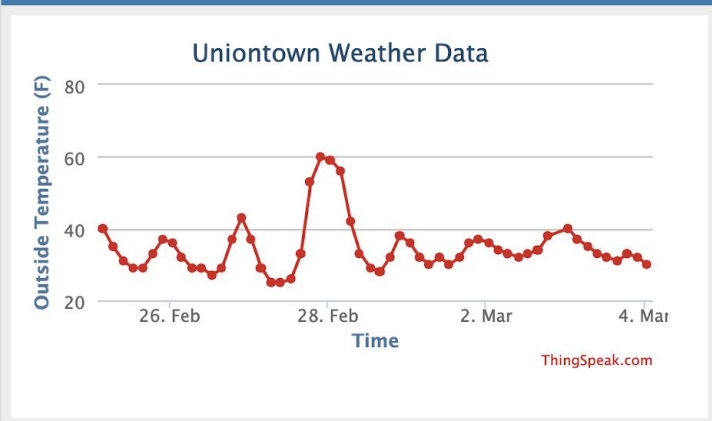

Field 2 Chart

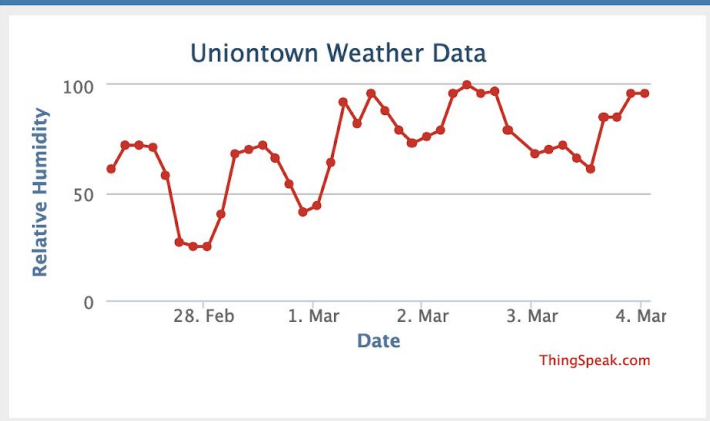

MQTT

MQTT is a standard messaging protocol ([v3.1.1](#), [v5.0](#)).


It uses TCP/IP as a transport, on port 1883 and 8883.

In MQTT, *clients* exchange *messages* via a *broker*.

Clients can be *publishers*, *subscribers* or both.

Brokers offer multiple channels, or *topics*.

MQTT

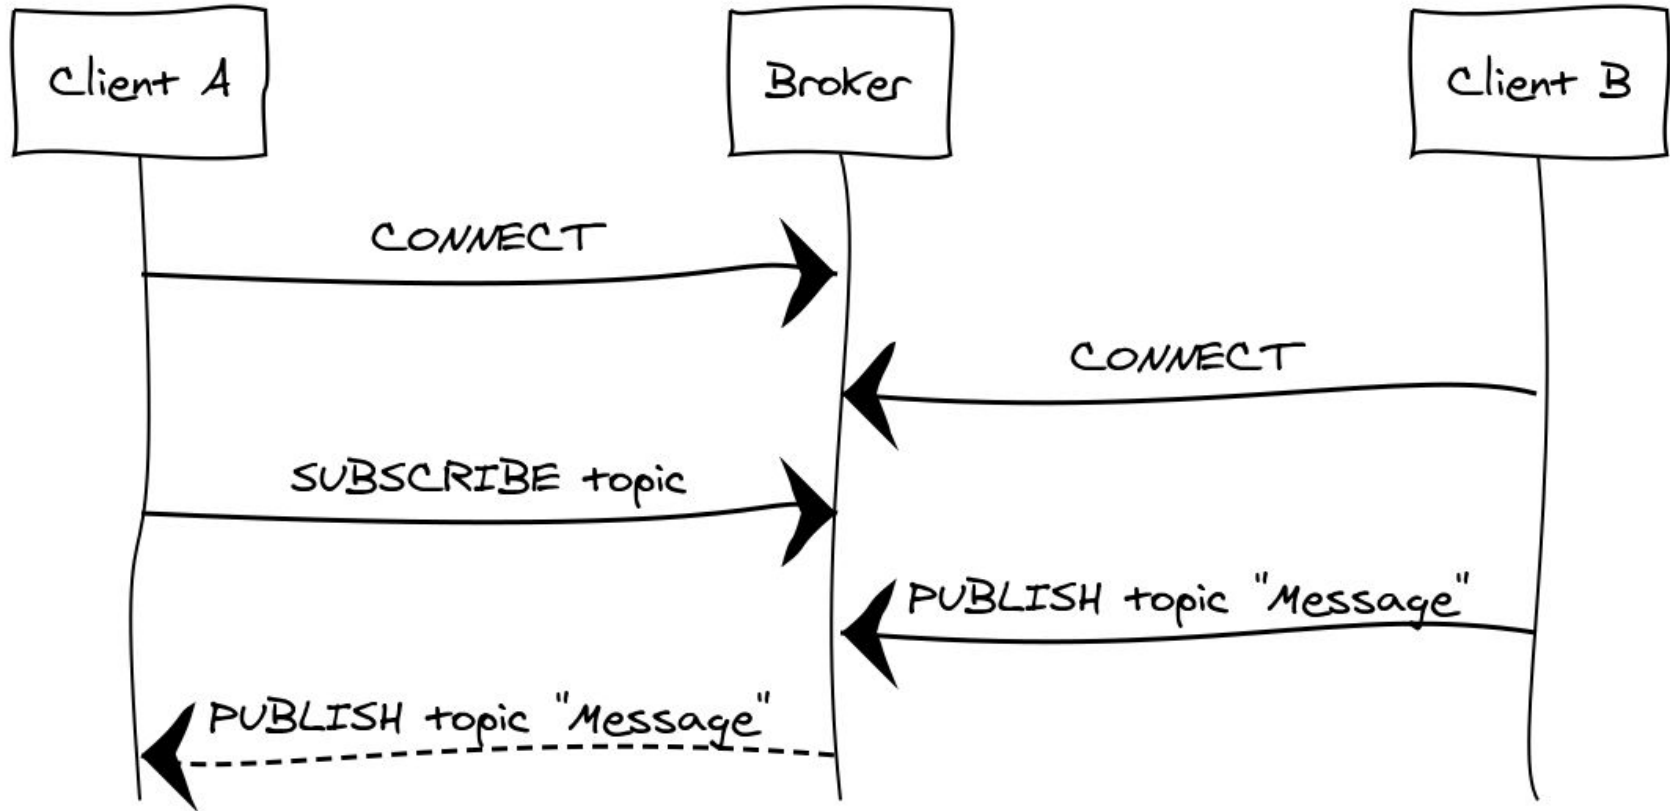

Debugging MQTT with Node.js *mqtt* CLI

Install the Node.js **mqtt** command line tool (CLI):

```
$ sudo npm install mqtt -g # adds tool to path
```

To publish/subscribe with the command line tool, try:

```
$ mqtt sub -t 'mytopic' -h 'test.mosquitto.org'
```

```
$ mqtt pub -t 'mytopic' \
```

```
-h 'test.mosquitto.org' \
```

```
-m 'Hello, world!'
```

ThingSpeak MQTT API

ThingSpeak has a [device-](#) and [client-side MQTT API](#).

Host: `mqtt.thingspeak.com`

Port: 1883 or 8883 (or Websocket: 80, 443)

```
PUB -t 'channels/CHANNEL_ID/publish/\nWRITE_API_KEY' -m 'field1=42&field2=23'
```

```
SUB -t 'channels/CHANNEL_ID/subscribe/\nFORMAT/READ_API_KEY'
```

MQTT on Android

Eclipse Paho is an open source MQTT [client library](#).

There are Android specific Java [docs](#) and [examples](#).

Another option is the HiveMQ MQTT [client library](#)*.

Consider MQTT if there is no HTTP endpoint.

*One advantage of HiveMQ is MQTT v5.0 support. 16

General definition of API

An **API**, or application programming interface, is a contract between clients and providers of a service.

Both parties have to agree on:

- How to access the service.
- How to submit data to it.
- How to get data out of it.

Good APIs are documented or self-explanatory.

Data formats

Two parties need to agree on what is valid content.

Parsing means reading individual "content tokens".

Text-based formats, e.g. JSON are human readable.

Binary formats, e.g. Protobuf, take less space.

Data formats are often specified in **EBNF**.

CSV

Comma Separated Values (CSV), defined in [RFC4180](#).

```
file = record *(CRLF record) [CRLF];  
record = field *(COMMA field);  
field = *TEXTDATA;  
CRLF = CR LF;  
COMMA = %x2C; CR = %x0D; LF = %x0A;  
TEXTDATA = %x20-21 / %x23-2B / %x2D-7E;
```

Header and escaped fields omitted for shortness.

JSON

JSON is a simple data format based on Unicode text:

```
{"temp": 23} // try ddg.co/?q=json+validator
```

On Arduino, use e.g. the [Arduino_JSON](#) library:

```
JSONVar obj = JSON.parse("{ \"temp\" : 23 }");  
String data = JSON.stringify(obj);
```

On Android, use e.g. json.org, [Gson](#) or [Moshi](#).

```
JSONObject obj = new JSONObject(data);  
String data = obj.toString();
```

Protobuf

Protocol Buffers (Protobuf) is a binary data format:

```
message Measurement {  
    required int32 temp = 1;  
    optional int32 humi = 2;  
}
```

Message schemas are compiled to a target language, i.e. a parser is generated, to be called from your code.

Information model

The information model defines how data is structured.

It's the "common denominator" of all involved parties.

Data formats (on the wire) define how it's transported.

The information model is more about data semantics.

E.g. ThingSpeak knows channels and fields.

Summary

IoT platforms receive and provide data via an API.

E.g. through HTTP requests or MQTT messages.

Data formats allow to write and read payloads.

The information model defines semantics.

Feedback or questions?

Join us on [MSE TSM MobCom](#) in MS Teams

Or email thomas.amberg@fhnw.ch

Thanks for your time.