








## PD\_T10\_MANGO

### Schematic Revision 1.1

Title	Page
COVER SHEET	1
SYSTEM ARCHITECTURE	2
T10 IO/NOR FLASH	3
TF CARD	4
ETH/USB/AUDIO	5
DVP CAMERA	6
UART/RST/BOOT/LDR	7
T10_POWER	8
POWER_SUPPLY	9
REVISION HISTORY	10

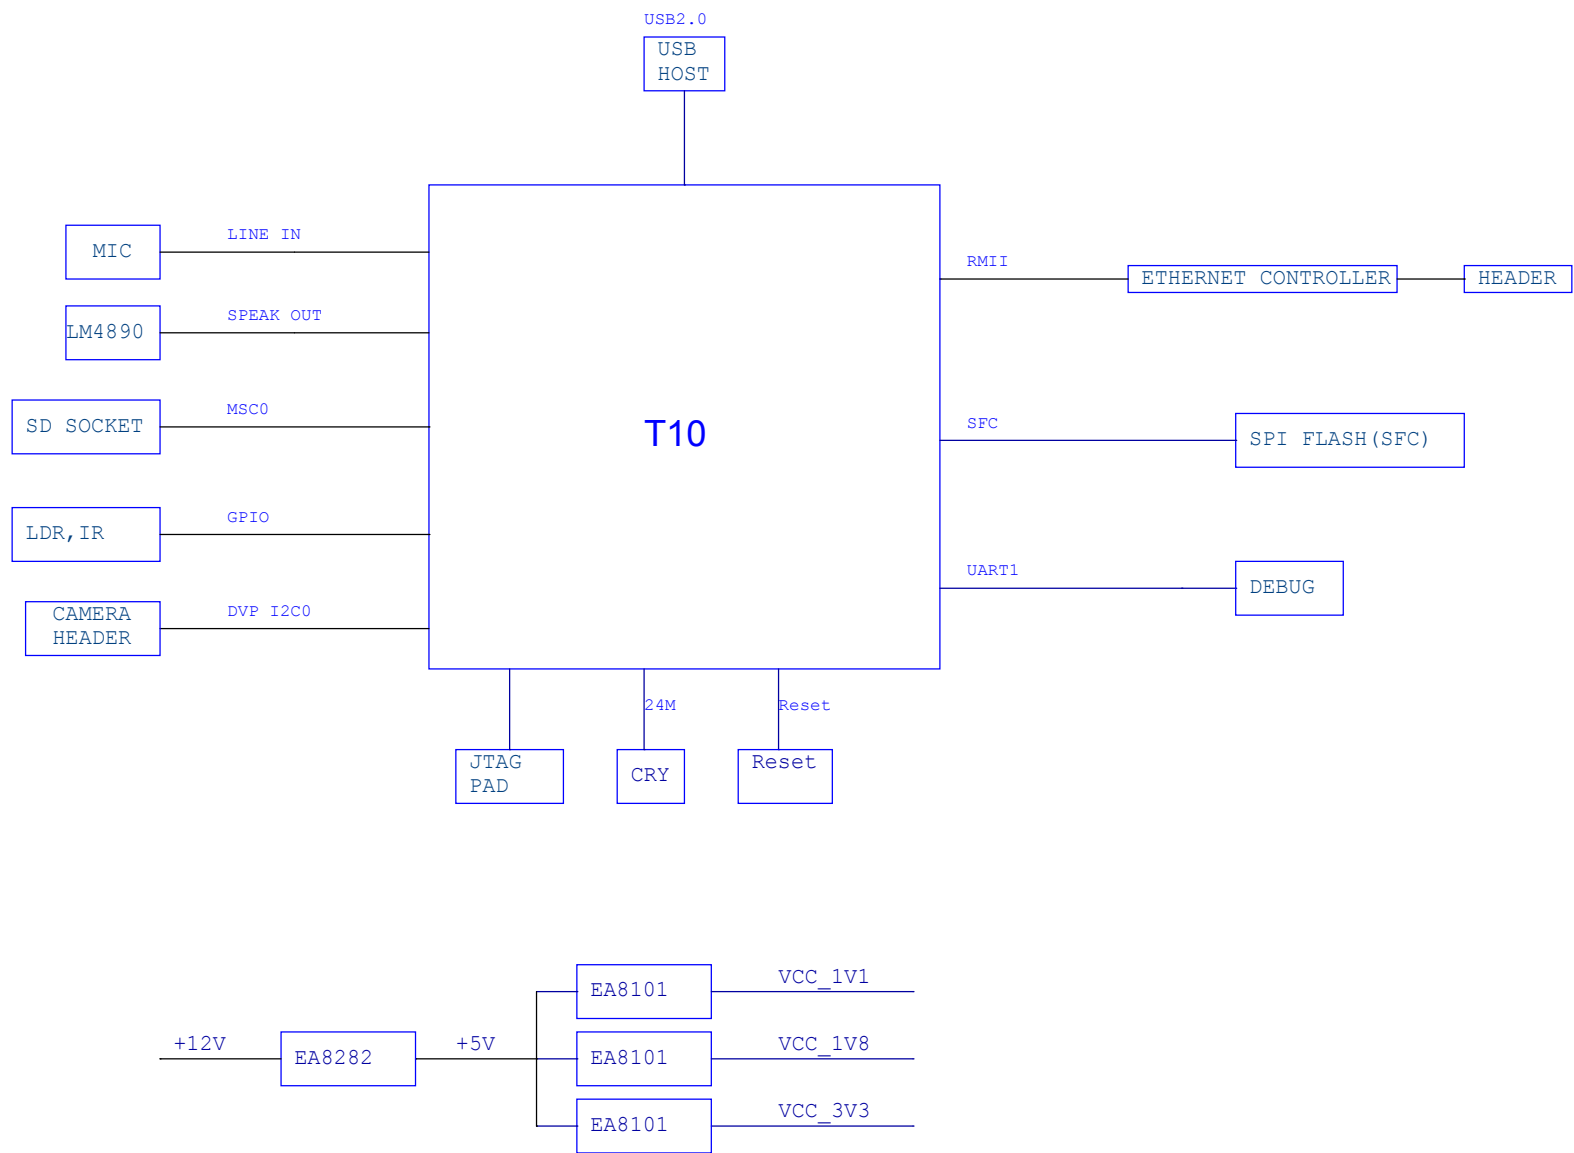


## T10\_IO/NOR FLASH

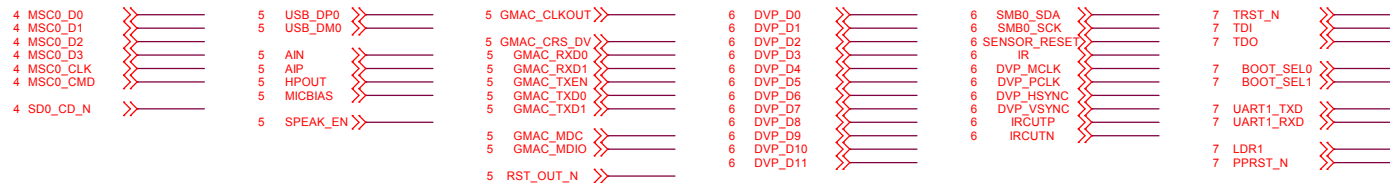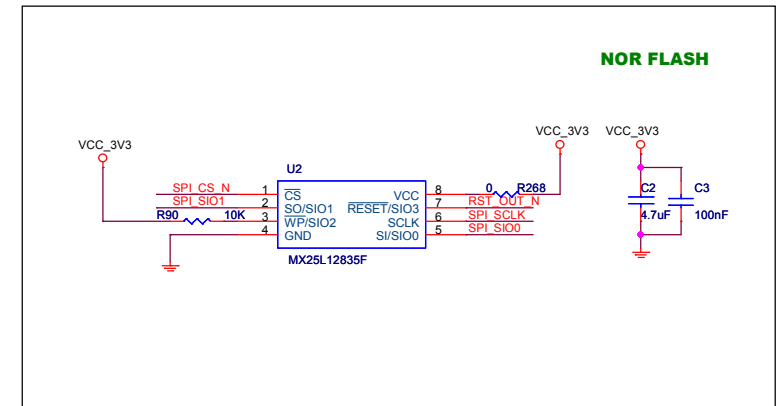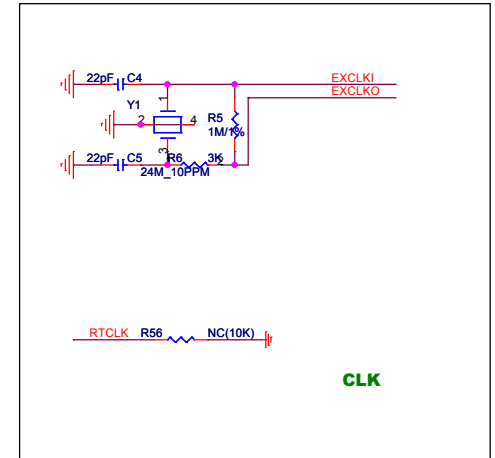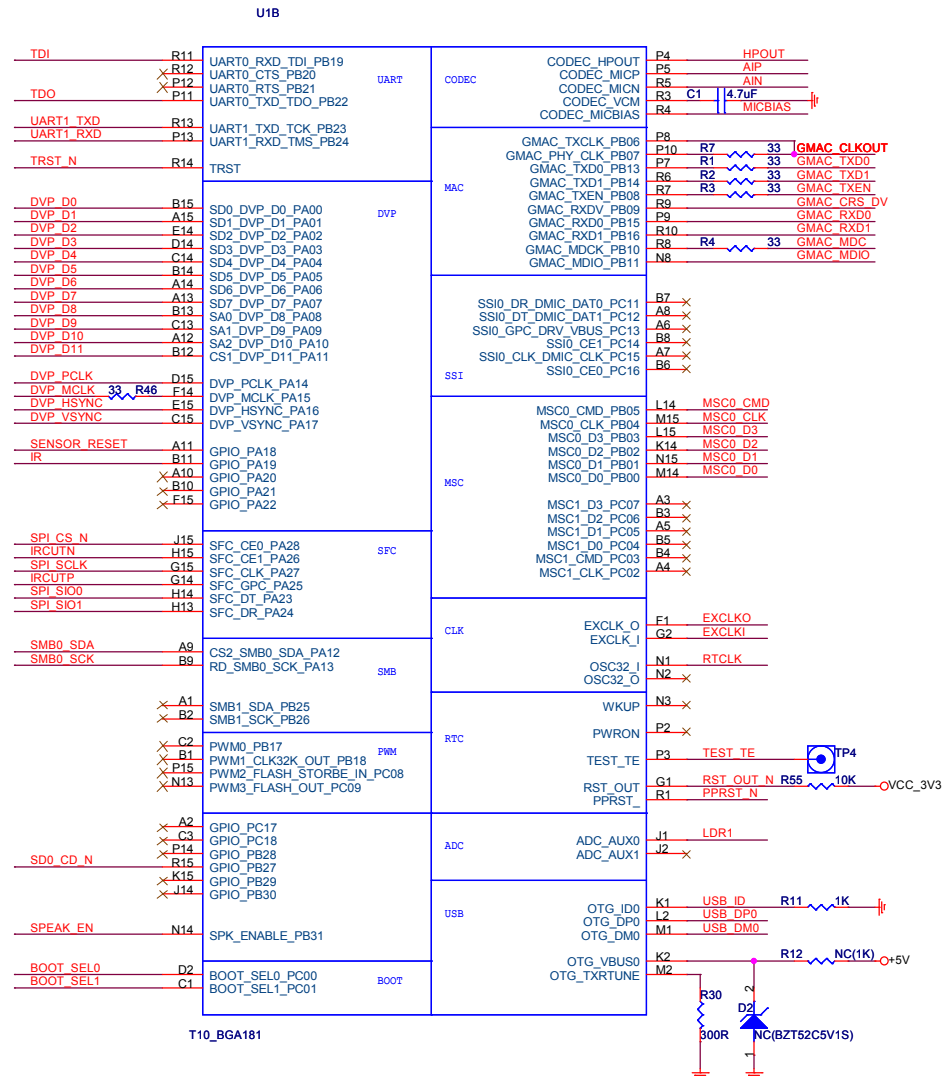


TF CARD


TF CARD

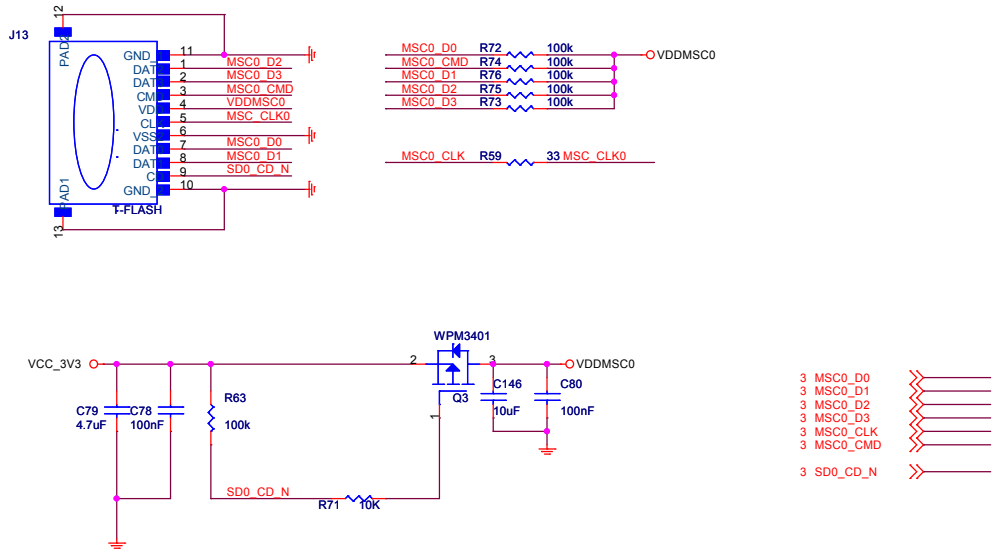


ETH\_RMII/USB/AUDIO

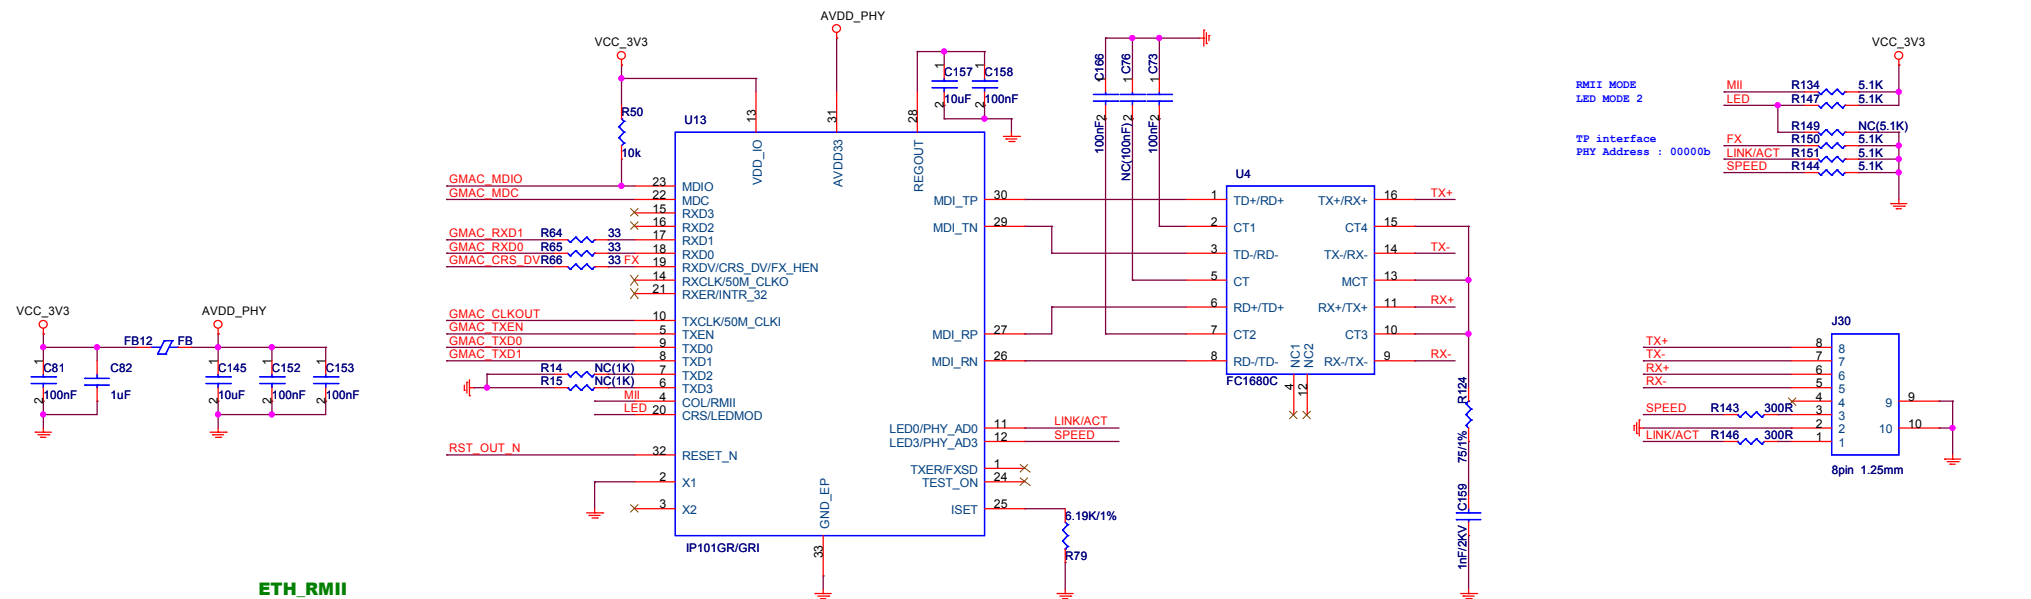





USB2.0\_HOST

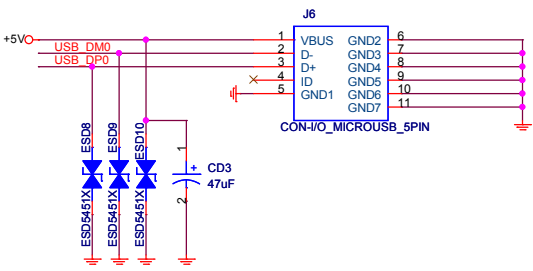


SPK

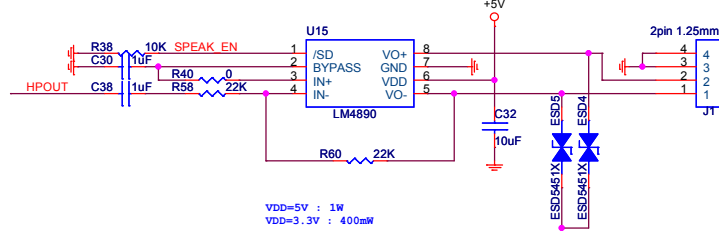

DVP CAMERA

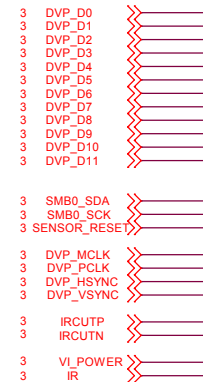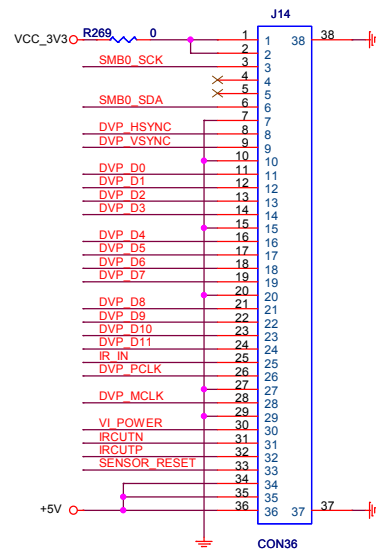


RESET/BOOT/LDR/DEBUG/JTAG




DEBUG


JTAG



LDR





BOOT CONFIGURATION





BOOT_SEL1	BOOT_SEL0	BOOT FROM
0	0	SD card : MSC0
0	1	SFC : SPI0/SSI CE0







RESET CIRCUITS

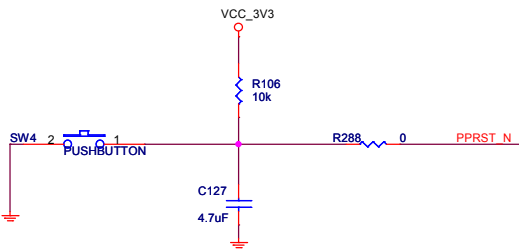

# T10\_POWER

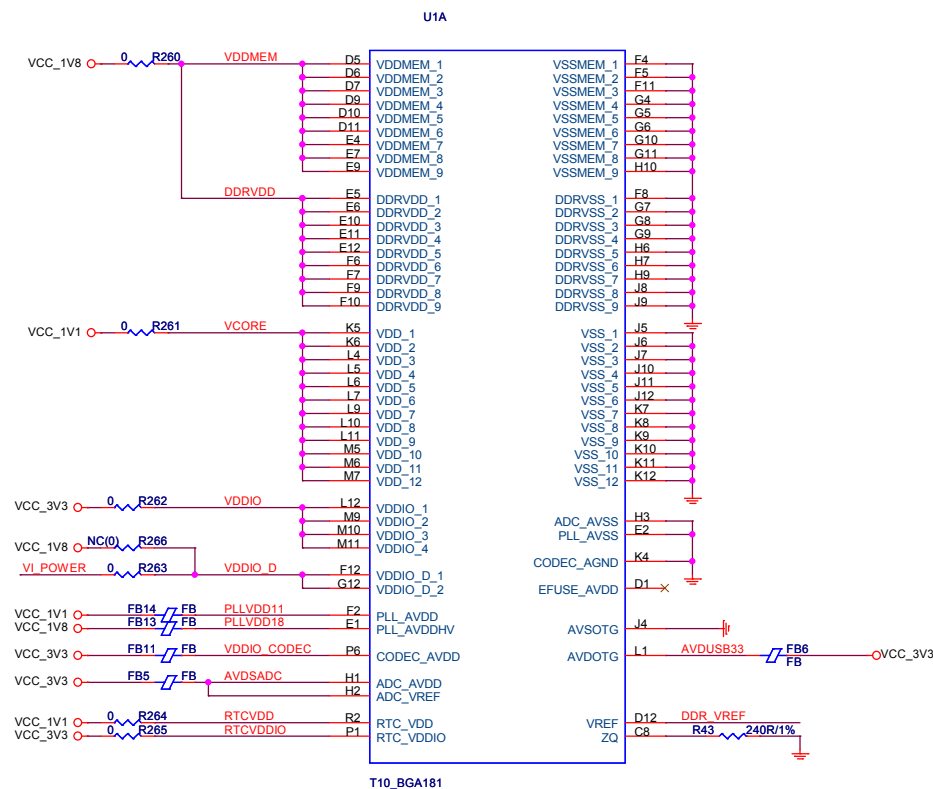







6 VL\_POWER >>>



INGENIC SEMICONDUCTOR CO.,LTD			
Title	PD_T10_MANGO		
Size	Document Number		
A3	T10 POWER		
Date:	Tuesday, December 15, 2015	Sheet	8 of 10
			Rev 1.1



POWER SUPPLY

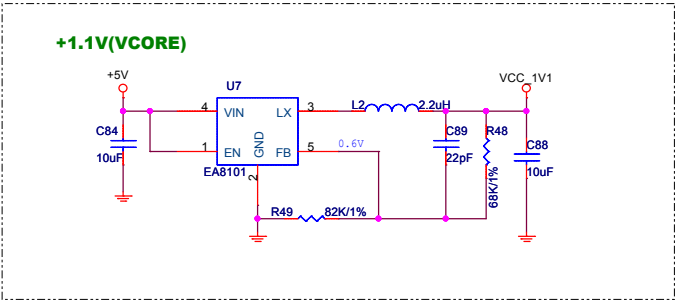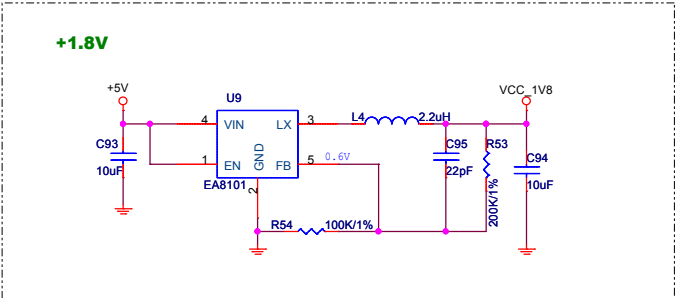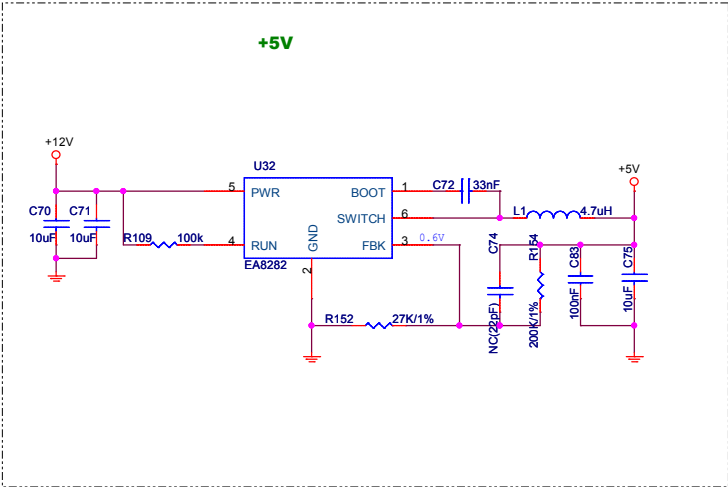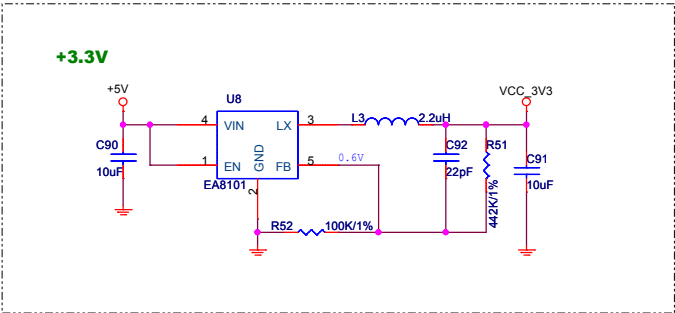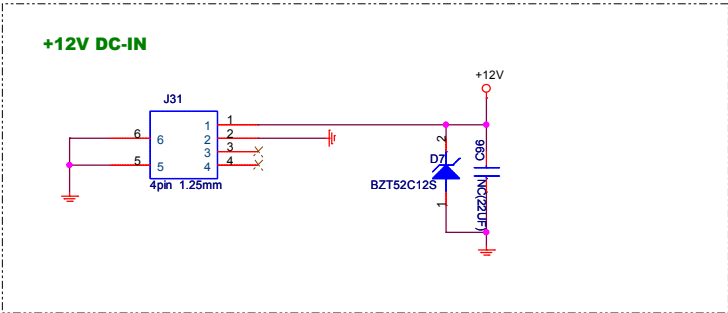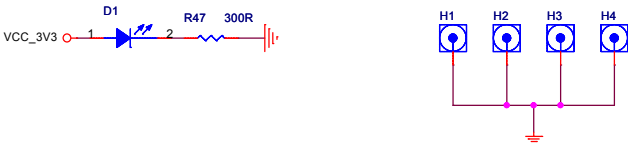

Data	Revision	Change
Sep 18 2015	Rev1.0	1. First Revision
Dec 11 2015	Rev1.1	1.Change C74 connection and change CD21 to C96 2. AUDIO input change to AIN 3. ADD speak output 4. Change C1 1uF to 4.7uF 5. NC R12 and D2