




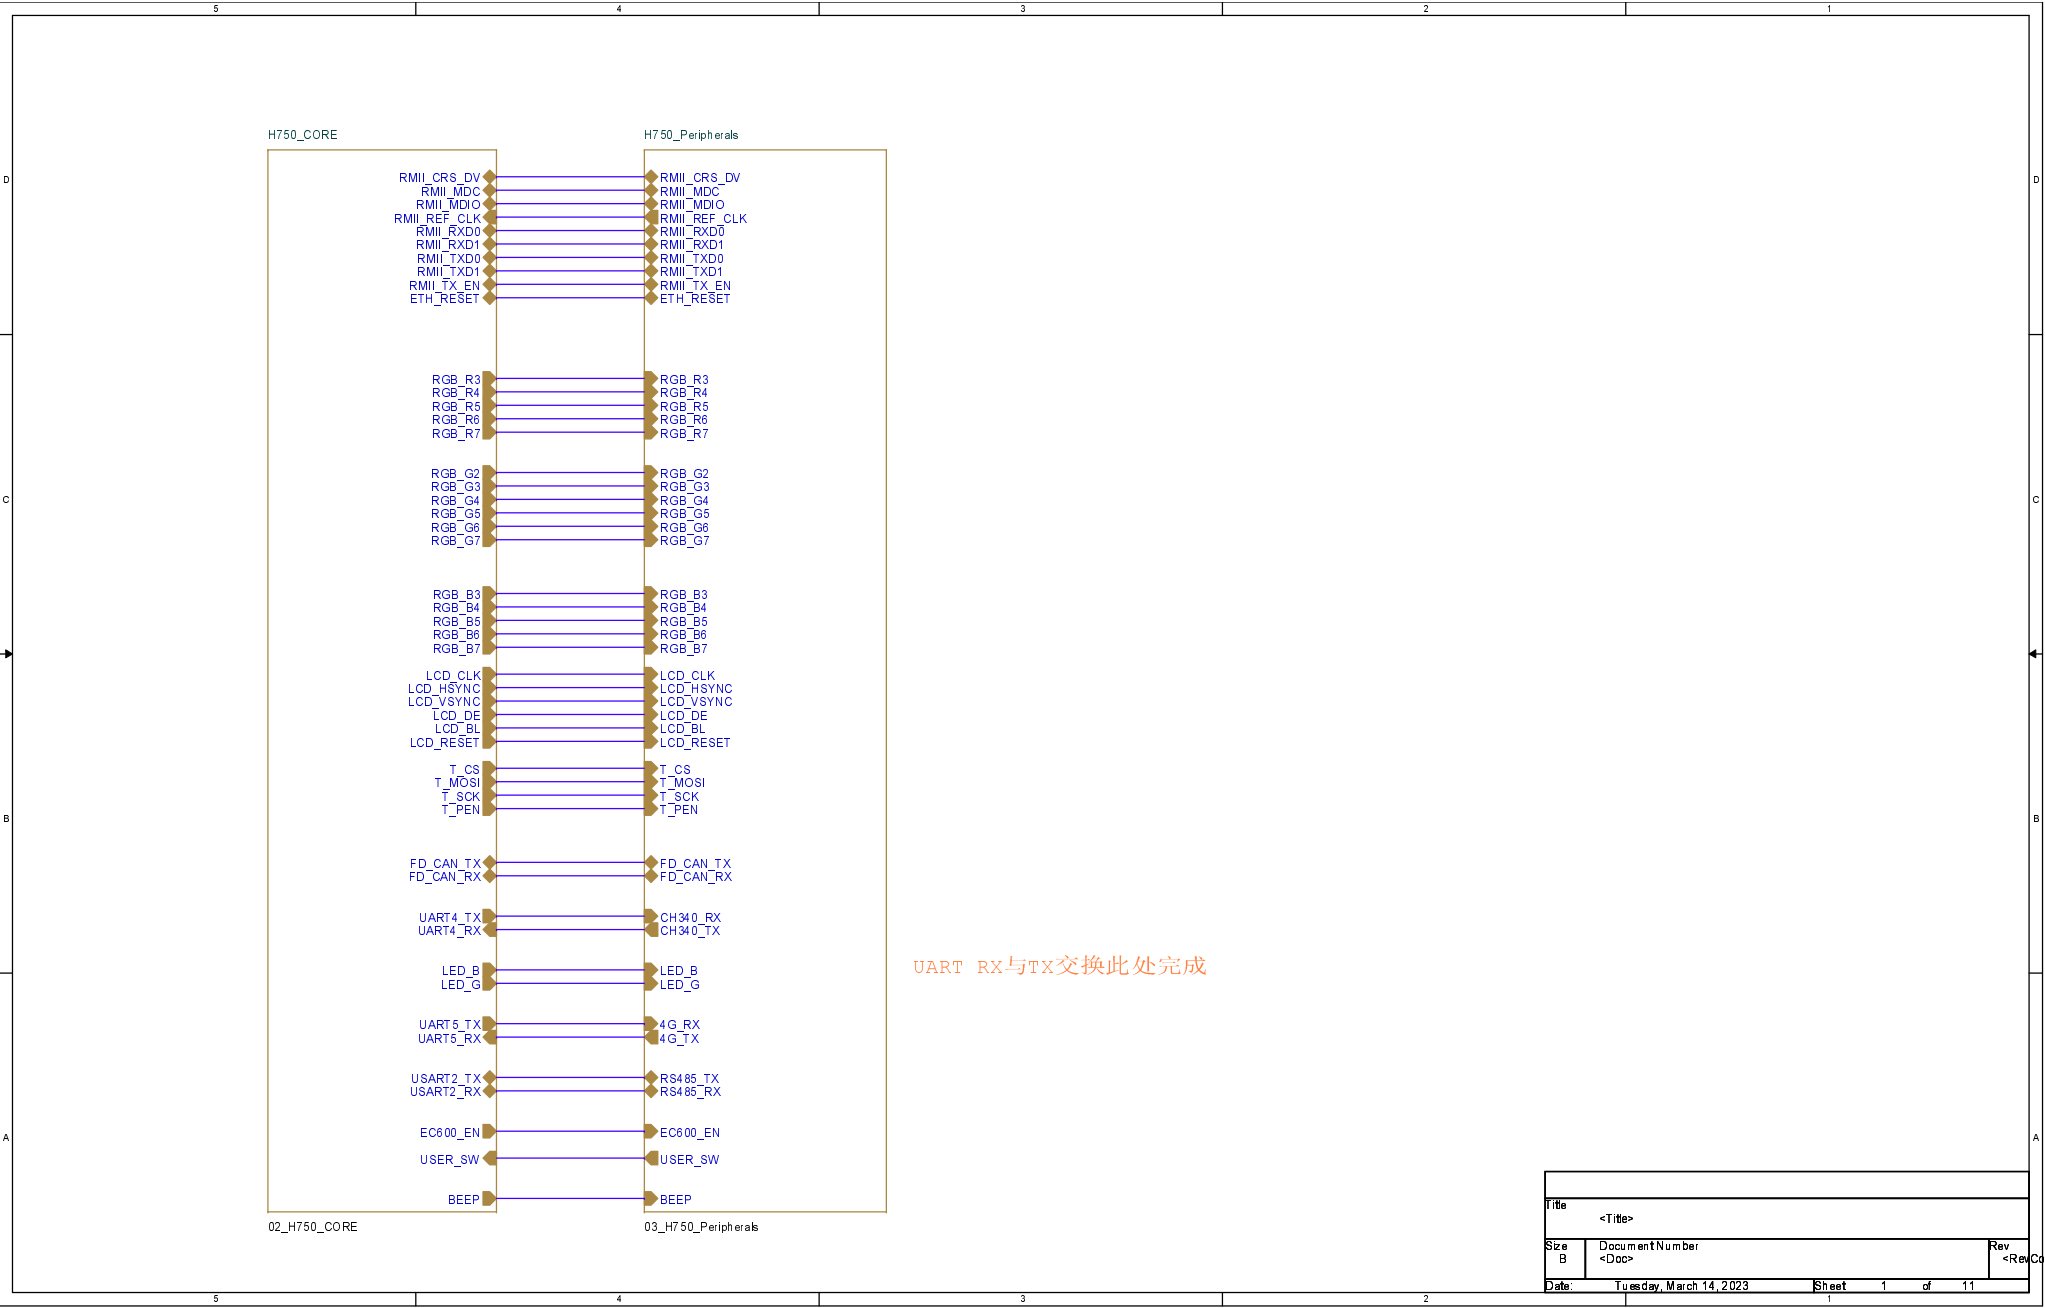


VCC_CORE_5V0--->VCC_CORE_3V3



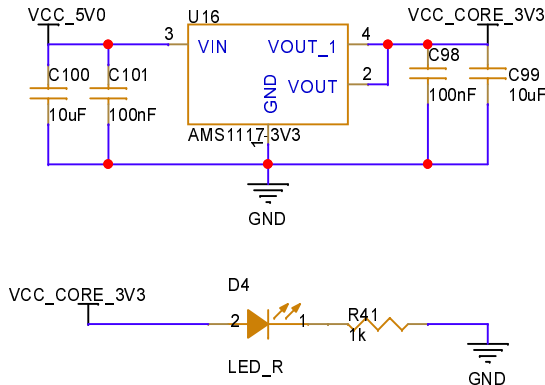


Title		
<Title>		
Size	Document Number	Rev
A	<Doc>	<RevCode>
Date:	Tuesday, March 14, 2023	Sheet 2 of 11






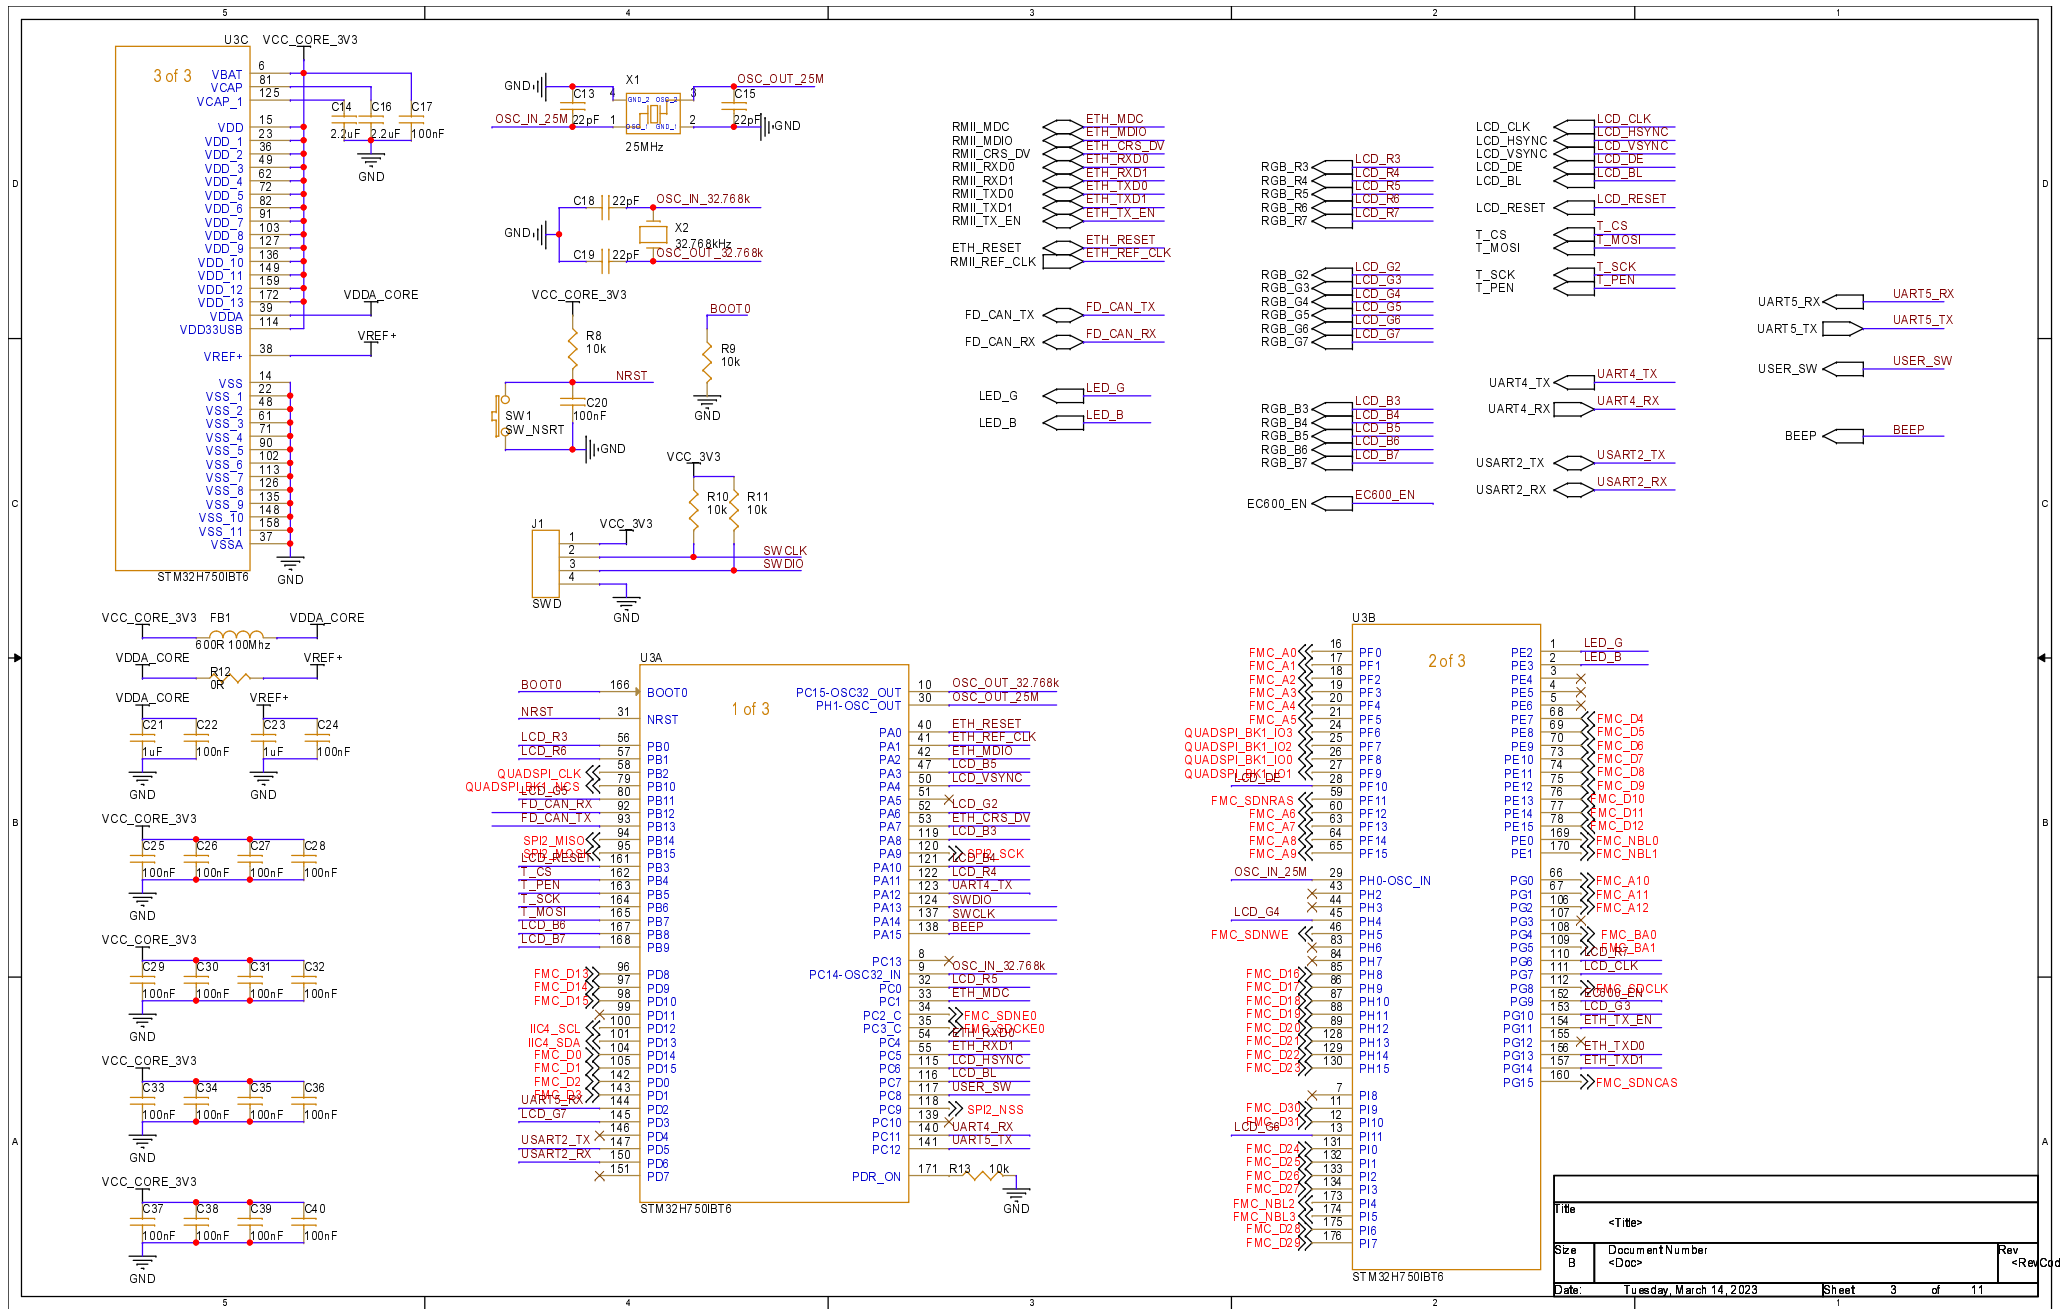


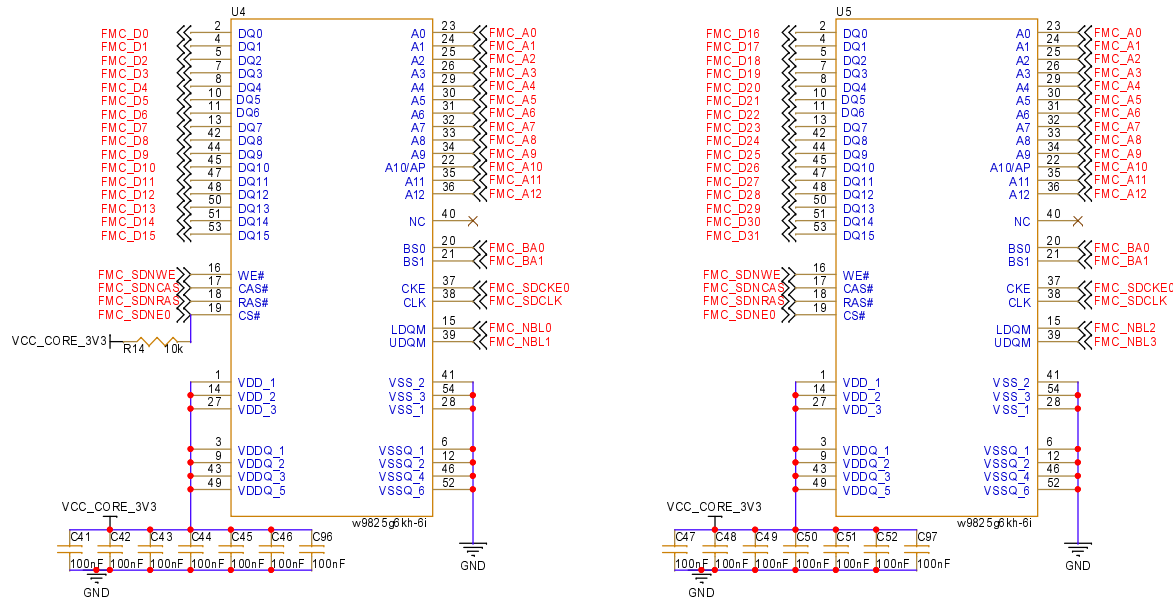


两片16位SDRAM组成32位

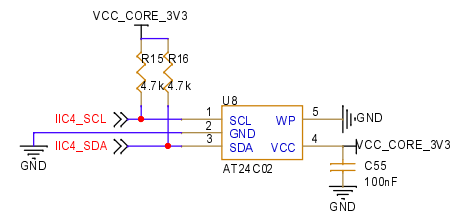
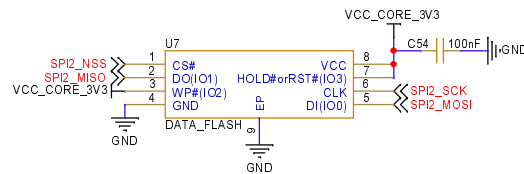
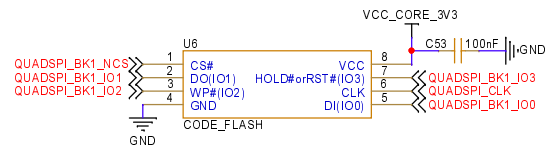


Title		<Title>	
Size	Document Number	Rev	
B	<Doc>	<Rev>	
Date	Tuesday, March 21, 2023	Sheet	4 of 11



				A
Title <Title>				
Size A	Document Number <Doc>		Rev <RevCode>	
Date: Tuesday, March 14, 2023 Sheet 5 of 11				

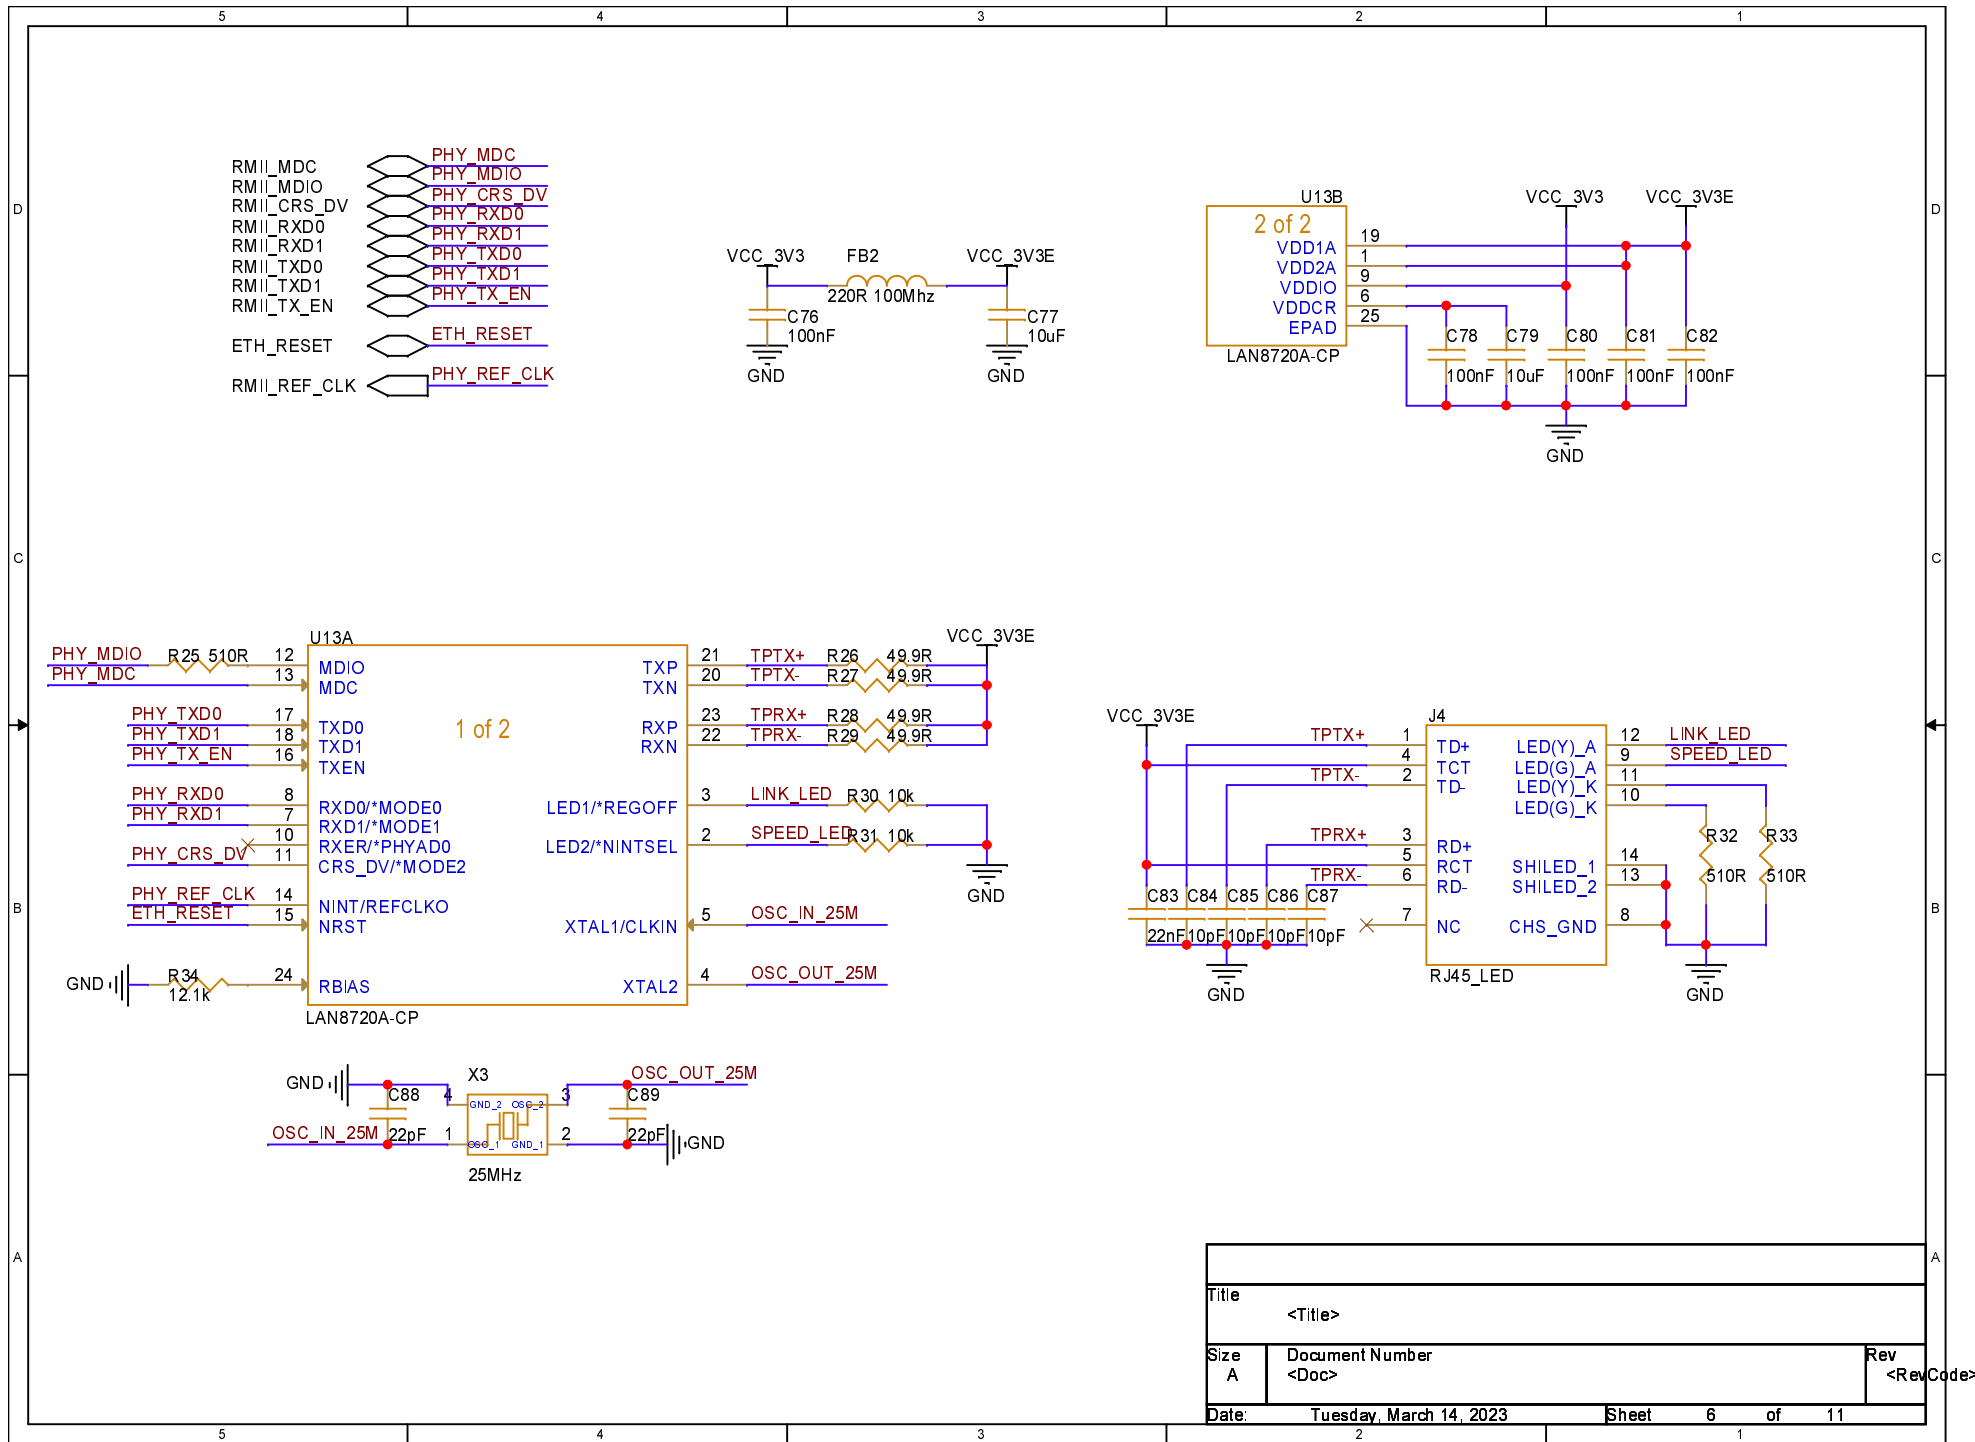

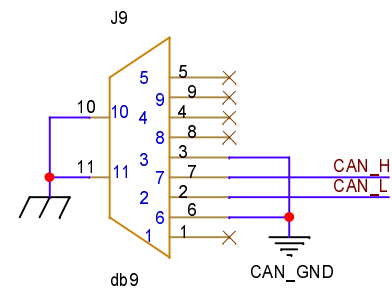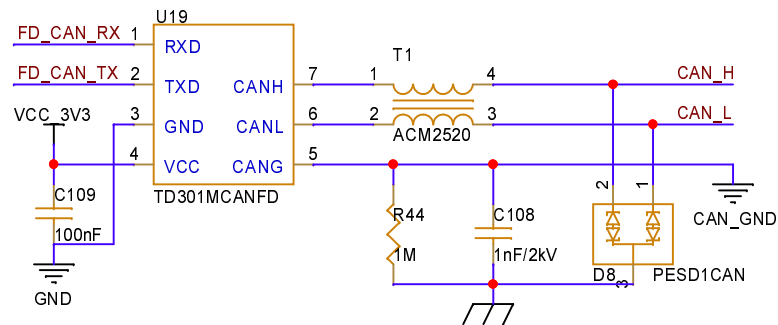

Title		
<Title>		
Size	Document Number	Rev
A	<Doc>	<RevCode>
Date:	Tuesday, March 14, 2023	Sheet 7 of 11

RGB_R3 LCD_R3
 RGB_R4 LCD_R4
 RGB_R5 LCD_R5
 RGB_R6 LCD_R6
 RGB_R7 LCD_R7

RGB_G2 LCD_G2
 RGB_G3 LCD_G3
 RGB_G4 LCD_G4
 RGB_G5 LCD_G5
 RGB_G6 LCD_G6
 RGB_G7 LCD_G7

RGB_B3 LCD_B3
 RGB_B4 LCD_B4
 RGB_B5 LCD_B5
 RGB_B6 LCD_B6
 RGB_B7 LCD_B7

LCD_CLK LCD_CLK
 LCD_HSYNC LCD_HSYNC
 LCD_VSYNC LCD_VSYNC
 LCD_DE LCD_DE
 LCD_BL LCD_BL

LCD_RESET LCD_RESET


T_CS T_CS
 T_MOSI T_MOSI

T_SCK T_SCK
 T_PEN T_PEN




触摸屏实际用的是I2C

T_SCK=I2C_SCL



T_MOSI=I2C_SDA

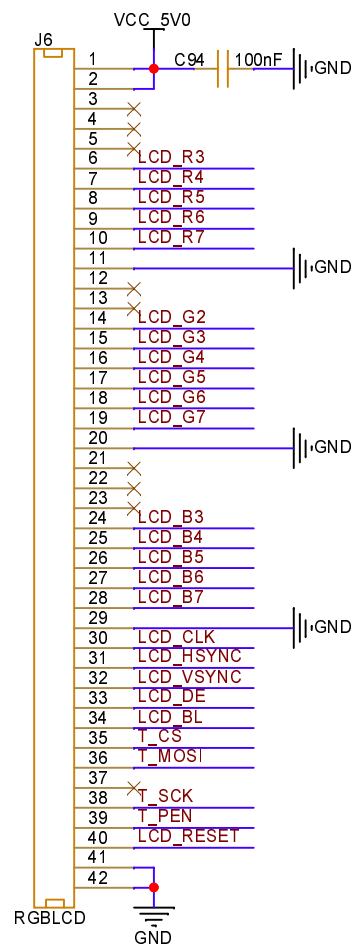





Title		
<Title>		
Size	Document Number	Rev
A	<Doc>	<RevCode>
Date:	Tuesday, March 14, 2023	Sheet 8 of 11




RX与TX交换在TOP处完成

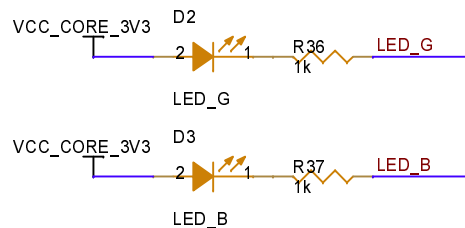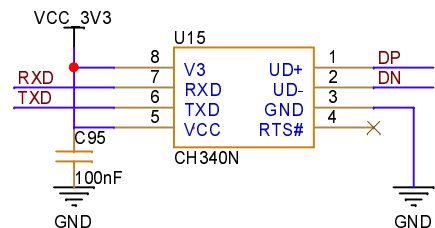






MCU与CH340采用统一供电，不用VBUS

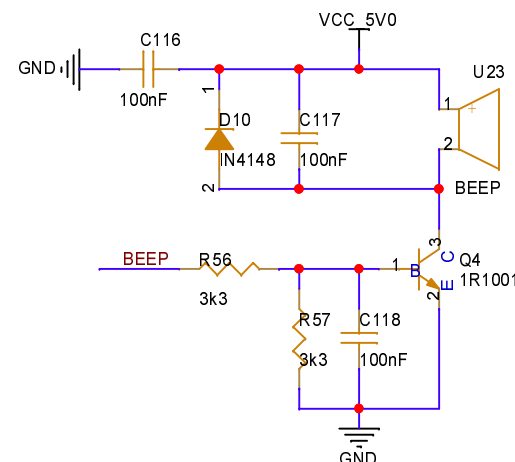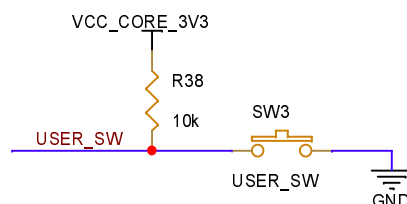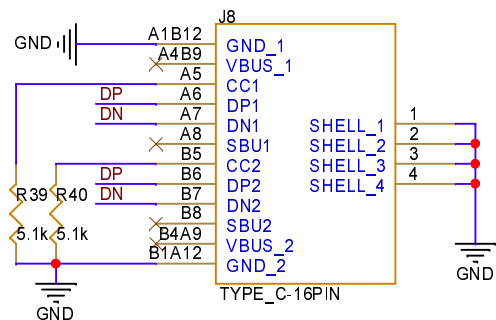


Title			<Title>
Size	Document Number	Rev	<RevCode>
A	<Doc>		
Date:	Sunday, April 02, 2023	Sheet	9 of 11



RX与TX交换在TOP处完成

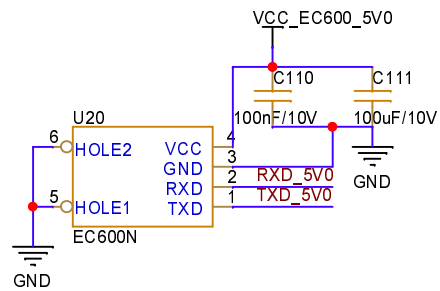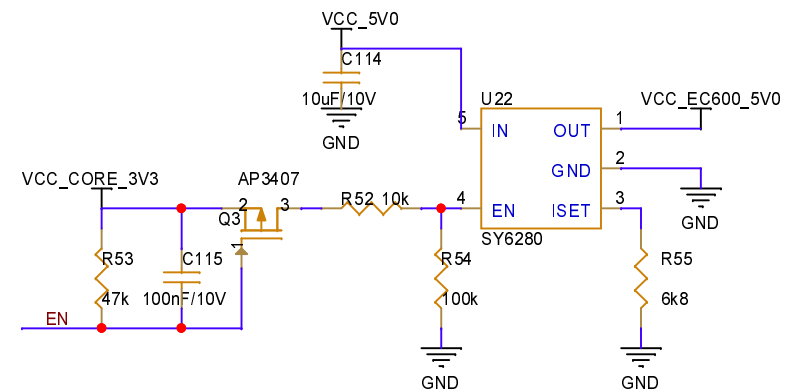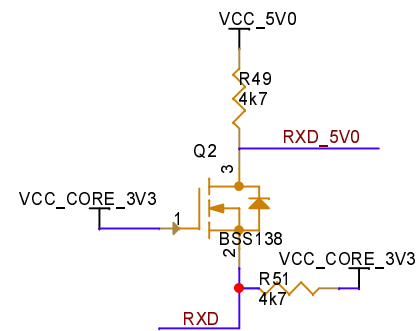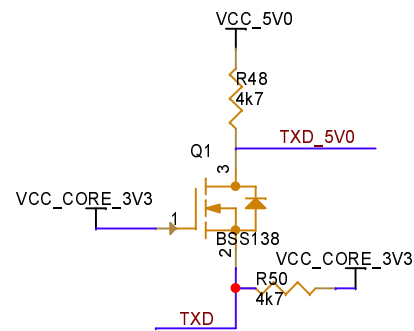

Title		
<Title>		
Size	Document Number	Rev
A	<Doc>	<RevCode>
Date:	Tuesday, March 14, 2023	Sheet 10 of 11

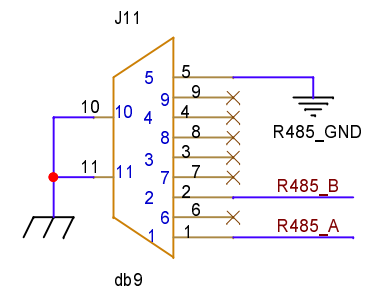

						A
Title <Title>						
Size A	Document Number <Doc>					Rev <RevCode>
Date:	Tuesday, March 14, 2023		Sheet	11	of	11