

AIM- To implement inter-task communication using a FreeRTOS queue where one task generates or acquires sensor data and another task receives the data.

APPARATUS- STM32 Nucleo-F446RE development board, USB Type-A to Mini-B cable, Ultrasonic Sensor, STM32 CUBE IDE, STM32 CubeMX.

THEORY

The implementation of inter-task communication in a real-time operating system (RTOS) like FreeRTOS is a cornerstone of modular embedded design. While semaphores and task notifications are excellent for synchronization (signaling *that* an event happened), they are insufficient for transferring actual data. To solve the challenge of passing complex information—such as sensor readings, strings, or structured data—between independent execution threads, FreeRTOS provides the **Queue** mechanism.

The Anatomy of a Queue

A FreeRTOS queue is a thread-safe, kernel-managed buffer that operates on a **First-In, First-Out (FIFO)** principle. Unlike a standard C array or a global variable, a queue is designed for concurrency. It consists of a fixed number of "slots," each of a fixed size. For instance, if you are acquiring data from an RFID reader, you might define a queue with 10 slots, each large enough to hold a 32-bit integer or a custom `struct`.

One of the most critical features of the FreeRTOS queue is that it uses **Copy by Value**. When a task "Sends" data to a queue, the data is physically copied into the queue's memory. This means the original variable can be modified or even go out of scope without corrupting the data waiting in the queue. While this consumes a small amount of CPU time for the copy operation, it significantly simplifies memory management and prevents "race conditions" where two tasks try to access the same memory address simultaneously.

Thread Safety and Blocking Logic

In a multi-tasking environment, a queue must handle situations where a producer is faster than a consumer (Queue Full) or a consumer is faster than a producer (Queue Empty). FreeRTOS handles this through **Blocking**.

- **The Consumer (Receiver):** When a task attempts to read from an empty queue, it can enter the **Blocked** state. It remains in this state—consuming zero CPU cycles—until another task or an Interrupt Service Routine (ISR) places data into the queue. The moment data arrives, the scheduler moves the receiver to the **Ready** state.
- **The Producer (Sender):** Conversely, if a queue is full, the sending task can block until space becomes available. This creates a natural "back-pressure" system that synchronizes the speed of data generation with the speed of data processing.

The Producer-Consumer Model


This experiment follows the **Producer-Consumer** architectural pattern.

1. **The Producer (Sensor Task):** This task interfaces with hardware (e.g., an Ultrasonic sensor, ADC, I2C sensor or RFID module). Once it acquires a valid reading, it calls `osMessageQueuePut`.
2. **The Consumer (Display/Processing Task):** This task sits in a loop calling `osMessageQueueGet`. It remains dormant until a new sensor value is available, at which point it wakes up to process the data (e.g., displaying it on an LCD or making a logic decision).


The producer task in this experiment involves reading the distance with a period of 1000 ms.

PROCEDURE


1. Open CubeMX and Click on ACCESS TO MCU SELECTOR.

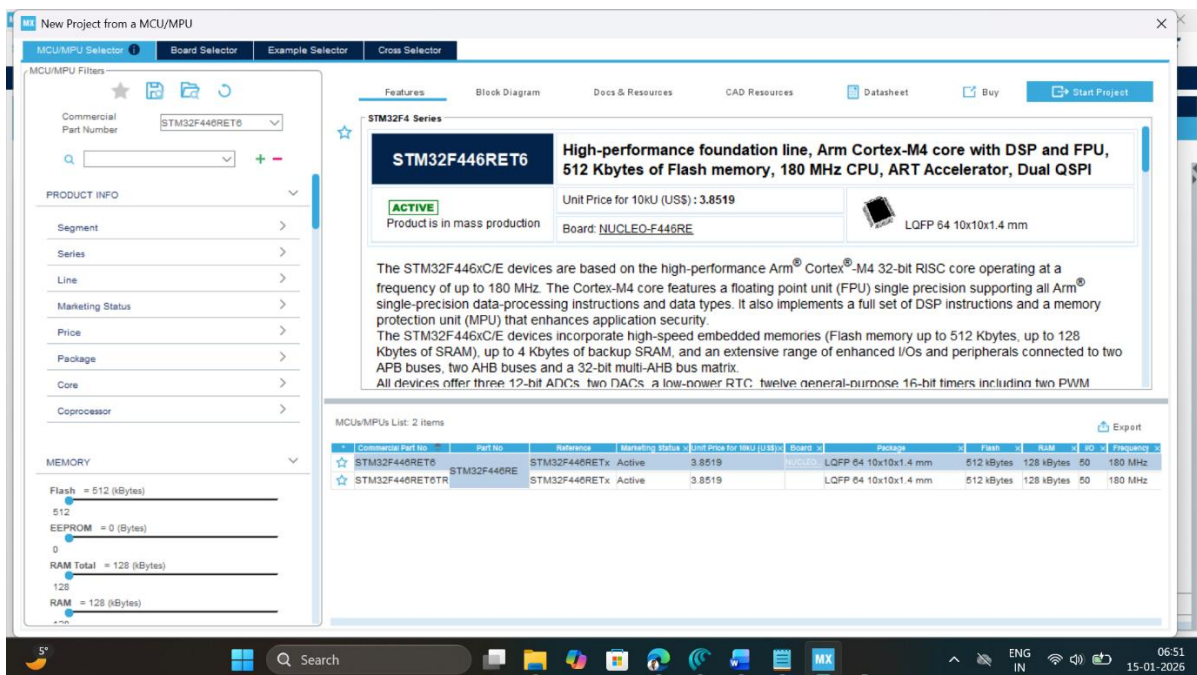


2. Write and select the microcontroller as you want to use and then click start the project. Select commercial part number STM32L446RE.
3. **Clock Configuration:** Configure clock as shown below to get maximum internal clock frequency of 84MHz.

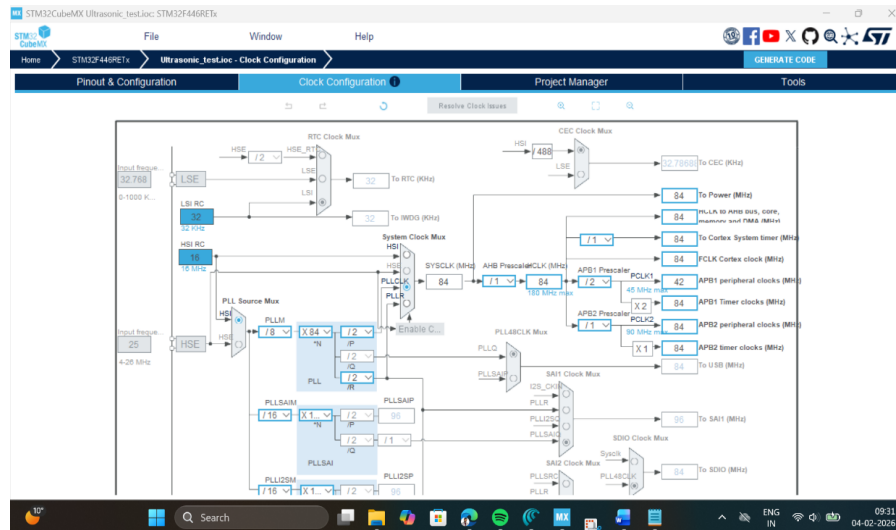

4. **SYS Mode:** Click on SYS mode and select debug as *Trace Asynchronous Sw*, and Timebase source to **TIM6**.

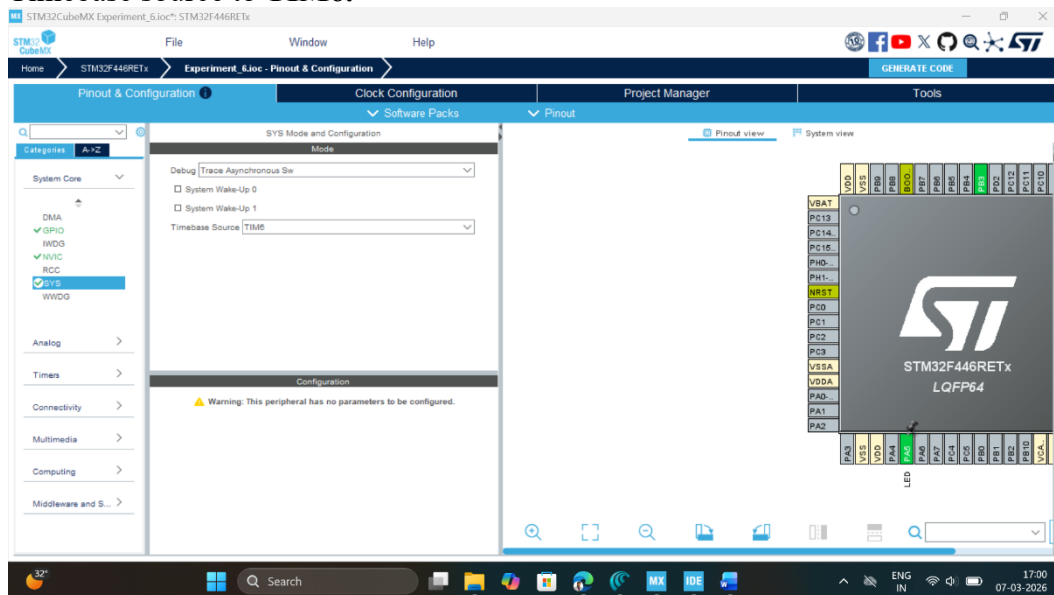

5. **FreeRTOS Configuration:** Click on Middleware and Software Pack, then select FreeRTOS software pack, which is already available with STMCube Mx. Select interface as **CMSIS_V2**.

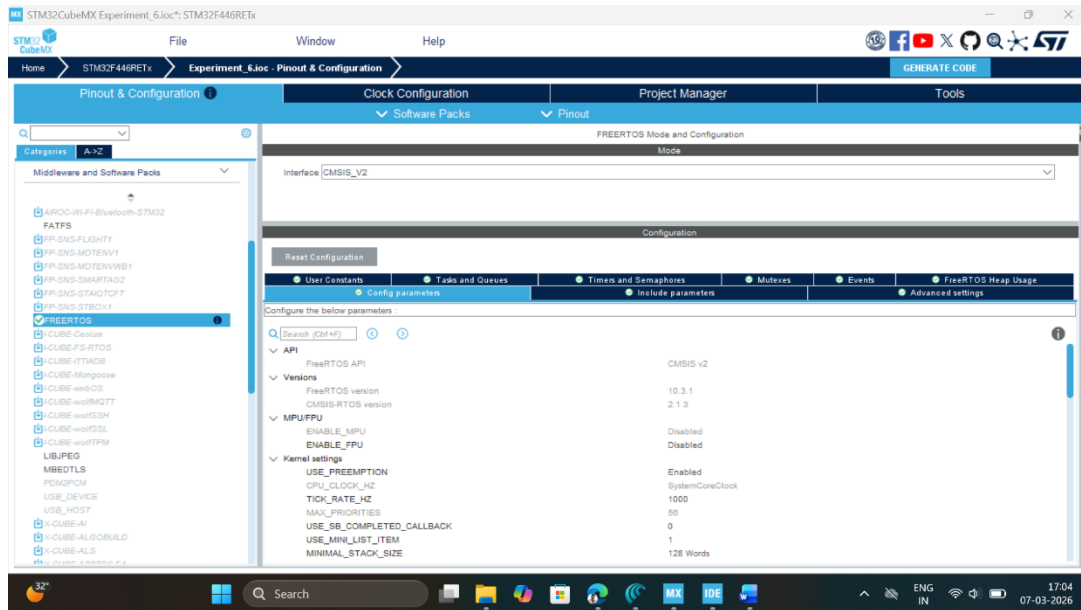

6. Click on Task & Queue Tab of configuration settings and rename the default task as 'Sensing_Task'. Rename the entry function as 'Sensor_Read'. Add another task named 'Navigation_Task' and rename its entry function as 'Motion_Control'.

Tasks and Queues	Timers and Semaphores	Mutexes	Events	FreeRTOS Heap Usage
Config parameters	Include parameters	Advanced settings	User Constants	

Tasks

Task Name	Priority	Stack Size	Entry Function	Code Size	Parameter	Allocation	Buffer Name	Control Block
Sensing_Task	osPriorityNormal	128	Sensor_Read	Default	NULL	Dynamic	NULL	NULL
Navigation_Task	osPriorityLow	128	Motion_Control	Default	NULL	Dynamic	NULL	NULL


Add

Delete


7. Now 'Add' a Queue to the application by clicking the Add button as shown below:

Queues					
Queue Name	Queue Size	Item Size	Allocation	Buffer Name	Control Block Name
myQueue01	16	uint16_t	Dynamic	NULL	NULL


8. Select Advanced Settings tab, and enable the USE_NEWLIB_REENTRANT setting

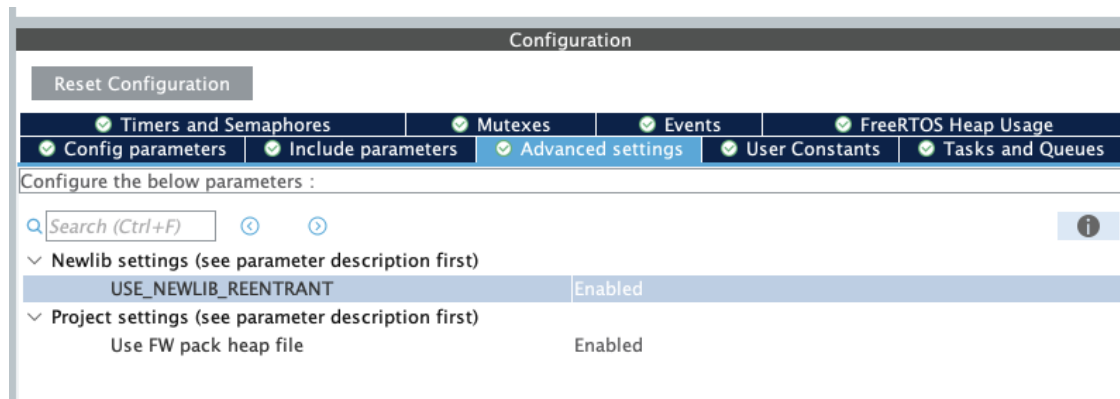

9. Write Project name and select IDE.

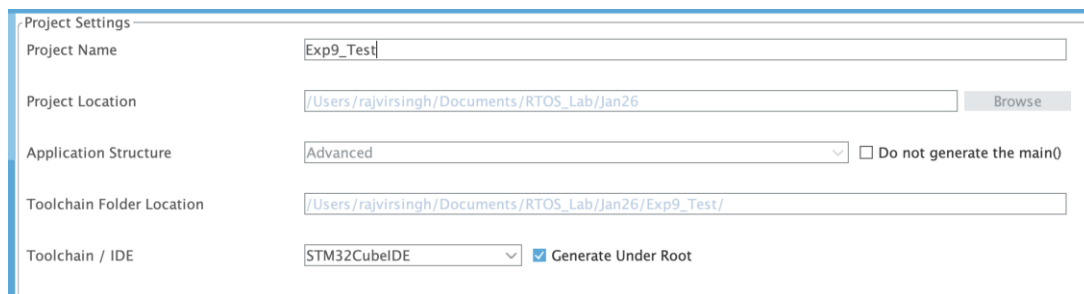


10. Click on generate code.
11. Click on the open project.
12. Click 'OK' on the generated popup showing "successfully imported the project on the workspace" and the project will be successfully added to the cube IDE.
13. Open the main source code on Cube IDE by clicking on **main.c**
14. Click on project properties, go to C/C++ Build settings check box for *printf* and *scanf* settings.

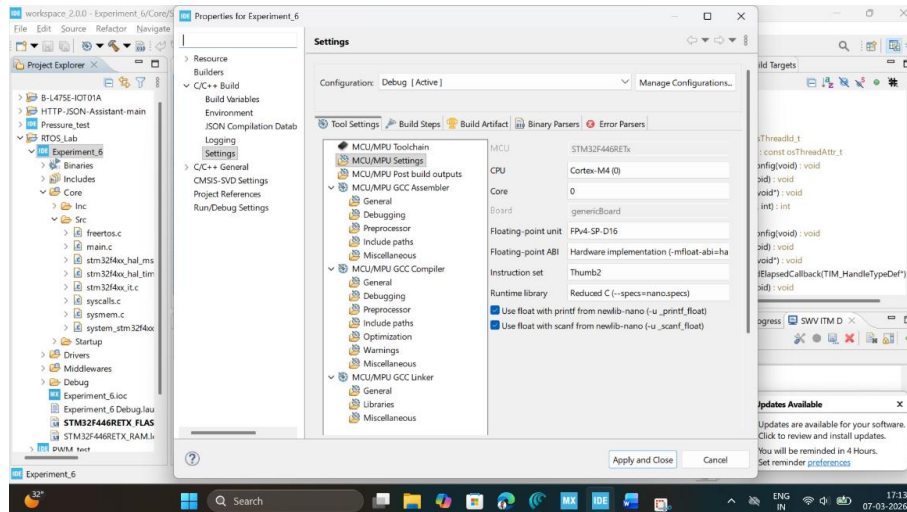

15. Now click on Debug icon and configure debugger for SWV ITM Trace

16. Click on Debugger configuration, select the debugger console, and click on ST-LINK S/N and then scan, as we attach a STM32F446RE development board, it will automatically pick up ST-LINK id.

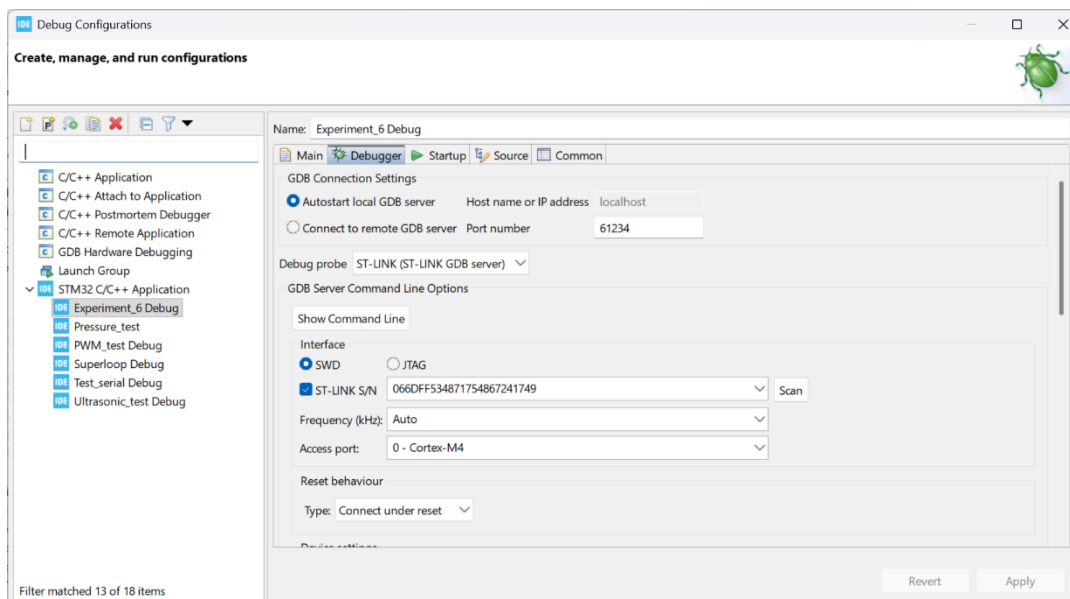

17. Next, select the Serial Wire Viewer (SWV) and check the enable button and make sure to pass on the right core clock frequency which is set-up at point 4 here i.e. 84MHz. Then click on the Apply button and close this window.

18. After configuration write following instructions in the **main.c** file and compile the program and ensure there will be zero error after compiling. */* Private includes -----*

```
-----*/
/* USER CODE BEGIN Includes */
#include<stdio.h>
/* USER CODE END Includes */
```

Write the function to enable SWV ITM Console to trace the output of tasks

```
/* USER CODE BEGIN 0 */
int _write(int file, char *ptr, int len) {
for (int i = 0; i < len; i++) {
ITM_SendChar(*ptr++);
}
return len;
}
/* USER CODE END 0 */
```

Edit the following line of code to create a queue to store unsigned integers

```
/* Create the queue(s) */
/* creation of myQueue01 */
myQueue01Handle = osMessageQueueNew (16, sizeof(unsigned int),
&myQueue01_attributes);
/* USER CODE BEGIN RTOS_QUEUES */
/* add queues, ... */
/* USER CODE END RTOS_QUEUES */
```

Edit the Sensor_Read task function as given below

```
void Sensor_Read(void *argument)
{
/* USER CODE BEGIN 5 */
    unsigned int dist = 0;
/* Infinite loop */
for(;;)
{
    printf("Inside Data Producer Task\n");
    dist = dist + 1;
    osMessageQueuePut(myQueue01Handle, &dist, 0, osWaitForever);
    osDelay(1000);
}
/* USER CODE END 5 */
}
```

Edit the Motion_Control task function as given below


```
void Motion_Control(void *argument)
{
/* USER CODE BEGIN Motion_Control */
    unsigned int distance;
/* Infinite loop */
for(;;)
{
    printf("Inside Data Consumer Task\n");
    osMessageQueueGet(myQueue01Handle, &distance, NULL, osWaitForever);
    printf("Distance is %u\n", distance);
}
```

```


}
/* USER CODE END Motion_Control */
}

```

19. Now, click on Window tab, select show view ☐ other ☐ select SWV ITM Data Console.
20. Now click on the Debug button, start debugging this main.c file and click on switch to change the perspective to debugger.
21. Click on SWV ITM Data Console setting, enable the PC sampling and select port 0.

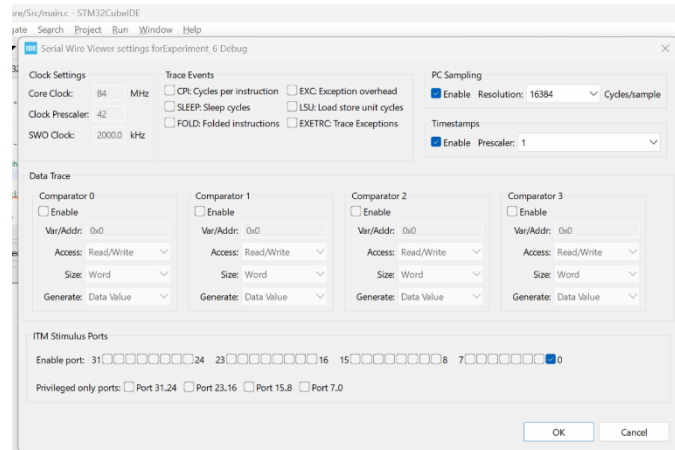

22. Click on Start Trace (Red Dot) on SWV ITM Data Console tab and then click on resume button to start executing the main program. Now you can see the message on Port 0 and LED Toggle on STM32F446RE development board.

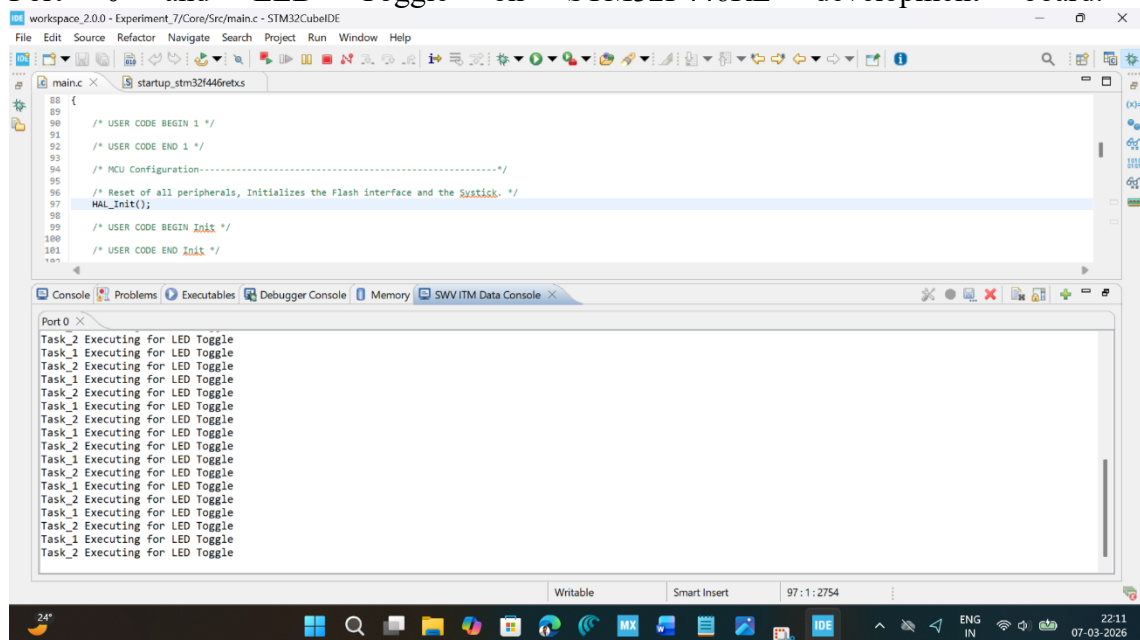

23. Start the debug session and use the SWV ITM Data Console to see the trace output from the tasks.

OBSERVATION:

Observation Number	Query	Response
--------------------	-------	----------

1	Specify the priority level of the following tasks by looking up from the Cube MX:	Sensor_Read	Normal
		Motion_Control	Low
2	Select the correct option based on the Cube MX priority setting for both tasks in the application.	Both tasks have same priority Sensor_Task has higher priority (correct) Motion_Task has higher priority	
3	From the trace output printed in 'SWV ITM Data Console', identify which task is running more frequently?	Both are running alternately	
4	Is the consumer task able to receive every value produced by the producer task?	Yes	

RESULT

The experiment successfully demonstrated synchronized inter-task communication using a **FreeRTOS Message Queue** within a producer-consumer architecture. The **Sensor_Read** task functioned as the producer, incrementing a distance variable and utilizing **osMessageQueuePut** to copy the data into the kernel-managed buffer every 1 second. Simultaneously, the **Motion_Control** task acted as the consumer, remaining in a power-efficient **Blocked** state via **osMessageQueueGet** until data became available.

Reflection Summary

1. Elaborate the meaning of the term 'thread-safe' in context of the following statement- 'A FreeRTOS implementation of Queue is thread-safe'.

1) In RTOS, thread-safe means that queue can be accessed by multiple tasks without causing data corruption or crashes. When a task reads/writes from a queue, FreeRTOS temporarily disables interrupts or uses a critical section so that context switch doesn't happen during a copying task.

2. Develop and test an implementation that uses a Queue to synchronize a fast data producing task with a slow data consuming task? The fast data producing task will quickly fill the queue to its full capacity after which the data production should stop till the queue can accommodate data.

2) We will set osDelay in consumer task to high value (eg 5000ms) than producer task (eg - 1000ms). The producer will quickly fill 16 slots of queue and when 17th item is generated, the producer task will enter blocked state. This will prevent system from losing data.

3. Develop and test an implementation that uses a Queue to synchronize a slow data producing task with a fast data consuming task? The fast data consuming task will quickly empty the queue after which the data consumption should stop till the data becomes available in the queue.

3) In this scenario, the producer task will have a long delay and consumer has very less or no delay. The consumer will call OS Message Queue Get and immediately process 1st piece of data. Since producer is slow, the queue stays empty usually consumer will enter blocked state after 1st execution. The consumer won't use CPU while in blocked state.