

‘e-casa’ - Eco-friendly Household Waste System

Group 6

A project report in partial fulfilment of the requirements for the subject

SYSTEMS ENGINEERING (BSS 410)

in the

FACULTY OF ENGINEERING, BUILT ENVIRONMENT, AND
INFORMATION TECHNOLOGY

UNIVERSITY OF PRETORIA

October 24, 2018

‘e-casa’ - Eco-friendly Household Waste System

Executive Summary

The aim of this project is to create a household waste system System of that will not only reduce the waste produced by a generic household but do so by increasing value to the user. The final deliverable for this project will be a report that details the needs analysis, conceptual design, feasibility and risk assessment of the designed system. The conceptual design will be done with the use of *Core 9* to capture all identified needs accurately and produce system design documentation.

Contents

List of Figures	iv
List of Tables	v
Acronyms	vi
1 Introduction and Background	1
1.1 Problem Background	1
1.2 Project Objective	1
2 Concept Development Stage	2
2.1 Needs Analysis Phase	2
2.1.1 Operational Need Analysis	2
2.1.2 Operational Objectives	3
2.1.3 Functional Definition	3
2.1.4 Feasibility Definition	4
2.1.5 Need Validation	5
2.2 Concept Exploration	6
2.2.1 Operational Requirements Analysis	6
2.2.2 Performance Requirements Formulation	6
2.2.3 Implementation of Concept Exploration	7
2.2.4 Performance Requirements Validation	9
2.3 Concept Definition	12
2.3.1 Performance Requirement Analysis	12
2.3.2 Functional Analysis and Formulation	13
2.3.3 Concept Selection	13
2.3.4 Concept Validation	13
3 Engineering Development Phase	14
3.1 Advanced Development Phase	16
3.1.1 Requirements Analysis	16
3.1.2 Functional Analysis and Design	16
3.1.3 Prototype Development	16
3.1.4 Development Testing	16
3.2 Engineering Procurement Phase	16
3.2.1 Requirements Analysis	16
3.2.2 Functional Analysis and Design	16
3.2.3 Component Design	16
3.2.4 Design Validation	16
3.3 Integration and Evaluation Phase	16

3.3.1	Test Planning and Preparation	16
3.3.2	System Integration	16
3.3.3	Developmental System Testing	16
3.3.4	Operational Test and Evaluation	16
4	Post Development Stage	17
4.1	Production and Deployment Phase	17
4.1.1	Transitions from Development to Production	17
4.1.2	Production Operations	17
4.2	Operations and Support Phase	17
5	Software Design and System Dynamics	18
5.1	Core 9 System Design Structure	18
5.2	System Dynamics Analysis	18
5.3	Selected Elements for System Dynamics Analysis	18
5.4	Sensitivity Analysis	18
6	Conclusion	19
A	Some data as appendix	20

List of Figures

2.1	Objective Tree Structure	3
2.2	e-casa Objective Tree Structure	4
2.3	Household separation recycling bin	5
2.4	Household grey water system	5
2.5	Outdoor Household Composter (220 <i>litres</i>)	6
2.6	Provide waste sortation and storage	8
2.7	Reduce water consumption	8
2.8	Provide long-term cost savings function	9
3.1	System Diagram	15

List of Tables

2.1	System Performance Metrics	7
2.2	System Alternatives for Functional Tasks	10

Acronyms

e-casa	Eco-friendly Household Waste System
FBD	Functional Block Diagram
SD	System Dynamics

Chapter 1

Introduction and Background

1.1 Problem Background

Households consume a variety of products and create different wastes. Products may take the form of food items, municipal water, electricity and other consumables which are either used up or discarded after use. Products discarded after use, such as excess food, food and beverage packaging and water exit the household as forms of waste. Food clippings from preparing dinner or paper-based packaging is often discarded into dustbins alongside plastic and other waste types to be collected and transported to a dump site. Water used at bathroom sinks or showers is sent directly to the the municipal water system after use to be disposed of. Each type of waste generated by a typical residential household requires proceeding systems that will either store, repurpose or discard the waste.

Recent trends have made the consumer market ecologically aware of their own waste generation and many systems have been created to reduce the total waste output of a household. Such products include grey water systems, recycling bins and compost containers. There is a growing need for these means to be adpoted but presently no solution on the market that integrates all means into one comprehensive system for homeowners.

Because these systems operate independently, the outputs of one system are often not used as inputs to another. Integrating these systems to operate together could provide more value to the user and further reduce household waste. For example: using food clippings (to create a compost heap) and grey water to grow vegetables in one's garden instead of disposing food clippings in a general waste bin and discarding water to the municipal water system directly after its first use. This eliminates the need for compost to be purchased from a store and reduces water consumption.

1.2 Project Objective

The objective of this project is therefore to investigate the possibility of integrating these different systems as one. The intention is to determine whether the potential cost and resource use savings to be earned from such an integrated system outweigh the financial cost and initial inconvenience to install.

Chapter 2

Concept Development Stage

2.1 Needs Analysis Phase

2.1.1 Operational Need Analysis

Eco-friendly Household Waste System ([e-casa](#)) is a sustainable household waste management system intended to fulfill the increasingly prevalent need for sustainable living. The need for individuals and households to consume and dispose of resources in a more sustainable manner is becoming ever more pertinent because of increasing strain on the world's most essential natural resources such as water and fossil fuels. The need is driven by the requirement for individuals (and society as a whole) to reduce their negative impact on the environment by re-use, recycling and minimising resource use as these natural resources become more scarce. Successfully meeting this need will not only improve living conditions for societies but importantly alleviate pressure on governments and municipalities who have to manage and distribute these water and electricity resources to the public. Although regulation does not yet fully drive this need, government encourages and sometimes imposes restrictions to encourage responsible water and electricity use. This is important to develop a sustainable mindset and awareness of waste generation. Because regulation is still limited on the use of these resources, the onus lies with society and individuals who are aware of and want to mitigate their negative impact on the environment.

[e-casa](#) is aimed at fulfilling the operational need of sustainable living for households by providing a system that makes it possible to manage and dispose of waste responsibly while simultaneously minimising water consumption. [e-casa](#) is also expected to provide long-term financial benefits to the user in the form of reduced water consumption costs and grocery bills (with some homegrown foods). Furthermore, there is the expected intangible benefit of the system - knowing one's adverse impact on the environment is mitigated.

Due to a lack of solutions currently on the market, there is an opportunity to enter a gap in the market with [e-casa](#). However, this gap is anticipated to be small in size as this product will mainly be aimed at high income individuals aware of (and wanting to reduce) their impact on the environment. There is also an opportunity to market this system as a product to middle class individuals who have sufficient capital to purchase such a system now in order to reap the aforementioned financial savings down the line. However, this extension will likely only be possible if the initial cost of the system is not too high for these individuals and the financial savings are substantial enough to persuade this group.

2.1.2 Operational Objectives

The overarching objective that **e-casa** is intended to fulfil is to provide sustainable household waste management. This objective is deconstructed into three primary objectives, namely: *Provide Waste Sortation and Storage*, *Reduce Water Consumption* and *Provide long-term cost savings*. Figure 2.2 shows the operational objectives of the **e-casa** system.

*We need an objective tree of our own here that resembles Figure 2.1. Figure 2.2 is a work in progress of that so far.

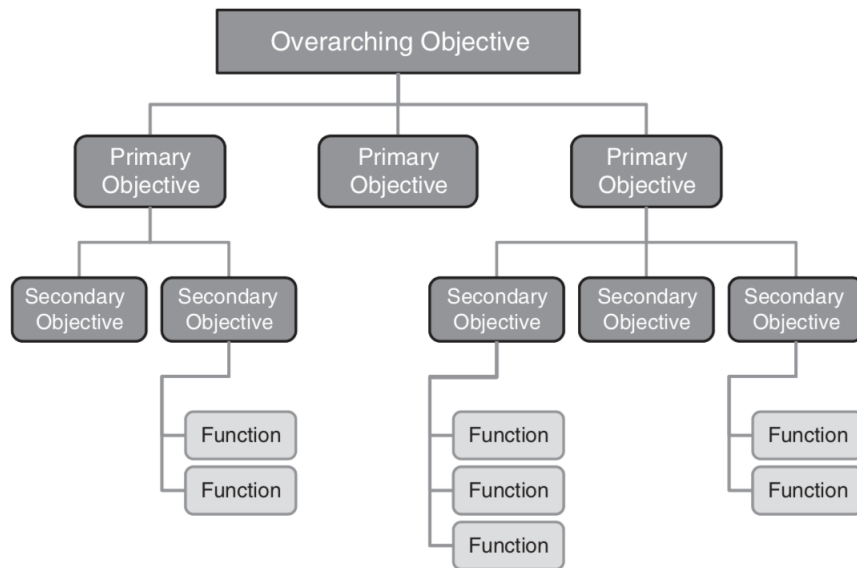


Figure 6.3. Objectives tree structure.

Figure 2.1: Objective Tree Structure

2.1.3 Functional Definition

e-casa needs to perform the following functions in order to achieve the objectives layed out in the objective tree:

Provide Waste Sortation and Storage - The system must provide the capability for waste to be sorted according to its composition: paper, plastic, glass, organic material and unusable waste. Organic material must be retained to be used in a composter and recyclable waste stored temporarily in its respective category for it to be later removed from the household system and passed on to the local municipality waste collection service.

Reduce Water Consumption - To achieve this objective a grey water system will need to perform the functions of receiving used water, processing this water (to be re-used again), storing the water until it is demanded at an outlet and directing the water from storage to the necessary outlet when it is demanded.

Provide Long-term Cost Savings - The use of a grey water system alone will provide long-term cost savings by means of reduced water consumption. Therefore if the objective

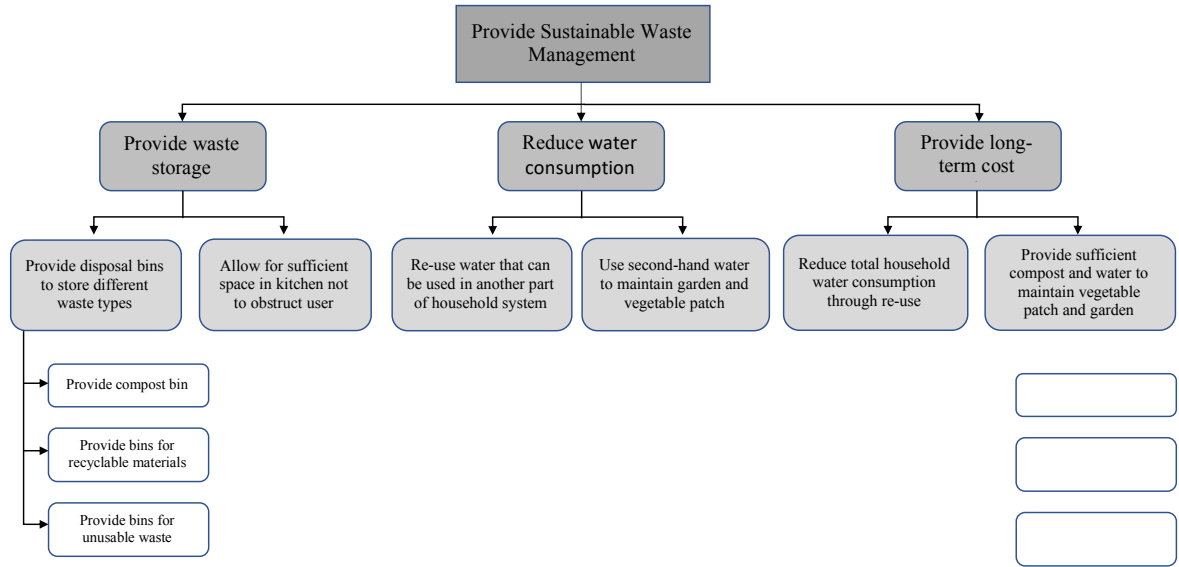


Figure 2.2: e-casa Objective Tree Structure

of reduced water consumption is met with a grey water system that fulfills the necessary functionality, the household will demand less water from the municipality and cost savings will be realised immediately during system use. However, to provide long-term cost savings in other terms, [e-casa](#) will need to effectively integrate grey water, composting and waste recycling to use each other's outputs as inputs and reduce the amount of external resources such as compost, vegetables and water to required to be used as inputs to the household system.

Effective utilisation (re-use) of water and organic waste will reduce the amount of water that needs to be purchased from the municipality, compost that needs to be purchased and eventually groceries that need to be bought. This functionality is essential to reduce the household's input costs and provide tangible financial value to the system user.

2.1.4 Feasibility Definition

At present there are household recycling bins available on the market that separate waste into the necessary categories. The technology is therefore currently available and feasible as a solution to the functions of waste sortation and storage. A recycling bin similar to that shown in Figure 2.3 would likely be purchased and used in the [e-casa](#) system.

There are also existing grey water systems available for purchase online or in-store. However, the setup of these systems and the size of its components usually vary case-to-case dependent on the appliances to be linked to the system, the size of the storage tank required by the household and the quality of the filtration component to be installed. Components of a grey water system can be easily purchased by any individual, but some degree of expertise and knowledge in the field is usually required to correctly size components, determine how they will function together and physically setup the system with the household's present water supply system.

The design for [e-casa](#)'s expected to be much like the one in Figure 2.4 with linking to the household's shower/bath, basins, washing machine, outdoor tap and toilet. A number of different household composters are available on the South African market. These composters



Figure 2.3: Household separation recycling bin

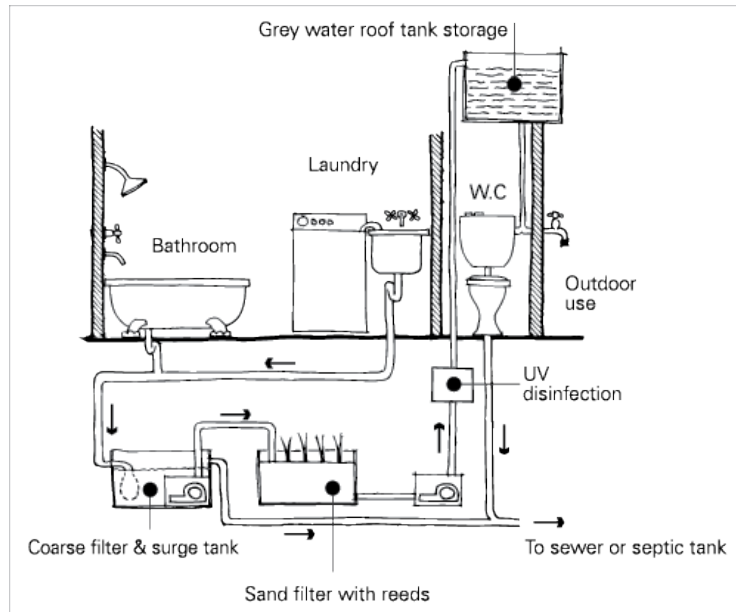


Figure 2.4: Household grey water system

are easily accessible and available online and in hardware stores. It is assumed for the time being that a 220 *litre* composter (shown in Figure 2.5) will be of sufficient size to store a household's organic and garden refuse waste.

2.1.5 Need Validation

Design Validation What we need to do: Define metrics to evaluate performance requirements. Present scenarios and evaluate what the metrics would do.

To ensure the proposed system can fulfill the identified need, metrics have been developed that will be used to evaluate the performance of the system. The five metrics in Table 2.2 are to be evaluated using different hypothetical scenarios. These scenarios reflect expected environmental conditions and consideration of the metrics in conjunction with these scenarios



Figure 2.5: Outdoor Household Composter (220 *litres*)

is used to determine the appropriateness of the system. The hypothetical scenarios are as follows:

Long term system failure - The water and waste savings will be realised within the first usage cycle, meaning once the system has re-used waste and waste, the saving immediately materialises. The return on investment is expected to be achieved before the onset of long term system failure. The likelihood of system failure can be decreased with continued maintenance of the system.

External market competition - No other competitors are presently offering an integrated system however, there are suppliers offering parts of the system. This implies that other suppliers can match or better the household service cost of the [e-casa](#) system. The reduced cost of implementing e-casa shall lie in the simple integration with current household systems. Customers would not require large renovations to install the system, reducing the over cost and improving the return on investment making the system marketable.

2.2 Concept Exploration

2.2.1 Operational Requirements Analysis

analysing the stated operational requirements in terms of their objectives. Restating, redefining or amplifying (as required) to provide specificity, independence and consistency among different objectives

2.2.2 Performance Requirements Formulation

Translating operational requirements into subsystem functions and defining a necessary and sufficient set of performance characteristics reflecting the functions essential to meeting the system's operational requirements. Formulating the performance parameters required to meet the stated operational requirements.

Table 2.1: System Performance Metrics

Metric Category	Unit Measure	Description
Water savings	<i>litres</i>	The volume of water saved is calculated as the reduction in the volume of water that enters the household.
Organic waste reduction	<i>kilogram</i>	The total mass of organic waste re-used by means of composting is the reduction in household waste output.
Disposable waste reduction	<i>kilogram</i>	The total mass of plastic, paper and glass respectively represent disposal waste reduction. It is assumed firstly, that all disposable materials were not previously recycled and that secondly, all disposable materials will be recycled by the municipality's garbage management system once the system is installed.
Household service cost saving	<i>Rands</i>	The reduced water consumption of the household (from the municipality's system) and the re-used organic waste helps to perform household activities that would otherwise require a homeowner to purchase water, compost and vegetables. This includes the municipal water used in the household and compost for a vegetable garden. Household service cost saving is thus the total monetary savings obtained from reduced water use, self-composting and not having to purchase vegetables as frequently.
Payback Period	<i>years</i>	The payback period is defined as the period of time it takes for the financial savings generated by the system, to equal the initial cost of purchasing and installing the e-casa system.

Subsystem functions are allocated and represented by the following Functional Block Diagram ([FBD](#))s:

2.2.3 Implementation of Concept Exploration

Exploring a range of feasible implementation technologies and concepts offering a variety of potentially advantageous options.

Recycling and Waste Disposal Technologies - The recycling and waste disposal subsystem can be expanded to include metal and electronic waste bins as well. However, garbage bins with more than three bins to separate waste are not commercially available and this type of garbage bin would therefore have to be designed and built. It is particularly advantageous to simply purchase any already existent multiple-container garbage bin because the costs that would need to be incurred to design a new one do not appear to outweigh the financial or intangible benefits to be gained. It is also expected that most households will

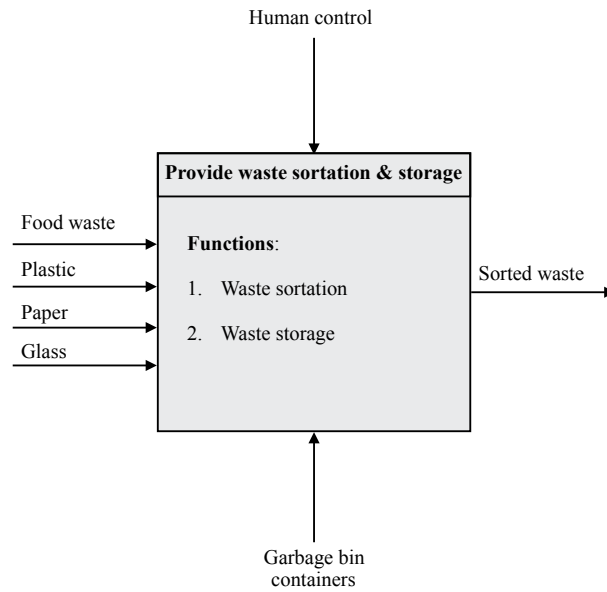


Figure 2.6: Provide waste sortation and storage

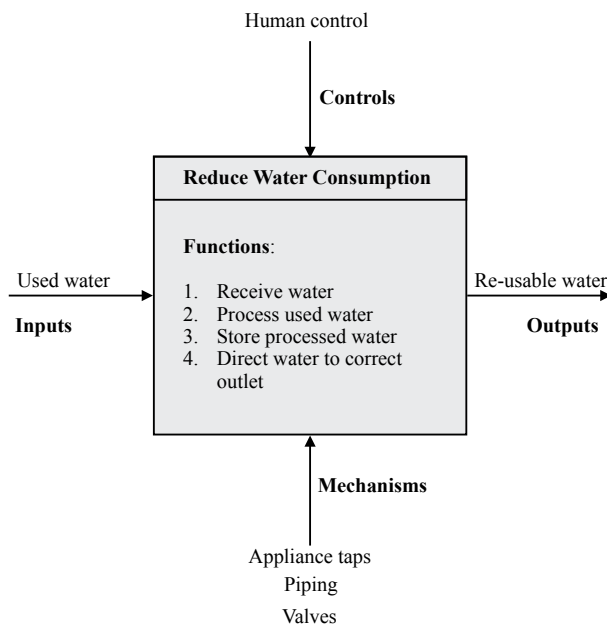


Figure 2.7: Reduce water consumption

not have enough physical space to house such a large bin and if a household did, it would be easy to purchase two three-container bins for use. Furthermore, metal and electronic waste is often found in significantly smaller quantities than more populous, plastic, paper and glass waste and it is difficult to justify separate containers for these two waste categories as they will likely only be emptied a couple times a year.

Grey water system technologies - Composting Options -

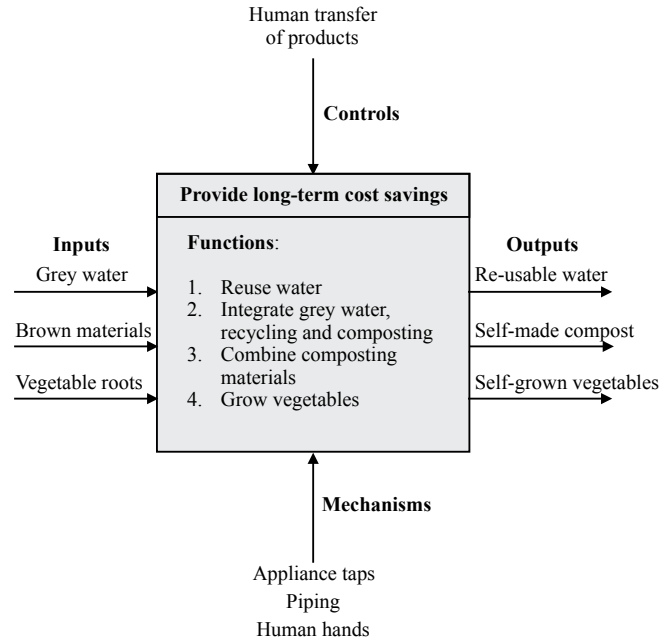


Figure 2.8: Provide long-term cost savings function

2.2.4 Performance Requirements Validation

Conducting effectiveness analyses to define a set of performance requirements that accommodate the full range of desirable system concepts and validating the conformity of these requirements with the stated operational objectives and refining the requirements if necessary.

Updated upstream The most suitable alternative for each of the system aspects addressed in the section above will be chosen to form the the system. The system as whole must be as cost effective as possible. However, quality should not be sacrificed for unreliable components. The grey water system components will be selected with the intention of a minimum 50 year project life for each, as per industry piping standards. This is important to ensure the system does require repairs over the life of the project, only maintenance. The labour and expertise required to make system repairs for the installed grey water system are expected to be costly and should be avoided. ===== The most suitable alternative for each of the system aspects addressed in the section above will be chosen to form the the system.

For waste sortation, alternative one will be selected in order to save space and keep the garbage bin as small as possible to fit into the household's kitchen.

() Will be chosen for waste storage.

To receive water, the alternative with the least invasive way of changing the household's current piping system will be selected (which is anticipated to be ?). With regards to the processing of used water, alternative two will be selected. This is because the filter is a significant expense and will require frequent maintenance. The significant expense and inconvenience of alternative one is anticipated to outweigh its financial benefit as this would only save water being demanded by the household's washing machine.

Alternative two for used water storage goes hand-in-hand with alternative two for water processing. Because a filter will not be purchased for the grey water system, a smaller central tank will be used to temporarily store used water until it is demanded for vegetable garden

Table 2.2: System Alternatives for Functional Tasks

Functional Task	Alternative 1	Alternative 2
Waste sortation	One garbage bin with multiple compartments	Multiple garbage bins each with a single compartment
Waste storage	Don't know	Don't know
Receive water	Four separate pipes from (bath, shower, basin and washing machine) that connect to the central grey water storage tank	One pipe that merges bathroom appliance outputs and one kitchen pipe. These two pipes connect to the central grey water tank
Process used water	Filter grey water to be sent back to the washing machine for use	Do not purchase a filter and only use grey water in the garden for composting and plant watering
Store processed water	Large central tank to store all water received until it is needed again by the washing machine or in the garden	Small central tank to store used water only for the garden
Direct water	Three-way valve to direct grey water back to the washing machine, to an outside water tap to be used in a compost heap and to the garden's sprinkler system to water the vegetable patch	Two-way valve to direct grey water back to outside water tap to be used in a compost heap and to the garden's sprinkler system to water the vegetable patch
Re-use water	Grey water system makes water available for re-use at necessary outlet points and human user is required to re-use water	Grey water system makes used water available for re-use at necessary outlet points in the required quantities at specific times to eliminate the need for the user to retrieve the water and use it themselves
Integrate water, recycling and composting	N/A - Alternatives explored by other system functions	N/A - Alternatives explored by other system functions
Combine composting materials	Purchase a residential size compost container that combines the necessary materials to produce compost	Create a large compost heap in the household's garden to store and mix compost materials
Grow vegetables	User must collect water from the outside garden tap in the necessary quantity and use it to water the vegetable patch. Compost collected and filled in the vegetable patch manually by human user	Connect grey water storage tank directly to garden sprinkler system to be activated by the human user by the flick of a switch. Compost collected and filled in the vegetable patch manually by human user

and composting activities.

Alternative one is chosen for the re-use water function. Water will be made available for re-use by the grey water system that will make it available at the outside garden tap and sprinkler system for the user. It is then up to the user to use (re-use) this water as best

possible. Alternative two would provide more value to the system user but would require substantial, research, financial investment and testing to develop and automated system that caters specifically to the household's unique needs.

For the direct water function, alternative two will be selected as only a two-way valve will be needed if water is not to be re-directed from the storage tank to the washing machine for use.

The function of integrating water, composting and recycling will be performed both by hardware and the human user. Hardware (piping) will be used to connect the grey water subsystem directly to the outside sprinkler system surrounding the vegetable patch and to an outside tap for garden water usage. Grey water directed to the outside tap will need to be collected in the necessary quantity by the human user and input into the compost container. The human user will also be required to create the link between the recycling system and the compost system by means of physically transporting paper waste, garden refuse and food clippings to the compost container. There is no alternative for this option because alternatives for integrating these subsystems in different ways are explored through the other function tasks.

Alternative one will be selected to combine composting materials. Although a large garden compost heap may produce more compost than a smaller compost container, the smaller residential compost container is more convenient for the human user. To maintain a large compost heap in the garden (alternative two) is not practical for all households due to: space restrictions, the need for a structure to protect the compost from weather conditions that will change the balance of water in the heap and the cost of such a structure. The function of combining the composting materials will be performed by the human user who will place the required amounts of dry materials, food waste, paper and brown materials into the residential size compost container.

The task of growing vegetables will need to be performed by the human user. However, fulfilling this function will be made easier for the human user by selecting alternative two that will connect the household's water sprinkler system directly to the grey water storage tank. This way the user will just have to flick a switch to turn on the sprinklers and water the vegetable garden instead of manually collecting water from a tap and watering the growing vegetables. Although alternative two is expected to be more expensive because of the hardware required, it is expected to add a significant benefit to the system user in the form of convenience. The compost to grow vegetables will have to be collected out of the bottom of the compost container by the human user and placed into the vegetable patch. This is because there is not yet a way to automate this process feasibly on such a small scale.

The system as whole must be as cost effective as possible. However, quality should not be sacrificed for unreliable components. The grey water system components will be selected with the intention of a minimum 50 year project life for each, as per industry piping standards (?). This is important to ensure the system does not require large-scale repairs over the life of the project, only maintenance. The labour and expertise required to make system repairs for the installed grey water system are expected to be costly and should be avoided. ~~~~~
Stashed changes

The alternatives chosen to fulfil the functions (tasks) are the biometric scanner for finger-printing, a touch screen for the data input, a receipt printer and portable card machine for payments as well as a cash alternative feed, a built-in camera and scanner to take pictures and to scan documents and lastly, a hard drive for the data storage. These alternatives were chosen with the multi objectivity of suitability, convenience, ease of use and a consideration of cost effectiveness in terms of meeting the requirements without over-designing for its purpose.

2.3 Concept Definition

2.3.1 Performance Requirement Analysis

Relating analysed specifications to operation needs

Three primary operational needs were identified. Each need will be evaluated individually to determine if the proposed specifications can adhere to the need.

1. Reduce water consumption

- (a) Reducing the amount of water consumed by a household would require that water be reused when possible. The specification states that 10% of input water be diverted to other functions within the house thus reducing the water used from the municipal supply. The grey water system can divert a sufficient volume of water back into the house for consumption or this water can be stored for later use. The net effect is that less water is purchased from the municipality and the household consumption decreases thus satisfying the requirement.

2. Reduce the production of physical waste

- (a) The production of physical waste refers the mass of waste received by the municipality for further processing and is to be reduced by 20%. To achieve this, e-casa processes and diverts physical waste generated within the household to other sources that may benefit from the waste.
- (b) The composted organic matter is reused in the garden.
- (c) The net reduction of waste is required to be

3. Provide sustainable waste management system

- (a) Reducing the amount of water consumed by a household directly reduces the running cost of the house and thus for cost reduction to occur, further reductions in water consumption are required. The reduction in costs of the waste management system shall only materialise once the the composting has been complete. Households may use the compost for the maintenance of their gardens or to grow their own vegetables, further reducing household running costs. A cost reduction of 13% is anticipated as the impact of reducing physical waste production has less direct implications on cost.
- (b) the cost of the system is expected to be fairly high. The savings, in the form of reduced operating costs of a household, generated by the system must be repaid within a 2 year period.
- (c) Reducing the consumption of water and production of physical waste reduces the net effect on the environment. This is sufficient to achieve the goal of 5 ton reduction.

System performance requirements refinement

Weak points of the current system are as follow - does not include the impact of materials used in the system - specifications do not take into account the individual needs of each household - specification do not take into account the maintainability of the system -

2.3.2 Functional Analysis and Formulation

Allocating subsystem functions to the component level in terms of system functional elements and defining element interactions, developing functional architectural products, and formulating preliminary functional requirements corresponding to the assigned functions.

2.3.3 Concept Selection

Synthesizing alternative technological approaches and component configurations designed to performance requirements; developing physical architectural products; and conducting trade-off studies among performance, risk, cost, and schedule to select the preferred system concept, defined in terms of components and architectures.

2.3.4 Concept Validation

Conducting system analyses and simulations to confirm that the selected concept meets requirements and is superior to its competitors and refining the concept as may be necessary.

Chapter 3

Engineering Development Phase

analysing the system functional specifications with regard to their derivation from operational and performance requirements and the validity of their translation into subsystem functional requirement identifying components requiring development

The system's functional specifications are translated into three subsystem functional requirements:

Grey Water subsystem - This system interfaces with the household's municipal water supply which is its primary input. It is also connected to multiple household components, namely: the washing machine, bath/shower, toilet cistern and garden. This subsystem has three functional capabilities. The first being to store grey water in a central tank to be recycled (re-used) in the system, secondly to sort re-usable water from unusable waste water and finally to transfer both the re-usable and unusable water in the subsystem to the appropriate destination (component). This subsystem also feeds grey water to the next subsystem (compost).

Compost subsystem - The compost subsystem interfaces with the household's garden and organic material stockpile components. It uses organic materials from the material stockpile to provide compost to the garden component. Its primary capabilities are to store organic materials and provide some form of visual management for the user to know when there is sufficient compost for the storage container to be emptied. This subsystem is connected to the grey-water subsystem which provides grey water as an input as well as to the Recycling and waste disposal subsystem which provides paper and other organic waste to the compost system.

Recycling and waste disposal subsystem - This subsystem interfaces with the household's kitchen as a component in order to receive all household waste as an input. It also interfaces with the municipal recycling system at the point where waste is placed on the sidewalk for collection by the municipality's waste collection service. Its primary capability is to sort household waste into the relevant categories for re-use or disposal. Paper recyclables and organic waste collected by this subsystem are output to be used in the compost subsystem while other recyclables and non-recyclable waste is disposed of to the municipal recycling system.

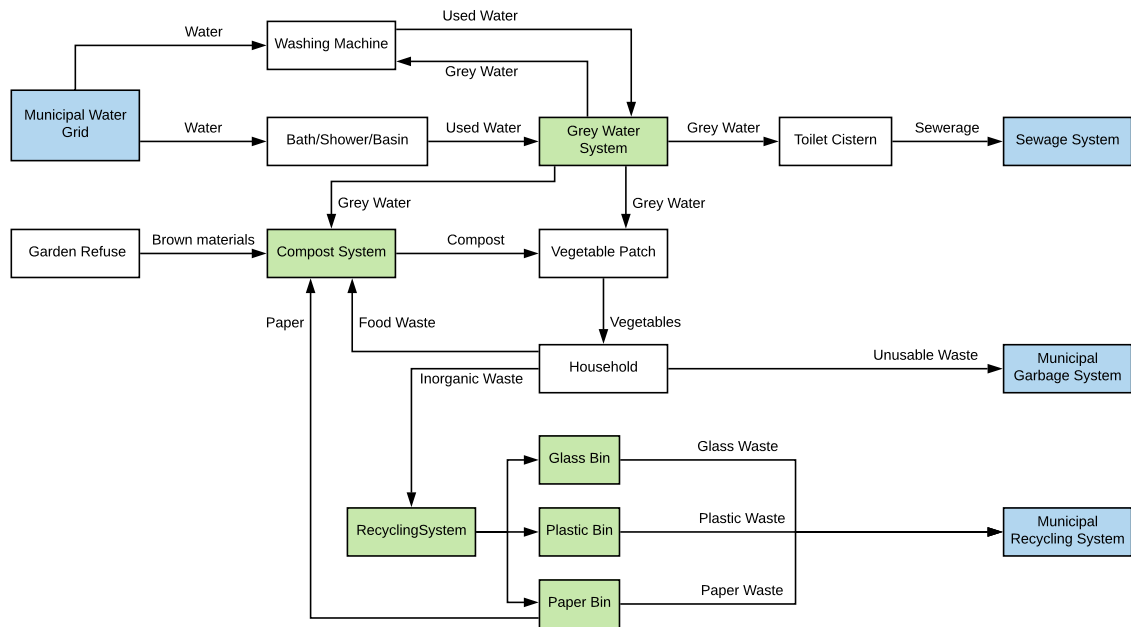


Figure 3.1: System Diagram

3.1 Advanced Development Phase

3.1.1 Requirements Analysis

3.1.2 Functional Analysis and Design

3.1.3 Prototype Development

3.1.4 Development Testing

3.2 Engineering Procurement Phase

3.2.1 Requirements Analysis

3.2.2 Functional Analysis and Design

3.2.3 Component Design

3.2.4 Design Validation

3.3 Integration and Evaluation Phase

3.3.1 Test Planning and Preparation

3.3.2 System Integration

3.3.3 Developmental System Testing

3.3.4 Operational Test and Evaluation

Chapter 4

Post Development Stage

4.1 Production and Deployment Phase

4.1.1 Transitions from Development to Production

4.1.2 Production Operations

4.2 Operations and Support Phase

Installation and test (system integration site, internal and external, disruptive or non-disruptive installation, early system operational difficulties encountered or that could be encountered, operational personnel) Logistics, Support and Maintenance schedule System Upgrades (hard and software upgrade plans)

Chapter 5

Software Design and System Dynamics

This phase is required to study the behaviour and structure of a system by carrying out sensitivity analysis tests. Only select critical elements or more as deemed fit from the designed system and apply to these to the modelling capability of a chosen software. Your algorithm/software approach should be such that a change in the value of one element's input can be quantitatively seen in other elements within the network. [Use software such as: Anylogic, Vensim, Stella, Dynamo++ etc] Phase II is tied to your ability to demonstrate sensitivity analysis, structure and behaviour of a system resulting from a change in one or more parameters of some system elements.

5.1 Core 9 System Design Structure

5.2 System Dynamics Analysis

==35marks==

5.3 Selected Elements for System Dynamics Analysis

==10/35marks== Reason for selecting these elements in a situation where the new network for SD differs from the main designed network ==5/35marks==

5.4 Sensitivity Analysis

==20/35marks== Simulation runs to demonstrate sensitivity analysis, changed system behaviour etc

Chapter 6

Conclusion

Bibliography

Fischer, G. Life cycle assessments of plastic pipe systems in the field of utility and building technology.

Appendix A

Some data as appendix