

## Simulation 1 \_ Straight

|            |       |
|------------|-------|
| Model:     | 400   |
| Quantity:  | 12    |
| Optic:     | 13°   |
| Direction: | 0°    |
| Color:     | 2700K |

## Simulation 2 - Spread

|            |            |
|------------|------------|
| Model:     | 400        |
| Quantity:  | 12         |
| Optic:     | 13°        |
| Direction: | -45° x 45° |
| Color:     | 2700K      |

## Simulation 3 - Straight

|            |       |
|------------|-------|
| Model:     | 400   |
| Quantity:  | 12    |
| Optic:     | 13°   |
| Direction: | 0°    |
| Color:     | 6500K |


## Simulation 4 - Spread

|            |            |
|------------|------------|
| Model:     | 400        |
| Quantity:  | 12         |
| Optic:     | 13°        |
| Direction: | -45° x 45° |
| Color:     | 6500K      |




# MLR 4800-LED SLED MOUNTED

## Simulation 1 \_ Staight \_ 2700k

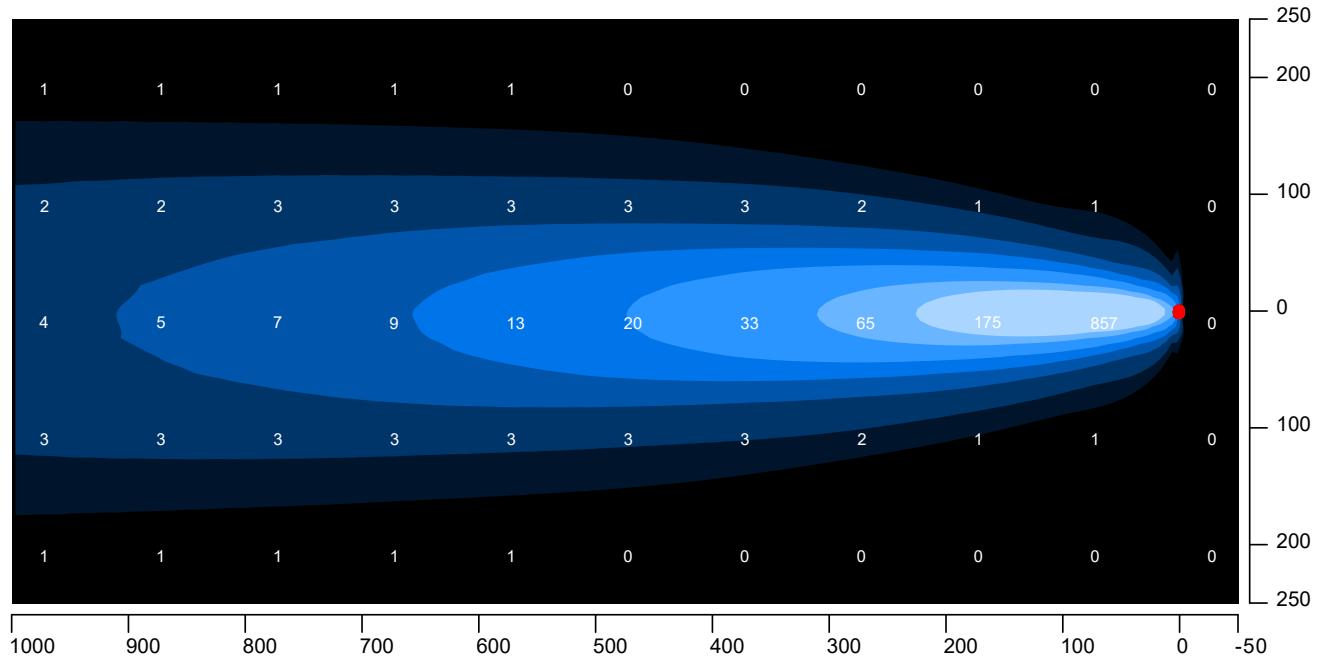


## Simulation 2 \_ Spread \_ 2700k

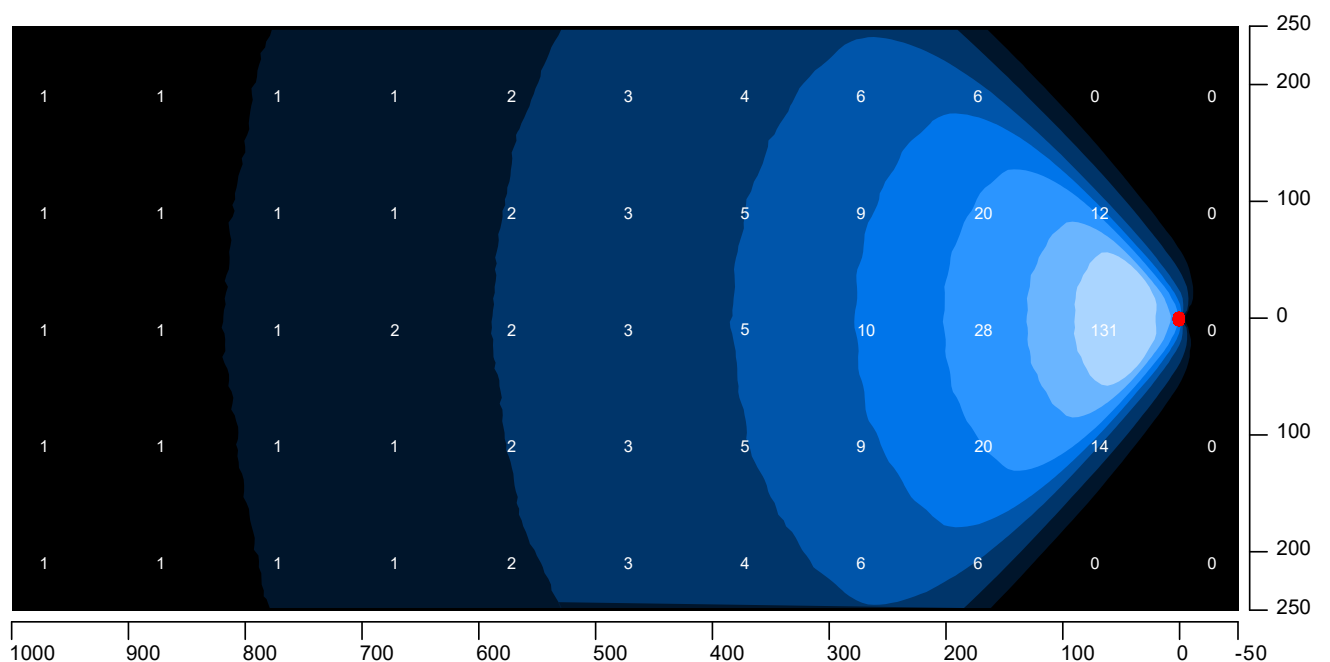

# MLR 4800-LED SLED MOUNTED

## Simulation 3 \_ Staight \_ 6500k

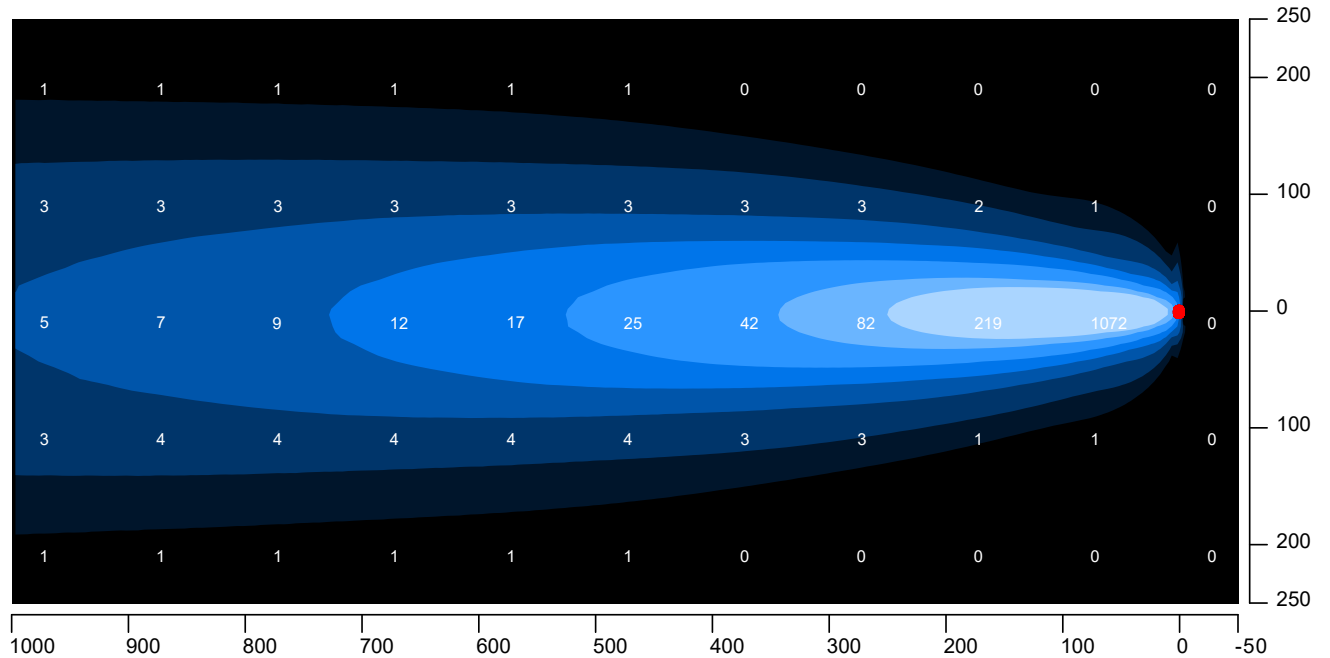

## Simulation 4 \_ Spread \_ 6500k

