


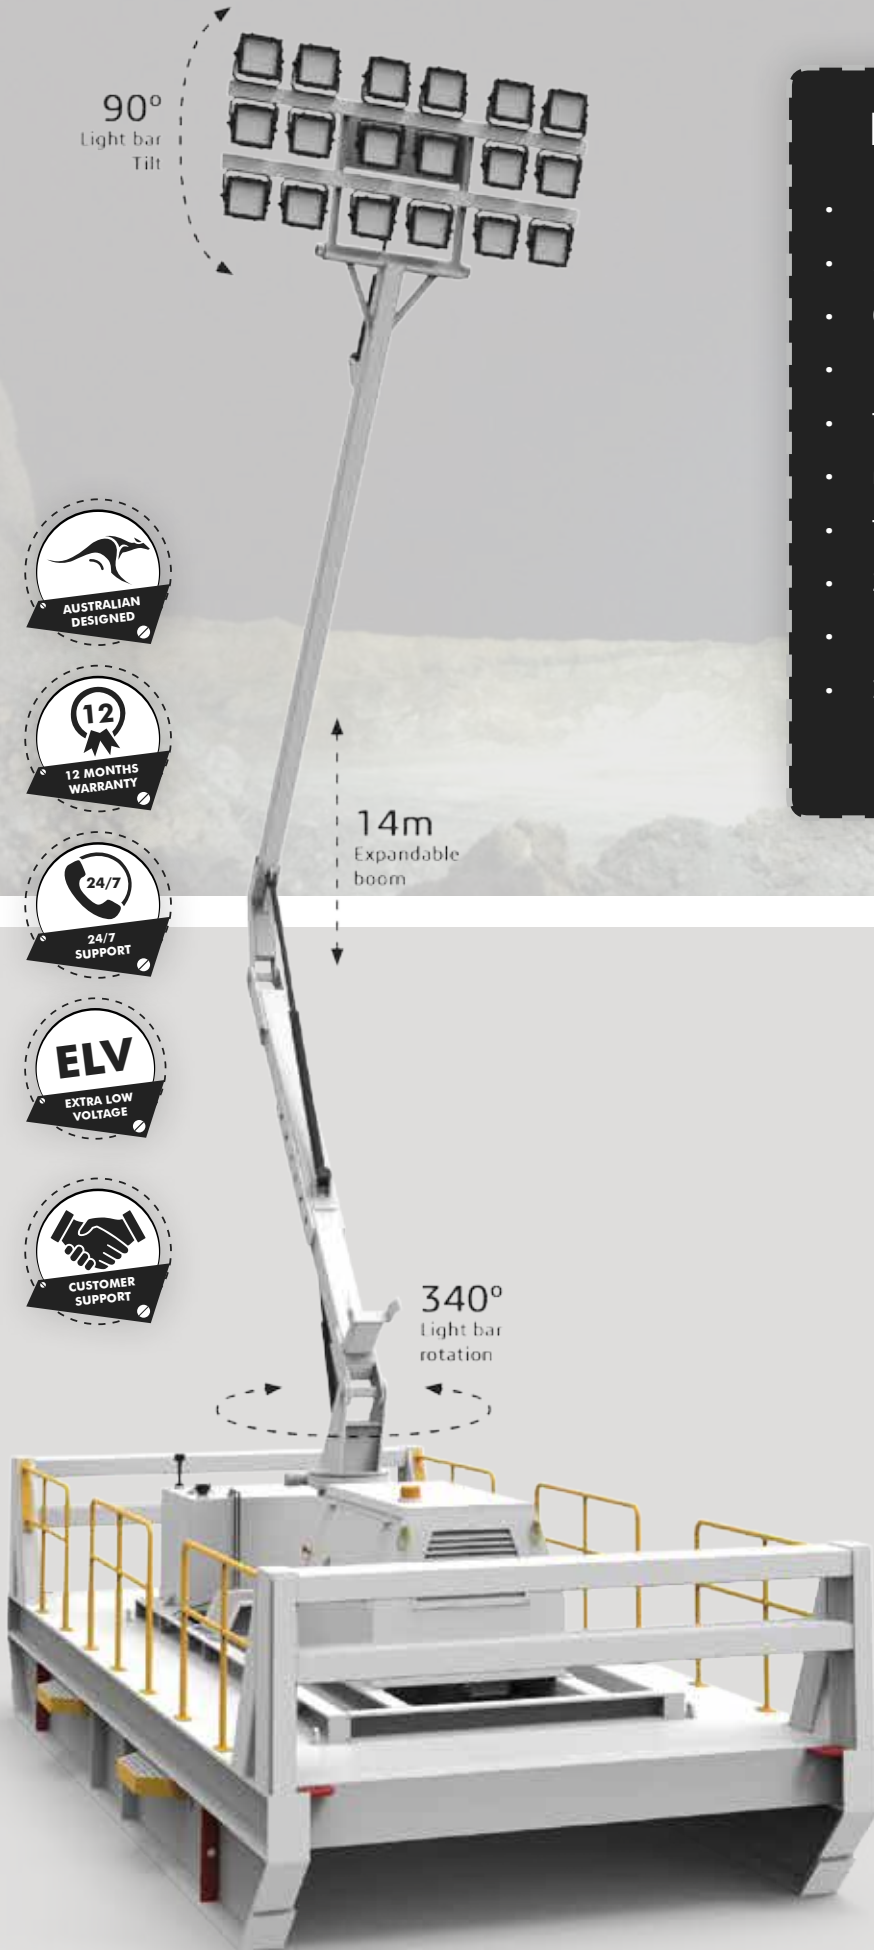

90°
Light bar
Tilt

14m
Expandable
boom

340°
Light bar
rotation

Mine Spec Series Features

- 12 months - 1500 hrs warranty
- 500 hr Service interval standard on all models
- Original equipment manufacturer
- Extra low voltage
- Total hydraulic controlled
- Auto start/stop
- Twin filtered engine oil standard
- 2 stage air filter system
- Low fuel level beacon - Automatic email @10%
- 3 stage Paint Protection Package as Standard inc Electronic E Coat

Light Features

Military/aero grade
titanium based coating

Military/aero grade
soldering process

Copper PCB

Automatic thermal control

Failsafe light switch PCB
for maximum protection

Smart brightness
controlled without PWM

MLR 7200-LED SLED MOUNTED

Model

Model	MLR7200-LED
Configuration	Sled Mounted

Dimensions

Width	3 170 mm
Length	6 980 mm
Height	3 370 mm
Net Weight	12 950 kg

Engine and Generator

Fuel	Diesel
Engine	Kubota 1103
No Engine Cylinders	3
Engine Speed RPM	1 500
Engine Aspiration	Natural
Generator	Sincro
Generator Voltage	24 VDC
Wiggins Fast Fill	Standard
Stabiliser Supports	Sled Mounted
Tow Point	Tow Chains

Lights

Type of Lights	LED
No. of Lights	18
Light output (wattage)	7 200 w
Installed lamp Wattage	400 w
Installed total Lumens	1 497 600 lm
Lumens per Watt (max)	208 lm/w
Lamp life Hours	100 000

Mast

Mast Height	14.25 m
Mast Rotation	340°
Wind Rating Speed	100 km/h

Fuel

Fuel Capacity	1200 L
Operating Hours at 100% Load	600 hours (2.0L/h)

STANDARD FEATURES ON ALL MODELS

Manufactured from marine grade 316L stainless steel		Dual Colour switching (Not available in any other lighting tower)
24VDC Extra Low Voltage System	Safety Valves on Hydraulic Rams	Jump Start Receptacle
Auto Start and Stop	LED Tail Lights and Beacons	Tier IV Engines
All Contaminates Fully Bunded	Fail Safe Shutdown System	Lockable Starter and Battery Isolators



MLR 7200-LED SLED MOUNTED

Axles, Brakes and Springs

Sled Base	530mm Heavy Wall I Beams
Wear Package	20mm BIS80 Wear Packages to Bottom of 530mm I Beams
Protection Plates	20mm BIS80 Wear Protection Plates to end of Push Plates
Deck	6mm Heavy Duty Checker Plate
Access Steps	To Comply with MDG15/Maximum Step height of 400mm
Handrails	To Comply with MDG15 all 4 sides (Painted Yellow)
Reflective Tape	50mm Yellow on each side, 50mm Red on front and rear
Tow Chain	16mm Twin leg with Large Tow Ring

Fuel

Fuel Tank Capacity	Double Wall with 1200l Capacity
Fill Point	Wiggins Quick Fill
Operating Hours at 100% load	50 x 12 hr Shifts or 600 Hours @ 2.0 L/H

Electrical

Isolators	Lockable Starter and Battery
Jump Start Recepticle	Andersen Type
Beacons	Amber and Red (Low Fuel)
Controller	Smartgen ALC700

Hydraulics

Manifolds	1 X 12 Volt 4 Station with Test Port
Motor	2.2KW 12 Volt Fan Cooled
Filter	10 Micron on Return Circuit
Pipes	CNC Stainless Bent Pipe
Hoses	MDG41 with Burst Sleeve
Safety valves	Double Pilot Check Valaves on All Cylinders

3 Stage Paint Process

Stage 1	Raw Steel Hydrostatically Dipped @ 180 Deg Celcius
Stage 2	Primed and Seam Sealed
Stage 3	2 Pak Polyurethane (White Std) Other Colours Available

Other

Fire Extinguisher	2 x 9kg Dry Chemical Powder
Call Sign	2 X As Per Customer Request

