


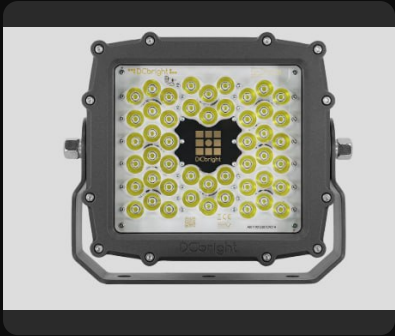

Compact Heavy-Duty LED Floodlight

DCB48/66 BARRACUDA

MEDIUM POWER LED FLOODLIGHT

IP67 • IK10 • 3 YEAR WARRANTY

★ AUSTRALIAN DESIGNED ★ IP67 ★ IK10 ★ HIGH-TEMP OPTION ★ SS316 OPTION ★ 3 YEAR WARRANTY

120-320 W POWER RANGE	19,650-42,000 lm LUMEN RANGE	131 lm/W EFFICACY	IP67 INGRESS PROTECTION	IK10 IMPACT RATING	7.2 kg WEIGHT (STD)
--------------------------	---------------------------------	----------------------	----------------------------	-----------------------	------------------------

TECHNICAL SPECIFICATIONS

ELECTRICAL	
WATTAGE RANGE	120W - 320W
LUMEN OUTPUT	19,650 - 42,000 lm
LUMINOUS EFFICACY	Up to 131 lm/W
INPUT VOLTAGE (DC)	10-60 VDC
INPUT VOLTAGE (AC)	100-277 VAC / 50-60 Hz
CCT	6500K
CRI	>70
POWER FACTOR	>0.9
MECHANICAL	
DIMENSIONS (W×H×D)	320 × 290 × 90 mm
WEIGHT (STANDARD)	7.2 kg
WEIGHT (SS316 FULL)	14.3 kg
HOUSING	Marine Grade Aluminium
BRACKET OPTIONS	MS or SS316
MOUNTING	Adjustable ±240° Rotation
LENS	Toughened Glass

OPTICAL	
BEAM ANGLE (NARROW)	14°
BEAM ANGLE (MEDIUM)	38°
BEAM ANGLE (WIDE)	70°
BEAM ANGLE (ASYMMETRIC)	14° × 46°
HT BEAM ANGLE	120° Only
OPTIC TYPE	High-Purity PMMA/PC
ENVIRONMENTAL	
INGRESS PROTECTION	IP67
IMPACT RESISTANCE	IK10
AMBIENT TEMP (STANDARD)	-40°C to +85°C
AMBIENT TEMP (HT OPTION)	-30°C to +120°C
SURGE PROTECTION	10 kV / 5 kA
CORROSION RESISTANCE	Marine Grade (C5-M)
WARRANTY	3 Years

KEY FEATURES	
▸ Compact form factor for tight installations	▸ High-temp option (-30°C to +120°C)
▸ Full SS316 option for extreme environments	▸ ±240° rotation for precise aiming
▸ Multiple beam angle configurations	▸ Corrosion & vibration resistant

MODEL VARIANT MATRIX					
Model	Wattage	Lumens	Input	Beam	Weight
DCB48-320DC	320 W	42,000 lm	10-60 VDC	14°/38°/70°/14×46°	7.2 kg
DCB48-320AC	320 W	42,000 lm	100-277 VAC	14°/38°/70°/14×46°	7.2 kg
DCB48-240AC	240 W	31,440 lm	100-277 VAC	14°/38°/70°/14×46°	7.2 kg
DCB48-120AC-HT	120 W	19,650 lm	100-277 VAC	120°	7.2 kg
DCB48-320AC-SS	320 W	42,000 lm	100-277 VAC	14°/38°/70°/14×46°	14.3 kg