

cell type: NiMH
cell size: Sub-C
number of cells: 6

nominal voltage: 7.2 V
max. charge voltage: 9.0 V
Conditions
 at standard charge
 (0.1C / 20°C)

capacity
 nominal: 3000 mAh discharge at 0.2C
 minimum: 2900 mAh discharge at 0.2C
 2700 mAh discharge at 3C
 6.0V end discharge voltage
 ta: 20°C

max. discharge current
 continuous: 30 A ta: 0...50°C
 temporary: 45 A

charge
 standard charge: 300 mA 14...16hrs
 quick charge: 1500 mA 2.1hrs
 fast charge: 3000 mA 1.05hrs

recommended charge 15...30 mV - delta V
 termination control 0.8...1 °C temperature rise per minute
 parameters: 45...55 °C TCO (temperature cut off)

trickle charge current: 30...150 mA (recommended)

continuous overcharge: ≤ 300 mA no conspicuous deformation
 (less than 48hours) no leakage

internal resistance: ≤ 60 mΩ at 1KHz
 (impedance) battery fully charged

life expectancy: ≥ 500 cycles acc. IEC standard


self discharge
 charge retention: ≥ 60 % after 28days
 storage at 20°C

ambient temperature range:
 0...45 °C standard charge
 10...40 °C fast charge
 - 20...50 °C discharge
 - 20...40 °C storage (≤1month)
 - 20...25 °C storage (≤12months)





QCT1: 20/2800/65
 QCT2: 30/2700/65

mechanical specifications
 pack dimensions (with sleeve)

length l1: 46.5 +/- 1 mm
 length l2: 24 +/- 1 mm
 height h: 134 +/- 3 mm
 weight: 360 +/- 20 g

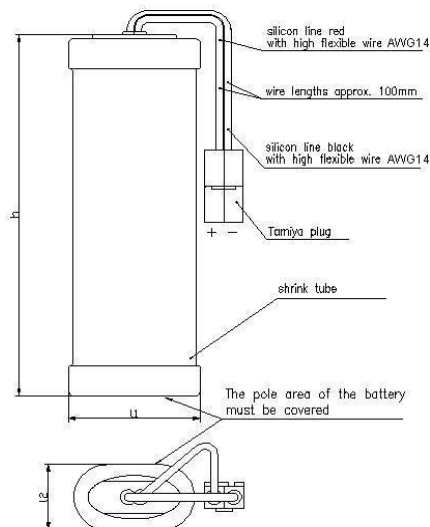

Diagrams
 for single cell

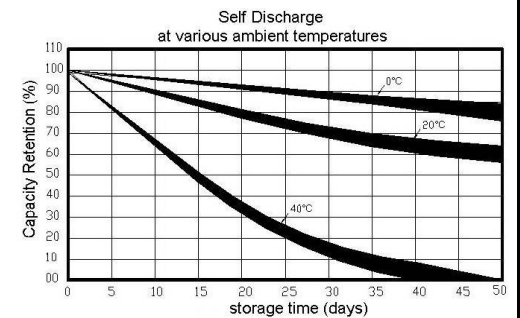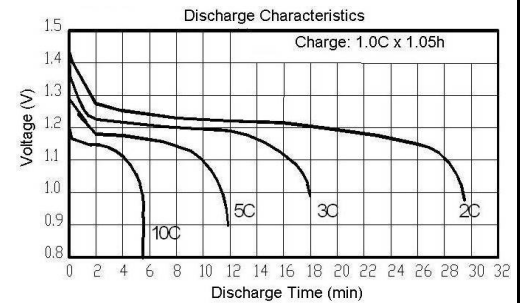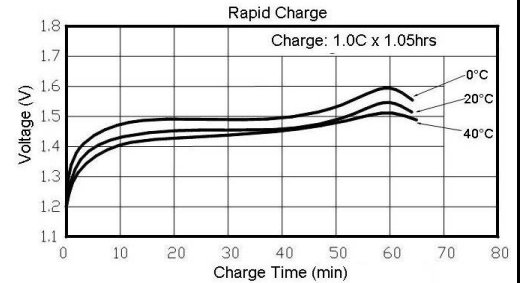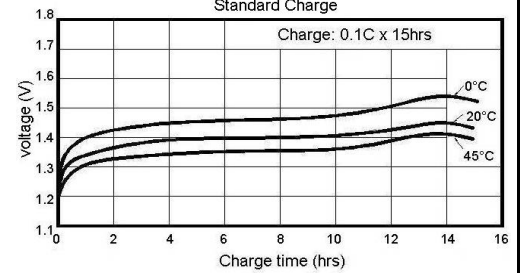

ANSMANN Specifications for model:

data sheet no. / part no.	4050-0002
supplier no.	518102
author / date	TG / 14.05.2012

NiMH RC - Battery Pack

7.2V 3000mAh (w. Tamiya plug)