
应用场景： 洗地机器人、玩具机器人

Application: Mopping Robot, Toy Robot

特性： 内置FOC驱动和高精度磁编码器，支持多种闭环。超低噪音

Feature: Integrated FOC driver and high-precision magnetic encoder, various closed-loop controls, low-noise BLDC



性能参数 Performance Specification

		BL4012
电压范围 Operating Range	V	9 to 16
额定电压 Rated Voltage	V	12
空载转速 No Load Speed	rpm	950
空载电流 No Load Current	mA	115
额定转速 Rated Speed	rpm	400
额定扭矩 Rated Torque	N·m	0.13
额定电流 Rated Current	A	0.95
额定功率 Rated Power	W	11
堵转扭矩 Stall Torque	N·m	0.2
堵转电流 Stall Current	A	2
最高效率 Max Efficiency	%	65

控制特性 Control Specification

控制方式 Control Methods	/	FOC
通讯方式 Protocol Type	/	UART TTL
编码器类型 Encoder Sensor	/	Magnetic
编码器分辨率 Encoder Resolution	bit	14
插座规格 Connnector	/	SH1.0-3pin/4pin
电子保护 Electronic Protection	/	Over load, over heat
信号反馈 Feedback Signal	/	Position, speed, current, fault info


电机特性 Motor Characteristic

KV值 KV Value	/	75
相电阻 Terminal Resistance	Ω	4
相数 Phases	/	3
极对数 Pole Pairs	/	10
槽数 Slots	/	24
背隙 Backlash	/	/

其他参数 Other Specification


重量 Weight	g	132
工作寿命 Lifespan	hr	2000
噪音值 Noise Level	dB	≤ 40 at 50cm
使用环境温度 Operating Temp	°C	-10 to 55
存储温度 Storage Temp	°C	-20 to 80
防护等级 IP Rating	/	IP4X

尺寸图 Drawing

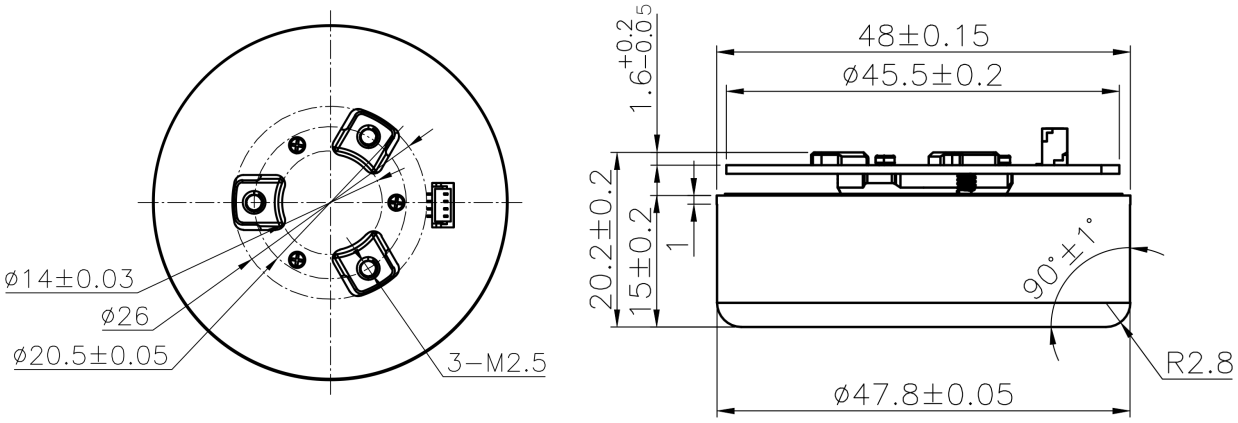

Unit: millimeter

特性曲线 Performance Curves

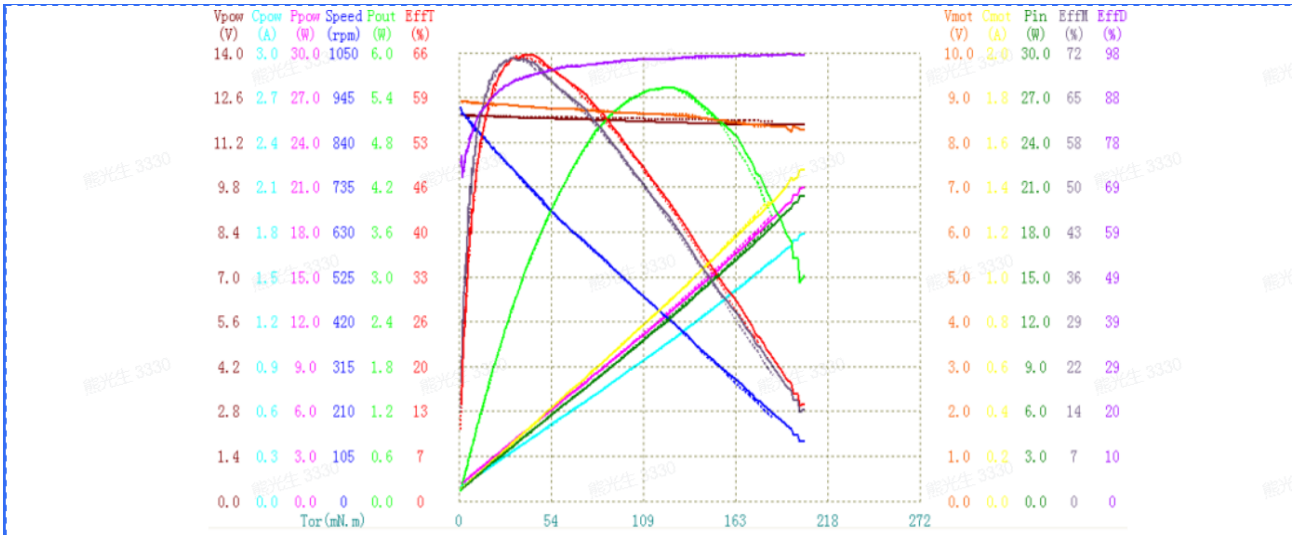

支持定制：电机的出轴尺寸及性能参数可根据需求进行调整，详情请咨询业务人员。
Note: Please inquire your sales representatives for output shaft and performance customization.

*内容如有更新，恕不另行通知。Content is subject to update without notice.
Kpower和伟创动力是伟创动力科技的商标。Copyright © 2005-2024 Kpower 伟创动力 版权所有