


COWL TOP OUTER PANEL (ASSY)

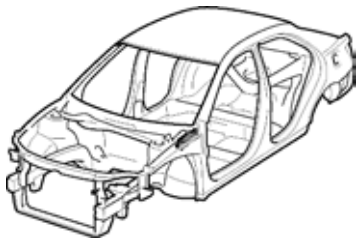

F25721A

With the cowl top side reinforcement and front body pillar lower gusset removed.

Symbol meaning

REMOVAL

INSTALLATION

 : Remove Weld Points


 : Cut with disc sander, etc.

 : MIG Plug Weld

 : Tack Weld

F25721B

REMOVAL-INSTALLATION

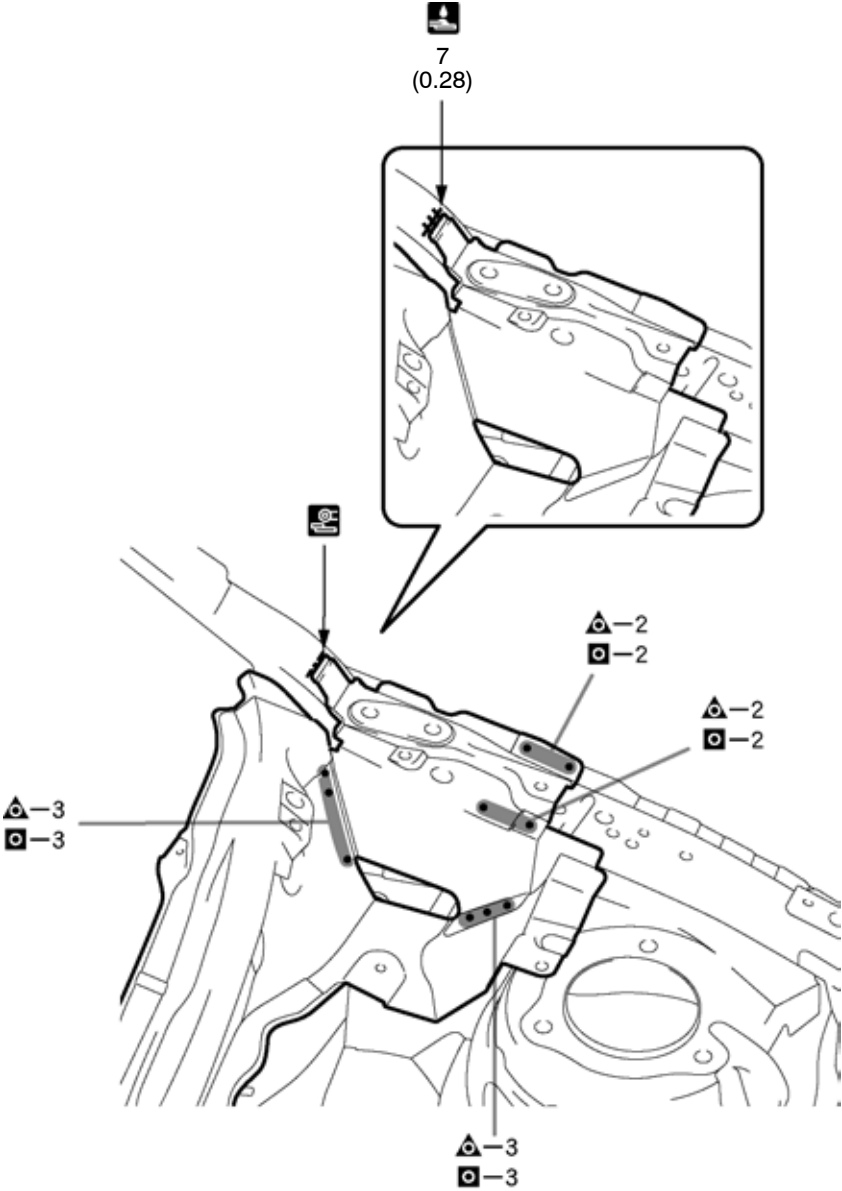

7
(0.28)

-2
-2
-2
-2
-3
-3
-3
-3

mm (in.)

F25721

INSTALLATION POINT

- 1 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- 2 After welding, apply body sealer to the corresponding parts. (See the paint-coating)
- 3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.