


BODY LOWER BACK PANEL (ASSY)

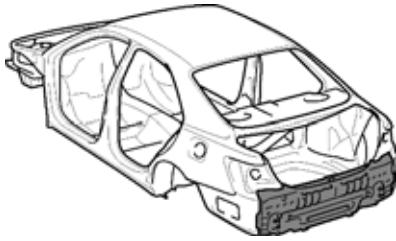

F25743A

Symbol meaning

REMOVAL


△ : Remove Weld Points

INSTALLATION

◻ : MIG Plug Weld

F25743B

REMOVAL-INSTALLATION

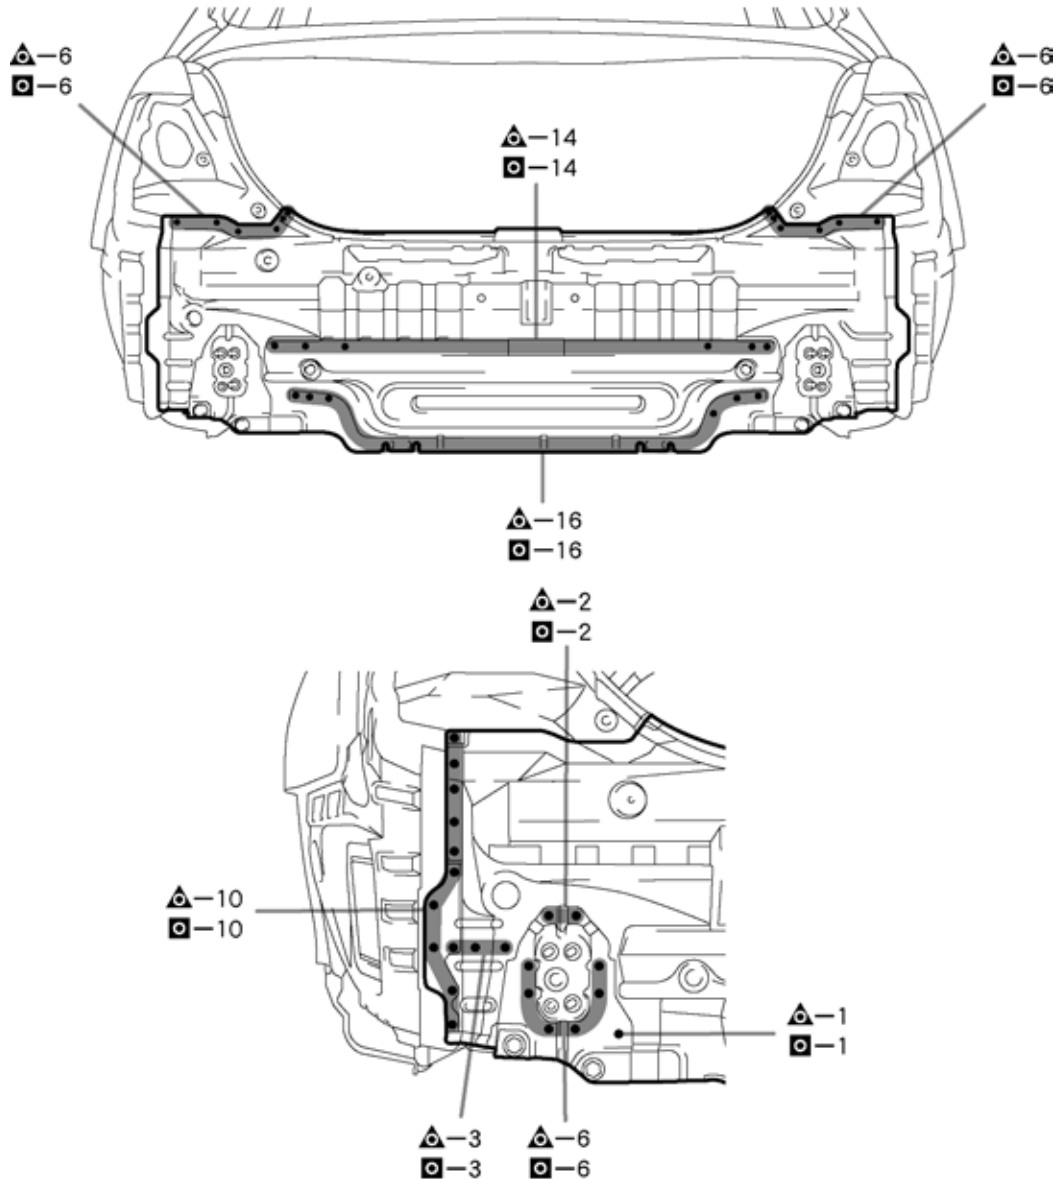

F25743

INSTALLATION POINT

- 1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- 2 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- 3 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint coating)
- 4 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.