


QUARTER PANEL END HOUSING (ASSY): TMMK made

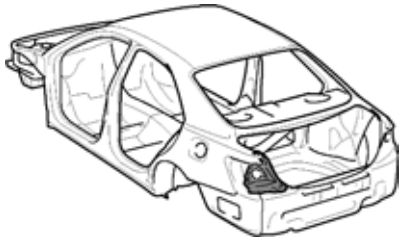

F25745A

Symbol meaning

REMOVAL

▲ ▲ : Remove Weld Points





: Cut with disc sander, etc.

INSTALLATION

◻ I : MIG Plug Weld

F25745B

REMOVAL-INSTALLATION

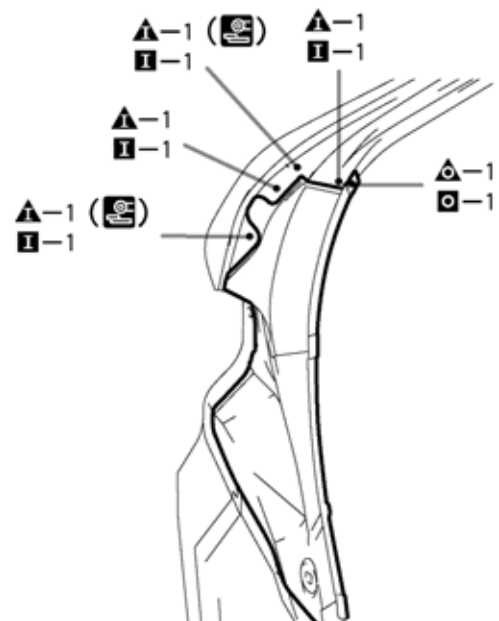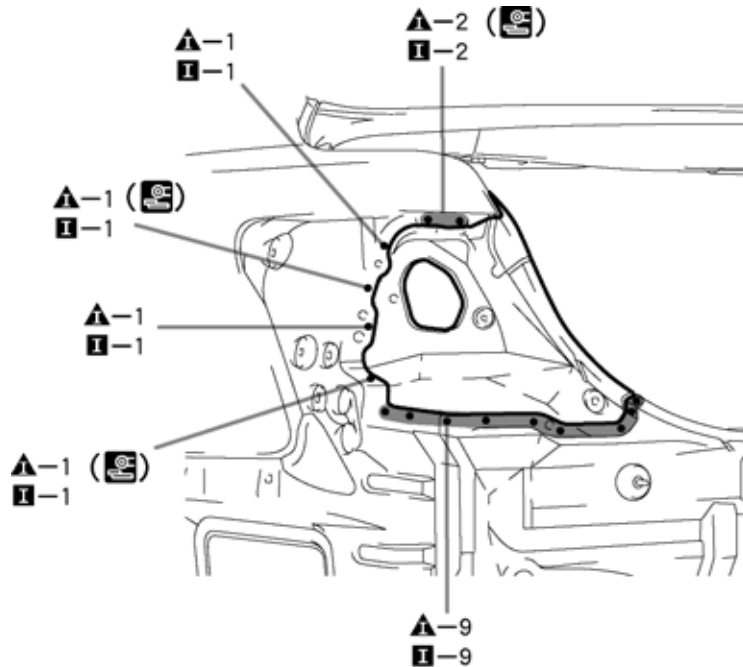

F25745

INSTALLATION POINT

- 1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- 2 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- 3 After welding, apply body sealer to the corresponding parts. (See the paint-coating)
- 4 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.