

REAR FLOOR NO. 3 CROSSMEMBER (ASSY)



F25746A

With the body lower back panel removed.


Symbol meaning

REMOVAL  : Remove Weld Points

INSTALLATION  : Spot Weld  : MIG Plug Weld

F25746B

REMOVAL-INSTALLATION

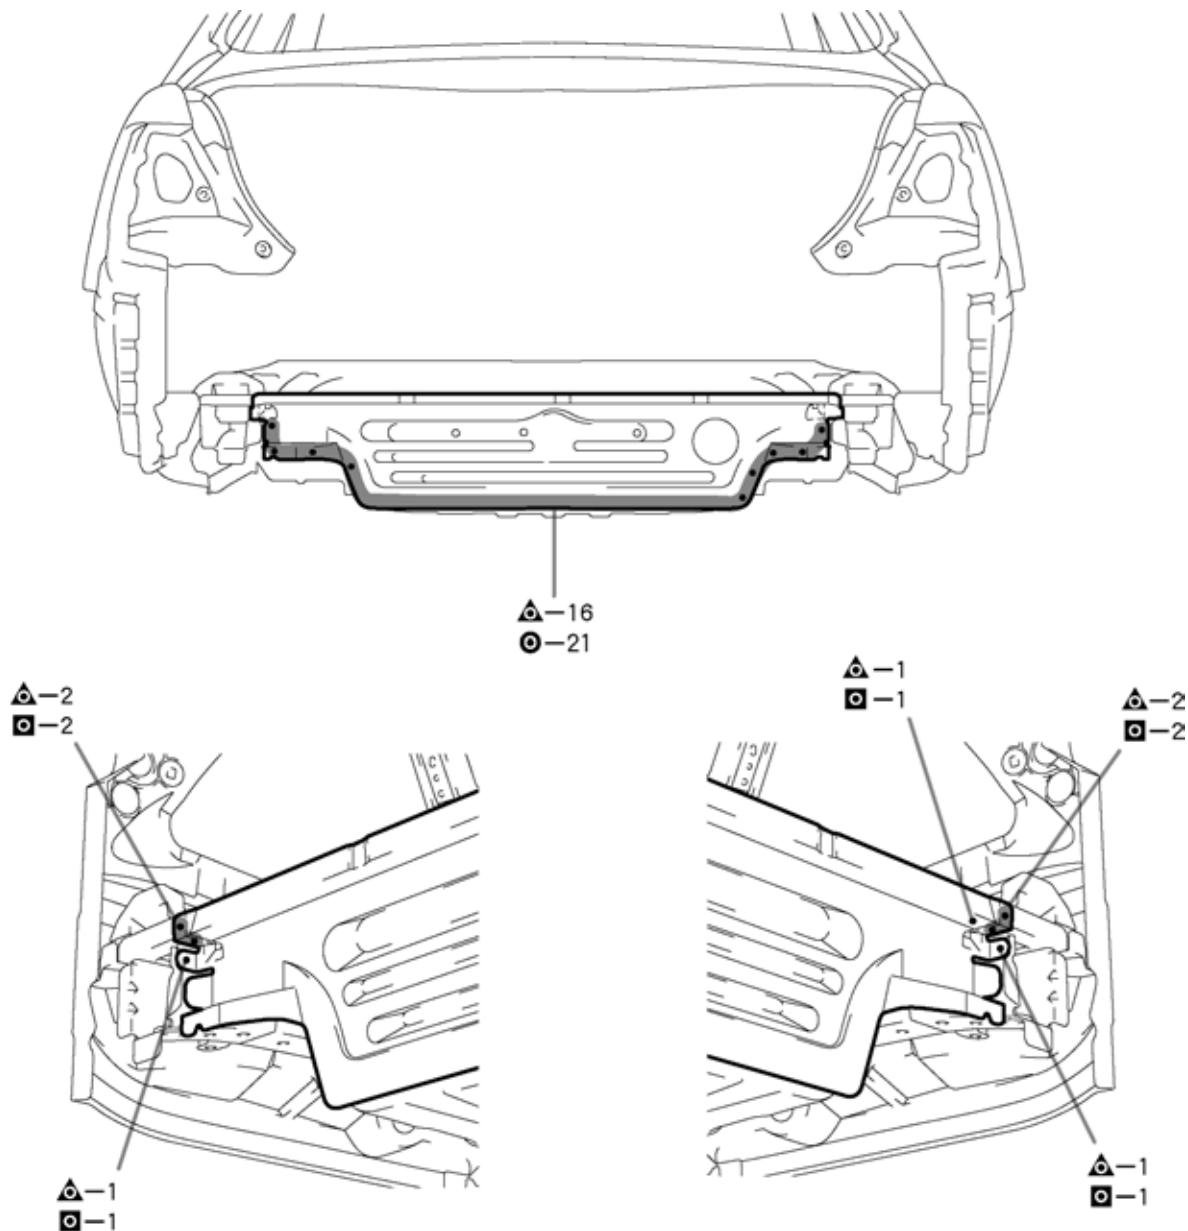

F25746

INSTALLATION POINT

- 1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish.
- 2 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint coating)
- 3 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.