


REAR FLOOR SIDE PANEL (ASSY)

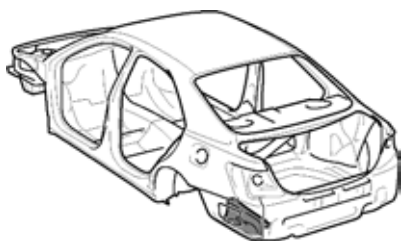

F25750A

With the rear floor pan removed.

Symbol meaning

REMOVAL

▲ ▲ : Remove Weld Points



INSTALLATION

■ ■ : MIG Plug Weld

F25750B

REMOVAL-INSTALLATION

[LH]

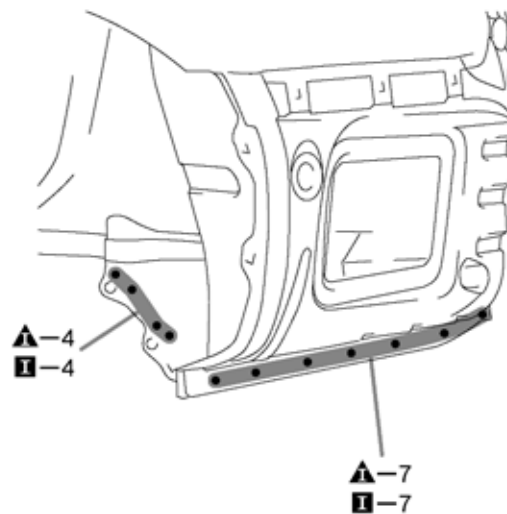
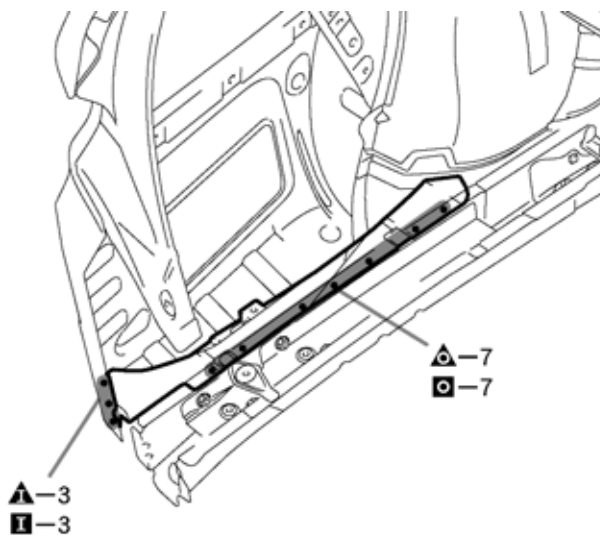


F25750

INSTALLATION POINT

- 1 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint-coating)
- 2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

[RH]

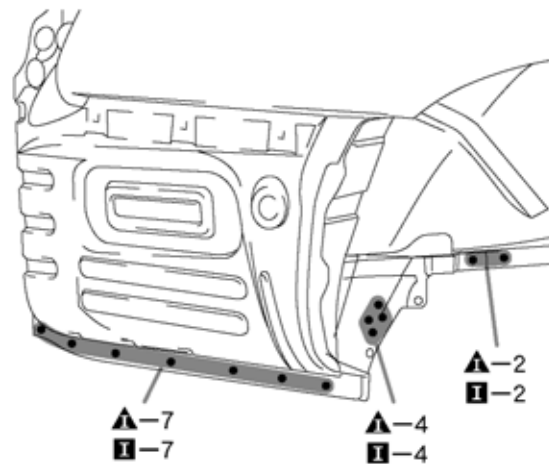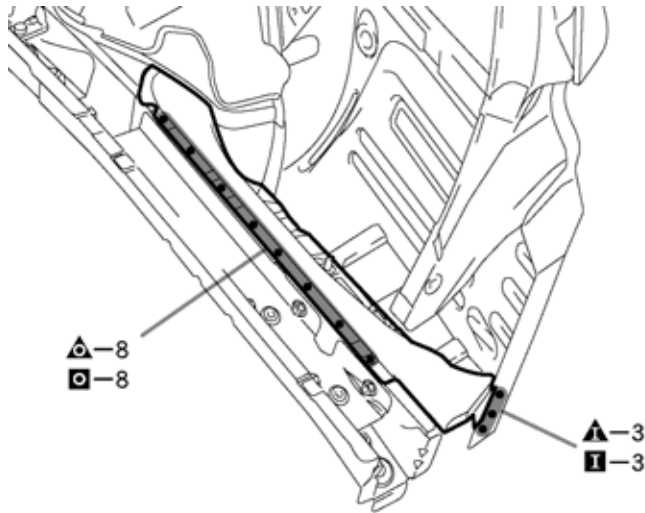

F25751

INSTALLATION POINT

- 1 After welding, apply body sealer and undercoating to the corresponding parts. (See the paint-coating)
- 2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.