


## ROOF PANEL (ASSY): Moon Roof

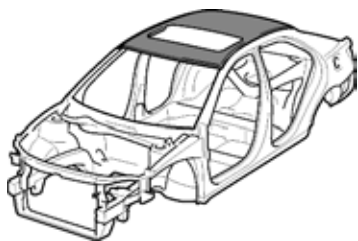

F25755A

### Symbol meaning

REMOVAL

△ : Remove Weld Points

INSTALLATION


○ : Spot Weld

◻ : MIG Plug Weld

◻ : Body Sealer

F25755B


### REMOVAL-INSTALLATION

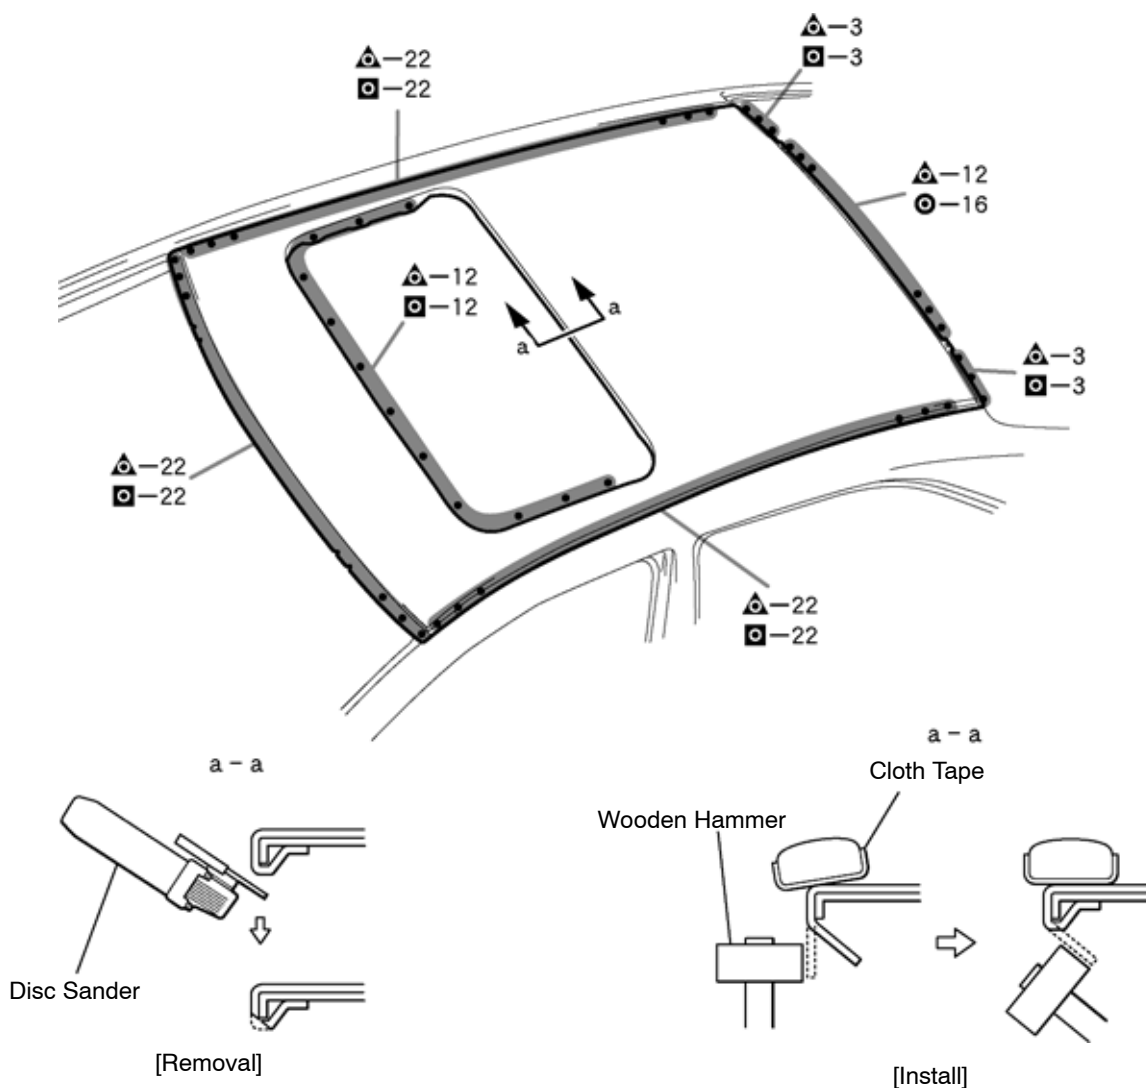

F25755

### INSTALLATION POINT

- 1 Inspect the fitting of the related parts around the new parts before welding. This affects the appearance of the finish
- 2 Temporarily install the new parts and measure each part of the new parts in accordance with the body dimension diagram. (See the body dimension diagram)
- 3 After welding, apply body sealer to the corresponding parts. (See the paint coating)
- 4 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.

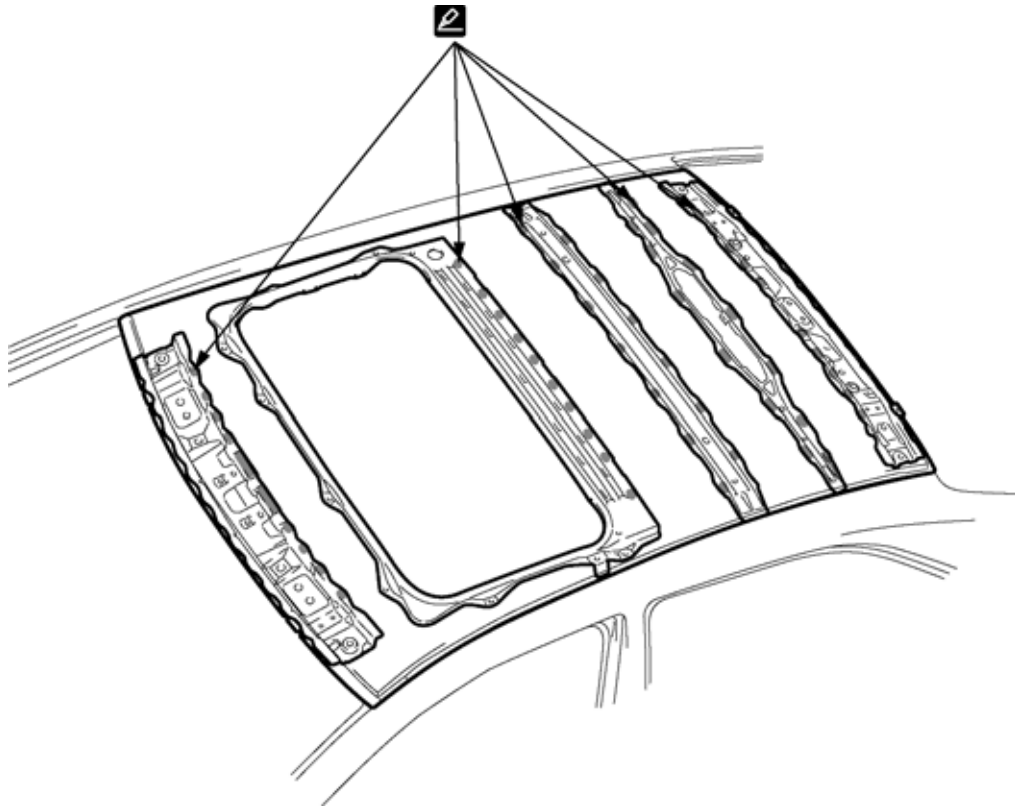

F25756

**INSTALLATION POINT**

- 1 Before temporarily installing the new parts, apply body sealer to the windshield header panel, roof panel reinforcement and back door opening frame.

**HINT:**

- 1) Apply just enough sealer for the new parts to make contact.