

NAME PLATE APPLICATION PROCEDURE

- (a) Heat the double-sided tape remaining on the body with an infrared lamp or equivalent.

HINT:

Heat the tape to 40 to 60°C for approximately 1 to 2 minutes.

- (b) Wipe off the remaining double-sided tape using a clean cloth or equivalent.

HINT:


If a name plate is installed without thoroughly removing the remaining double-sided tape from the body, the name plate will not adhere properly. Make sure to thoroughly wipe off the double-sided tape.

- (c) After cleaning the installation area of the body with degreasing agent, attach the name plate to the position shown in the illustration.

HINT:



The working environment should be 20°C when installing the name plate. If the working environment is below 20°C, heat the installation area of the body to 20 to 30°C and then install the name plate.

[GENERAL EXPORT]

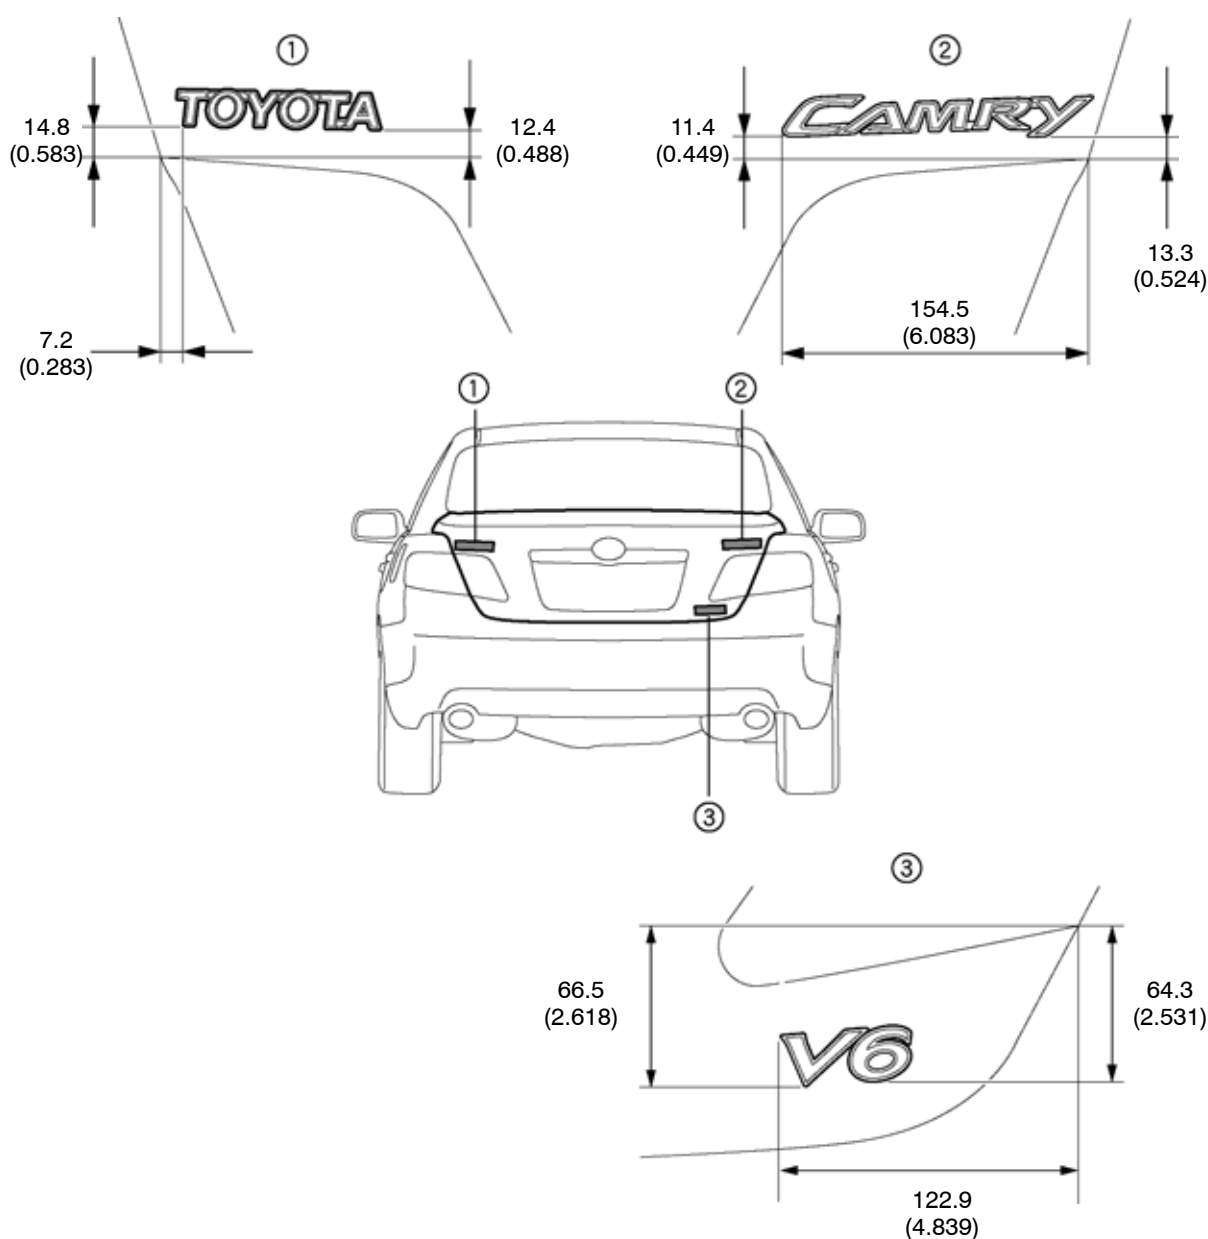


mm (in.)


[U.S.A., CANADA]

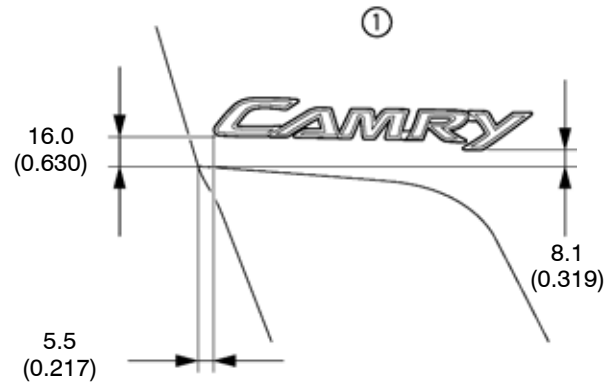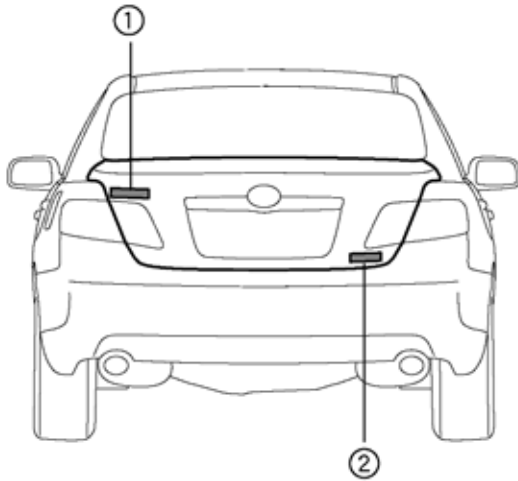


② [For name plate LE]

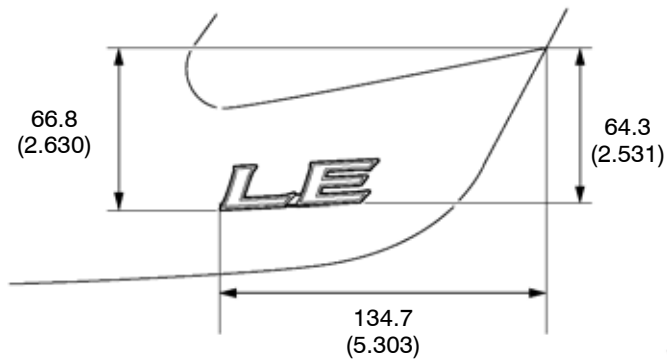

② [For name plate XLE]

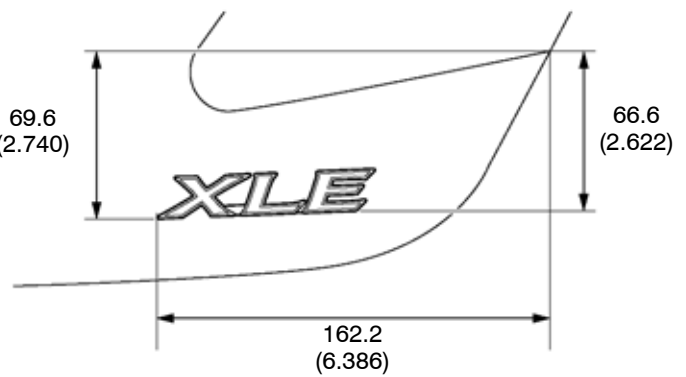

② [For name plate SE]

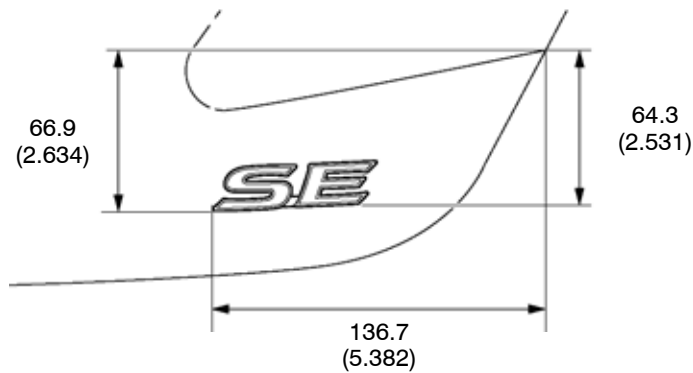

mm (in.)