


CAUTION LABEL ATTACHMENT POSITION

After using a degreasing agent to clean the surfaces of the body where the caution labels will be attached, attach the caution labels to the positions shown in the illustration.

HINT:


- 1) Attach each caution label with its orientation the same as the numbers shown in the illustration.
- 2) Make sure the caution label is not attached over a spot weld.
- 3) When attaching the caution label, make sure not to touch the label's adhesive surface.
- 4) To prevent the edges of the caution label from peeling, apply extra pressure to the label's periphery.
- 5) If the work area's temperature is 5°C or less, the caution label's adhesive will deteriorate. It is recommended that you heat the label to 20 to 40°C.

[GENERAL EXPORT]

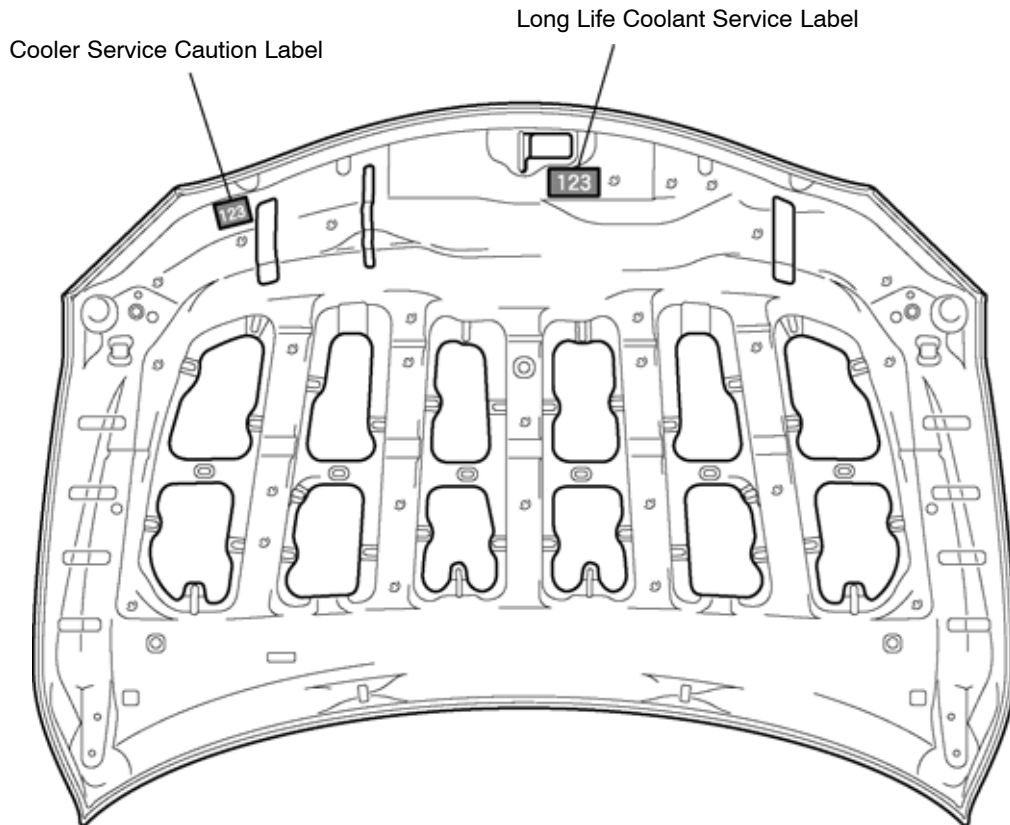

[GENERAL EXPORT]

Fuel Information Label



Name Plate


Tire Pressure Information Label

Side Air Bag Caution Label

Tire Pressure Information Label
(EUROPE RHD)

Side Air Bag Caution Label

[U.S.A., CANADA]

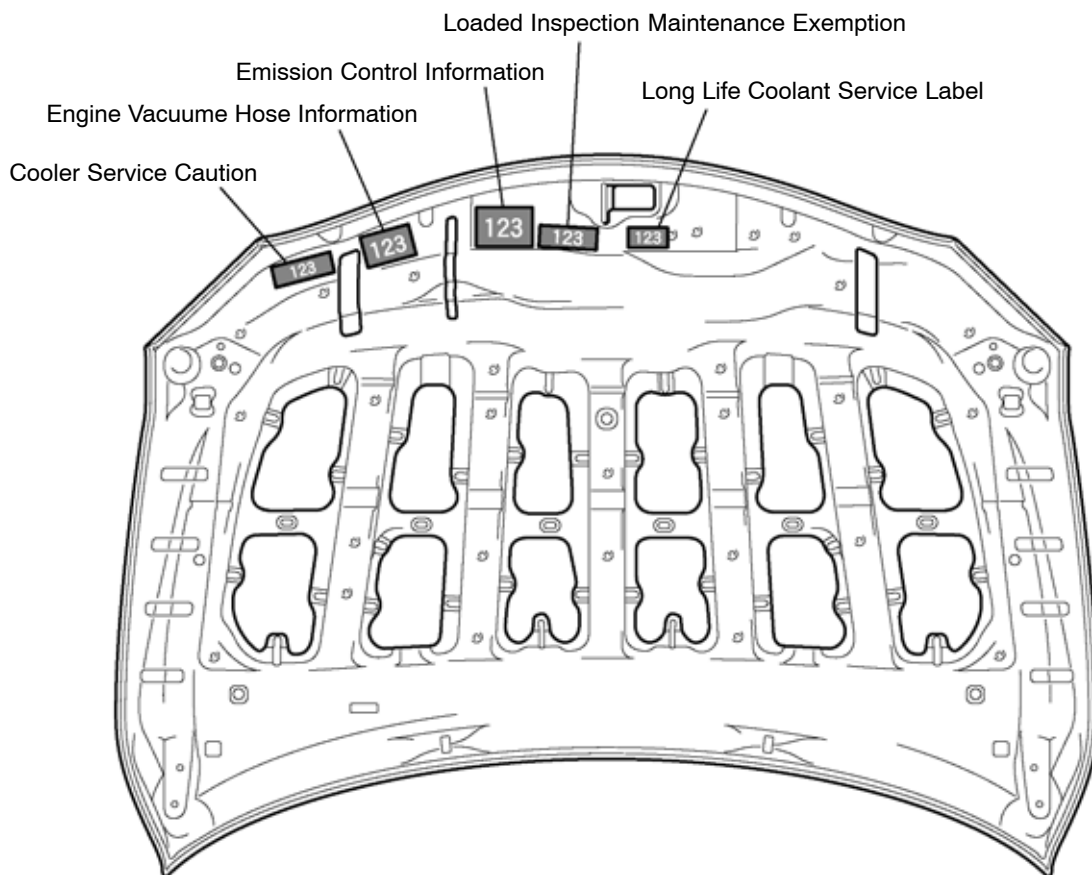

[U.S.A., CANADA]

