


## ■ CAN

### 1. General

- The '07 Camry uses two types of CAN that have different communication speeds: HS-CAN (500 kbps) and MS-CAN (250 kbps).
- The HS-CAN consists of the CAN No.1 bus. The terminating resistors of the CAN No.1 bus are built into the ECM and meter ECU.
- The MS-CAN consists of the MS bus. The terminating resistors of the MS-bus are built into the main body ECU and certification ECU. The MS bus is used only when the smart key system (certification ECU), which is optional equipment, is provided.
- The main body ECU, which has a gateway function, is used to transmit data between the CAN No.1 bus and the MS bus.


#### ► Image of Data Transmission between Buses ◀

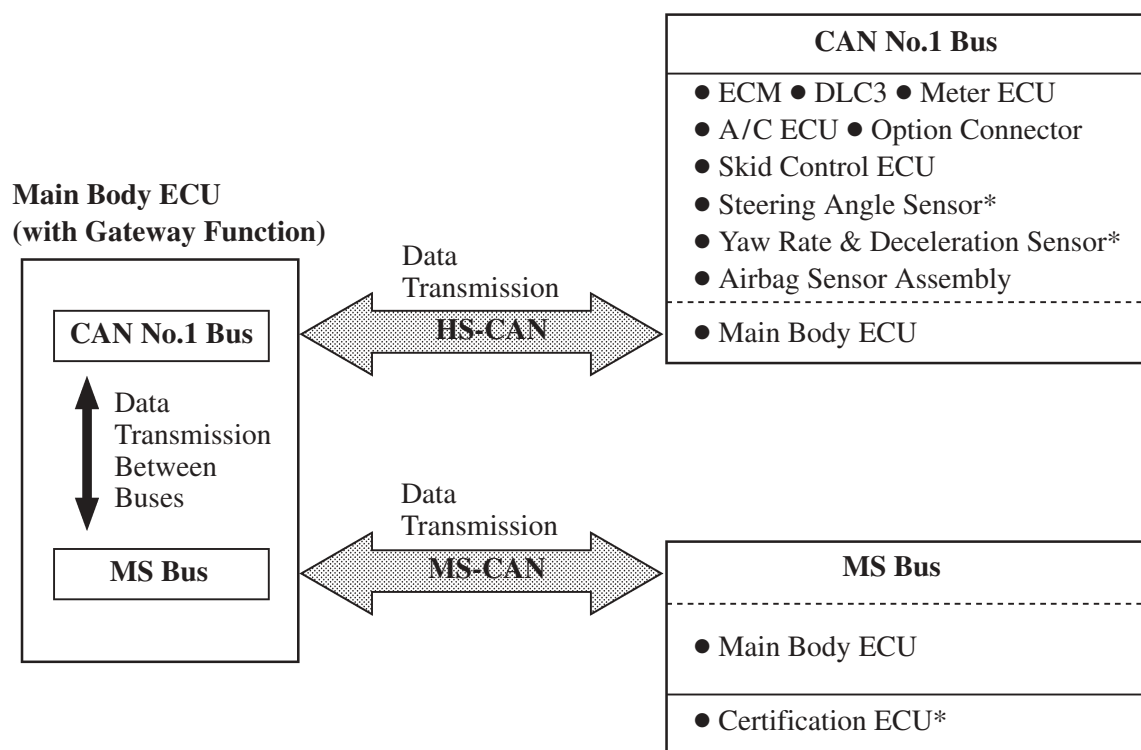

025BE53P

\*: Optional Equipment


## ► CAN No.1 Bus ◀

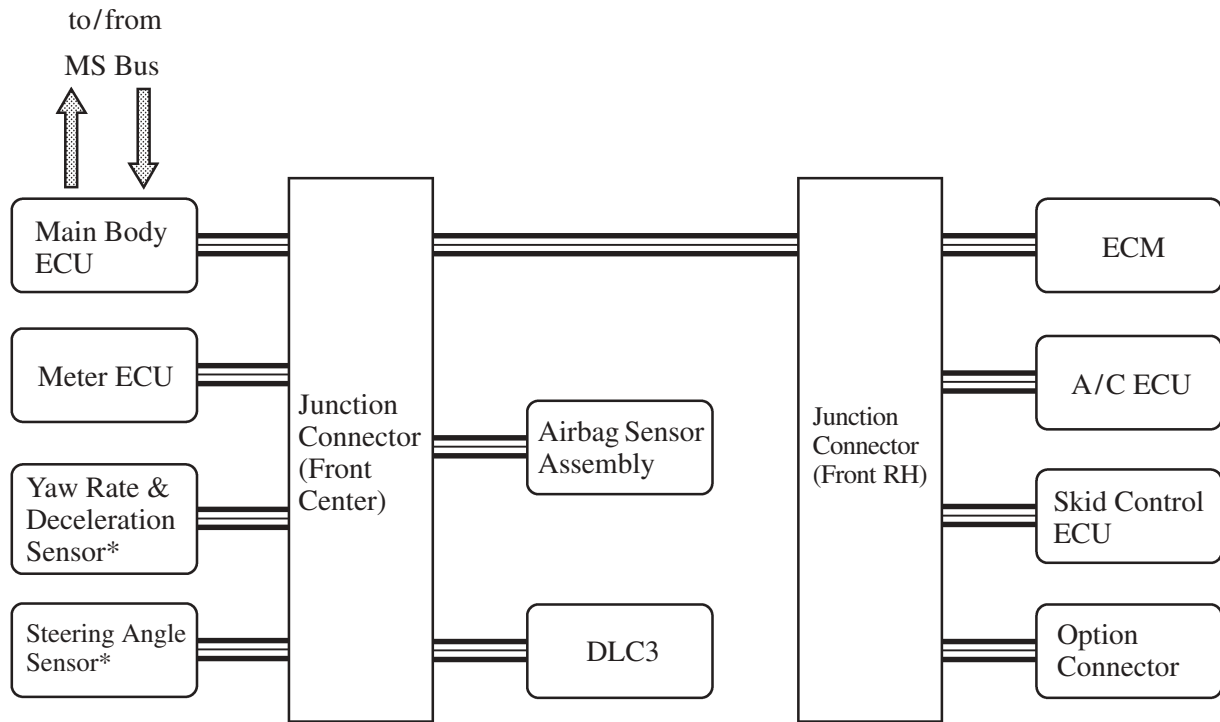

025BE02P

\*: Optional equipment


## ► MS Bus ◀

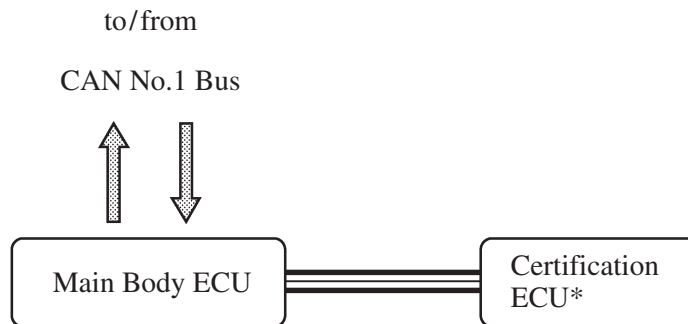

025BE03P

\*: Optional equipment

## 2. Layout of Main Components

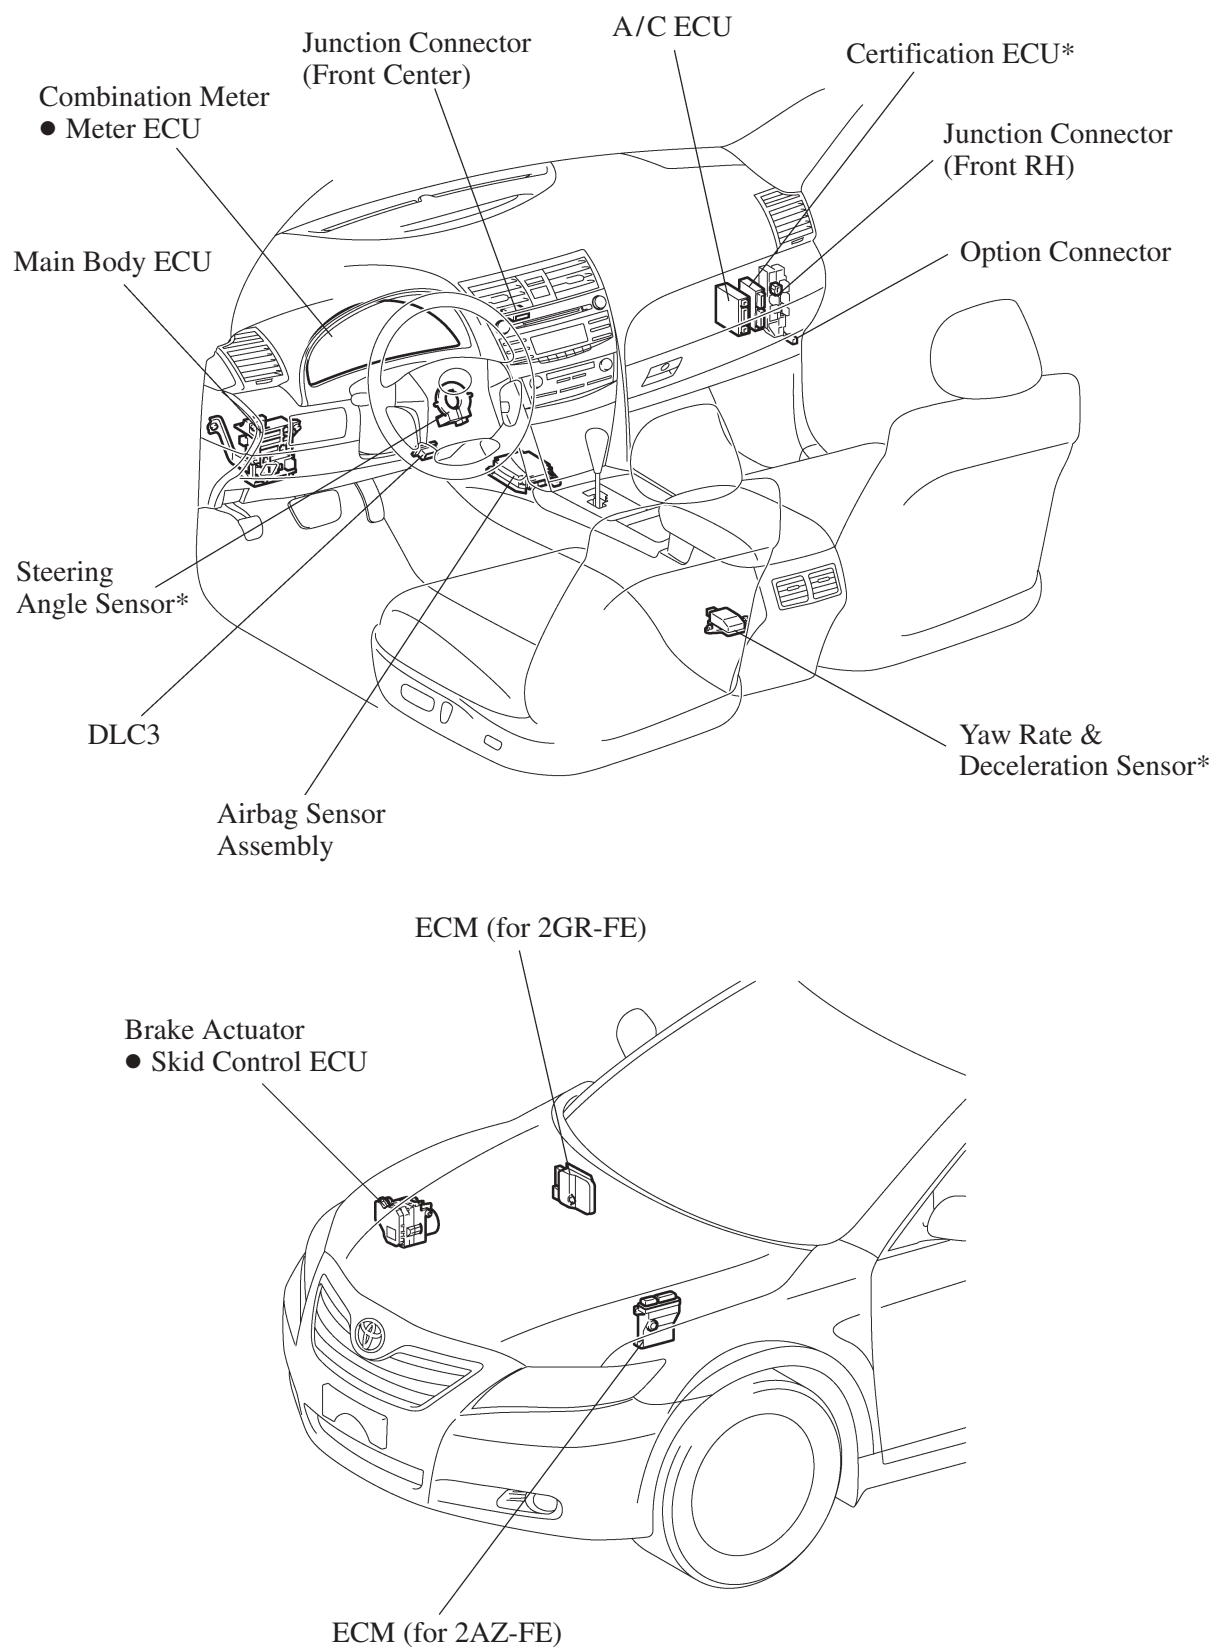

\*: Optional equipment

### 3. Diagnosis

- If a malfunction occurs on the CAN communication line, the ECU that is connected to the CAN communication line stores the DTC (Diagnostic Trouble Code) in its memory.
- The 5-digit DTC can be read by connecting a hand-held tester to the DLC3.
- The DLC3 is equipped with CAN-H and CAN-L terminals for CAN diagnosis. It is possible to determine if there is an open or short in the main wire of the CAN No. 1 bus by measuring the resistance value between these terminals.

For details, see the 2007 Camry Repair Manual (Pub. No. RM0250U).

#### Service Tip

The diagnostic communication uses the CAN protocol. Therefore, a hand-held tester and a dedicated adapter [CAN VIM (Vehicle Interface Module)] are required for accessing diagnostic data. For details, see the 2007 Camry Repair Manual (Pub. No. RM0250U).