


BODY

BODY STRUCTURE

■ LIGHTWEIGHT AND HIGHLY RIGID BODY

1. High Strength Sheet Steel


- High strength sheet steel is used in order to ensure body rigidity and realize a lightweight body.
- In the front pillar reinforcement, center pillar reinforcement and rocker members, ultra high strength sheet steel is used.
- Ultra high strength sheet steel has approximately 1.3 times the strength of conventional high strength sheet steel. Therefore, to provide the same strength of high strength sheet steel, a weight reduction of approximately 25% can be realized.

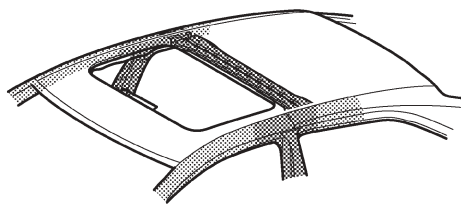

Sliding Roof

 : High Strength Sheet Steel


 : Ultra High Strength Sheet Steel

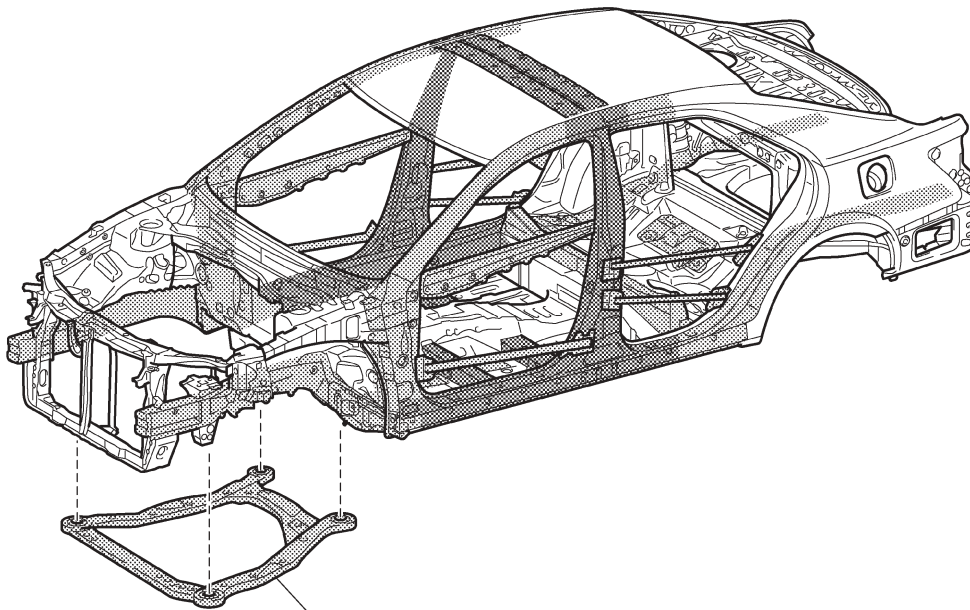


Front Sub Frame

2. Brace


- Excellent maneuverability and stability has been achieved by providing a cowl top outer panel for the front suspension tower.

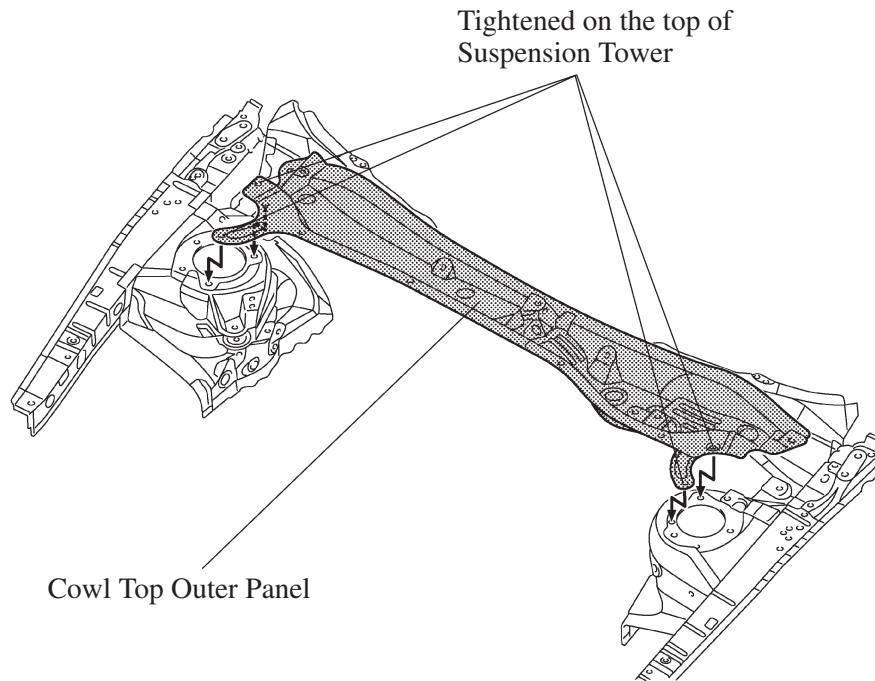**BO**

- For the XLE glade models and SE grade models, A V-shaped brace has been provided between the rear suspension tower and the floor. As a result, the body rigidity has been enhanced and excellent maneuverability and stability have been realized.

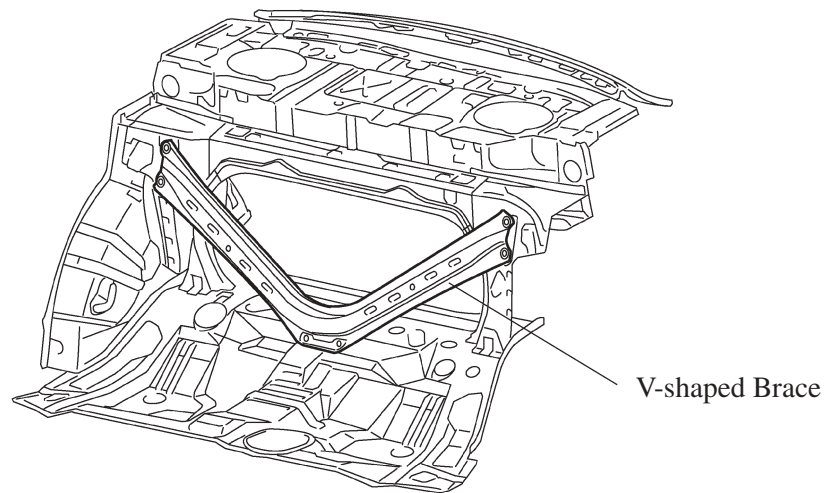

- High body rigidity has been achieved through the use of front floor braces between the front floor under reinforcement and rear floor side members for SE grade models.

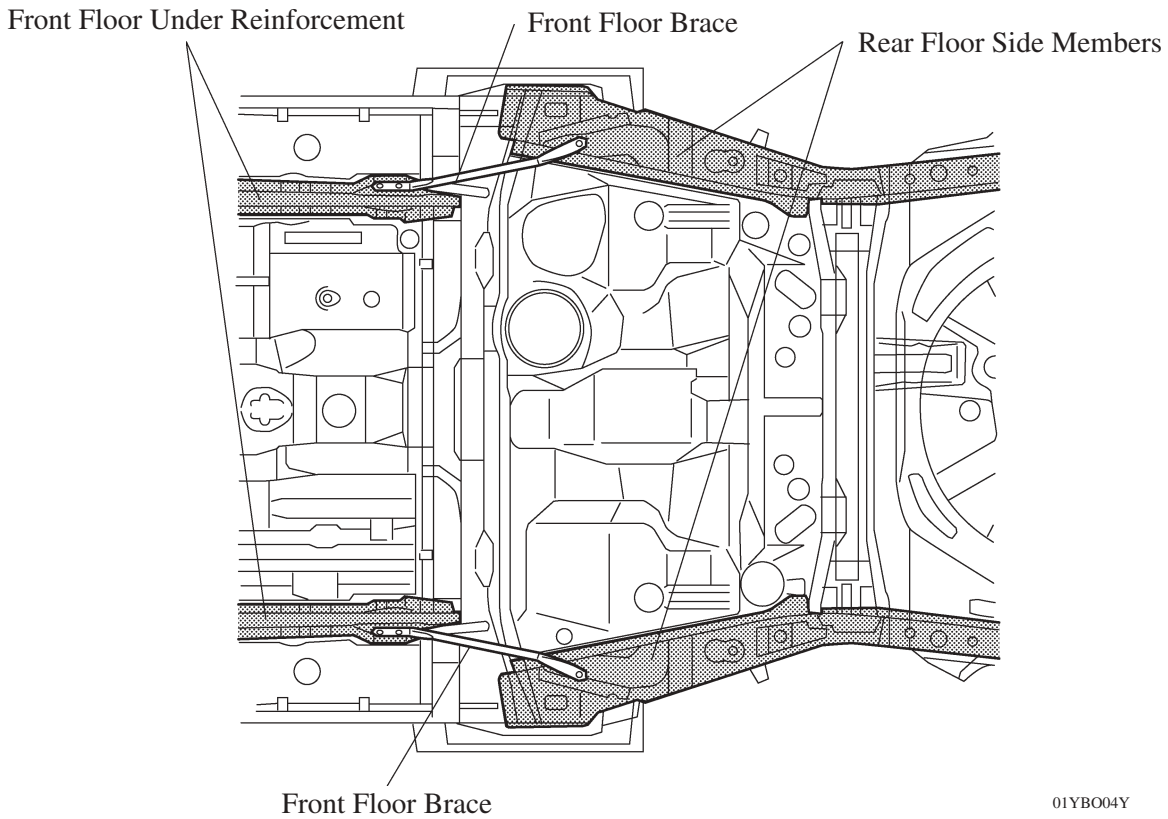

View from Bottom Side