


■ AERODYNAMICS

To improve aerodynamic performance, the following measures have been taken.


- Front and rear fairings are provided to smooth out the airflow around the tires and reduce the air resistance while the vehicle is in motion.

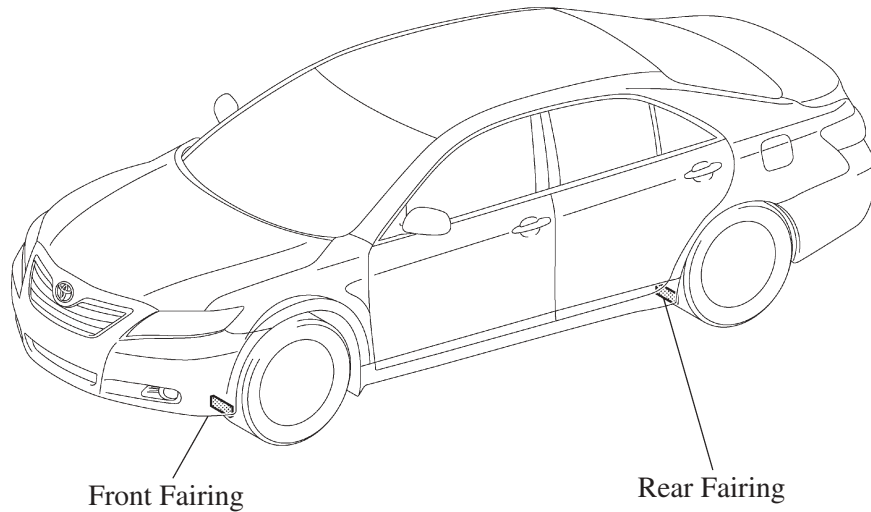

025BO20TE

BO

- The engine undercover has been formed into a step shape to increase the velocity of the air flowing underneath the vehicle. This creates a vacuum and suppresses the lift force, thus, excellent maneuverability and stability have been achieved.

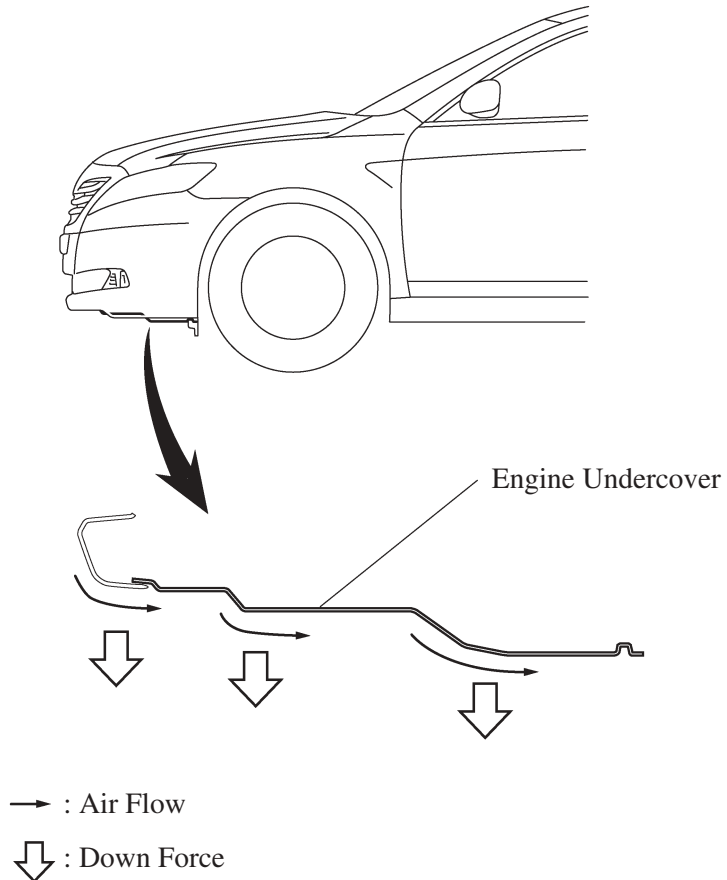

025BO21Y

- Excellent maneuverability and stability have been achieved by providing a rear floor under cover that is shaped to generate rectification and swirl effects on the rear floor (equipped with SE Grade models).

