


STEERING

DESCRIPTION

- A rack and pinion type steering gear with an engine speed sensing type power steering is used on the all models.
- The pressure return type vane pump is used which makes the discharge pressure flow volume return at middle and high speed, thus secured the fine steering feeling.
- A manual tilt and telescopic mechanism is used.
- The steering column uses an energy absorbing mechanism.
- An electrical steering lock system is used on models with smart key system.

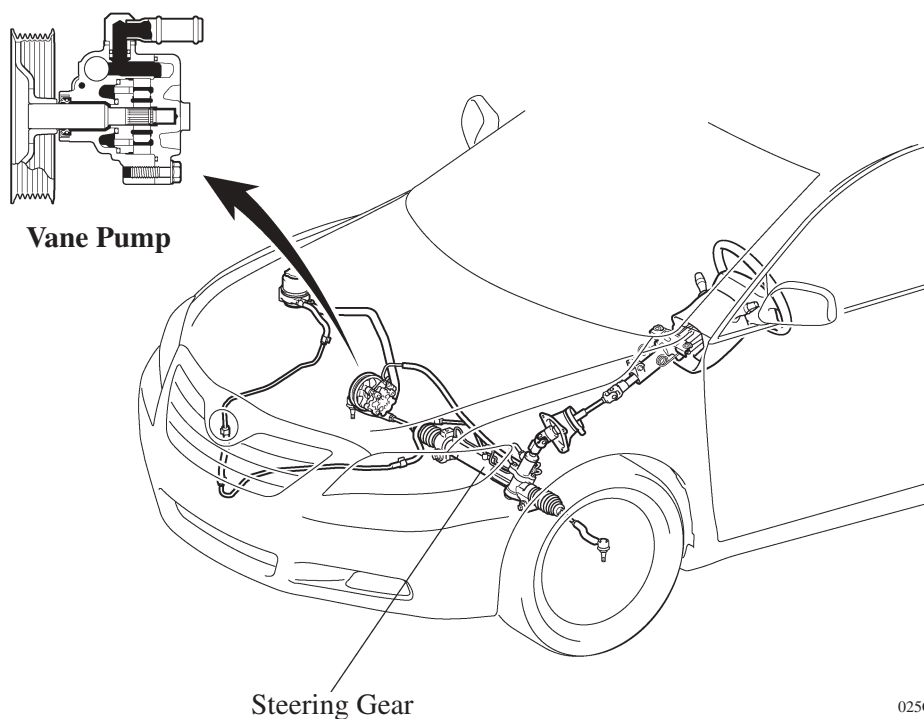

02SCH63TE

► Specifications ◀

Grade	SE		LE, XLE	
Engine Type	2AZ-FE	2GR-FE	2AZ-FE	2GR-FE
Gear Ratio (Overall)	15.9	16.1	16.0	←
No. of Turns Lock to Lock	3.20			
Rack Stroke	mm (in.) 156.0 (6.14)			
Fluid Type	ATF Type DEXRON® II or III			