



2GR-FE ENGINE

■ DESCRIPTION

The 2GR-FE engine on the '07 Camry is a newly developed, V6 3.5-liter, 24-valve DOHC engine. This engine uses the Dual VVT-i (Dual Variable Valve Timing-intelligent) system, DIS (Direct Ignition System), ACIS (Acoustic Control Induction System), and ETCS-i (Electronic Throttle Control System-intelligent). These control functions achieve improved engine performance, fuel economy, and reduced exhaust emissions.

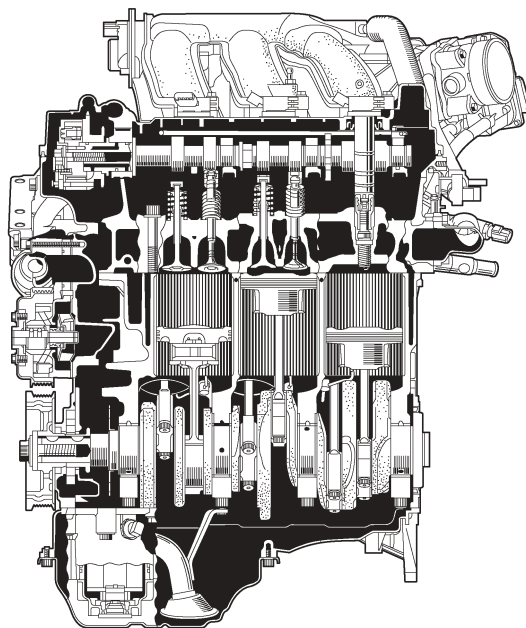

285EG01

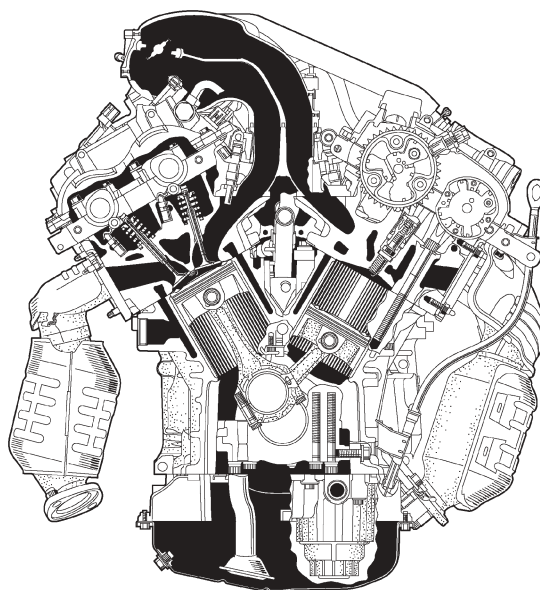

285EG02

► Engine Specifications ◀

No. of Cyls. & Arrangement			6-Cylinder, V Type
Valve Mechanism			24-Valve DOHC, Chain Drive (with Dual VVT-i)
Combustion Chamber			Pentroof Type
Manifolds			Parallel-Flow
Fuel System			SFI
Ignition System			DIS
Displacement		cm ³ (cu. in.)	3456 (210.9)
Bore x Stroke		mm (in.)	94.0 x 83.0 (3.70 x 3.27)
Compression Ratio			10.8 : 1
Max. Output (SAE-NET)* ¹			200 kW @ 6200 rpm (268HP @ 6200 rpm)
Max. Torque (SAE-NET)* ¹			336 N·m @ 4700 rpm (248 ft·lbf @ 4700 rpm)
Valve Timing	Intake	Open	–3° to 37° BTDC
		Close	71° to 31° ABDC
	Exhaust	Open	60° to 25° BBDC
		Close	4° to 39° ATDC
Firing Order			1 – 2 – 3 – 4 – 5 – 6
Oil Grade			ILSAC
Octane Rating			87 or more
Emission Regulation	Tailpipe		LEVII- ULEV, SFTP
	Evaporative		LEVII, ORVR
Engine Service Mass* ² (Reference)		kg (lb)	163 (359)

*¹: Maximum output and torque rating is determined by revised SAE J1394 standard.

*²: Weight shows the figure with the oil and engine coolant fully filled.

► Valve Timing ◀

