

PERFORMANCE


Power Train

Engine

Type	2AZ-FE		2GR-FE
	Models except for California Package	Models for California Package	
No. of Cylinders & Arrangement	4-Cylinder, In-line		6-Cylinder, V Type
Valve Mechanism	16-Valve DOHC, Chain Drive (with VVT-i)		24-Valve DOHC, Chain Drive (with Dual VVT-i)
Displacement	2362 cm ³ (144.1cu. in.)		3456 cm ³ (210.9cu. in.)
Max. Output [SAE-NET]* ¹	118 kW @ 6000 rpm (158 HP @ 6000 rpm)	116 kW @ 6000 rpm (155 HP @ 6000 rpm)	200 kW @ 6200 rpm (268 HP @ 6200 rpm)
Max. Torque [SAE-NET]* ¹	218 N·m @ 4000 rpm (161 ft-lbs @ 4000 rpm)	214 N·m @ 4000 rpm (158 ft-lbs @ 4000 rpm)	336 N·m @ 4700 rpm (248 ft-lbs @ 4700 rpm)


*¹: Maximum output and torque rating is determined by revised SAE J1394 standard.

► 2AZ-FE Engine ◀

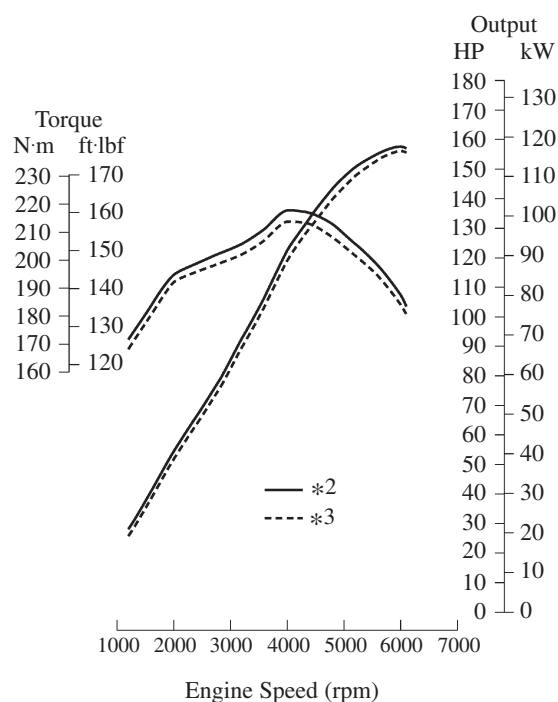

025MO40Y

► 2GR-FE Engine ◀

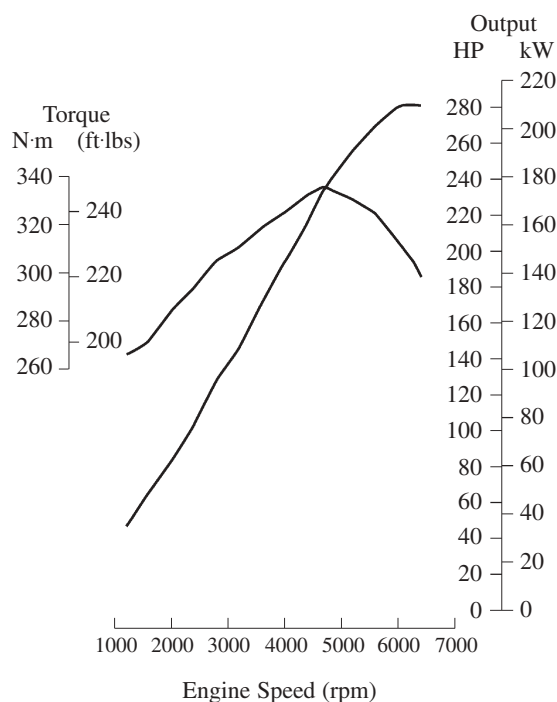

025MO41Y


*²: Models except for California Package

*³: Models for California Package


Transaxle

Type		5-Speed Manual	5-Speed Automatic	6-Speed Automatic
		E351	U250E	U660E
Gear Ratio	1st	3.538	3.943*	3.300
	2nd	2.045	2.197*	1.900
	3rd	1.333	1.413*	1.420
	4th	0.972	0.975*	1.000
	5th	0.731	0.703*	0.713
	6th	—	—	0.608
	Reverse	3.583	3.145*	4.148
Differential Gear Ratio		3.944	3.391	3.685*


*: Counter gear ratio included

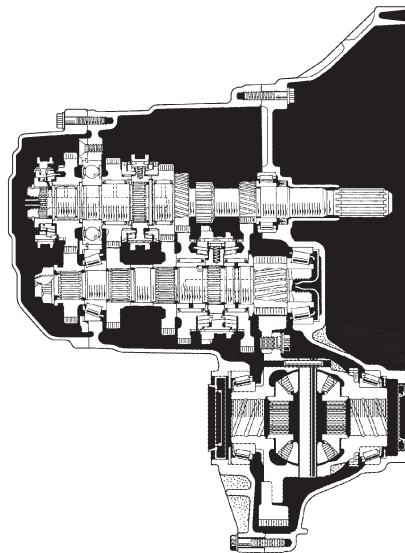

025CH58Y

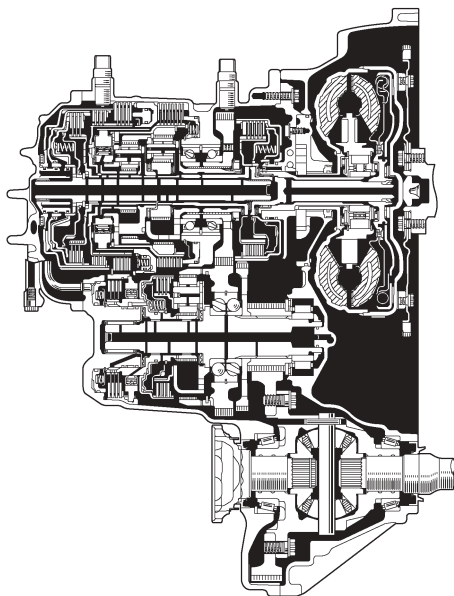E351 Manual Transaxle

025CH01Y

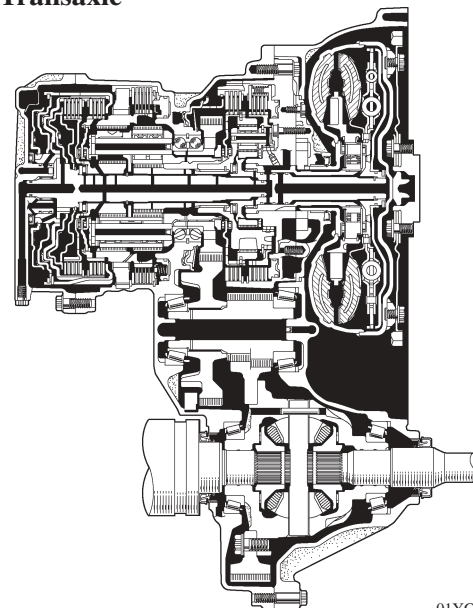U250E Automatic Transaxle

01YCH01Y

U660E Automatic Transaxle