


COWL TOP SIDE REINFORCEMENT (ASSY)

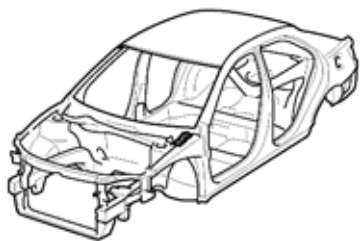

F25720A

Symbol meaning

REMOVAL


 : Cut with disc sander, etc.

INSTALLATION

 : Tack Weld

F25720B

REMOVAL-INSTALLATION

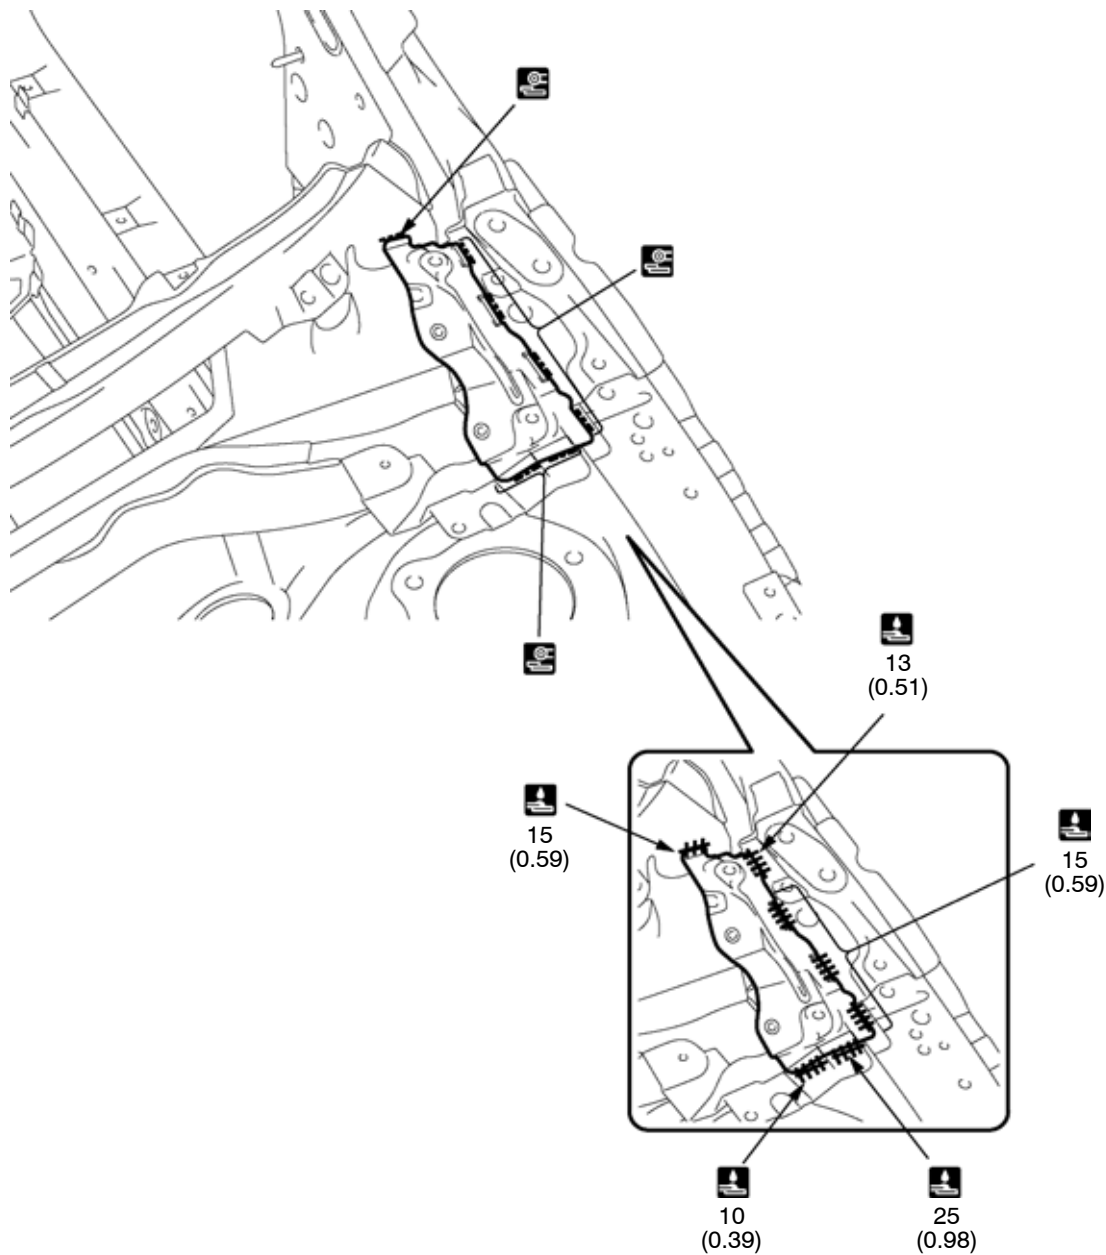

F25720

INSTALLATION POINT

- 1 After welding, apply body sealer to the corresponding parts. (See the paint-coating)
- 2 After applying the top coat, apply anti-rust agent to the internal panel portion of the closed section structural weld points.