


ENGINE


2AZ-FE ENGINE

■ DESCRIPTION

- In-line 4-cylinder, 2.4-liter, 16-valve DOHC 2AZ-FE engine is used on the '07 Camry. This engine uses the VVT-i (Variable Valve Timing-intelligent) system, DIS (Direct Ignition System), ETCS-i (Electronic Throttle Control System-intelligent). These control functions achieve improved engine performance, fuel economy, and reduced exhaust emissions.
- A special intake and exhaust system is used on the California specification 2AZ-FE engine models in order to comply with PZEV (Partial Zero Emission Vehicle) regulations.

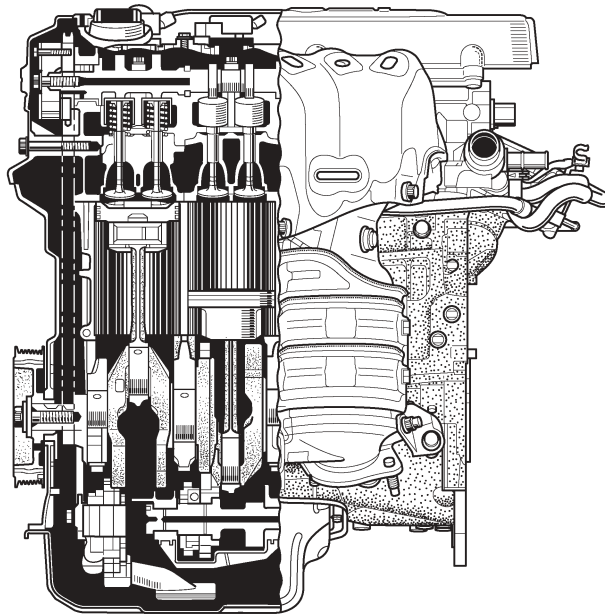

025EG01TE

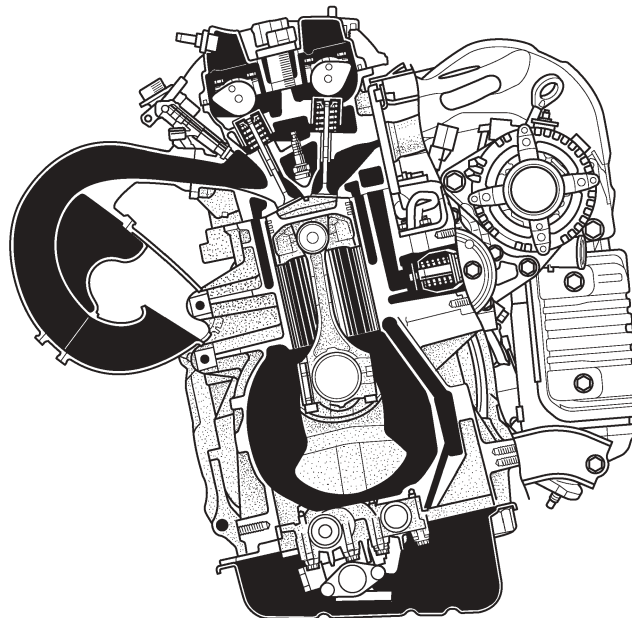

025EG02TE

► Engine Specifications ◀

Model			California Package	Except California Package
No. of Cyls. & Arrangement			4-Cylinder, In-line	←
Valve Mechanism			16-Valve DOHC, Chain Drive (with VVT-i)	←
Combustion Chamber			Pentroof Type	←
Manifolds			Cross-Flow	←
Fuel System			SFI	←
Ignition System			DIS	←
Displacement		cm ³ (cu. in.)	2362 (144.2)	←
Bore x Stroke		mm (in.)	88.5 x 96.0 (3.48 x 3.78)	←
Compression Ratio			9.8 : 1	←
Max. Output (SAE-NET)* ¹			116 kW @ 6000 rpm (155 HP @ 6000 rpm)	118 kW @ 6000 rpm (158 HP @ 6000 rpm)
Max. Torque (SAE-NET)* ¹			214 N·m @ 4000 rpm (158 ft·lbf @ 4000 rpm)	218 N·m @ 4000 rpm (161 ft·lbf @ 4000 rpm)
Valve Timing	Intake	Open	3° ~ 43° BTDC	←
		Close	65° ~ 25° ABDC	←
	Exhaust	Open	45° BBDC	←
		Close	3° BTDC	←
Firing Order			1 – 3 – 4 – 2	←
Oil Grade			ILSAC	←
Octane Rating			87 or more	←
Emission Regulation			PZEV (CARB* ³)	Tier2 (EPA* ⁴)
		Tailpipe	LEVII-SULEV, SFTP	Tier2-Bin5, SFTP
		Evaporative	LEVII-Zero Evapo, ORVR	Tire2, ORVR
Engine Service Mass* ² (Reference)		kg (lb)	130 (287)	←

*1: Maximum output and torque rating is determined by revised SAE J1394 standard.

*2: Weight shows the figure with the oil and engine coolant fully filled.

*3: CARB (California Air Resources Board)

*4: EPA (Environmental Protection Agency)

► Valve Timing ◀

