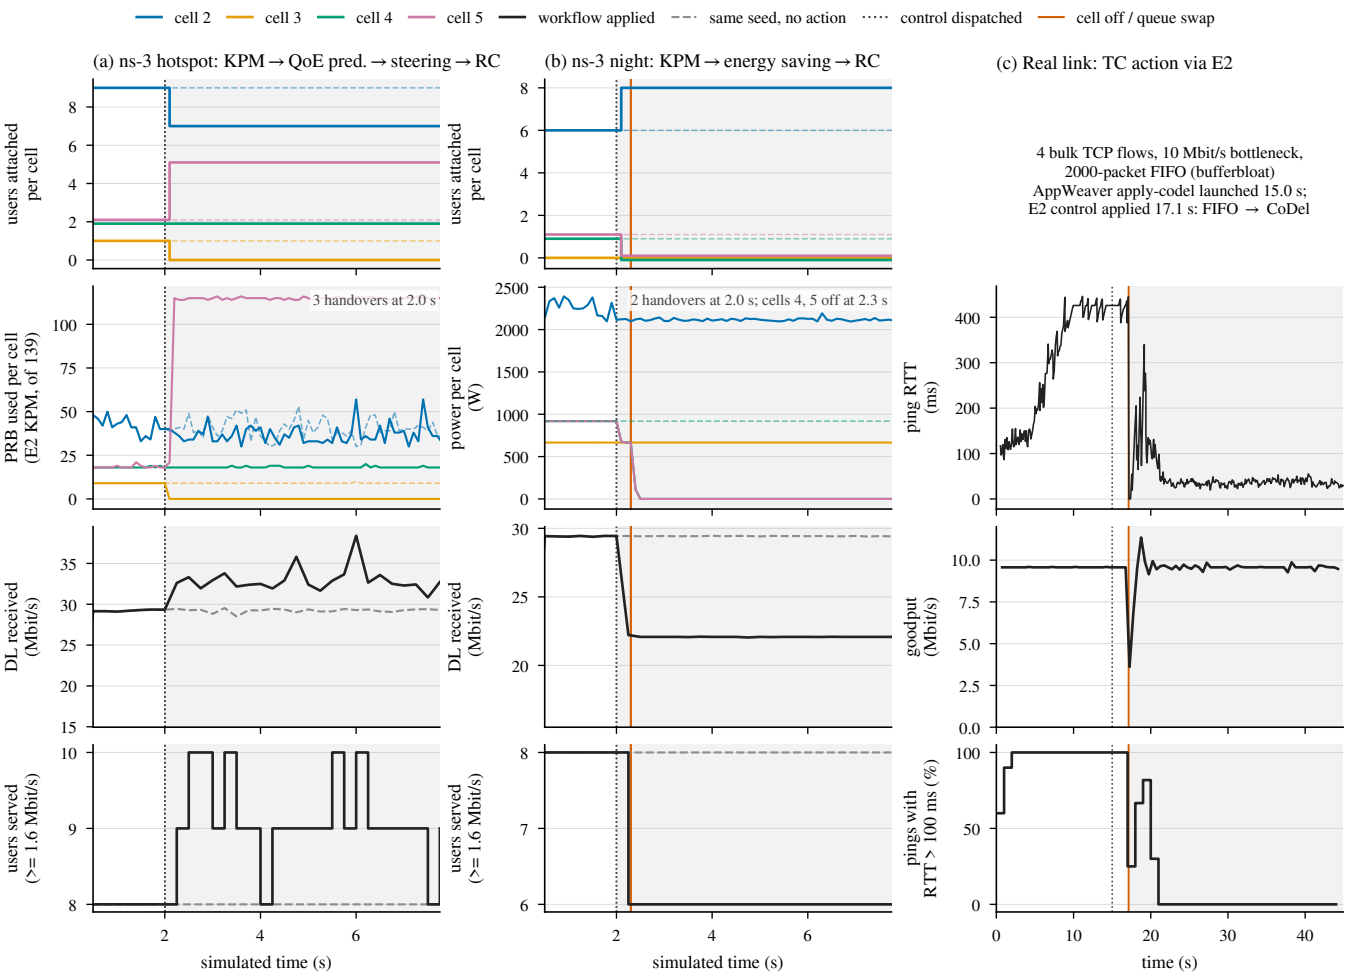
cell 2
cell 3
cell 4
cell 5
workflow applied
same seed, no action
control dispatched
cell off / queue swap
(a) ns-3 hotspot: KPM → QoE pred. → steering → RC
(b) ns-3 night: KPM → energy saving → RC
(c) Real link: TC action via E2
4 bulk TCP flows, 10 Mbit/s bottleneck,
2000-packet FIFO (bufferbloat)
AppWeaver apply-codel launched 15.0 s;
E2 control applied 17.1 s: FIFO → CoDel
users attached per cell
PRB used per cell (E2 KPM, of 139)
3 handovers at 2.0 s
power per cell (W)
2 handovers at 2.0 s; cells 4, 5 off at 2.3 s
ping RTT (ms)
DL received (Mbit/s)
goodput (Mbit/s)
users served (>= 1.6 Mbit/s)
pings with RTT > 100 ms (%)
simulated time (s)
simulated time (s)
time (s)