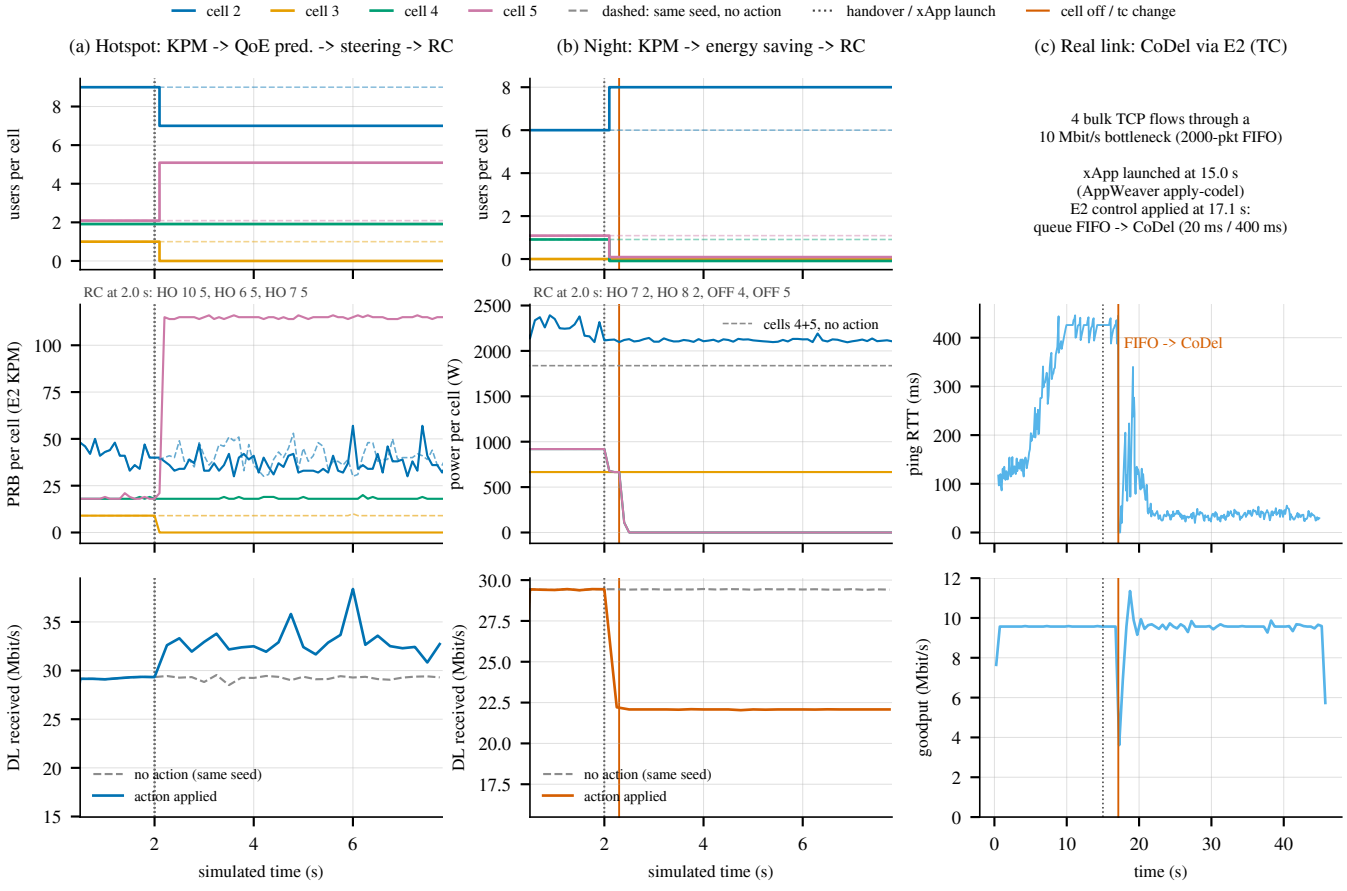
cell 2
cell 3
cell 4
cell 5
dashed: same seed, no action
handover / xApp launch
cell off / tc change
(a) Hotspot: KPM -> QoE pred. -> steering -> RC
(b) Night: KPM -> energy saving -> RC
(c) Real link: CoDel via E2 (TC)
users per cell
RC at 2.0 s: HO 10 5, HO 6 5, HO 7 5
PRB per cell (E2 KPM)
RC at 2.0 s: HO 7 2, HO 8 2, OFF 4, OFF 5
power per cell (W)
cells 4+5, no action
4 bulk TCP flows through a
10 Mbit/s bottleneck (2000-pkt FIFO)
xApp launched at 15.0 s
(AppWeaver apply-codel)
E2 control applied at 17.1 s:
queue FIFO -> CoDel (20 ms / 400 ms)
ping RTT (ms)
FIFO -> CoDel
DL received (Mbit/s)
no action (same seed)
action applied
goodput (Mbit/s)
simulated time (s)
time (s)