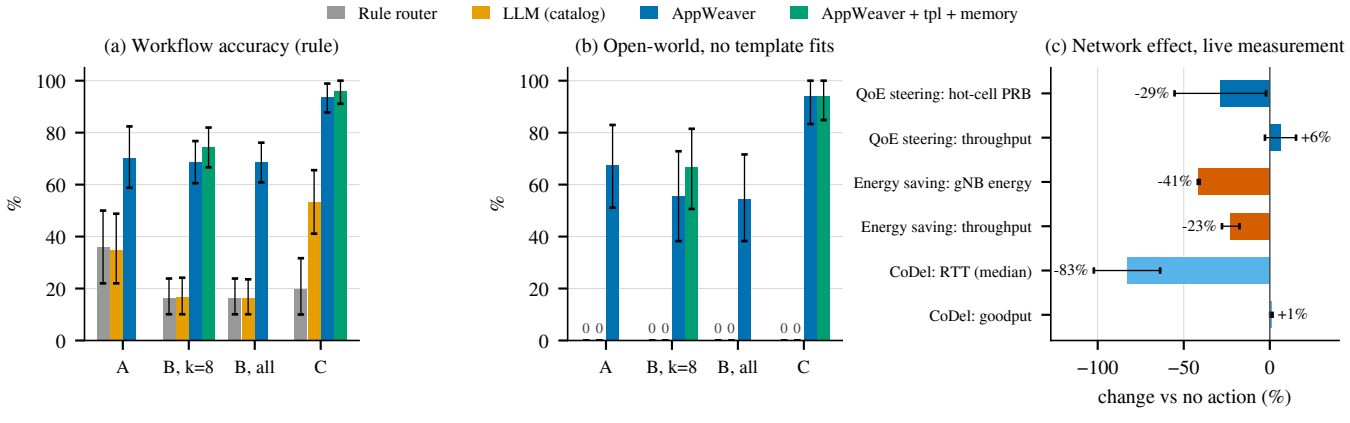
Rule router
LLM (catalog)
AppWeaver
AppWeaver + tpl + memory
(a) Workflow accuracy (rule)
%
100
80
60
40
20
0
A
B, k=8
B, all
C
(b) Open-world, no template fits
0 0
(c) Network effect, live measurement
QoE steering: hot-cell PRB
QoE steering: throughput
Energy saving: gNB energy
Energy saving: throughput
CoDel: RTT (median)
CoDel: goodput
-29%
+6%
-41%
-23%
-83%
+1%
−100
−50
0
change vs no action (%)